


IDEAS+ Daily Report for NRT data:


<u>19/07/2014</u>

Papart Braduation Data	21 101 2014	Check	Status	
Report Production Date:	21-Jul-2014	Server check: science-pds.cryosat.esa.int	Nominal	
Data Used:	L1 and L2 Fast Delivery Marine Mode	Server check: calval-pds.cryosat.esa.int	Nominal	
Data Used:	(FDM), and CAL Data	Product Software Check	Nominal	
		Product Format Check	Nominal	
		Product Header Analysis	Nominal	
		Auxiliary Data File Usage	Nominal	
		Correction Error Flags	Nominal	
		Measurement Confidence Flags	See Sections 5.5, 6.5, 6.6 and 6.8	

I	Mission / Instrument News		
	18-Jul-2014	SIRAL unavailability on 18-July-2014 from 11:47:08 to 12:44:29 due to a planned orbit manoeuvre.	
	19-Jul-2014	None	
	20-Jul-2014	Nothing planned	

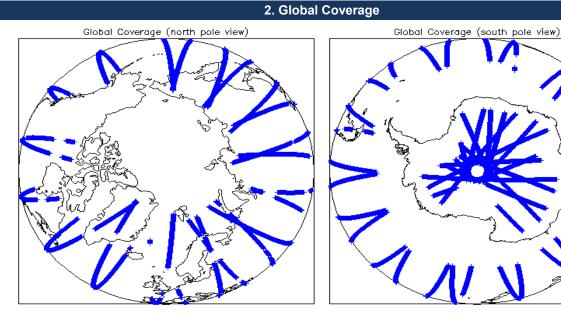

Global Coverage

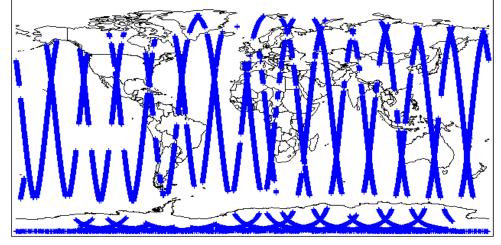

3. Instrument Configuration

The SIRAL instrument configuration for the day of acquisition is provided below.

SIRAL instrument(s) in use:	SIRAL - A		
Star Tracker(s) in use:	Star Tracker 1, 2 & 3		

4. Level 1B Calibration Data Quality Check

4.1 L1 CAL Product Format Check

Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL).

Number of products with errors:

4.2 L1 CAL Product Header Analysis

For all products, a series of pre-defined checks are carried out on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the processing chain.

0

4.3 L1 CAL Auxiliary Data File Usage Check				
Each product is checked for missing Data Set Descriptors wrt a pre-determined t	paseline and also to check the validity of A	uxiliary Data Files is correct.		
Number of products with errors: 0				
4.4 L1 CAL Measurement Confidence Flags				
CryoSat Cal1 and Cal2 data includes a measurement confidence flag word (field	11) for each measurement record. The bit	t value of this flag indicates any problems when set.		
Number of products with errors: 0				
5. Leve	el 1B FDM Data Quality (Check		
5.1 L1B FDM Product Format Check				
Each product, retrieved and unpacked from the science server, is checked to ens	sure it consists of both an XML beader file	(HDR) and a binary product file (DRI)		
Number of products with errors: 0				
5.2 L1B FDM Product Header Analysis				
For all products, a series of pre-defined checks are carried out on the MPH and S Number of products with errors: 0	SPH in order to identify any inconsistencie	s and/or errors raised by the ground-segment processing chain.		
5.3 L1B FDM Auxilary Data File Usage Check				
Each product is checked for missing Data Set Descriptors wrt a pre-determined b	paseline and also to check the validity of A	uxiliary Data Files is correct.		
Number of products with errors: 0				
5.4 L1B Correction Error Flags				
Each product is checked to detect auxiliary corrections flagged by the ground-sta	tion processing chain as missing or conta	ining errors.		
Number of products with errors: 0				
5.5 L1B FDM Measurement Confidence Flags				
CryoSat L1B data includes a measurement confidence flag word (field 14) for each	ch measurement record. The bit value of t	his flag indicates any problems when set.		
Number of products with errors: 7				
Product CS_OFFL_SIR_FDM_1B_20140719T133310_20140719T140924_B001	Test Failed Echo error	Description The Echo Rx1 Error flag is set, indicating a degraded raw echo		
CS_OFFL_SIR_FDM_1B_20140719T190021_20140719T190409_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo		
CS_OFFL_SIR_FDM_1B_20140719T203524_20140719T203725_B001	Attitude correction missing	The attitude has not been corrected		
CS_OFFL_SIR_FDM_1B_20140719T203728_20140719T204238_B001	Attitude correction missing	The attitude has not been corrected		
CS_OFFL_SIR_FDM_1B_20140719T221903_20140719T222007_B001	Attitude correction missing	The attitude has not been corrected		
CS_OFFL_SIR_FDM_1B_20140719T222007_20140719T222242_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo		
CS_OFFL_SIR_FDM_1B_20140719T235803_20140719T235936_B001	Attitude correction missing	The attitude has not been corrected		
6. Lev	vel 2 FDM Data Quality C	heck		
6.1 L2 FDM Product Format Check				
Each product, retrieved and unpacked from the science server, is checked to ens	sure it consists of both an XML beader file	(HDR) and a binary product file (DBI)		
Number of products with errors: 0				
6.2 L2 FDM Product Header Analysis				
For all products, a series of pre-defined checks are carried out on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the processing chain.				
Currently there is a high number of processing error flags set within the Level 2 FDM products (Product_Err and L2_Proc_Flag). These flags are set within L2 Header files (MPH field #19 and SPH field #29) and also within the L2 Product files (MPH field #35 and SPH field #33). They are set by the FDM processor when an error is detected during the L2 processing and also when the percentage of Data Set Records free of processing errors is below the minimum acceptable threshold set within the processor (currently set to 5%).				
This issue is under investigation.				
Number of products with errors: 0				
6.3 L2 FDM Auxiliary Data File Usage Check				
Each product is checked for missing Data Set Descriptors wrt a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct.				
Number of products with errors: 0				
Each product is checked for missing Data Set Descriptors wrt a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct.				
6.4 L2 FDM Correction Error Flags				

Each product is checked to detect auxiliary corrections flagged by the ground-station processing chain as missing or containing errors.

0

Number of products with errors:

6.5 L2 FDM Measurement Confidence Flags

CryoSat L2 data includes a quality flag word (field 8) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chain.

Number of products with errors: 6				
Product	Test Failed	Description		
CS_OFFL_SIR_FDM_220140719T133310_20140719T140924_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo		
CS_OFFL_SIR_FDM_220140719T190021_20140719T190409_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo		
CS_OFFL_SIR_FDM_220140719T203728_20140719T204238_B001	Attitude correction missing	The attitude has not been corrected		
CS_OFFL_SIR_FDM_220140719T221903_20140719T222007_B001	Attitude correction missing	The attitude has not been corrected		
CS_OFFL_SIR_FDM_220140719T222007_20140719T222242_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo		
CS_OFFL_SIR_FDM_220140719T235803_20140719T235936_B001	Attitude correction missing	The attitude has not been corrected		

6.6 L2 FDM Range Measurement Flags

Each product is checked to detect range measurements flagged by the processing chain as missing or containing errors.

2

Number of products with errors:

Product	Test Failed	Description
CS_OFFL_SIR_FDM_220140719T044701_20140719T050054_B001		The master fail flag is set by the OCOG call, for one or more records, indicating the values stored in fields #18, #19, #20 and #21 should be ignored for these records.
CS_OFFL_SIR_FDM_220140719T083443_20140719T084534_B001		The master fail flag is set by the OCOG call, for one or more records, indicating the values stored in fields #18, #19, #20 and #21 should be ignored for these records.

6.7 L2 FDM SWH and Backscatter Measurement Flags

Each product is checked to detect parameters related to SWH and sigma0 that are flagged by the processing chain as missing or containing errors. Number of products with errors:

6.8 L2 FDM Geophysical Measurement Flags

Each product is checked to detect geophysical measurements flagged by the processing chain as missing or containing errors.

Number of products with errors: 7					
Product	Test Failed	Description			
CS_OFFL_SIR_FDM_220140719T035533_20140719T041213_B001	Ocean Retracking Quality Flag	The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.			
CS_OFFL_SIR_FDM_220140719T043456_20140719T044521_B001	Ocean Retracking Quality Flag	The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.			
CS_OFFL_SIR_FDM_220140719T044701_20140719T050054_B001	Ocean Retracking Quality Flag	The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.			
CS_OFFL_SIR_FDM_220140719T054034_20140719T054743_B001	Ocean Retracking Quality Flag	The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.			
CS_OFFL_SIR_FDM_220140719T083443_20140719T084534_B001	Ocean Retracking Quality Flag	The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.			
CS_OFFL_SIR_FDM_220140719T133310_20140719T140924_B001	Ocean Retracking Quality Flag	The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.			
CS_OFFL_SIR_FDM_220140719T151221_20140719T154855_B001	Ocean Retracking Quality Flag	The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.			

7. QCC Check

The QCC is a CryoSat facility that performs a primary survey of data products immediately after production by the PDS and LTA processing facilities. A list of the tests which raised errors or warnings is provided below.

Product type	Nb. Products	Nb. QCC Reports	Nb. Valid	Nb. Warnings	Nb. Errors	
SIR_FDM_1B	140	0	0	0	0	
SIR_FDM_2	141	0	0	0	0	
7.1 QCC Errors						
Number of QCC reports with errors: 0						
7.2 Missing QCC Reports						
Number of products with missi	ing QCC reports: All					