


Repo


IDEAS+ Daily Report for NRT data:

<u>31/08/2014</u>

1. Overview					
Check Status					
port Production Date:	01-Sep-2014	Server check: science-pds.cryosat.esa.int	Nominal		
Data Used:	L1 and L2 Fast Delivery Marine Mode (FDM), and CAL Data	Server check: calval-pds.cryosat.esa.int	Nominal		
		Product Software Check	Nominal		
		Product Format Check	Nominal		
		Product Header Analysis	Nominal		
		Auxiliary Data File Usage	Nominal		
		Correction Error Flags	Nominal		
		Measurement Confidence Flags	See Sections 5.5, 6.5, 6.6 and 6.8		

Mission / Instrument News		
30-Aug-2014	None	
31-Aug-2014	None	
01-Sep-2014	Nothing planned	

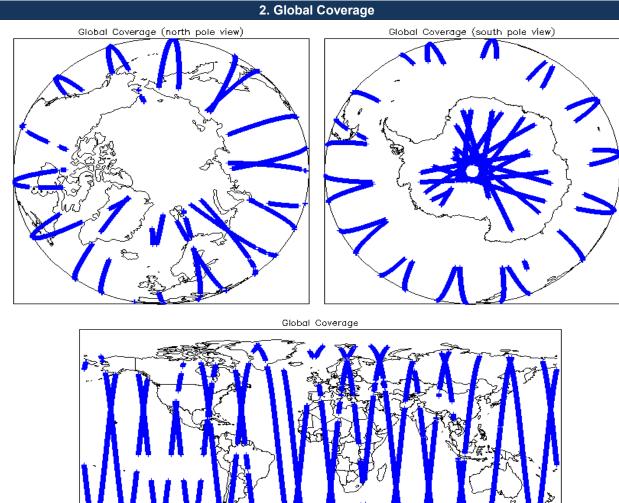

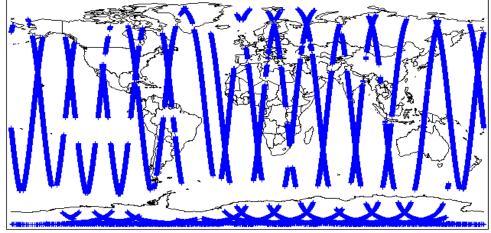

3. Instrument Configuration

The SIRAL instrument configuration for the day of acquisition is provided below.

SIRAL instrument(s) in use:	SIRAL - A
Star Tracker(s) in use:	Star Tracker 1 & 2

4. Level 1B Calibration Data Quality Check

4.1 L1 CAL Product Format Check

Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL).

Number of products with errors:

4.2 L1 CAL Product Header Analysis

For all products, a series of pre-defined checks are carried out on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the processing chain.

0

4.3 L1 CAL Auxiliary Data File Usage Check				
Each product is checked for missing Data Set Descriptors wrt a pre-determine	d baseline and also to check the validity	of Auxiliary Data Files is correct.		
Number of products with errors: 0				
4.4 L1 CAL Measurement Confidence Flags				
CryoSat Cal1 and Cal2 data includes a measurement confidence flag word (fie	ld 11) for each measurement record. Th	e bit value of this flag indicates any problems when set.		
Number of products with errors: 0				
5. Le	vel 1B FDM Data Qualit	y Check		
5.1 L1B FDM Product Format Check				
Each product, retrieved and unpacked from the science server, is checked to	ensure it consists of both an XML beade	r file (HDR) and a binary product file (DBI)		
Number of products with errors: 0				
5.2 L1B FDM Product Header Analysis				
For all products, a series of pre-defined checks are carried out on the MPH an	d SPH in order to identify any inconsiste	ncies and/or errors raised by the ground-segment processing chain.		
Number of products with errors: 0				
5.3 L1B FDM Auxilary Data File Usage Check				
Each product is checked for missing Data Set Descriptors wrt a pre-determine	d baseline and also to check the validity	of Auxiliary Data Files is correct.		
Number of products with errors: 0	,			
5.4 L1B Correction Error Flags				
Each product is checked to detect auxiliary corrections flagged by the ground-	station processing chain as missing or co	ontaining errors.		
Number of products with errors: 0				
5.5 L1B FDM Measurement Confidence Flags				
CryoSat L1B data includes a measurement confidence flag word (field 14) for a	each measurement record. The bit value	of this flag indicates any problems when set.		
Number of products with errors: 8				
Product	Test Failed	Description		
CS_OFFL_SIR_FDM_1B_20140831T005213_20140831T005408_B001	Attitude correction missing	The attitude has not been corrected		
CS_OFFL_SIR_FDM_1B_20140831T035838_20140831T040929_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo		
CS_OFFL_SIR_FDM_1B_20140831T042111_20140831T042728_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo		
CS_OFFL_SIR_FDM_1B_20140831T160226_20140831T160937_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo		
CS_OFFL_SIR_FDM_1B_20140831T172345_20140831T172350_B001	Attitude correction missing	The attitude has not been corrected		
CS_OFFL_SIR_FDM_1B_20140831T185957_20140831T190005_B001	Attitude correction missing	The attitude has not been corrected		
CS_OFFL_SIR_FDM_1B_20140831T203632_20140831T203803_B001	Attitude correction missing	The attitude has not been corrected		
CS_OFFL_SIR_FDM_1B_20140831T232723_20140901T000032_B001	Attitude correction missing	The attitude has not been corrected		
6. Le	evel 2 FDM Data Quality	/ Check		
6.1 L2 FDM Product Format Check				
Each product, retrieved and uppacked from the science server, is checked to	ensure it consists of both an XML heade	r file (HDR) and a binary product file (DBI)		
Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL) Number of products with errors: 0				
6.2 L2 FDM Product Header Analysis				
For all products, a series of pre-defined checks are carried out on the MPH an	d SPH in order to identify any inconsiste	ncies and/or errors raised by the processing chain.		
Currently there is a high number of processing error flags set within the Level 2 FDM products (Product_Err and L2_Proc_Flag). These flags are set within L2 Header files (MPH field #19 and SPH field #29) and also within the L2 Product files (MPH field #35 and SPH field #33). They are set by the FDM processor when an error is detected during the L2 processing and also when the percentage of Data Set Records free of processing errors is below the minimum acceptable threshold set within the processor (currently set to 5%).				
This issue is under investigation.				
Number of products with errors: 0				
6.3 L2 FDM Auxiliary Data File Usage Check				

Each product is checked for missing Data Set Descriptors wrt a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct.

Number of products with errors:

6.4 L2 FDM Correction Error Flags

Each product is checked to detect auxiliary corrections flagged by the ground-station processing chain as missing or containing errors.

0

0

Number of products with errors:

6.5 L2 FDM Measurement Confidence Flags

CryoSat L2 data includes a quality flag word (field 8) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chain.

Number of products with errors: 8		
Product	Test Failed	Description
CS_OFFL_SIR_FDM_220140831T005213_20140831T005408_B001	Attitude correction missing	The attitude has not been corrected
CS_OFFL_SIR_FDM_220140831T035838_20140831T040929_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo
CS_OFFL_SIR_FDM_220140831T042111_20140831T042728_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo
CS_OFFL_SIR_FDM_220140831T160226_20140831T160937_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo
CS_OFFL_SIR_FDM_220140831T172345_20140831T172350_B001	Attitude correction missing	The attitude has not been corrected
CS_OFFL_SIR_FDM_220140831T185957_20140831T190005_B001	Attitude correction missing	The attitude has not been corrected
CS_OFFL_SIR_FDM_220140831T203632_20140831T203803_B001	Attitude correction missing	The attitude has not been corrected
CS_OFFL_SIR_FDM_220140831T232723_20140901T000032_B001	Attitude correction missing	The attitude has not been corrected

6.6 L2 FDM Range Measurement Flags

Each product is checked to detect range measurements flagged by the processing chain as missing or containing errors.

1

Number of products with errors:

Product	Test Failed	Description
CS_OFFL_SIR_FDM_220140831T164949_20140831T170801_B001	OCOG Retracked Range Flag	The master fail flag is set by the OCOG call, for one or more records, indicating the values stored in fields #18, #19, #20 and #21 should be ignored for these records.

6.7 L2 FDM SWH and Backscatter Measurement Flags

Each product is checked to detect parameters related to SWH and sigma0 that are flagged by the processing chain as missing or containing errors. 0

Number of products with errors:

6.8 L2 FDM Geophysical Measurement Flags				
Each product is checked to detect geophysical measurements flagged by the processing chain as missing or containing errors.				
Number of products with errors: 4				
Product	Test Failed	Description		
CS_OFFL_SIR_FDM_220140831T011853_20140831T014002_B001	Ocean Retracking Quality Flag	The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.		
CS_OFFL_SIR_FDM_220140831T141857_20140831T143607_B001	Ocean Retracking Quality Flag	The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.		
CS_OFFL_SIR_FDM_220140831T164949_20140831T170801_B001	Ocean Retracking Quality Flag	The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.		
CS_OFFL_SIR_FDM_220140831T203803_20140831T204249_B001	Ocean Retracking Quality Flag	The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.		

7. QCC Check

The QCC is a CryoSat facility that performs a primary survey of data products immediately after production by the PDS and LTA processing facilities. A list of the tests which raised errors or warnings is provided below.

Product type	Nb. Products	Nb. QCC Reports	Nb. Valid	Nb. Warnings	Nb. Errors	
SIR_FDM_1B	129	0	0	0	0	
SIR_FDM_2	129	0	0	0	0	
7.1 QCC Errors	7.1 QCC Errors					
Number of QCC reports with errors: 0						
7.2 Missing QCC Reports						
Number of products with missing QCC reports: All						