


IDEAS+ Daily Report for IOP data:

25/10/2014



		1. Overview	
Demont Dreduction Deter	07 Oct 2014	Check	Status
Report Production Date:	27-Oct-2014	Server check: science-pds.cryosat.esa.int	Nominal
Data Used:	Intermediate Ocean Products (IOP) L1B and L2 Science Data	Server check: calval-pds.cryosat.esa.int	Nominal
		Product Software Check	Nominal
		Product Format Check	Nominal
		Product Header Analysis	Nominal
		Auxiliary Data File Usage Check	Nominal
		Auxiliary Correction Error Check	Nominal
		Measurement Confidence Data Check	See Section 4.6, 5.5 and 5.6
lission / Instrument News			
24-Oct-2014 None			
25-Oct-2014 None			
26-Oct-2014 Nothing planned	t		



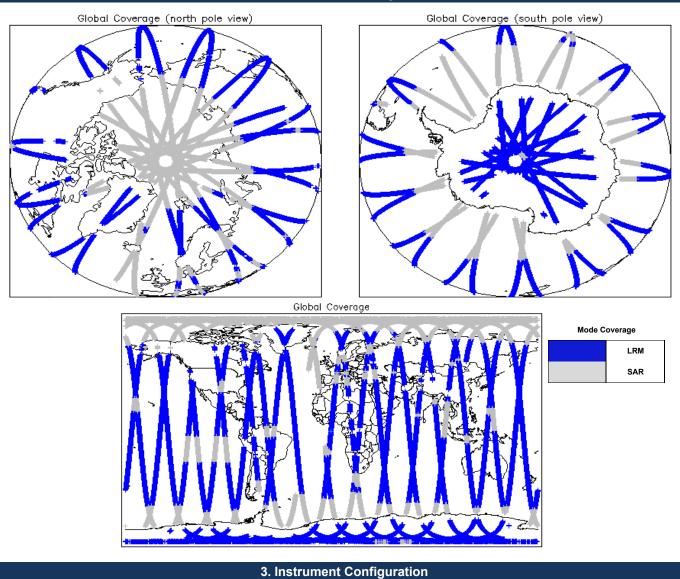

The SIRAL instrument configuration for the day of acquisition is provided below.

SIRAL - A

0

SIRAL instrument(s) in use:

4. IOP Level 1B Data Quality Check

4.1 L1B Product Format Check

Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL).

Number of products with errors:

4.2 L1B Product Header Analysis

For all products, a series of pre-defined checks are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain.

Number of products with errors:

	age Check
Each product is checked for missing Data Se	et Descriptors with repsect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct.
Number of products with errors:	0
4.4 L1B Auxiliary Correction E	Error Check
Each product is checked to detect auxiliary of	corrections flagged by the ground-station processing chain as missing or containing errors.
Number of products with errors:	0
4.5 L1B Measurement Confide	ence Data Check
CryoSat L1B data includes a measurement of	confidence flag (field 12) for each measurement record. The bit value of this flag indicates any problems when set.
Number of products with errors:	0
4.6 L1B Waveform Group Data	a Check
CryoSat L1B data includes a waveform data	flag (field 65) for each measurement record. The bit value of this flag indicates any problems when set.
Loss of Echo Flag: This flag is currently set	t for a large number of products over land, indicating that the tracking echo is missing.
Number of products with errors:	50
	5. IOP Level 2 Data Quality Check
5.1 L2 Product Format Check	
Each product, retrieved and unpacked from	the science server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL)
Number of products with errors:	0
5.2 L2 Product Header Analys	is
For all products, a series of pre-defined chec	cks are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain.
	0
Number of products with errors:	0
Number of products with errors: 5.3 L2 Auxiliary Data File Usa	
5.3 L2 Auxiliary Data File Usa	
5.3 L2 Auxiliary Data File Usa	ge Check
5.3 L2 Auxiliary Data File Usa	ge Check at Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct.
5.3 L2 Auxiliary Data File Usag Each product is checked for missing Data Se Number of products with errors: 5.4 L2 Measurement Confiden	ge Check at Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct.
5.3 L2 Auxiliary Data File Usa Each product is checked for missing Data So Number of products with errors: 5.4 L2 Measurement Confiden CryoSat L2 data includes a quality flag (field	ge Check et Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. 0 Ince Data Check
5.3 L2 Auxiliary Data File Usag Each product is checked for missing Data Se Number of products with errors: 5.4 L2 Measurement Confiden CryoSat L2 data includes a quality flag (field Number of products with errors:	ge Check et Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. 0 etermined baseline and also to check the validity of Auxiliary Data Files is correct. 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains. 0
5.3 L2 Auxiliary Data File Usage Each product is checked for missing Data Se Number of products with errors: 5.4 L2 Measurement Confiden CryoSat L2 data includes a quality flag (field Number of products with errors: 5.5 L2 Range Measurement Cl	ge Check et Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. 0 etermined baseline and also to check the validity of Auxiliary Data Files is correct. 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains. 0
 5.3 L2 Auxiliary Data File Usage Each product is checked for missing Data Set Number of products with errors: 5.4 L2 Measurement Confident CryoSat L2 data includes a quality flag (field Number of products with errors: 5.5 L2 Range Measurement Classical Classical Set (Set (Set (Set (Set (Set (Set (Set	ge Check at Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. 0 Ince Data Check 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains. 0 heck
 5.3 L2 Auxiliary Data File Usage Each product is checked for missing Data Se Number of products with errors: 5.4 L2 Measurement Confident CryoSat L2 data includes a quality flag (field Number of products with errors: 5.5 L2 Range Measurement Cl Each product is checked to detect range me Ocean Range Averaging Status Flag: This 	ge Check et Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. 0 ince Data Check 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains. 0 heck asurements flagged by the processing chain as missing or containing errors.
 5.3 L2 Auxiliary Data File Usage Each product is checked for missing Data Se Number of products with errors: 5.4 L2 Measurement Confident CryoSat L2 data includes a quality flag (field Number of products with errors: 5.5 L2 Range Measurement Cl Each product is checked to detect range me Ocean Range Averaging Status Flag: This 	ge Check at Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. 0 Ince Data Check 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains. 0 heck asurements flagged by the processing chain as missing or containing errors. a flag is currently set for products over land and sea ice, but this is to be expected.

SWH Averaging Status Flag: This flag is currently set for products over land and sea ice, but this is to be expected.

Ocean Backscatter Averaging Status Flag: This flag is currently set for products over land and sea ice, but this is to be expected.

Ice Backscatter Averaging Status Flag: This flag is currently set for some products over land and continental ice. 197

Number of products with errors: