


IDEAS+ Daily Report for IOP data:

18/01/2015




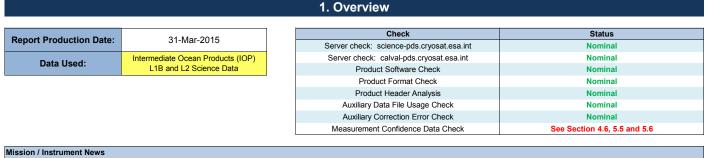

17-Jan-2015 SIRAL unavailability on 17-January-2015 from 03:55:47 to 17:21:15 due to a planned orbit manoeuvre. 18-Jan-2015 None

19-Jan-2015 Nothing planned

2. Global Coverage

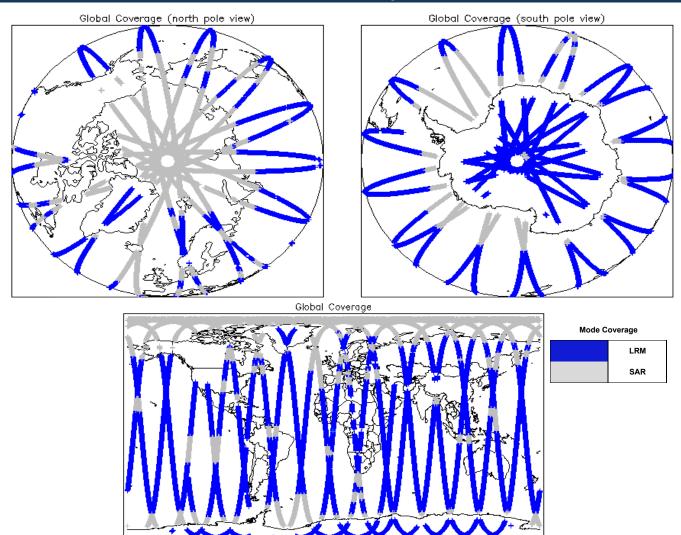

3. Instrument Configuration

The SIRAL instrument configuration for the day of acquisition is provided below.

SIRAL instrument(s) in use: SIRAL - A

4. IOP Level 1B Data Quality Check

4.1 L1B Product Format Check

Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL).

Number of products with errors:

4.2 L1B Product Header Analysis

For all products, a series of pre-defined checks are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain.

Number of products with errors:

Each product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: AL1EB Auxiliary Correction Error Check Each product is checked to detect auxiliary corrections flagged by the ground-station processing chain as missing or containing errors. Number of products with errors:	
4.4.1 B Auxiliary Correction Error Check Each product is checked to detect auxiliary corrections flagged by the ground-station processing chain as missing or containing errors. Number of products with errors: 0 4.5.1.1B Measurement Confidence Data Check CryoSat L1B data includes a measurement confidence flag (field 12) for each measurement record. The bit value of this flag indicates any problems when set. Number of products with errors: 0 4.5.1.1B Waveform Group Data Check CryoSat L1B data includes a waveform data flag (field 65) for each measurement record. The bit value of this flag indicates any problems when set. Loss of Echo Flag: This flag is currently set for a large number of products over land, indicating that the tracking echo is missing. Number of products with errors: 4.5 5.1.12 Product Format Check Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (HDR) and a binary product file (DBL) Number of products with errors: 0 5.1.2 Product Header Analysis For all products, a series of pre-defined checks are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain Number of products with errors: 0 5.1.2 Auxiliary Data File Usage Check Each product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 0 5.1.2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 2.0-14z measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chain CryoSat L2 data includes a quality flag (field 14) for each a 20-04-14z measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
Cach product is checked to detect auxiliary corrections flagged by the ground-station processing chain as missing or containing errors. A contract of products with errors:	
Number of products with errors: 0 4.5 L1B Measurement Confidence Data Check CryoSat L1B data includes a measurement confidence flag (field 12) for each measurement record. The bit value of this flag indicates any problems when set. Number of products with errors: 0 4.5 L1B Waveform Group Data Check CryoSat L1B data includes a waveform data flag (field 65) for each measurement record. The bit value of this flag indicates any problems when set. Loss of Echo Flag: This flag is currently set for a large number of products over land, indicating that the tracking echo is missing. Number of products with errors: 45 5. LOP Level 2 Data Quality Check 5.12 Product Format Check Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header flie (HDR) and a binary product flie (.DBL) Number of products, a series of pre-defined checks are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain Number of products with errors: 0 5.12 Auxiliary Data File Usage Check Card products with errors: 0 5.12 Auxiliary Data File Usage Check Card products with errors: 0 5.12 Measurement Confidence Data Check Card products with errors: 0 5.12 Auxiliary Data File Usage Check Card products with errors: 0 5.12 Auxiliary Data File Usage Check Card products with errors: 0 5.12 Auxiliary Data File Usage Check Card products with errors: 0	
A.5 L1B Measurement Confidence Data Check CryoSat L1B data includes a measurement confidence flag (field 12) for each measurement record. The bit value of this flag indicates any problems when set. Number of products with errors: 0 A.6 L1B Waveform Group Data Check CryoSat L1B data includes a waveform data flag (field 65) for each measurement record. The bit value of this flag indicates any problems when set. Less of Echo Flag: This flag is currently set for a large number of products over land, indicating that the tracking echo is missing. Number of products with errors: 45 CryoSat L2 Product Format Check E.12 Product Format Check E.12 Product Format Check For all uppacked from the science server, is checked to ensure it consists of both an XML header flie (HDR) and a binary product flie (DBL) Number of products with errors: 0 5.1 L2 Product Header Analysis For all products are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain Number of products with errors: 0 5.1 L2 Auxiliary Data File Usage Check Each product is whereros: 0 5.1 L2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
CryoSat L1B data includes a measurement confidence flag (field 12) for each measurement record. The bit value of this flag indicates any problems when set. Number of products with errors: 0 4.6.L1B Waveform Group Data Check CryoSat L1B data includes a waveform data flag (field 65) for each measurement record. The bit value of this flag indicates any problems when set. Loss of Echo Flag: This flag is currently set for a large number of products over land, indicating that the tracking echo is missing. Number of products with errors: 45 5.LOP Level 2 Data Quality Check 5.L2 Product Format Check Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header flie (HDR) and a binary product flie (.DBL) Number of products with errors: 0 5.L2 Product Header Analysis For all products a the rerors: 0 5.L2 Auxiliary Data File Usage Check Each product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 0 5.L2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
Aumber of products with errors: 0 4.6 L1B Waveform Group Data Check CryoSat L1B data includes a waveform data flag (fleid 65) for each measurement record. The bit value of this flag indicates any problems when set. coses of Echo Flag: This flag is currently set for a large number of products over land, indicating that the tracking echo is missing. Number of products with errors: 45 5.1 L2 Product Format Check Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (HDR) and a binary product file (DBL) Number of products with errors: 0 5.2 L2 Product Header Analysis For all products with errors: 0 5.3 L2 Auxiliary Data File Usage Check Each product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 0 5.4 L2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
A.6 L1B Waveform Group Data Check CryoSat L1B data includes a waveform data flag (field 46) for each measurement record. The bit value of this flag indicates any problems when set. Loss of Echo Flag: This flag is currently set for a large number of products over land, indicating that the tracking echo is missing. Number of products with errors:	
CryoSat L1B data includes a waveform data flag (field 65) for each measurement record. The bit value of this flag indicates any problems when set. Loss of Echo Flag: This flag is currently set for a large number of products over land, indicating that the tracking echo is missing. Number of products with errors: 45 Loce of Echo Flag: This flag is currently set for a large number of products over land, indicating that the tracking echo is missing. Loce of Product Swith errors: 45 Loce of Product Format Check Lach product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (HDR) and a binary product file (.DBL) Number of products with errors: 0 Loce of product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 0 Loce o	
Loss of Echo Flag: This flag is currently set for a large number of products over land, indicating that the tracking echo is missing. Number of products with errors: 45 5. IOP Level 2 Data Quality Check 5.1 L2 Product Format Check Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL). Number of products with errors: 0 5.2 L2 Product Header Analysis For all products, a series of pre-defined checks are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain Number of products with errors: 0 5.3 L2 Auxiliary Data File Usage Check Each product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 0 5.4 L2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
Number of products with errors: 45 5. IOP Level 2 Data Quality Check 5.1 L2 Product Format Check Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (HDR) and a binary product file (.DBL) Number of products with errors: 0 5.2 L2 Product Header Analysis For all products, a series of pre-defined checks are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain Number of product with errors: 0 5.3 L2 Auxiliary Data File Usage Check Each product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 0 5.4 L2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
5.1 L2 Product Format Check Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL) Number of products with errors: 0 5.2 L2 Product Header Analysis For all products, a series of pre-defined checks are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain Number of products with errors: 0 5.3 L2 Auxiliary Data File Usage Check Each product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 0 5.4 L2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL) Number of products with errors: 0 5.2 L2 Product Header Analysis For all products, a series of pre-defined checks are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain Number of products with errors: 0 5.3 L2 Auxiliary Data File Usage Check Each product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 0 5.4 L2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
Number of products with errors: 0 5.2 L2 Product Header Analysis For all products, a series of pre-defined checks are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain Number of products with errors: 0 5.3 L2 Auxiliary Data File Usage Check Each product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 0 5.4 L2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
5.2 L2 Product Header Analysis For all products, a series of pre-defined checks are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain Number of products with errors: 5.3 L2 Auxiliary Data File Usage Check Each product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 6 5.4 L2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
For all products, a series of pre-defined checks are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain Number of products with errors: 0 5.3 L2 Auxiliary Data File Usage Check Each product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 0 5.4 L2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
Number of products with errors: 0 5.3 L2 Auxiliary Data File Usage Check Each product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 0 5.4 L2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
5.3 L2 Auxiliary Data File Usage Check Each product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 0 5.4 L2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	ain.
Each product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 0 5.4 L2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
Each product is checked for missing Data Set Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 0 5.4 L2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
Number of products with errors: 0 5.4 L2 Measurement Confidence Data Check CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
CryoSat L2 data includes a quality flag (field 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.	
C. C. J. O. Dawney, Macaumanna Chaola	
5.5 L2 Range Measurement Check	
Each product is checked to detect range measurements flagged by the processing chain as missing or containing errors.	
Ocean Range Averaging Status Flag: This flag is currently set for products over land and sea ice, but this is to be expected.	
Image Averaging Status Flag: This flag is currently set for some products over land and continental ice. Number of products with errors: 241	
5.6 L2 SWH and Backscatter Measurement Check	

Ocean Backscatter Averaging Status Flag: This flag is currently set for products over land and sea ice, but this is to be expected.

Ice Backscatter Averaging Status Flag: This flag is currently set for some products over land and continental ice. 211

Number of products with errors: