


IDEAS+ Daily Report for IOP data:

<u>21/03/2015</u>



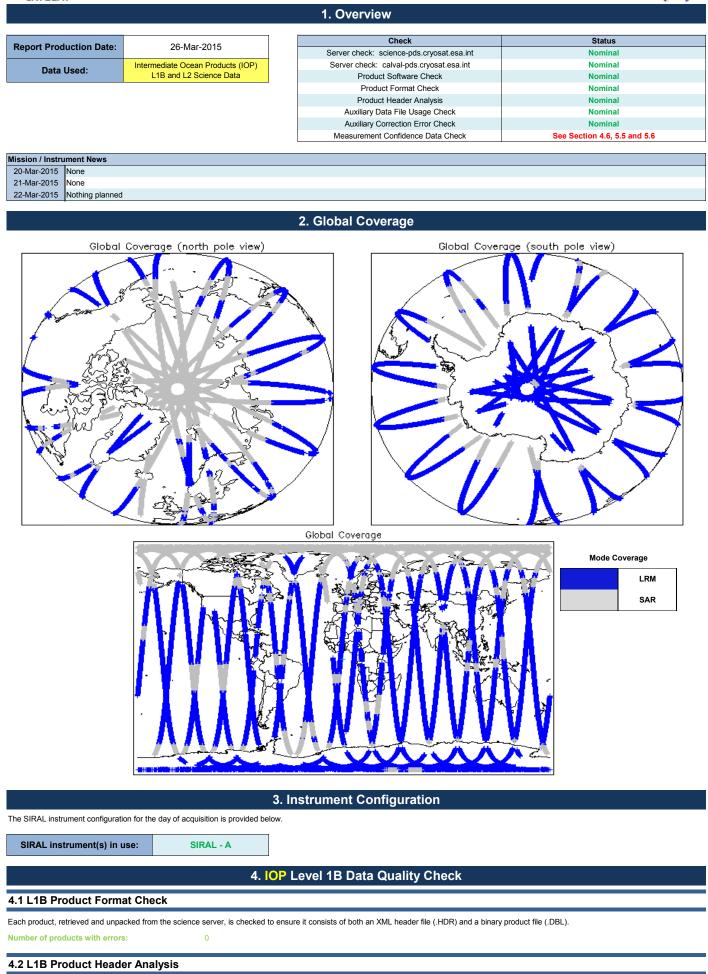

For all products, a series of pre-defined checks are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain.

Number of products with errors:

0

I.3 L1B Auxilary Data File Usage	Check
ach product is checked for missing Data Set De	scriptors with repsect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct.
umber of products with errors:	0
.4 L1B Auxiliary Correction Erro	r Check
ach product is checked to detect auxiliary correc	ctions flagged by the ground-station processing chain as missing or containing errors.
umber of products with errors:	0
.5 L1B Measurement Confidence	e Data Check
ryoSat L1B data includes a measurement confid	dence flag (field 12) for each measurement record. The bit value of this flag indicates any problems when set.
umber of products with errors:	0
.6 L1B Waveform Group Data Ch	neck
ryoSat L1B data includes a waveform data flag ((field 65) for each measurement record. The bit value of this flag indicates any problems when set.
oss of Echo Flag: This flag is currently set for a	a large number of products over land, indicating that the tracking echo is missing.
lumber of products with errors:	47
	5. IOP Level 2 Data Quality Check
.1 L2 Product Format Check	
ach product, retrieved and unpacked from the so	cience server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL)
lumber of products with errors:	0
5.2 L2 Product Header Analysis	
or all products, a series of pre-defined checks ar	re performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain.
umber of products with errors:	0
.3 L2 Auxiliary Data File Usage C	Check
ach product is checked for missing Data Set De:	scriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct.
lumber of products with errors:	0
.4 L2 Measurement Confidence I	Data Check
ryoSat L2 data includes a quality flag (field 14) f	or each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.
umber of products with errors:	0
.5 L2 Range Measurement Chec	k
ach product is checked to detect range measure	ements flagged by the processing chain as missing or containing errors.
cean Range Averaging Status Flag: This flag	is currently set for products over land and sea ice, but this is to be expected.
	urrently set for some products over land and continental ice.
e Range Averaging Status Flag: This flag is cu	
e Range Averaging Status Flag: This flag is cu umber of products with errors:	250

SWH Averaging Status Flag: This flag is currently set for products over land and sea ice, but this is to be expected.

Ocean Backscatter Averaging Status Flag: This flag is currently set for products over land and sea ice, but this is to be expected.

Ice Backscatter Averaging Status Flag: This flag is currently set for some products over land and continental ice. 227

Number of products with errors: