



IDEAS+ Daily Report for IOP data:

20/05/2015



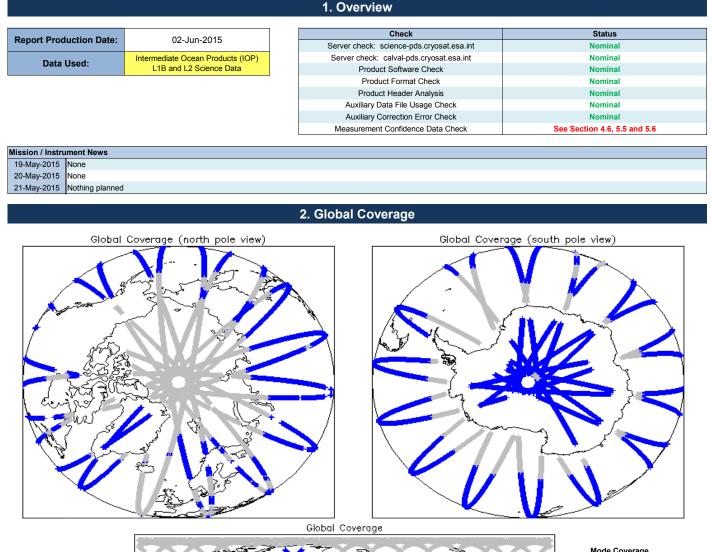

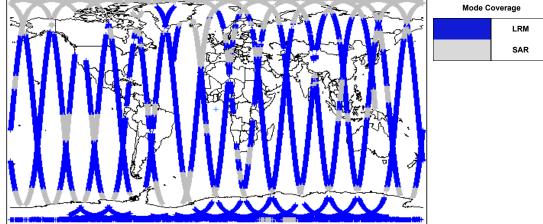

3. Instrument Configuration

The SIRAL instrument configuration for the day of acquisition is provided below.

## SIRAL instrument(s) in use:

## 4. IOP Level 1B Data Quality Check

## 4.1 L1B Product Format Check

Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL).

Number of products with errors:

## 4.2 L1B Product Header Analysis

For all products, a series of pre-defined checks are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain.

Number of products with errors:

0

SIRAL - A

4.3 L1B Auxilary Data File Us	age Check
Each product is checked for missing Data S lumber of products with errors:	et Descriptors with repsect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct.
aunder of products with errors.	U
4.4 L1B Auxiliary Correction	Error Check
Each product is checked to detect auxiliary	corrections flagged by the ground-station processing chain as missing or containing errors.
Number of products with errors:	0
4.5 L1B Measurement Confid	ence Data Check
CryoSat L1B data includes a measurement	confidence flag (field 12) for each measurement record. The bit value of this flag indicates any problems when set.
Number of products with errors:	0
4.6 L1B Waveform Group Dat	a Check
CryoSat L1B data includes a waveform data	a flag (field 65) for each measurement record. The bit value of this flag indicates any problems when set.
Loss of Echo Flag: This flag is currently se	et for a large number of products over land, indicating that the tracking echo is missing.
Number of products with errors:	38
	5. IOP Level 2 Data Quality Check
5.1 L2 Product Format Check	
Each product, retrieved and unpacked from	the science server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL)
Number of products with errors:	0
5.2 L2 Product Header Analys	sis
For all products, a series of pre-defined che	cks are performed on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain.
Number of products with errors:	0
5.3 L2 Auxiliary Data File Usa	ge Check
Each product is checked for missing Data S	et Descriptors with respect to a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct.
Number of products with errors:	0
5.4 L2 Measurement Confider	nce Data Check
CryoSat L2 data includes a quality flag (field	1 14) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chains.
Number of products with errors:	0
5.5 L2 Range Measurement C	heck
Each product is checked to detect range me	easurements flagged by the processing chain as missing or containing errors.
Ocean Range Averaging Status Flag: Thi	s flag is currently set for products over land and sea ice, but this is to be expected.
ce Range Averaging Status Flag: This fla	ag is currently set for some products over land and continental ice.
Number of products with errors:	215
5.6 L2 SWH and Backscatter	Measurement Check
Each product is checked to detect paramete	ers related to SWH and sigma0 that are flagged by the processing chain as missing or containing errors.
	surrantly set for products over land and sea ice. but this is to be expected

SWH Averaging Status Flag: This flag is currently set for products over land and sea ice, but this is to be expected.

Ocean Backscatter Averaging Status Flag: This flag is currently set for products over land and sea ice, but this is to be expected.

Ice Backscatter Averaging Status Flag: This flag is currently set for some products over land and continental ice. 190

Number of products with errors: