

REPORT OF 031031

1. [Introduction](#)
2. [Summary](#)
 - [Instrument Unavailability](#)
 - [Browse Visual Inspection](#)
 - [Module Stepping Results](#)
 - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
 - [Daily statistics \(row 3 and 24\)](#)
 - [Cyclic statistics \(row 3 and 24\)](#)
 - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
 - [raw data mean I and Q](#)
 - [raw data stdev I and Q](#)
 - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
 - [Unbiased Doppler Error](#)
 - [Absolute Doppler](#)
 - [Doppler evolution versus ANX](#)

1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA_WVS_1P) products, which are the available few hours after the acquisition, on the high rate browse (BP) products and on the Module Stepping (MS) product.

2 - Summary

2.1 - Instrument Unavailability

The unavailabilities during the reported period are listed in the table below.

Sub-system	Start	Stop	Planned
ASAR	2003-10-30 06:55:09	2003-10-30 08:32:47	-No-

2.2 - Browse Visual Inspection

Anomalies observed from browse products visual inspection:

- ASA_WS__BPZPDK20031030_183649_000000122021_00142_08713_2320.N1



2.3 - Data Analysis

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.

3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis. The purpose of this mode is to identify any malfunctioning modules and to identify modules for which calibration offsets are to be applied.









No anomalies observed on available MS products:

- ASA_MS__0PNPDK20031030_194722_000000152021_00142_08713_0093.N1
- ASA_MS__0PNPDK20031030_194842_000000152021_00142_08713_0094.N1



Polarisation	Start Time
V	20031030 194842
H	20031030 194722

MSM in V/V polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
	
	
	
	

MSM in H/H polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
☒	☒
☒	☒
☒	☒
☒	☒

4 - Internal calibration Results

No anomalies observed.

4.1 - Daily statistics

row	stat	AveP1	AveP2	AveP3
3	mean	-3.77811	-22.5259	-8.14716
	stdev	0.00527657	0.0709061	0.00254885
24	mean	-5.14306	-21.2271	-8.14716
	stdev	0.0105526	0.0673788	0.00254885

☒

4.2 - Cyclic statistics

row	stat	AveP1	AveP2	AveP3
3	mean	-3.79370	-22.5413	-8.14337
	stdev	0.00551420	0.0624563	0.00255298
24	mean	-5.36555	-21.2637	-8.14337
	stdev	0.889808	0.0595686	0.00255298

☒

4.3 - cal pulses monitoring (all rows)

☒

5 - RAW data statistics

No anomalies observed.

5.1 - Input mean I/Q

channel	stat	DSS-B
MEAN I	mean	0.000364582
	stdev	3.60703e-07
MEAN Q	mean	0.000277131
	stdev	3.37033e-07



5.2 - Input stdev I/Q

channel	stat	DSS-B
STDEV I	mean	0.113880
	stdev	0.00141643
STDEV Q	mean	0.114123
	stdev	0.00143314



5.3 - Gain imbalance I/Q



6 - Wave Doppler Analysis

No anomalies observed in Doppler evolution.
Doppler analysis performed over the last 35 days

6.1 - Unbiased Doppler Error

Evolution of unbiased Doppler error (Real - Expected)
Ascending
Descending

6.2 - Absolute Doppler


Evolution of Absolute Doppler
Ascending
Descending

6.3 - Doppler evolution versus ANX


Evolution Doppler error versus ANX
<input type="checkbox"/>




Average P1 (row 3 & row 24)

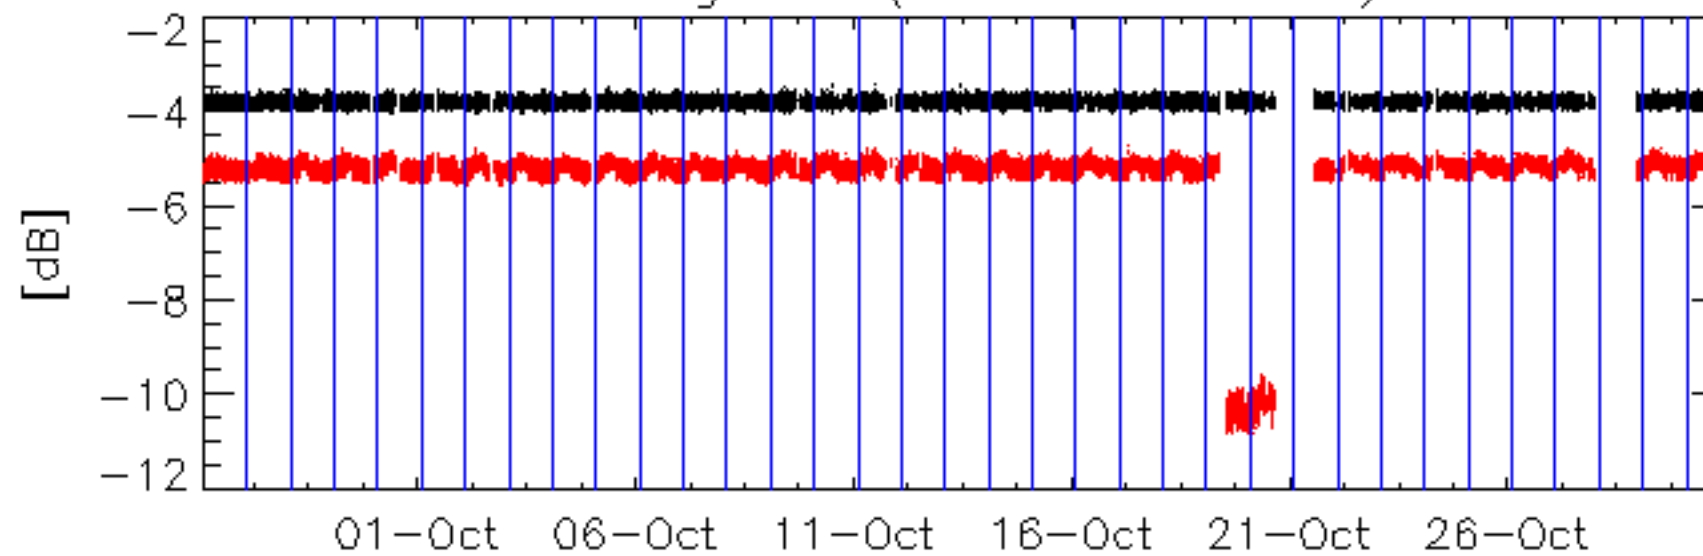


Average P2

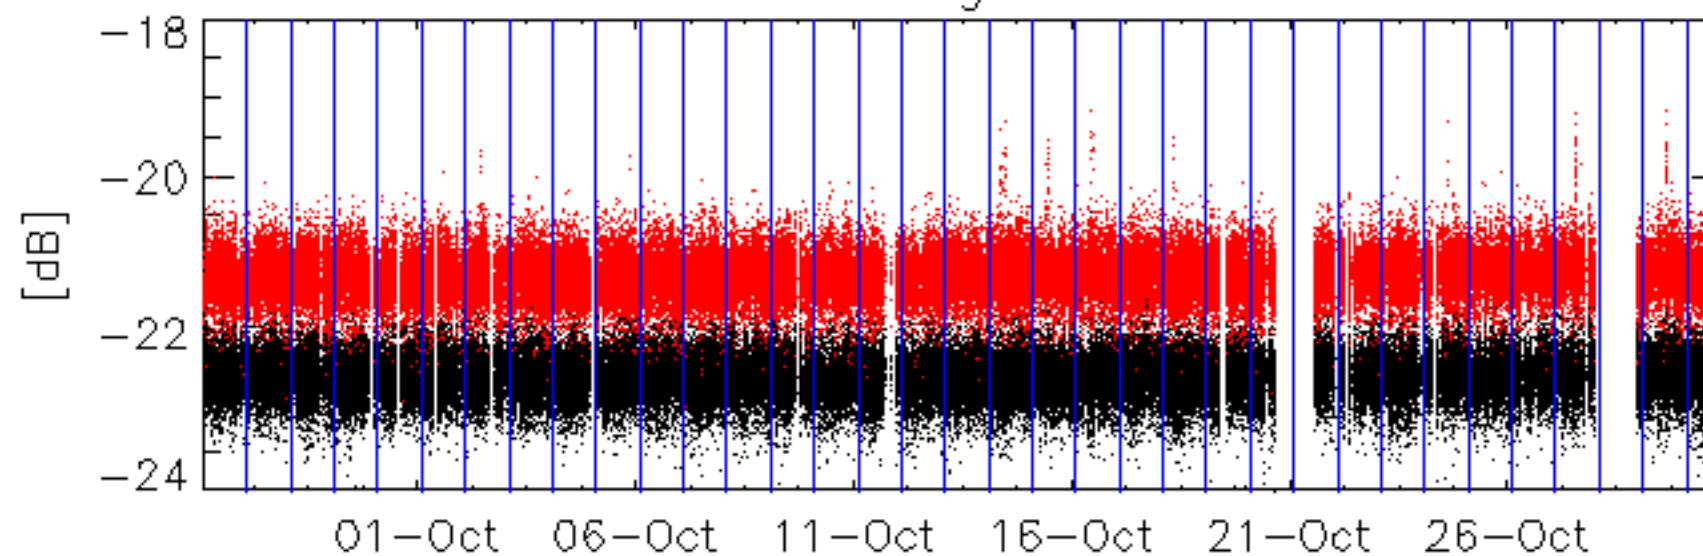

Average P3

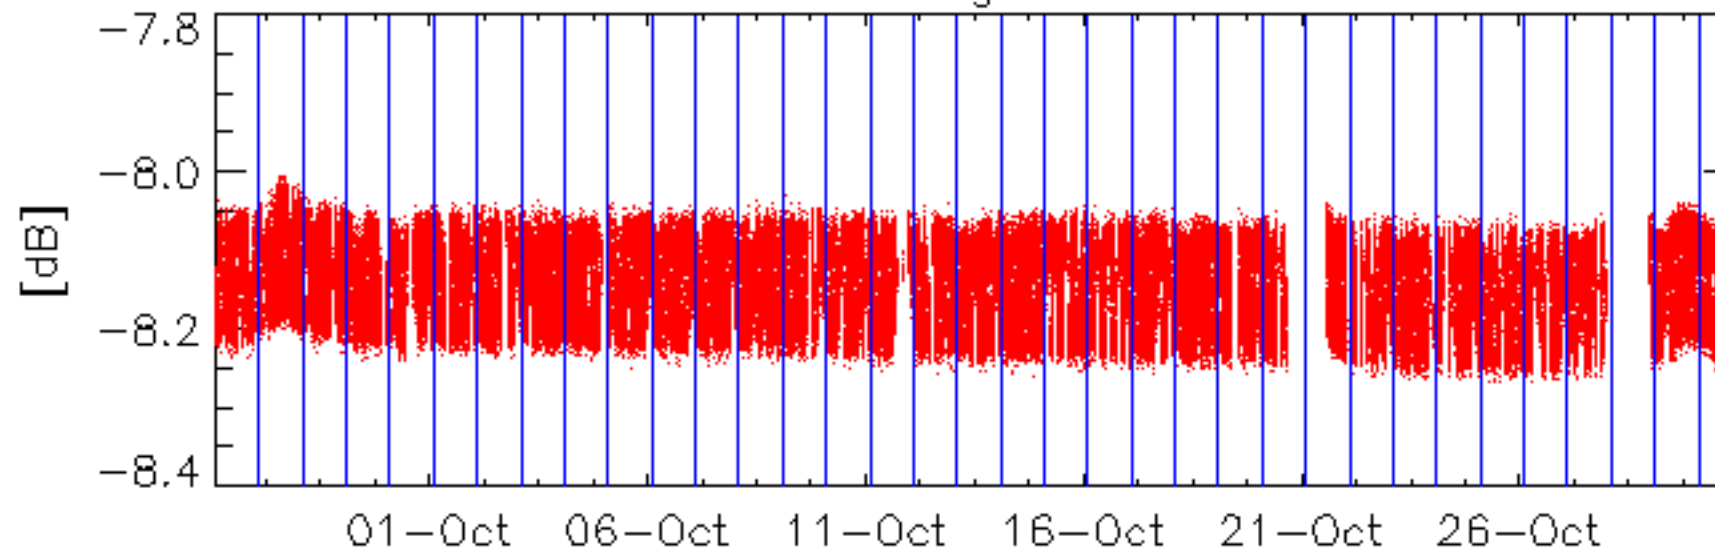


Average P1 (row 3 & row 24)

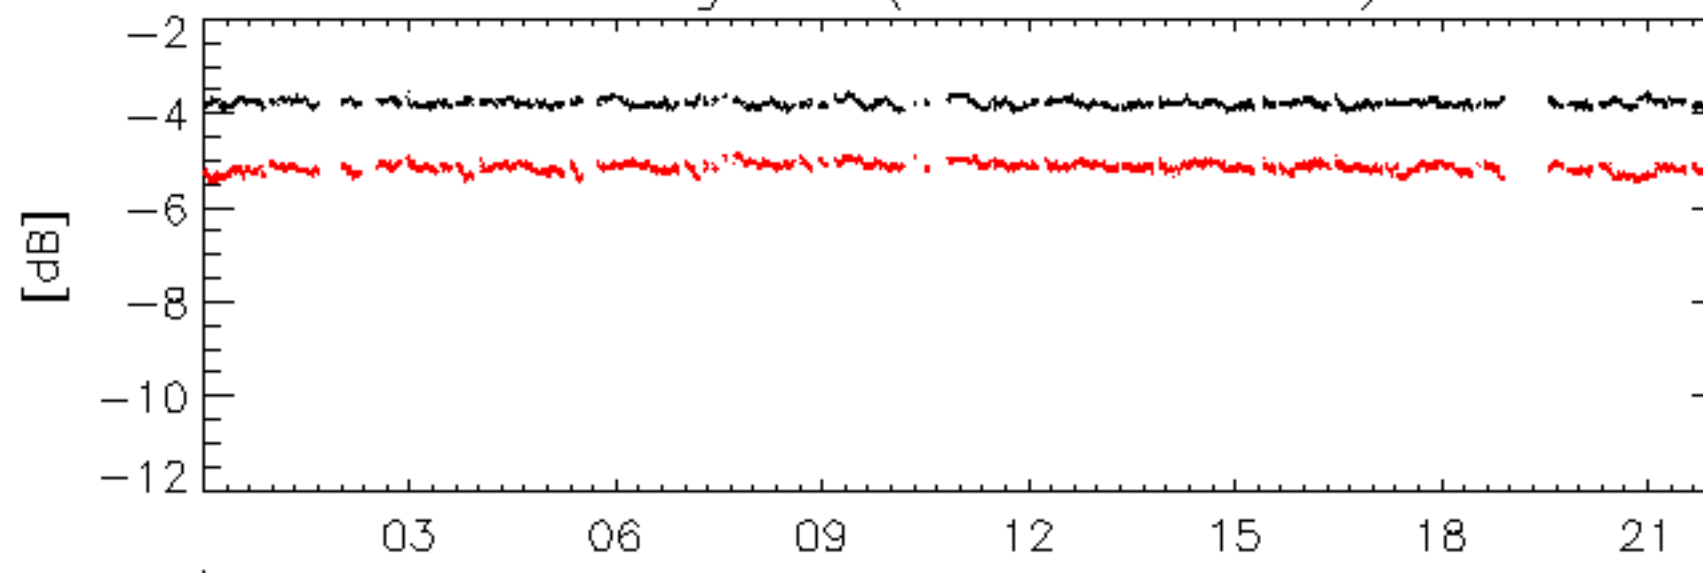


30-Oct

Average P2

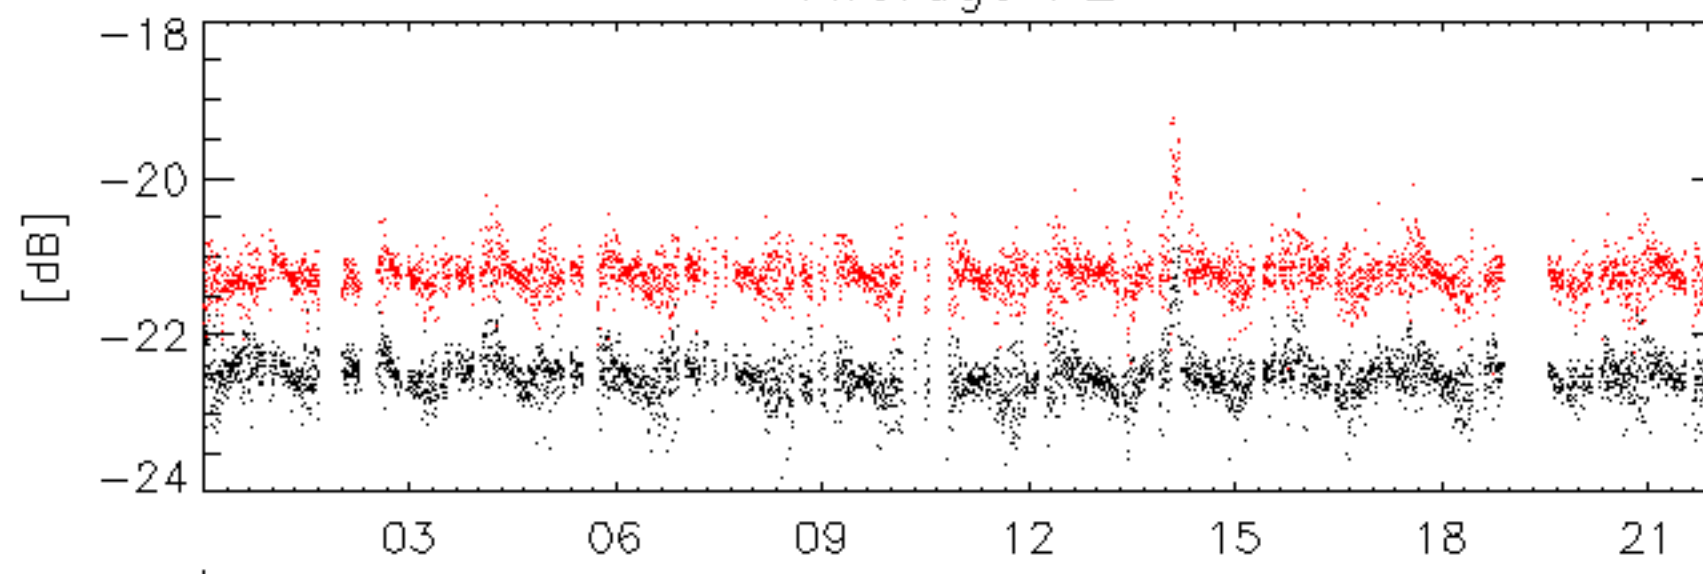


30-Oct

Average P3

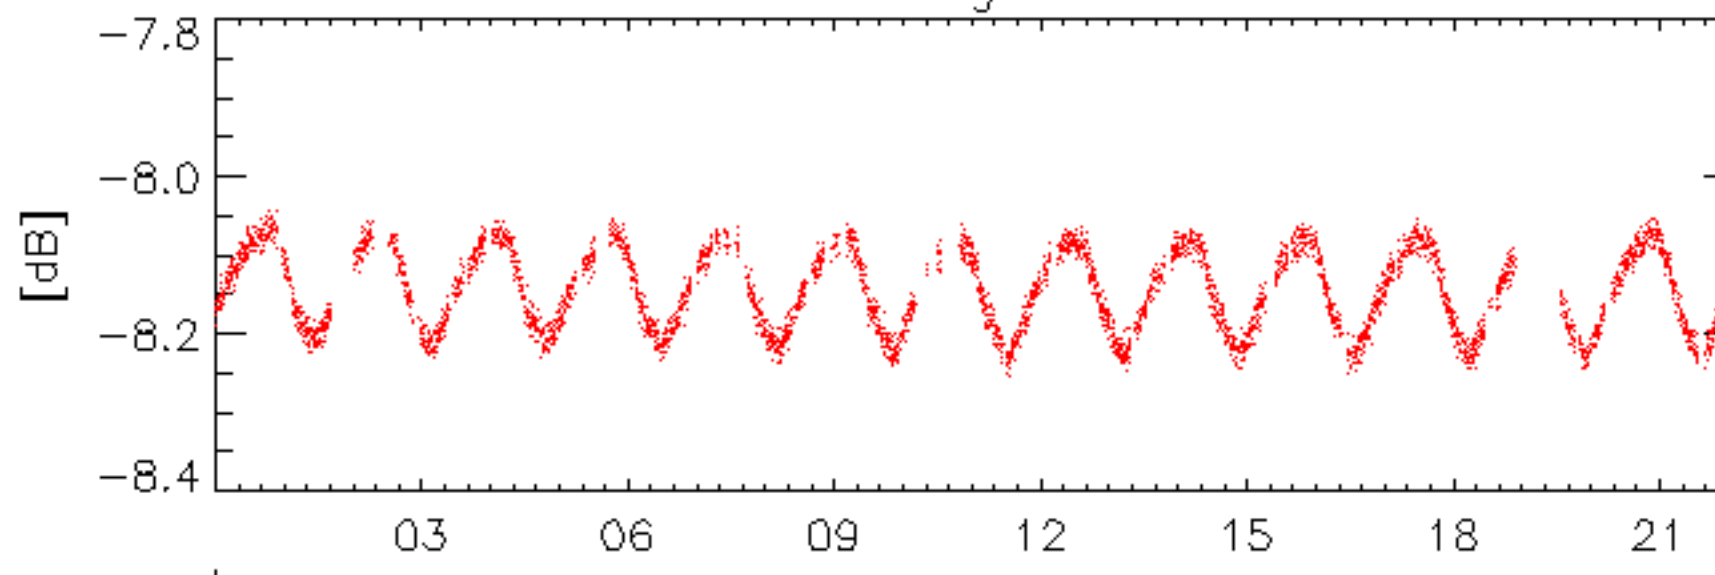


30-Oct

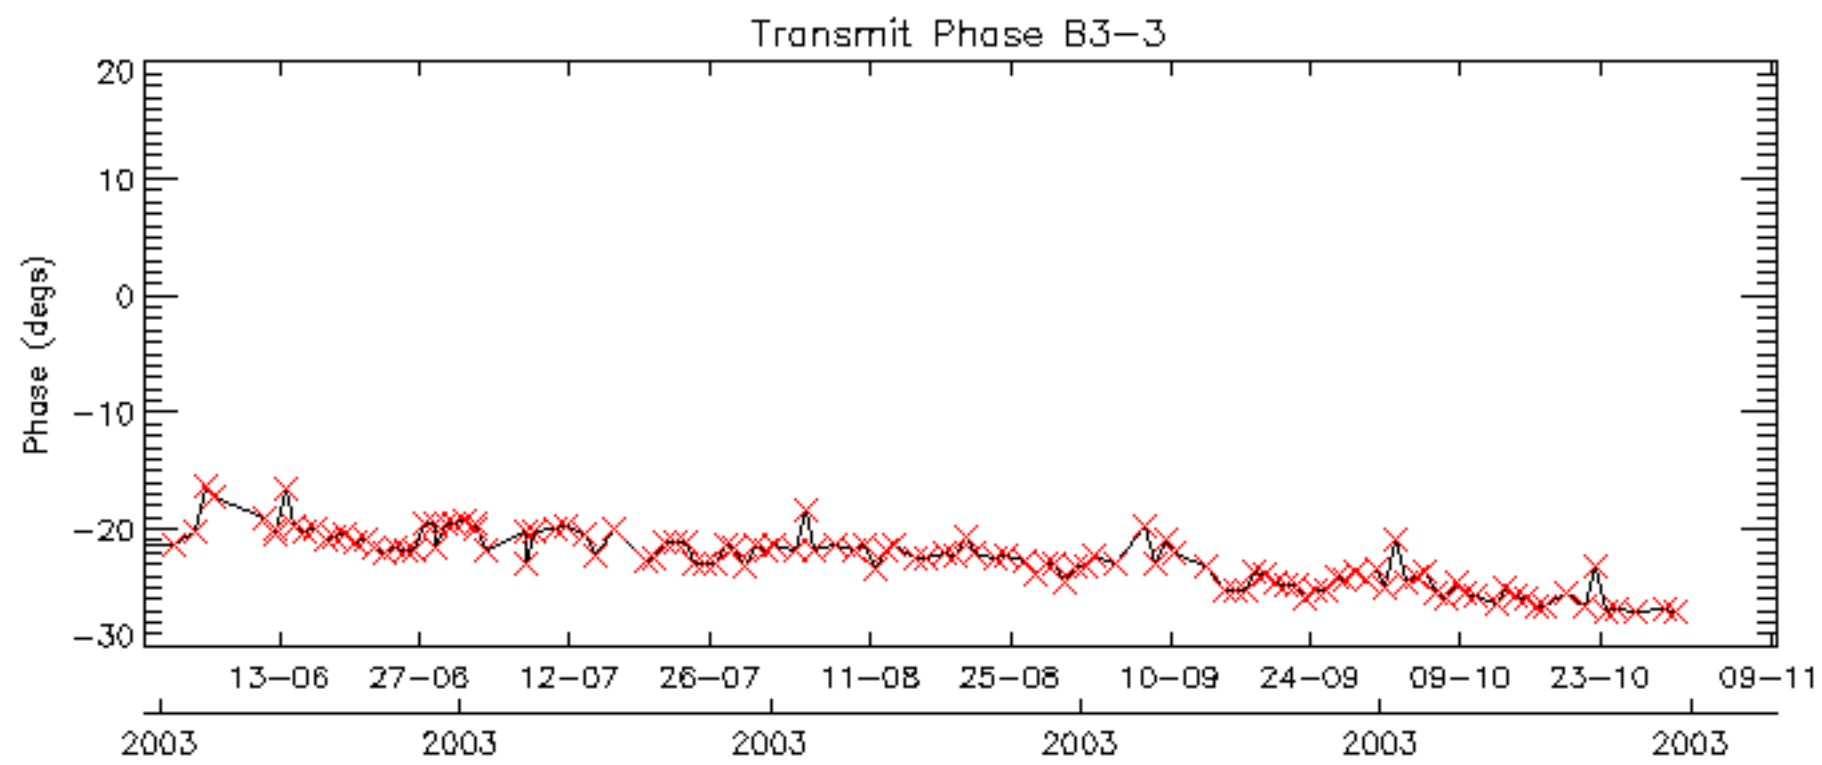

No anomalies observed on available browse products


No anomalies observed.

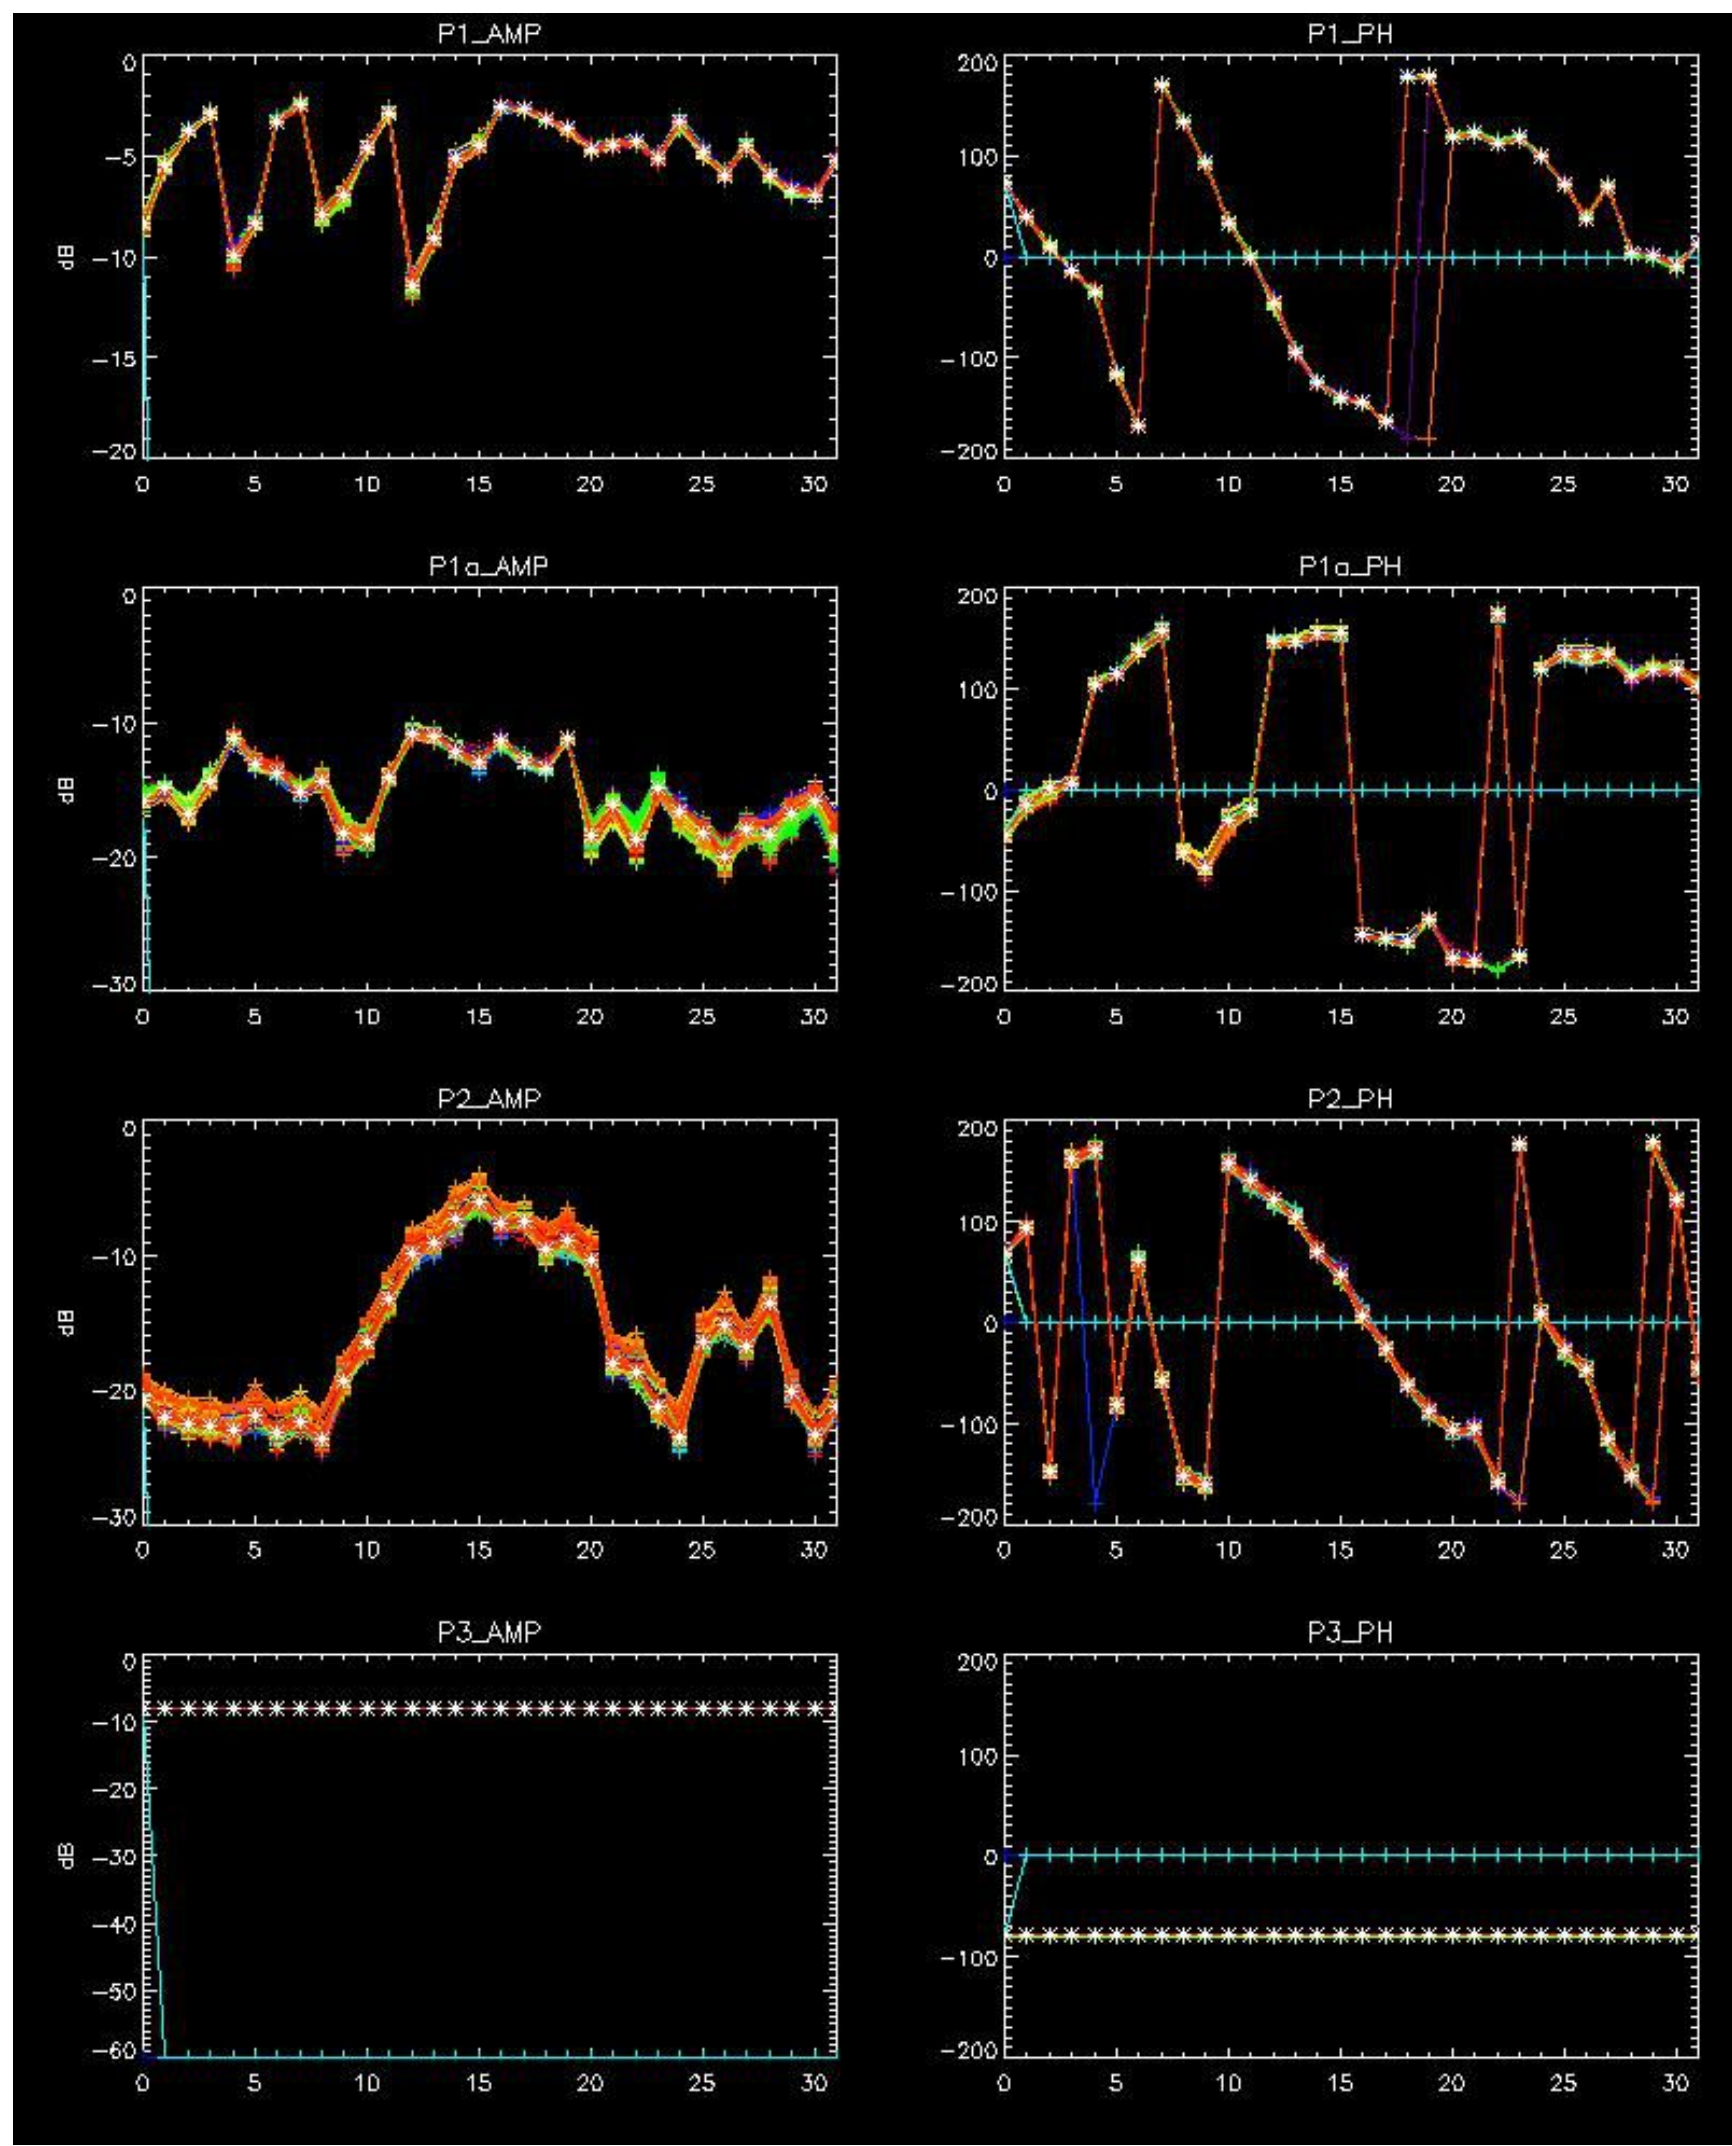


- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.



No anomalies observed in Doppler evolution.
Doppler analysis performed over the last 35 days

Doppler 'WVS' 'IS2' 'H/H'

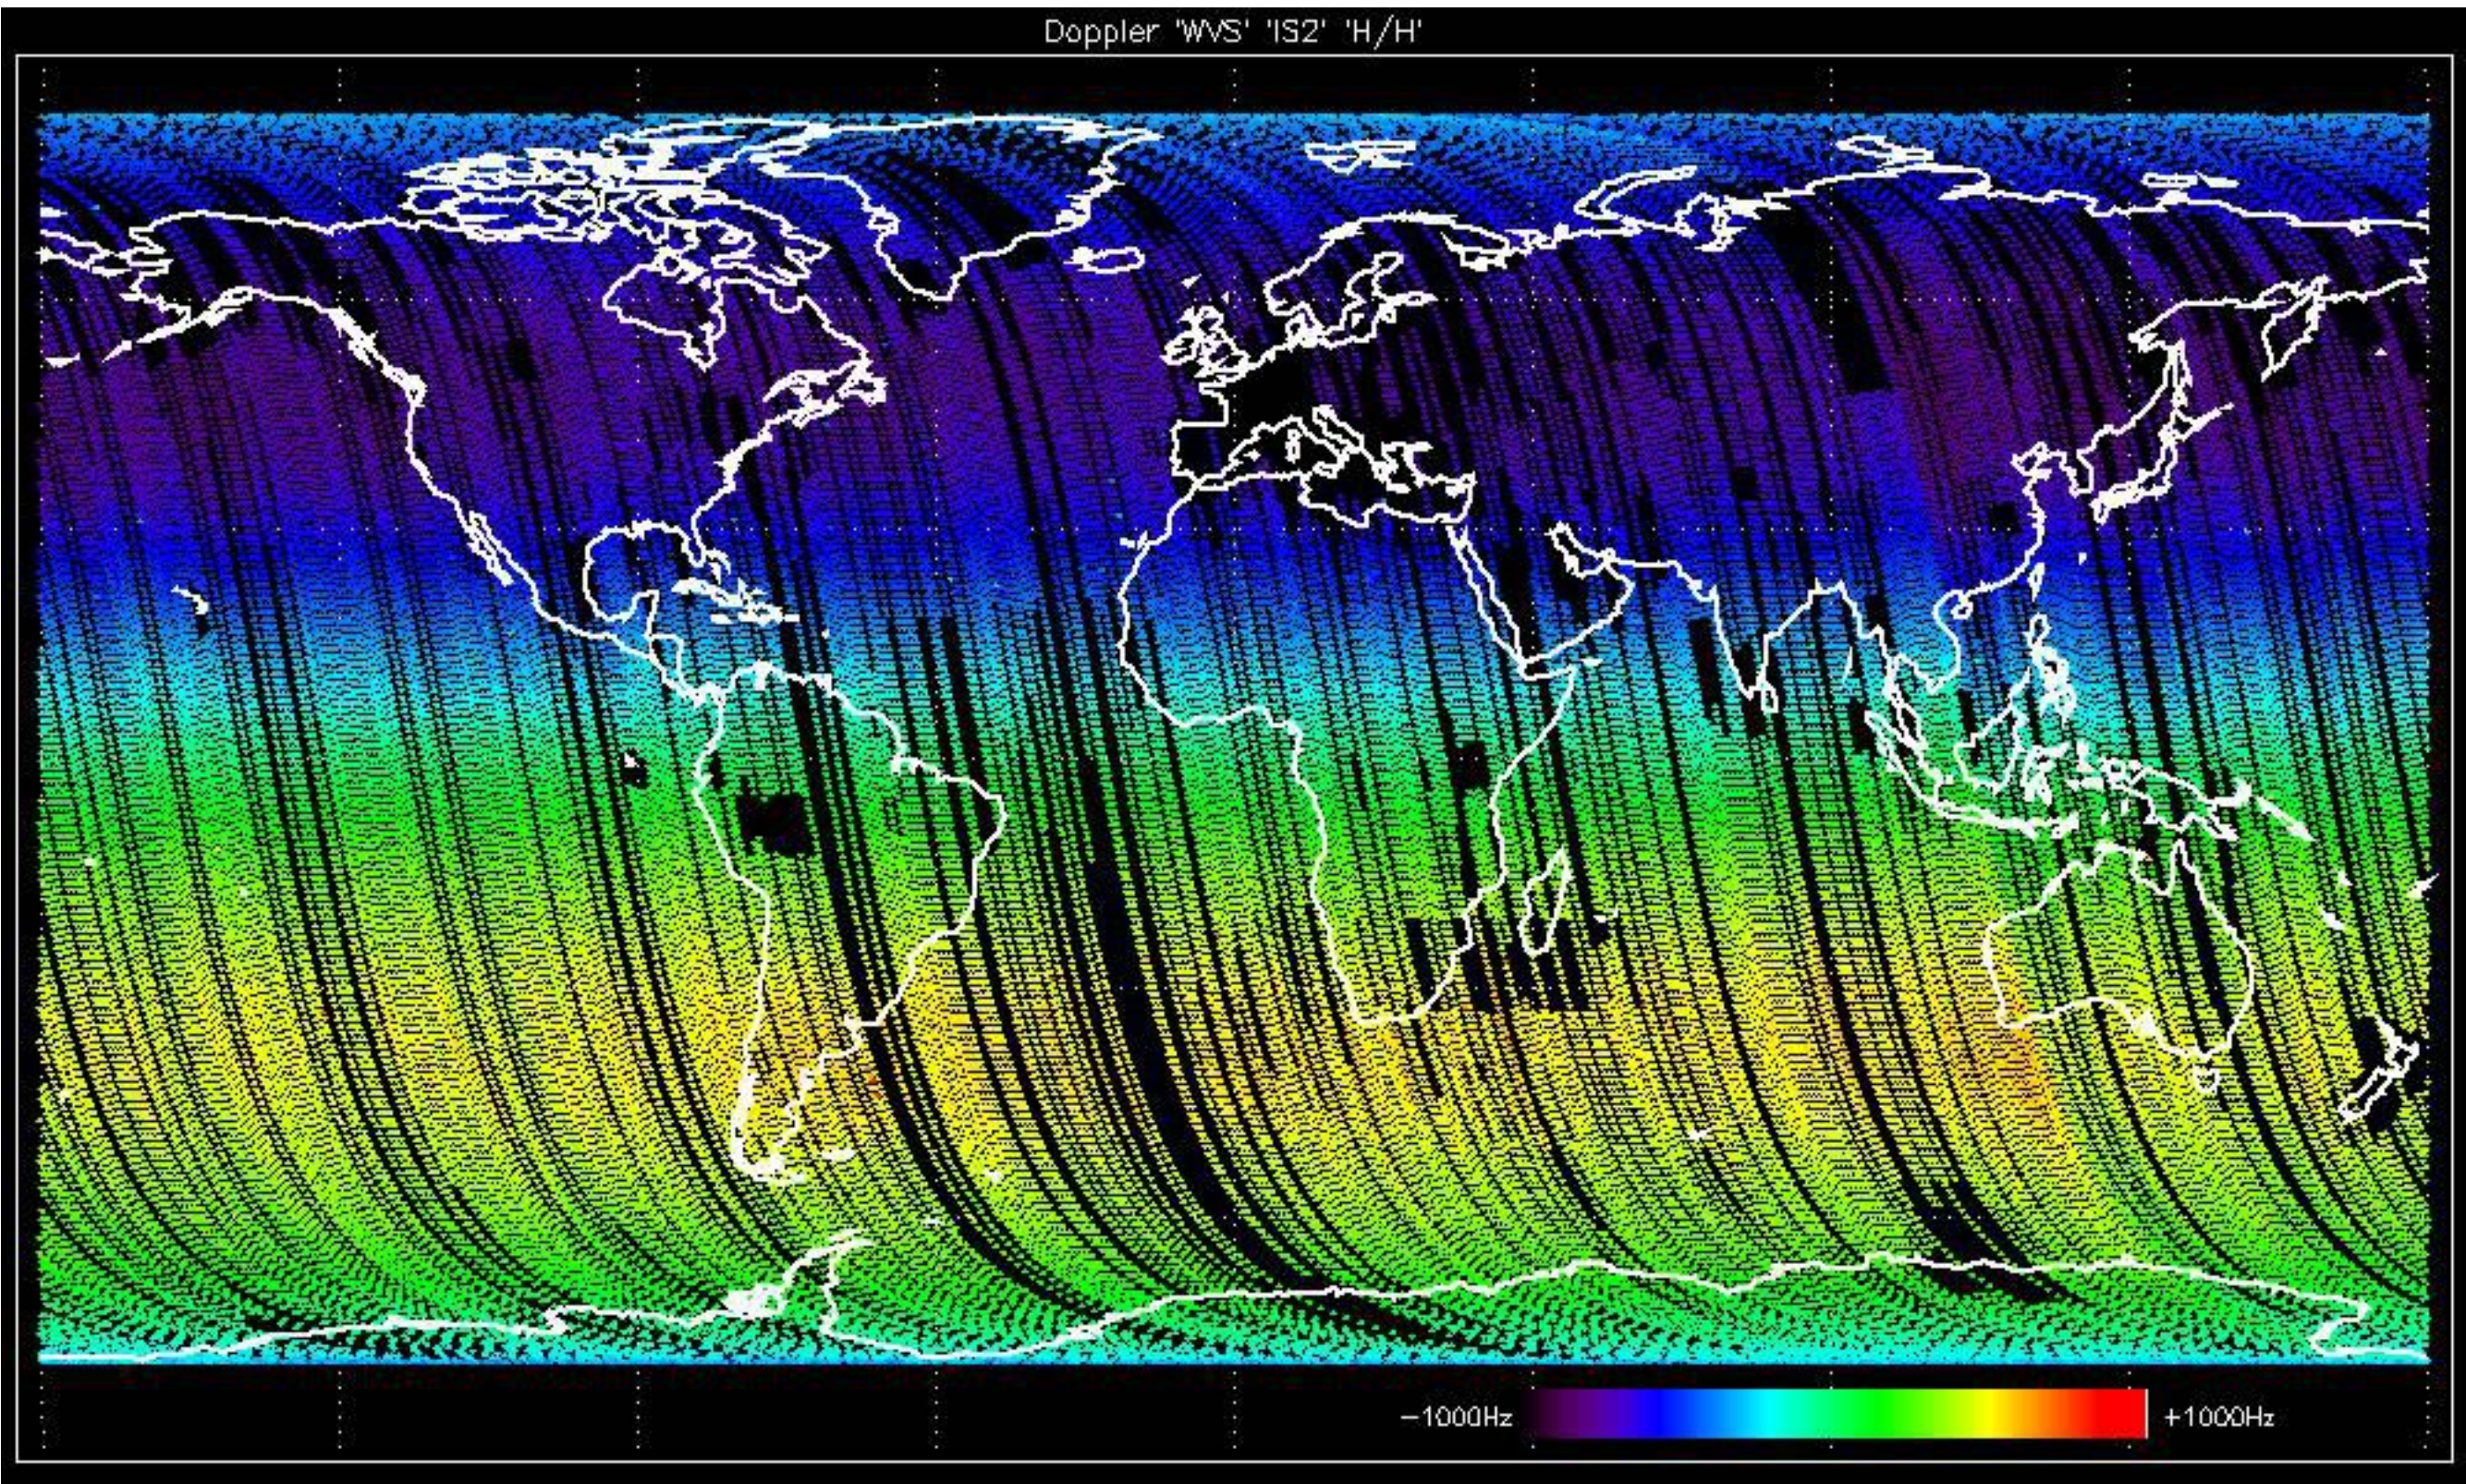


Doppler 'WVS' 'IS2' 'V/V'

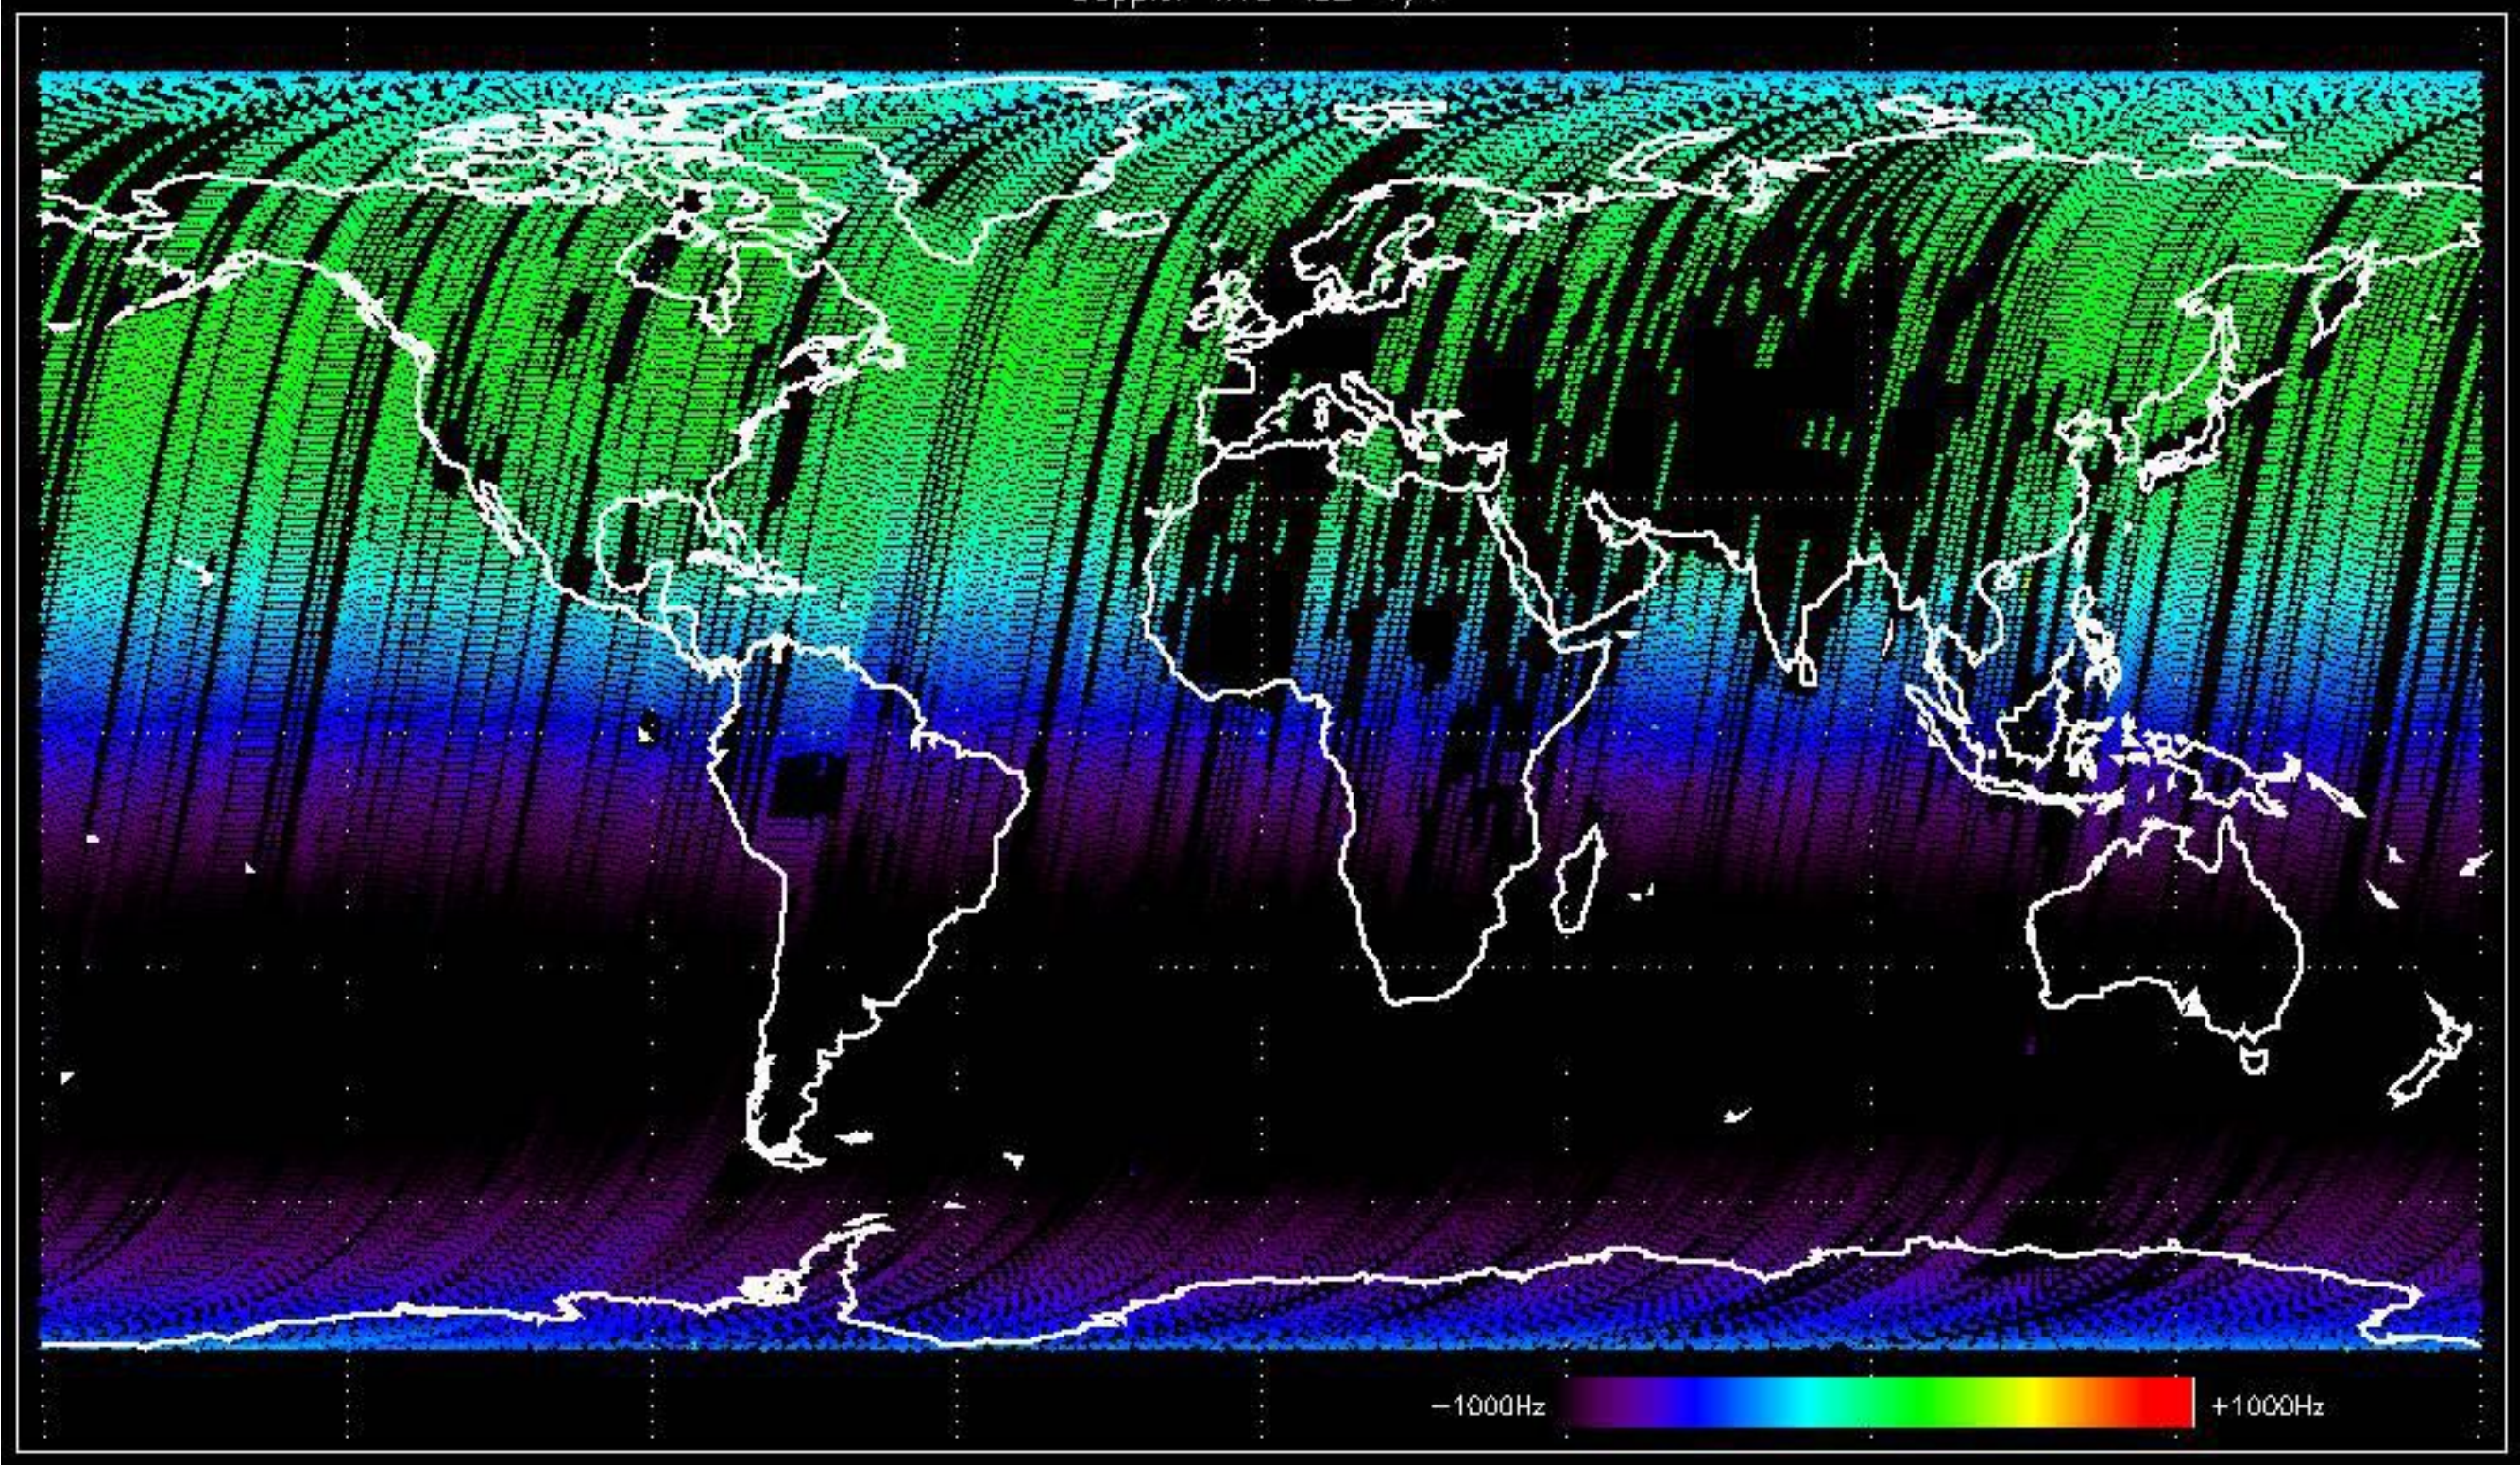


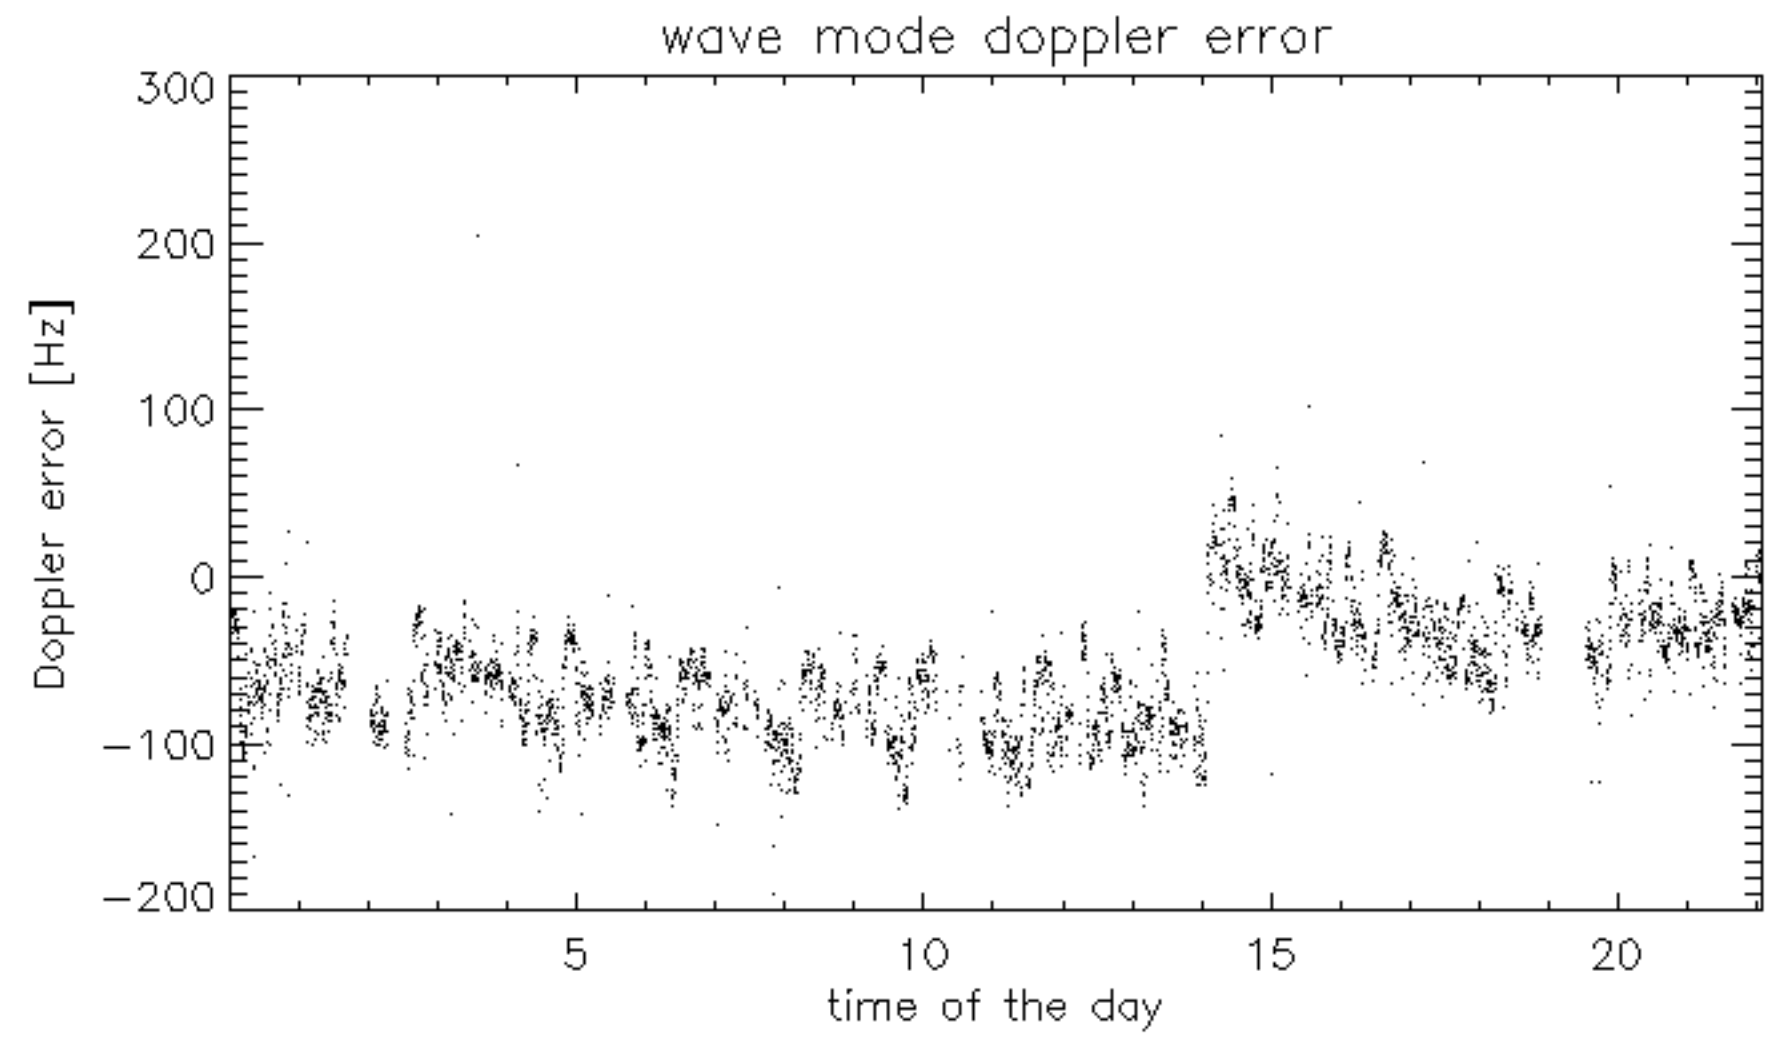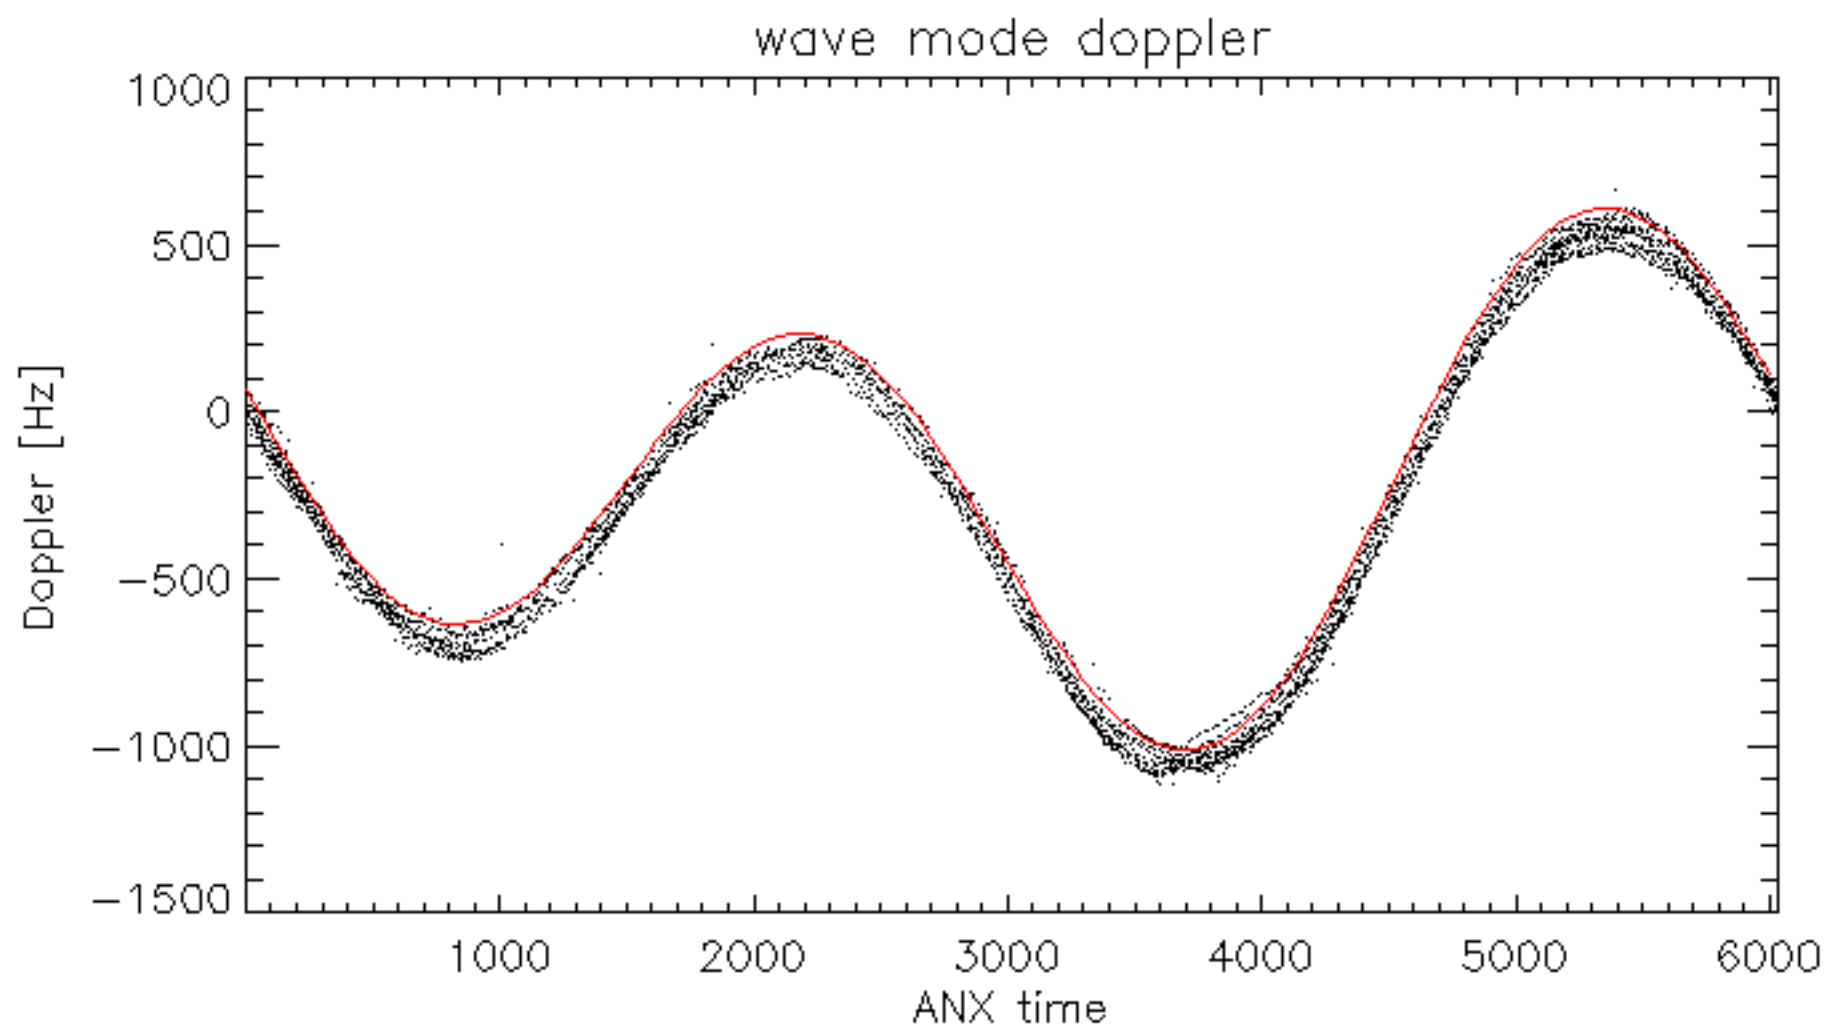

Doppler difference, estimated-predicted 'WVS' 'IS2' 'H/H' -error mean of 53 Hz

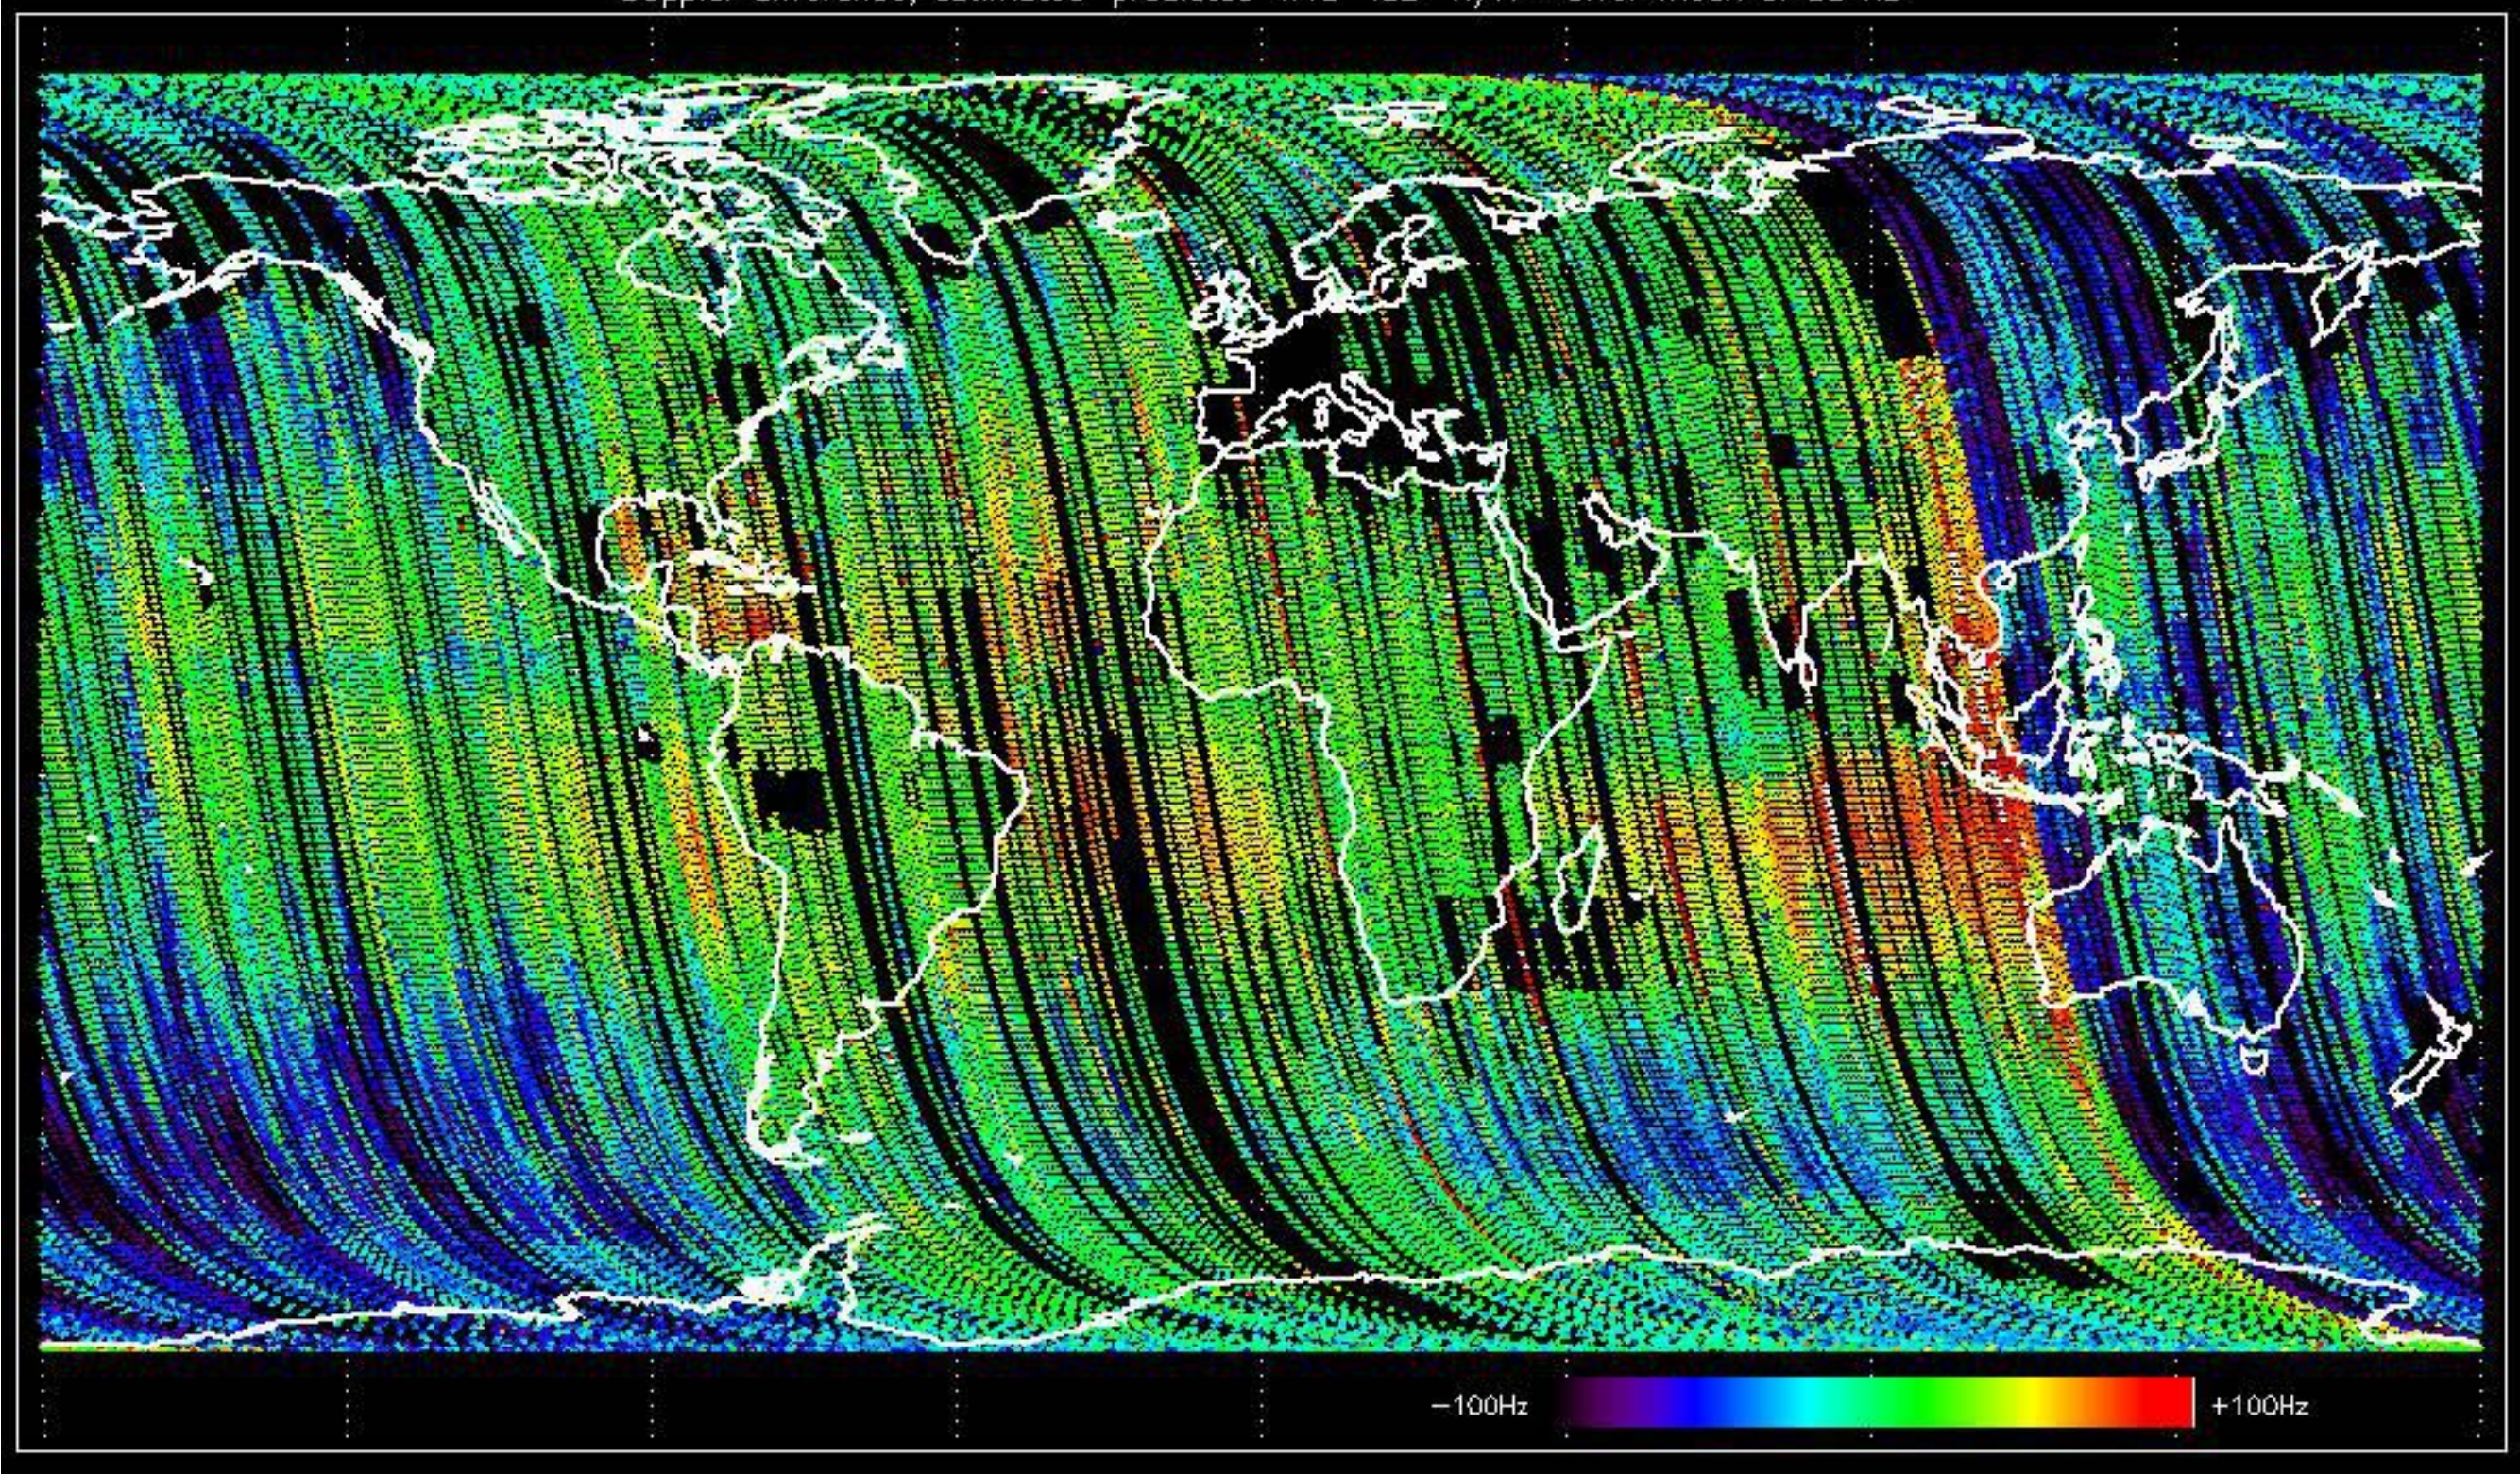

Doppler difference, estimated-predicted 'WS' 'IS2' 'V/V' -error mean of 53 Hz

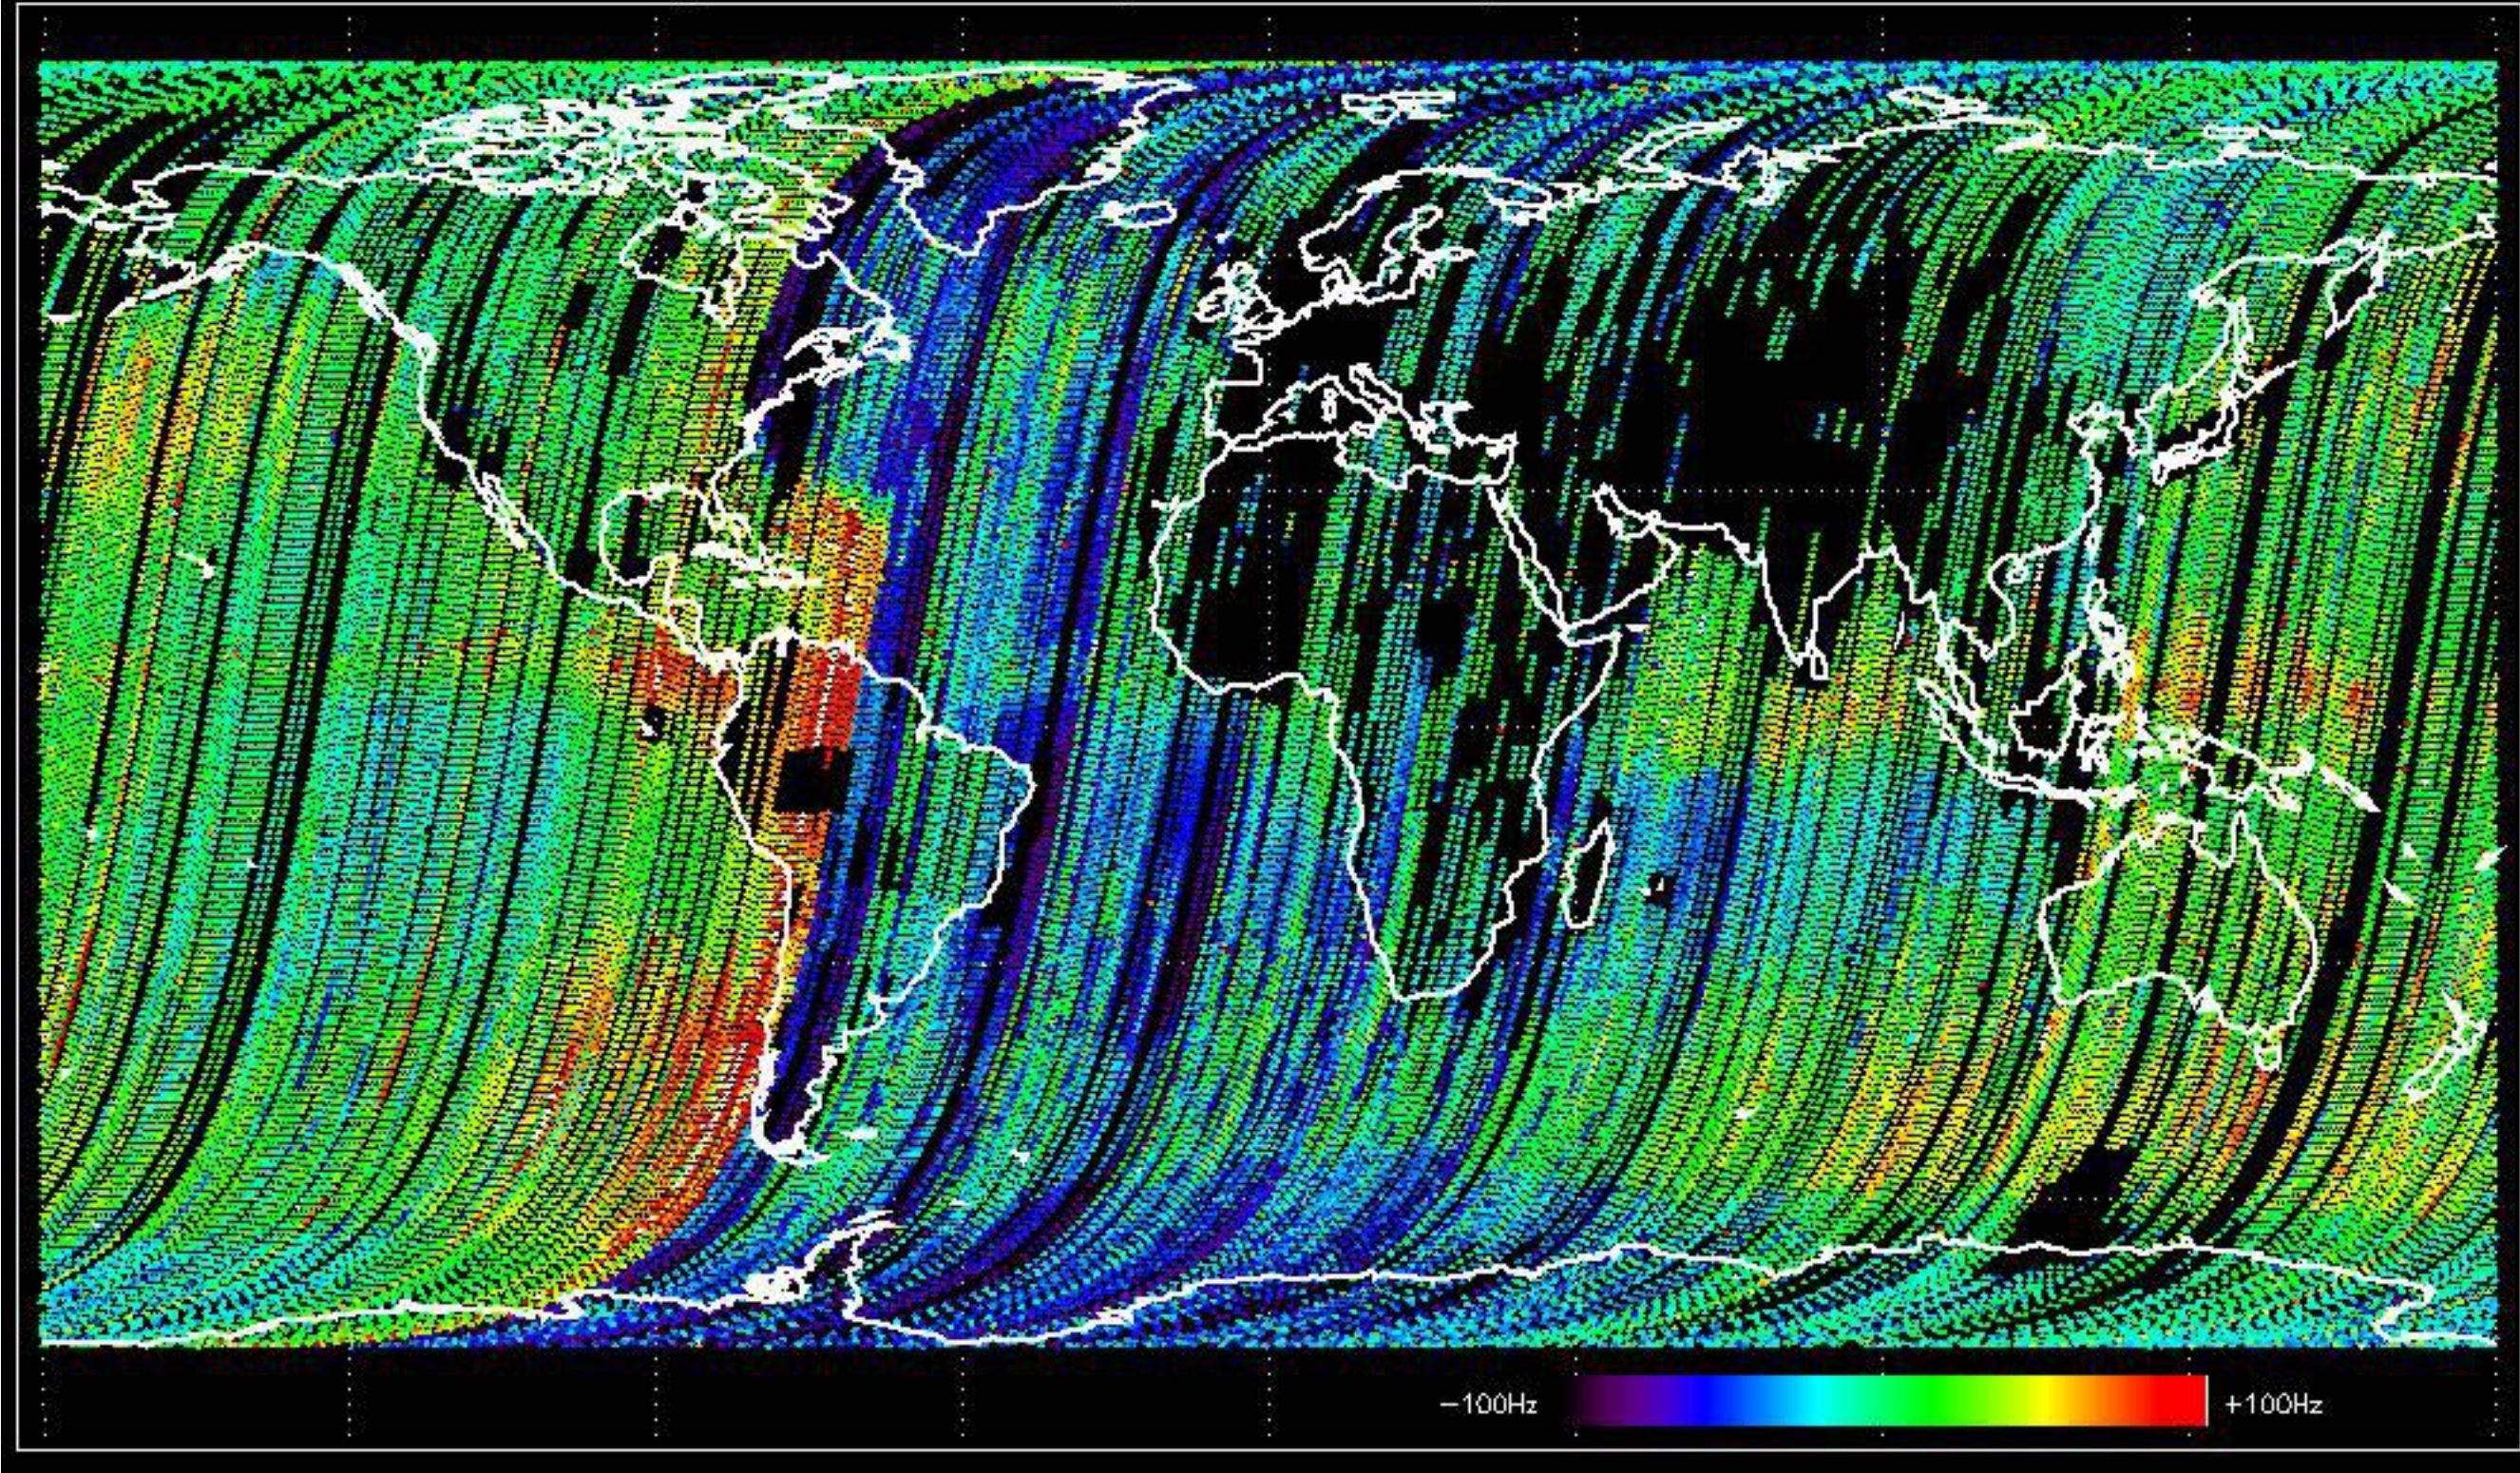


The MS mode provides an internal health check on an individual module basis.
The purpose of this mode is to identify any malfunctioning modules and
to identify modules for which calibration offsets are to be applied.


No anomalies observed on available MS products:




- ASA_MS__0PNPDK20031030_194722_000000152021_00142_08713_0093.N1
- ASA_MS__0PNPDK20031030_194842_000000152021_00142_08713_0094.N1




No anomalies observed.

Reference: 2003-06-12 14:08:52 H RxGain
 Test : 2003-10-30 19:47:22 H

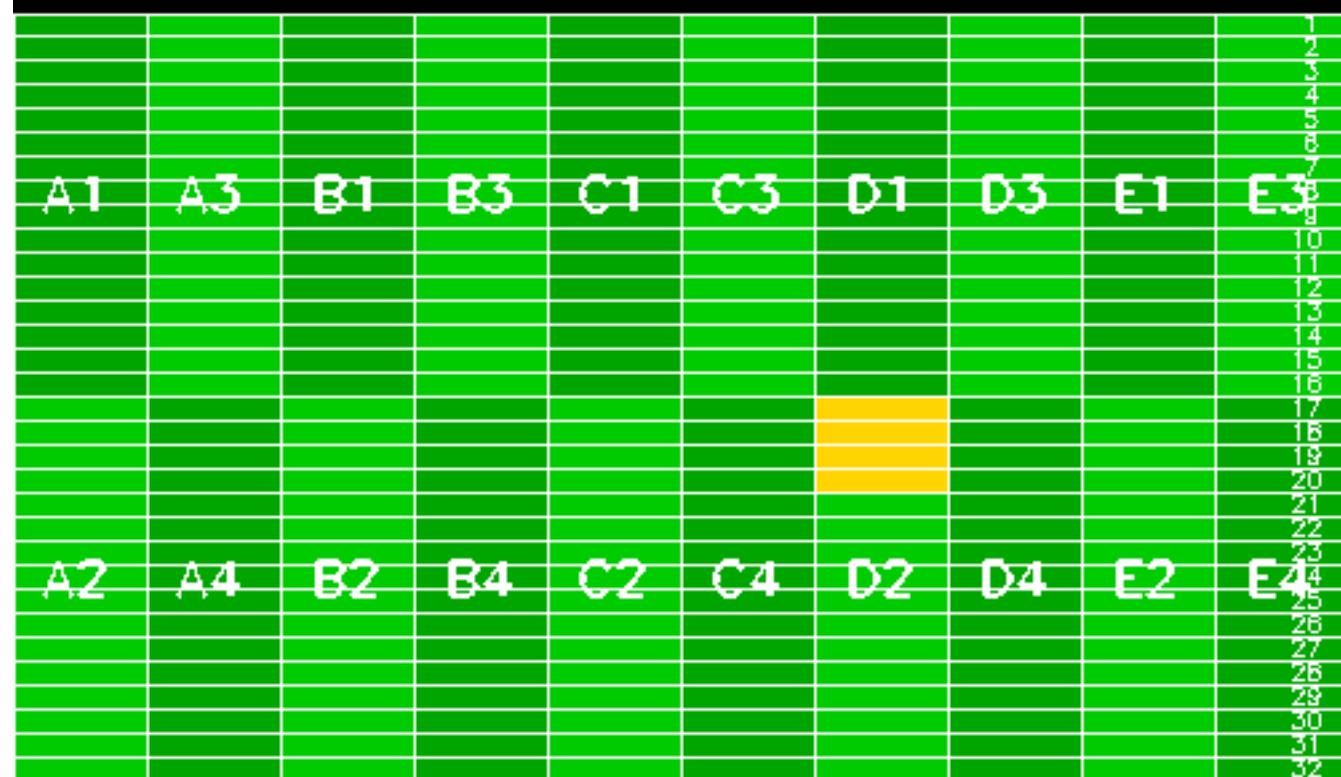

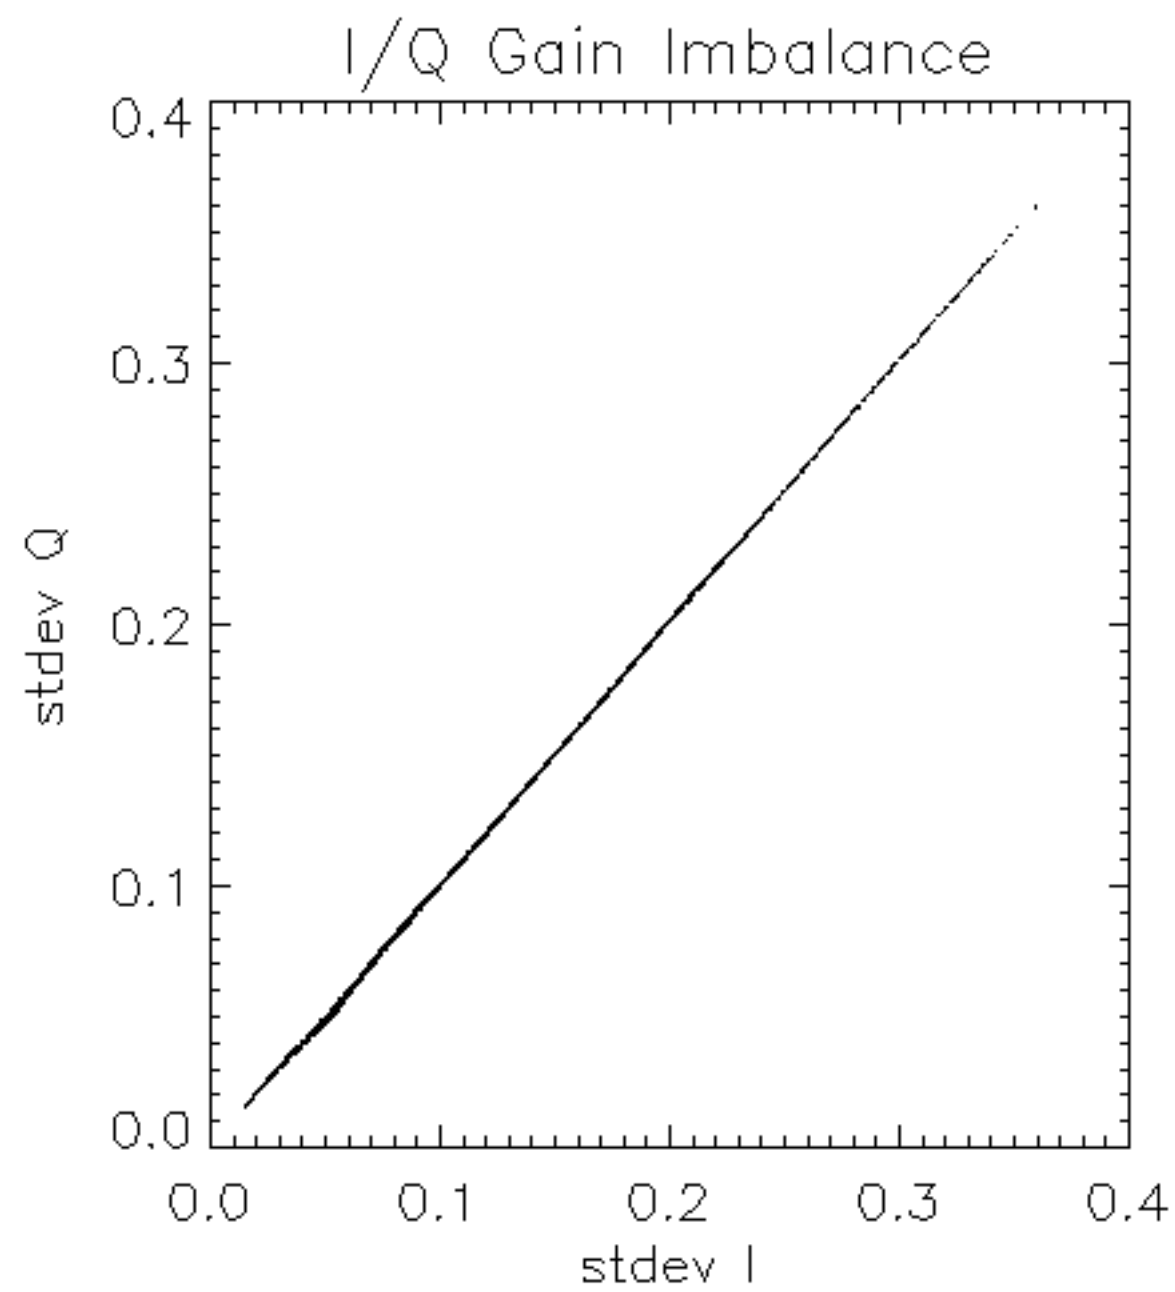

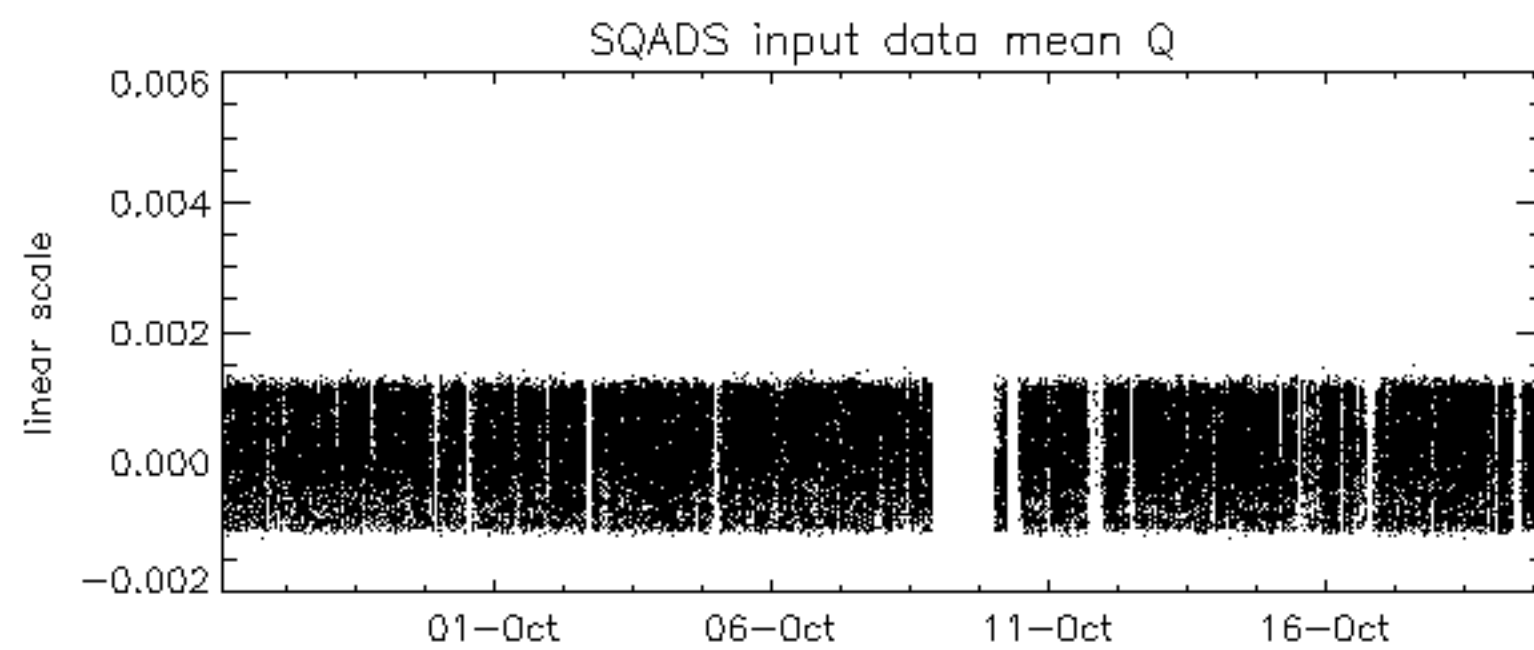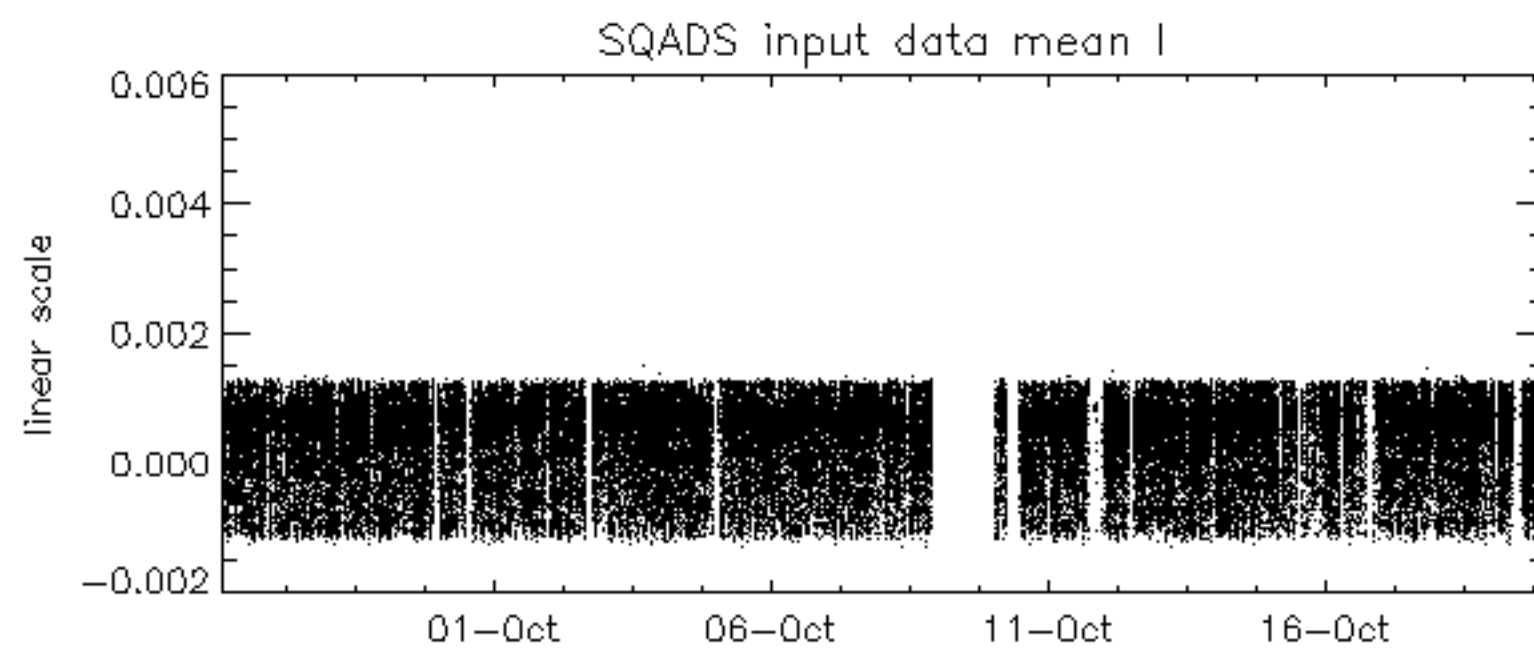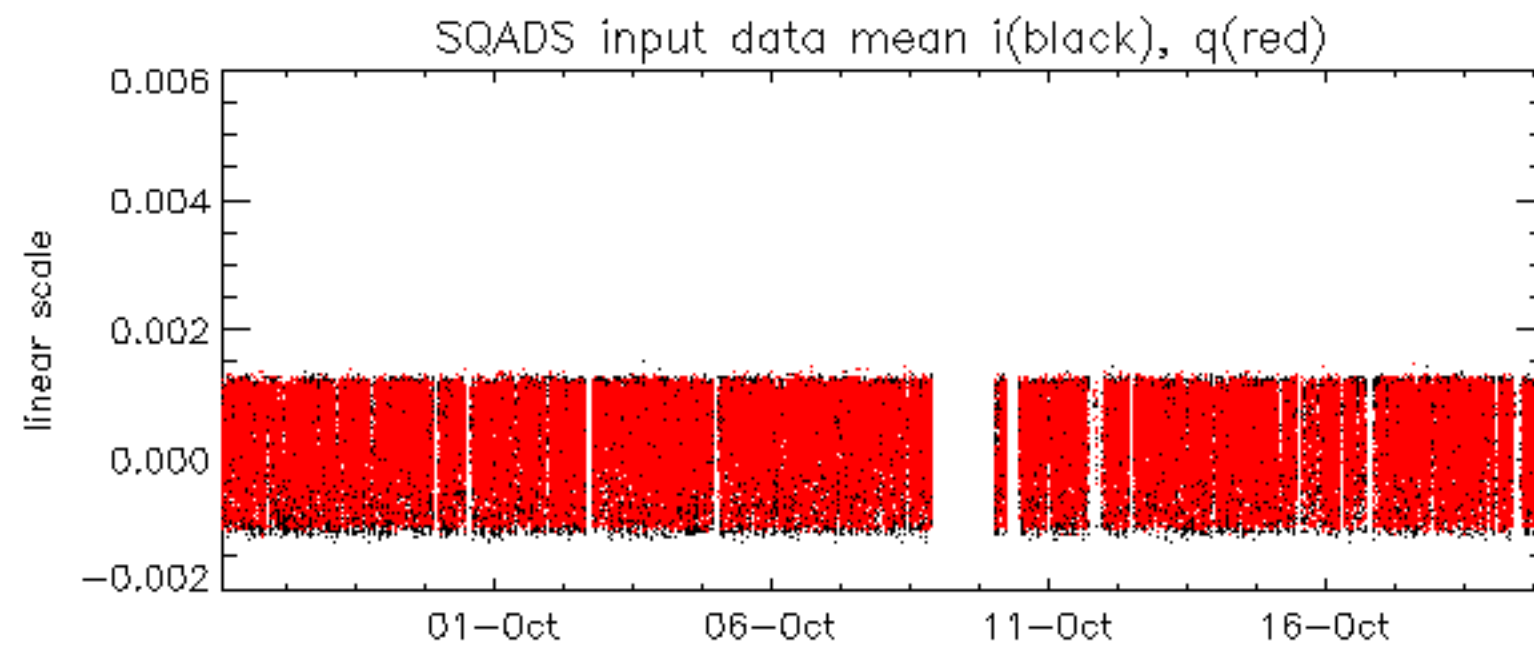

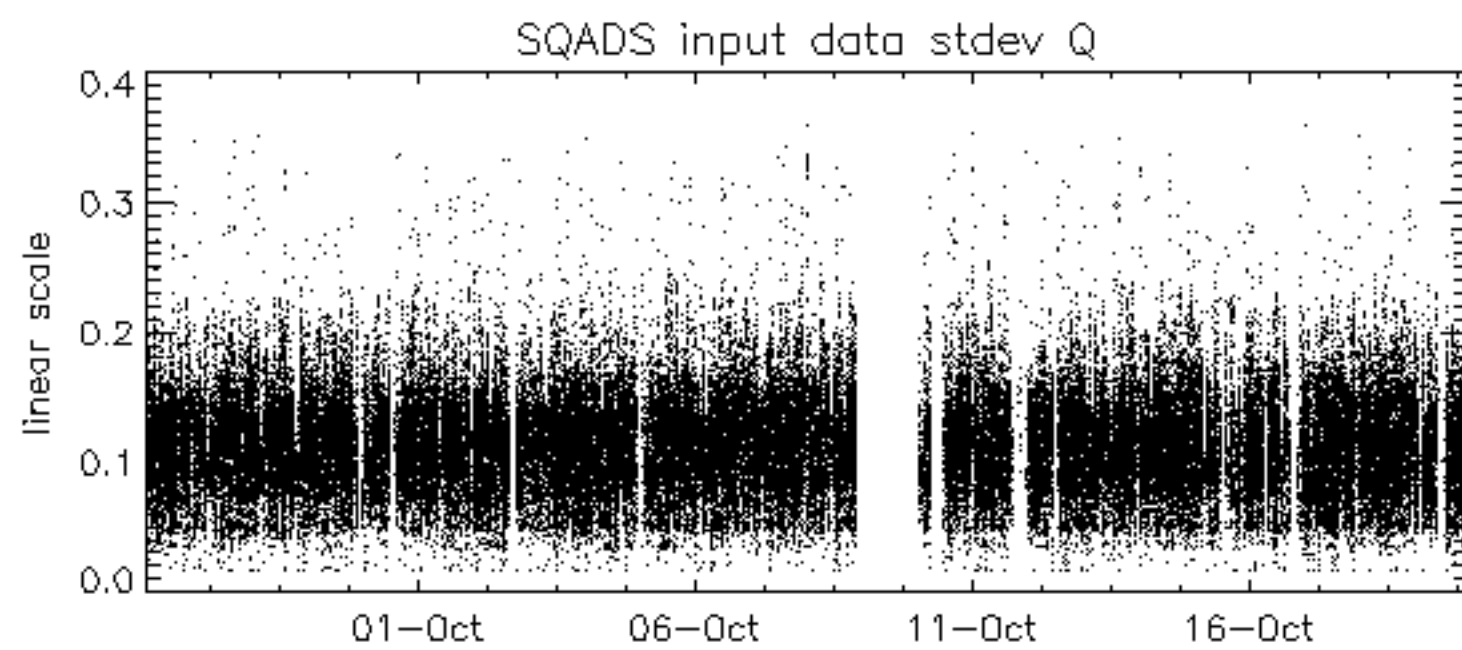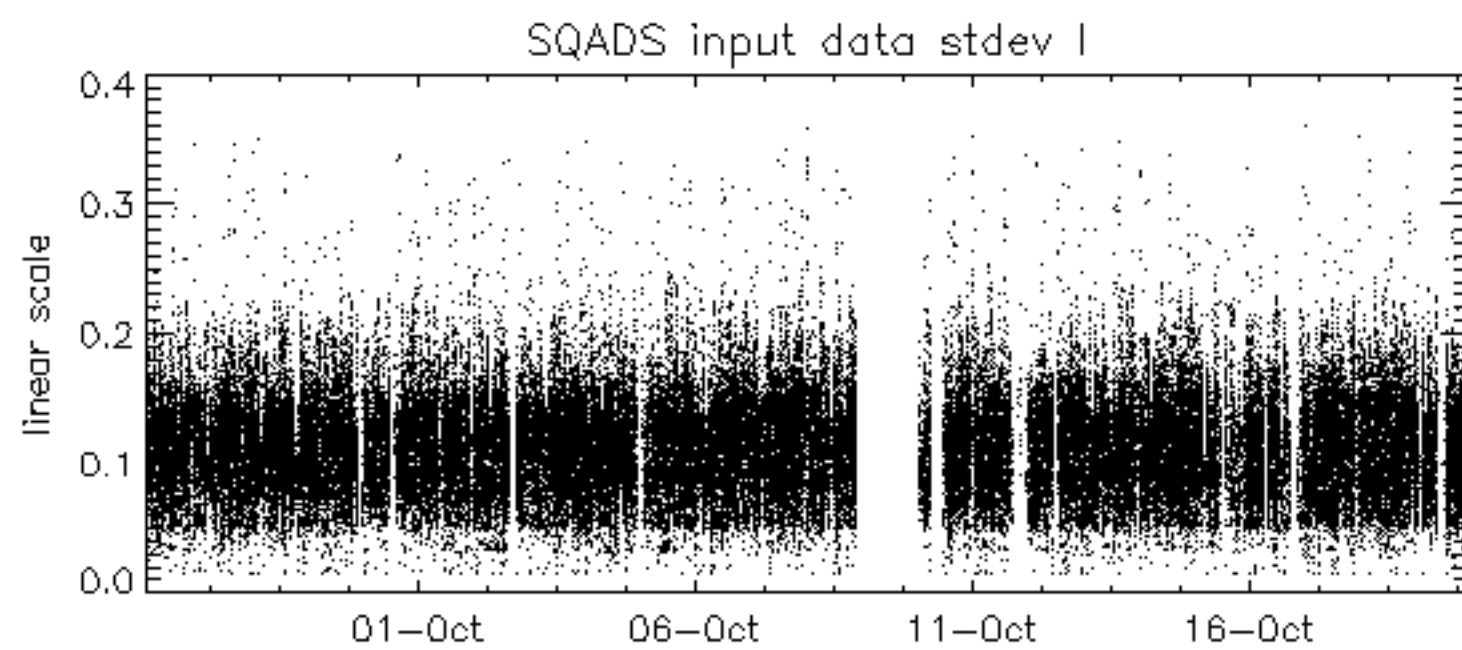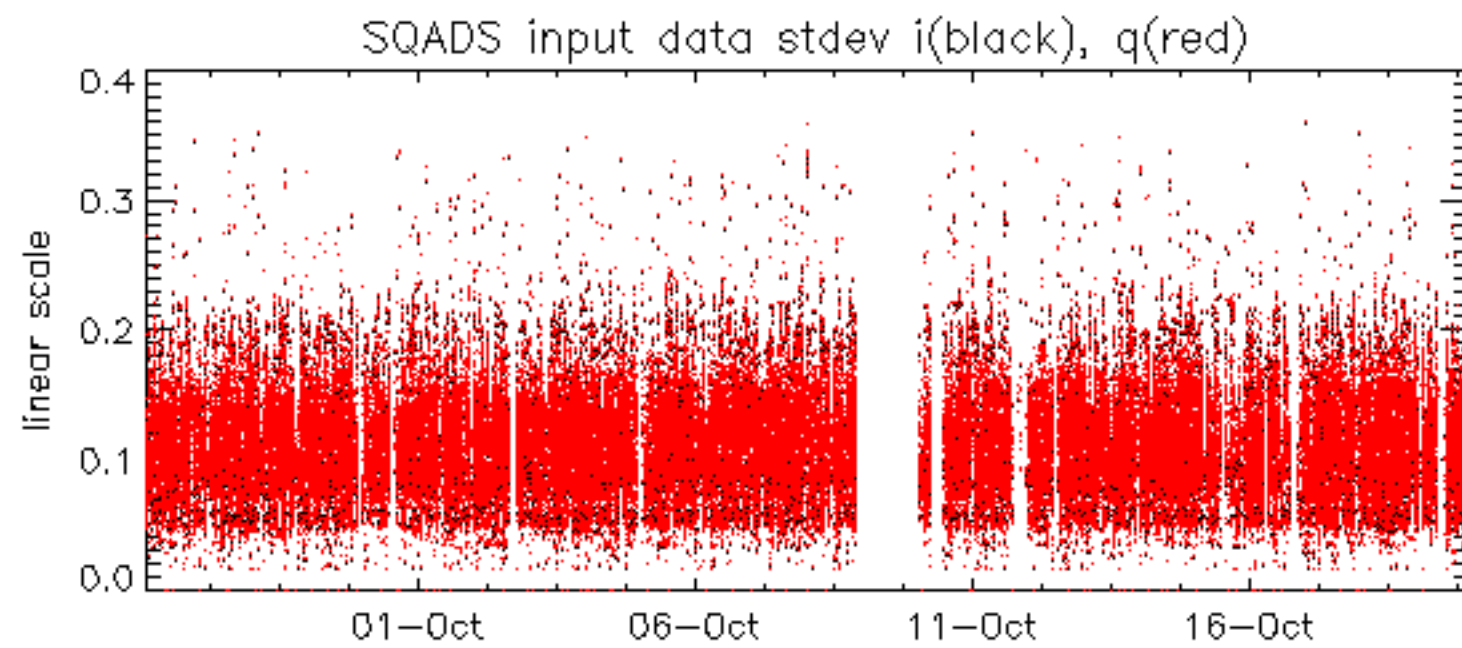

The unavailabilities during the reported period are listed in the table below.