

REPORT OF 031107

1. [Introduction](#)
2. [Summary](#)
 - [Instrument Unavailability](#)
 - [Browse Visual Inspection](#)
 - [Module Stepping Results](#)
 - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
 - [Daily statistics \(row 3 and 24\)](#)
 - [Cyclic statistics \(row 3 and 24\)](#)
 - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
 - [raw data mean I and Q](#)
 - [raw data stdev I and Q](#)
 - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
 - [Unbiased Doppler Error](#)
 - [Absolute Doppler](#)
 - [Doppler evolution versus ANX](#)

1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA_WVS_1P) products, which are the available few hours after the acquisition, on the high rate browse (BP) products and on the Module Stepping (MS) product.

2 - Summary

2.1 - Instrument Unavailability

No unavailability during the reported period.

2.2 - Browse Visual Inspection

Anomalies observed from browse products visual inspection:

-ASA_WS__BPZPDK20031106_145400_000000122021_00240_08811_0137.N1



The problem is under investigation.

2.3 - Data Analysis

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.

3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis. The purpose of this mode is to identify any malfunctioning modules and to identify modules for which calibration offsets are to be applied.

No anomalies observed on available MS products:

- ASA_MS__0PNPDK20031106_193036_000000152021_00242_08813_0002.N1
- ASA_MS__0PNPDK20031106_193156_000000152021_00242_08813_0003.N1

Stabilization of the B3-3 module drift in transmit phase on H polarisation as shown below.



Polarisation	Start Time
V	20031106 193156
H	20031106 193036

MSM in V/V polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
	
	
	
	

MSM in H/H polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
☒	☒
☒	☒
☒	☒
☒	☒

4 - Internal calibration Results

No anomalies observed.

4.1 - Daily statistics

row	stat	AveP1	AveP2	AveP3
3	mean	-3.77644	-22.5763	-8.16126
	stdev	0.00638739	0.0617576	0.00279358
24	mean	-5.13978	-21.2647	-8.16126
	stdev	0.0150265	0.0557760	0.00279358

☒

4.2 - Cyclic statistics

row	stat	AveP1	AveP2	AveP3
3	mean	-3.78919	-22.5455	-8.14770
	stdev	0.00547965	0.0635433	0.00265624
24	mean	-5.35114	-21.2528	-8.14770
	stdev	0.890442	0.0603662	0.00265624

☒

4.3 - cal pulses monitoring (all rows)

☒

5 - RAW data statistics

No anomalies observed.

5.1 - Input mean I/Q

channel	stat	DSS-B
MEAN I	mean	0.000376778
	stdev	3.56332e-07
MEAN Q	mean	0.000274157
	stdev	3.40573e-07



5.2 - Input stdev I/Q

channel	stat	DSS-B
STDEV I	mean	0.113835
	stdev	0.00145005
STDEV Q	mean	0.114074
	stdev	0.00146787



5.3 - Gain imbalance I/Q



6 - Wave Doppler Analysis

No anomalies observed in Doppler evolution.
Doppler analysis performed over the last 35 days

6.1 - Unbiased Doppler Error

Evolution of unbiased Doppler error (Real - Expected)
Ascending
Descending

6.2 - Absolute Doppler

Evolution of Absolute Doppler

Ascending




Descending

6.3 - Doppler evolution versus ANX


Evolution Doppler error versus ANX






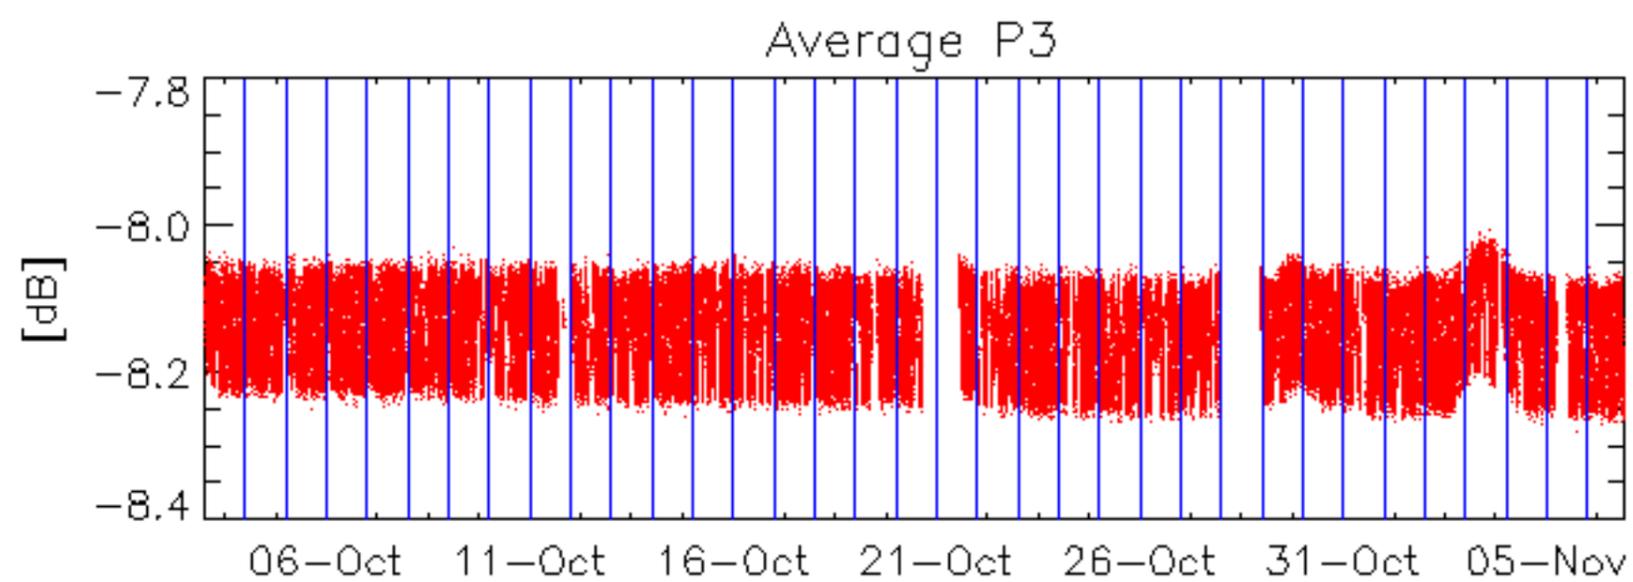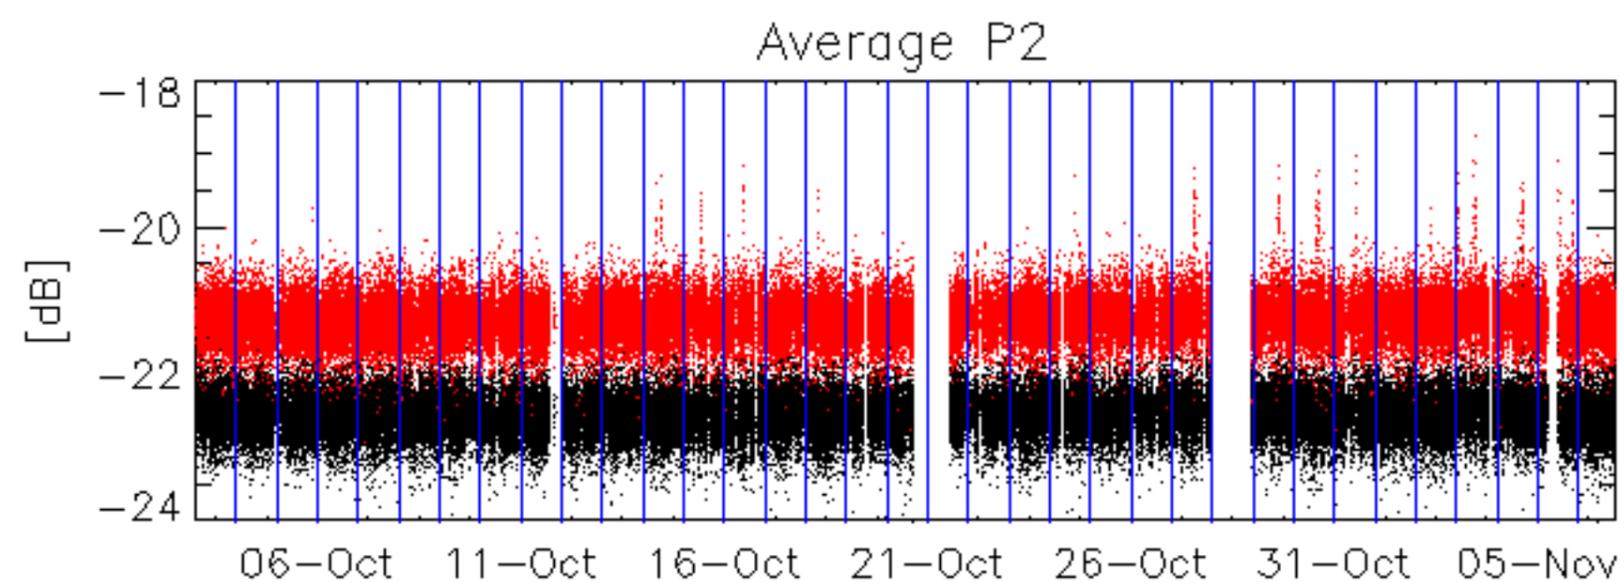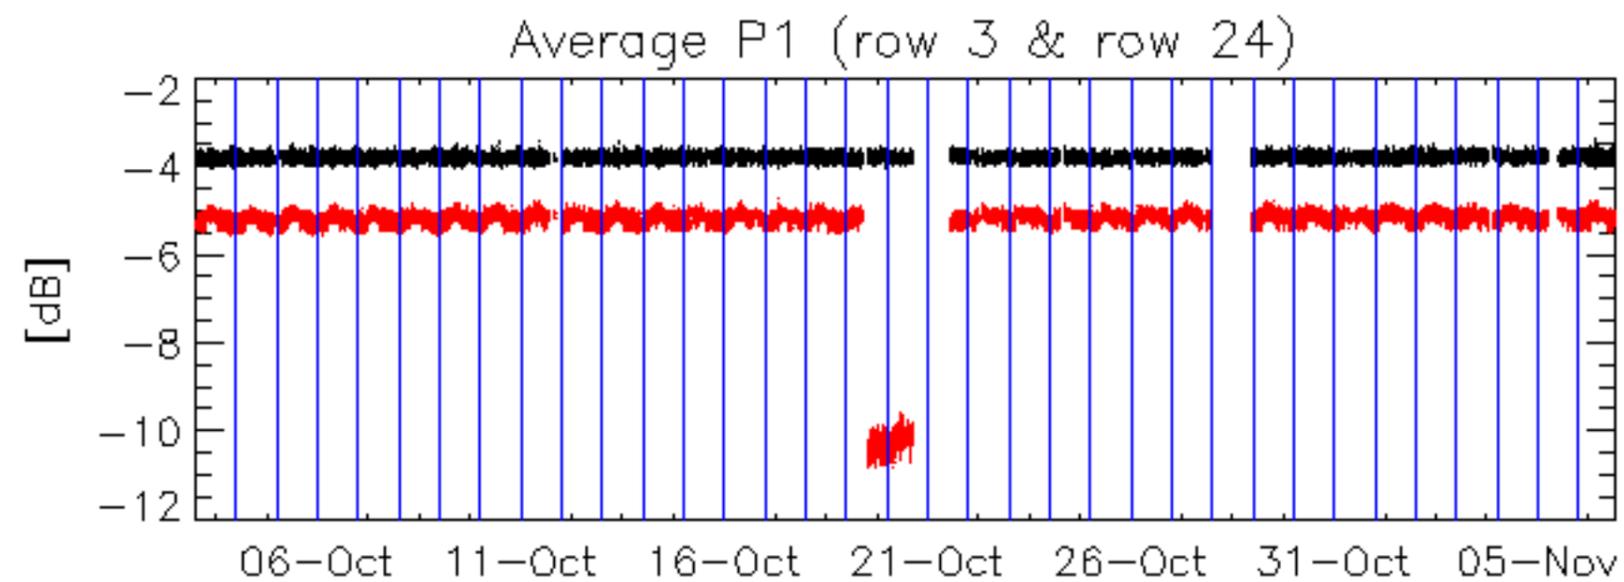


Average P1 (row 3 & row 24)

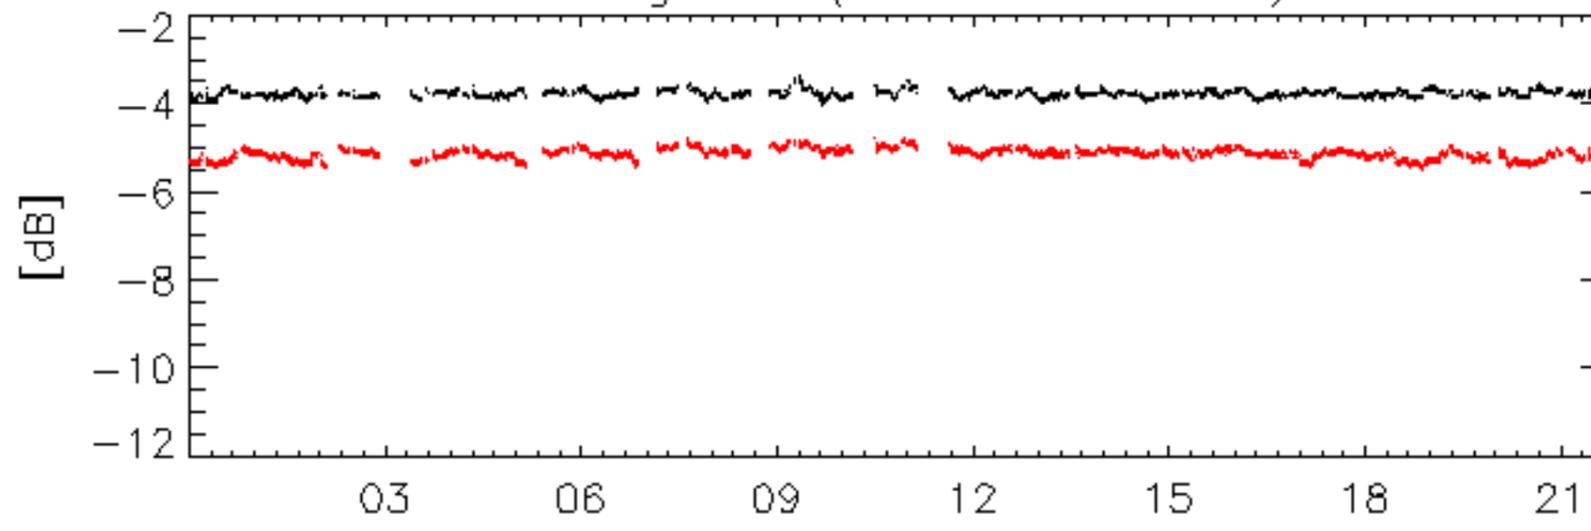

06-Nov
Average P2

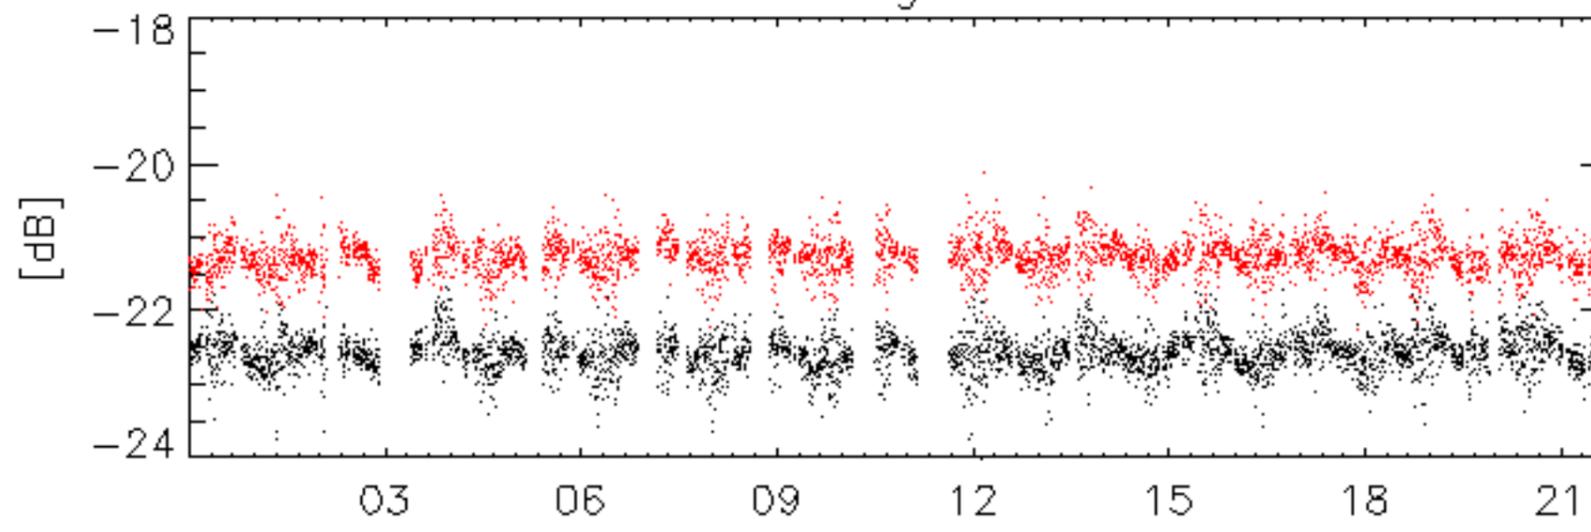

06-Nov
Average P3

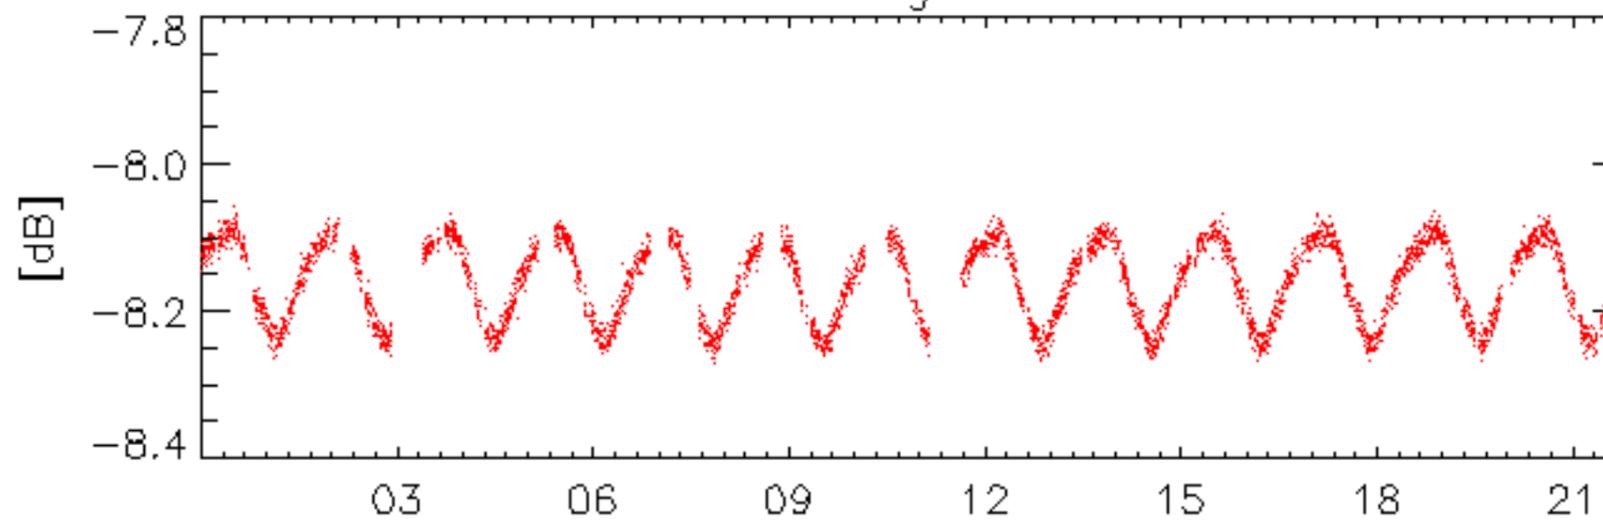


06-Nov

Anomalies observed from browse products visual inspection:
-ASA_WS__BPZPK20031106_145400_000000122021_00240_08811_0137.N1

The problem is under investigation.


No anomalies observed.

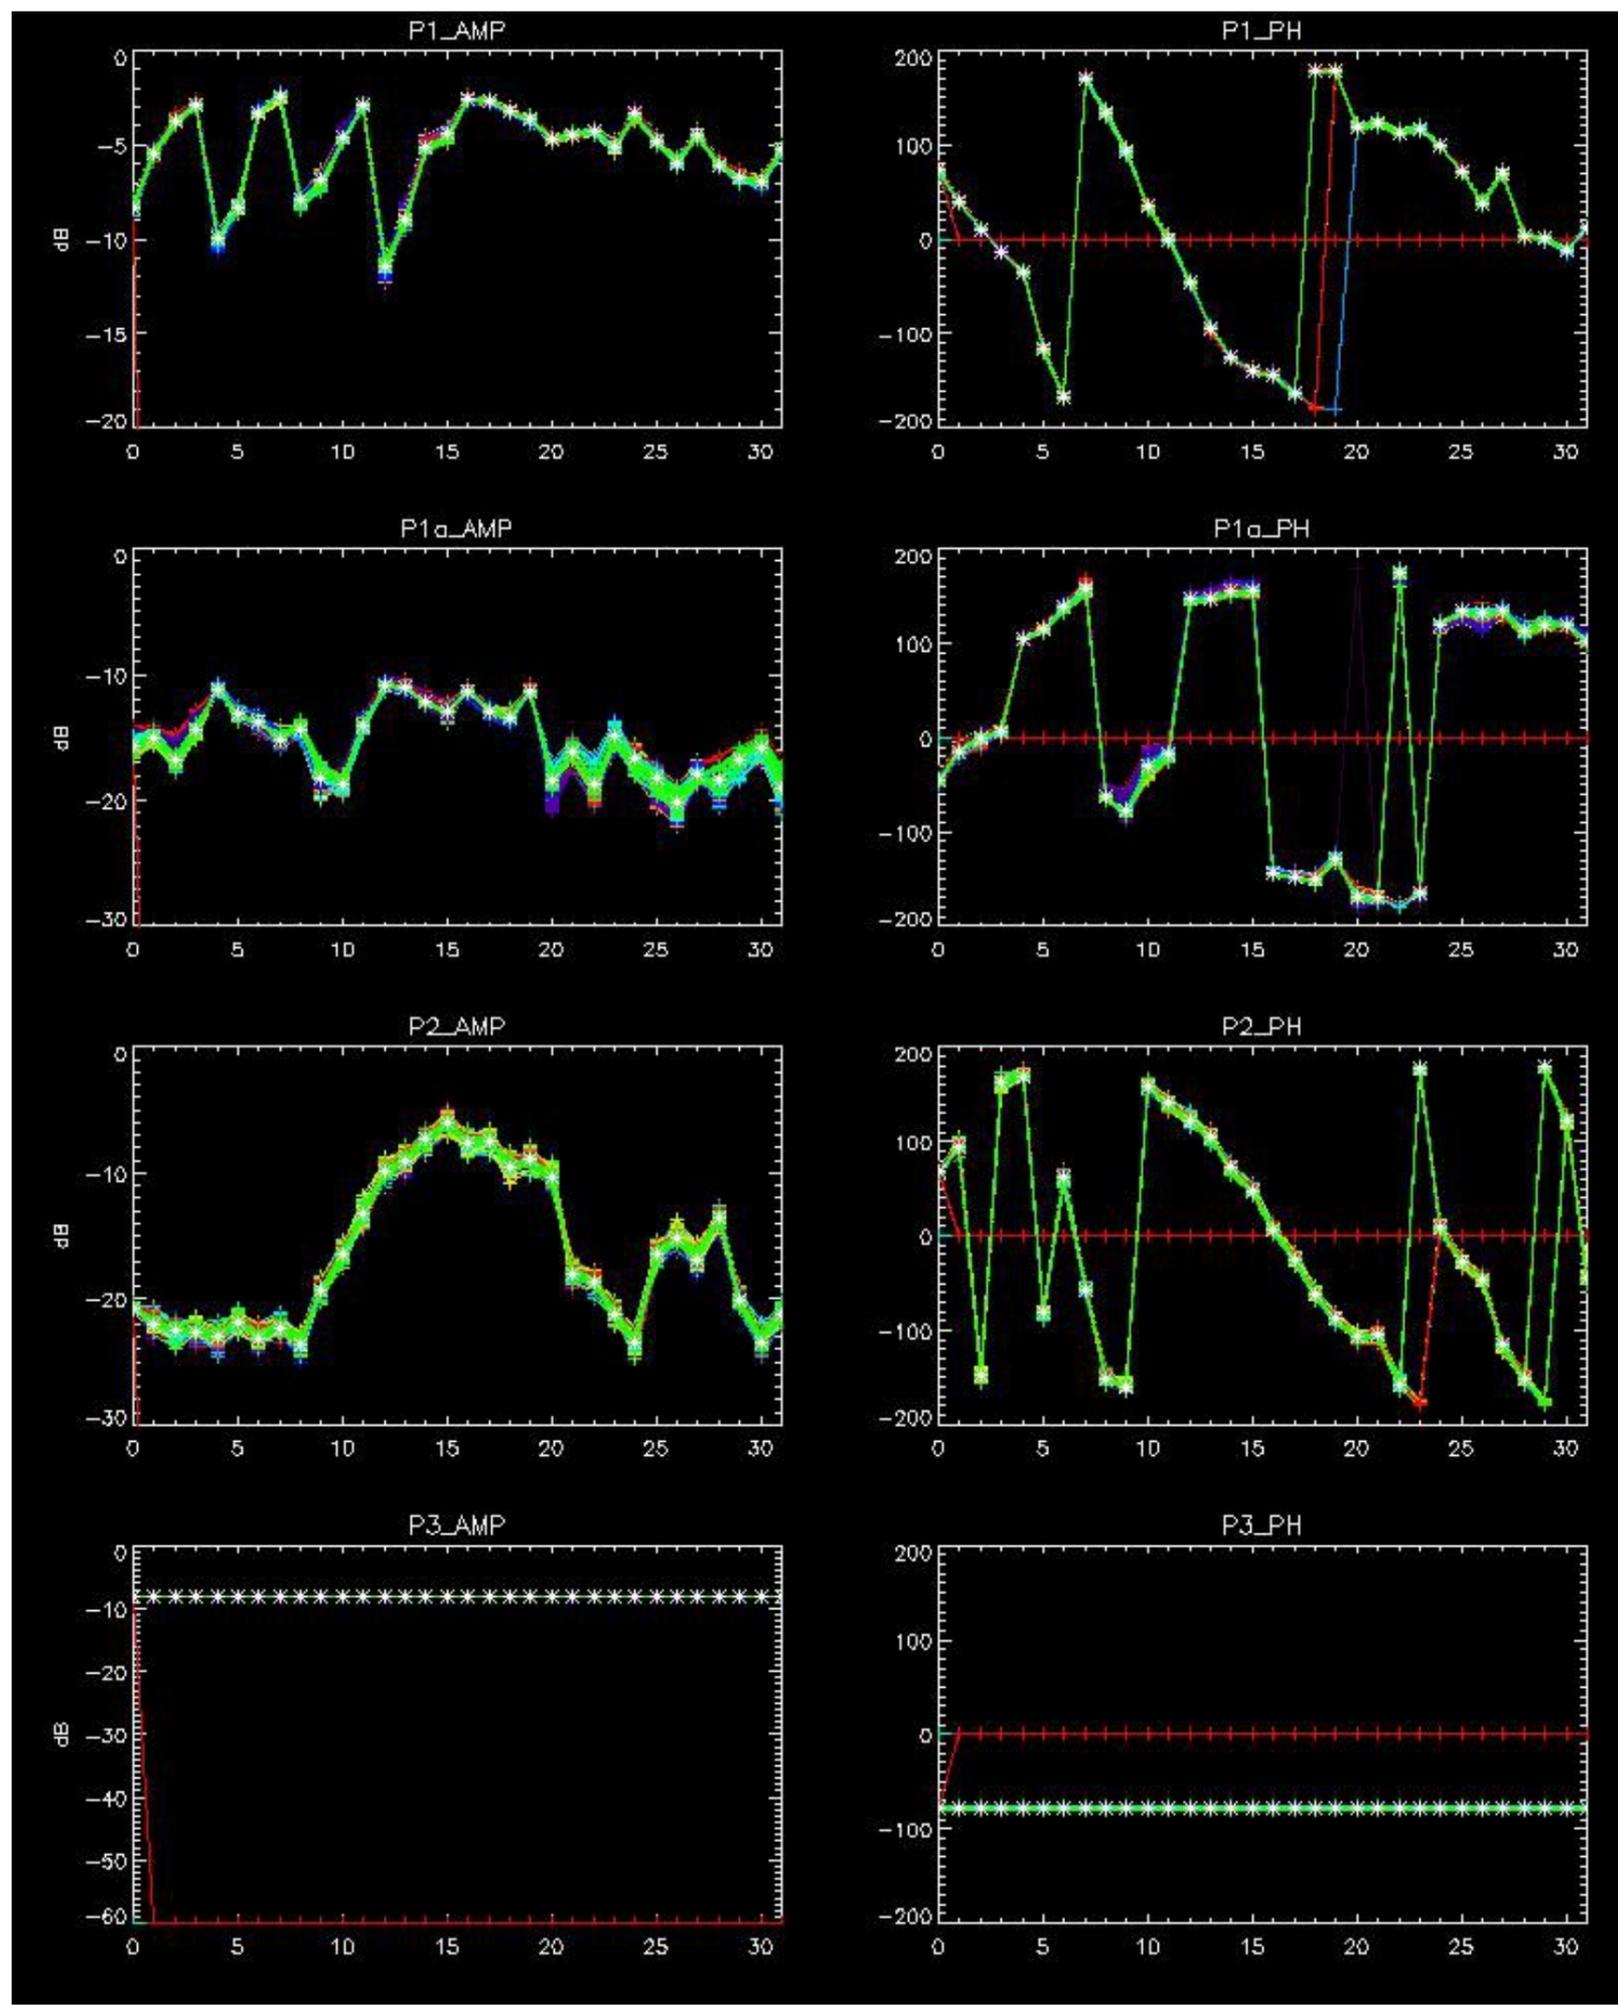


- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.



No anomalies observed in Doppler evolution.
Doppler analysis performed over the last 35 days

Doppler 'WVS' 'IS2' 'H/H'

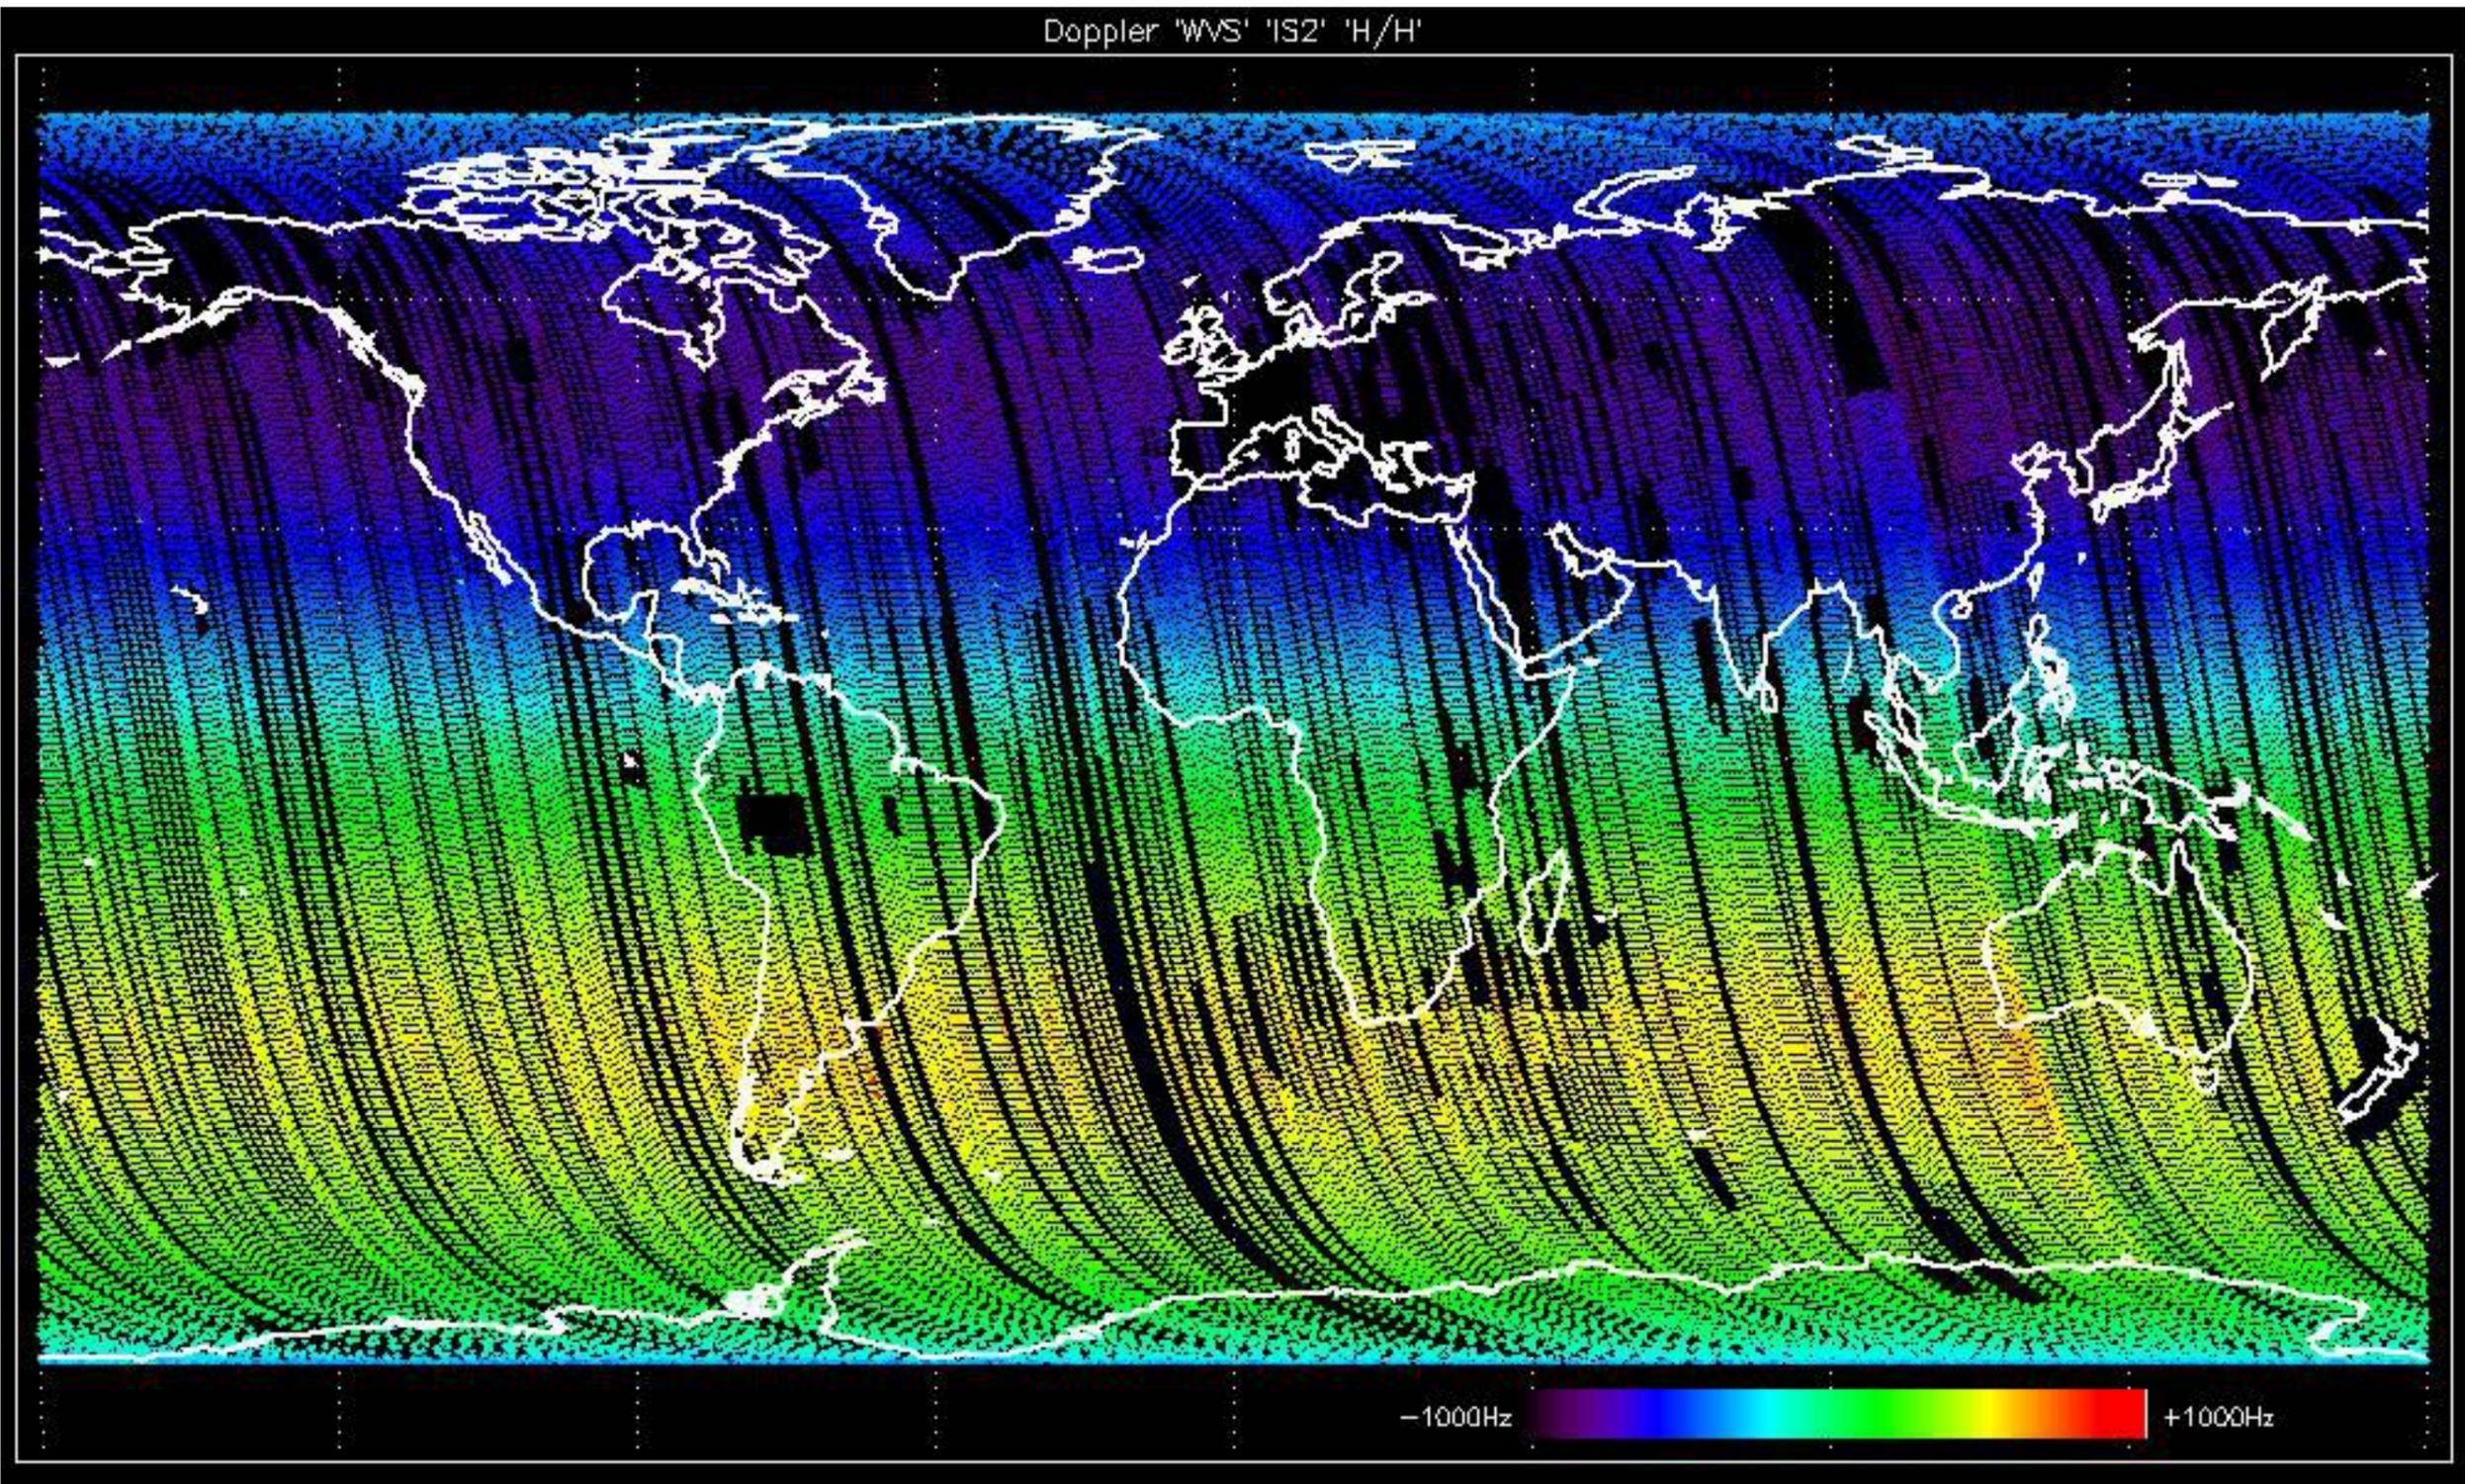


Doppler 'WVS' 'IS2' 'V/V'

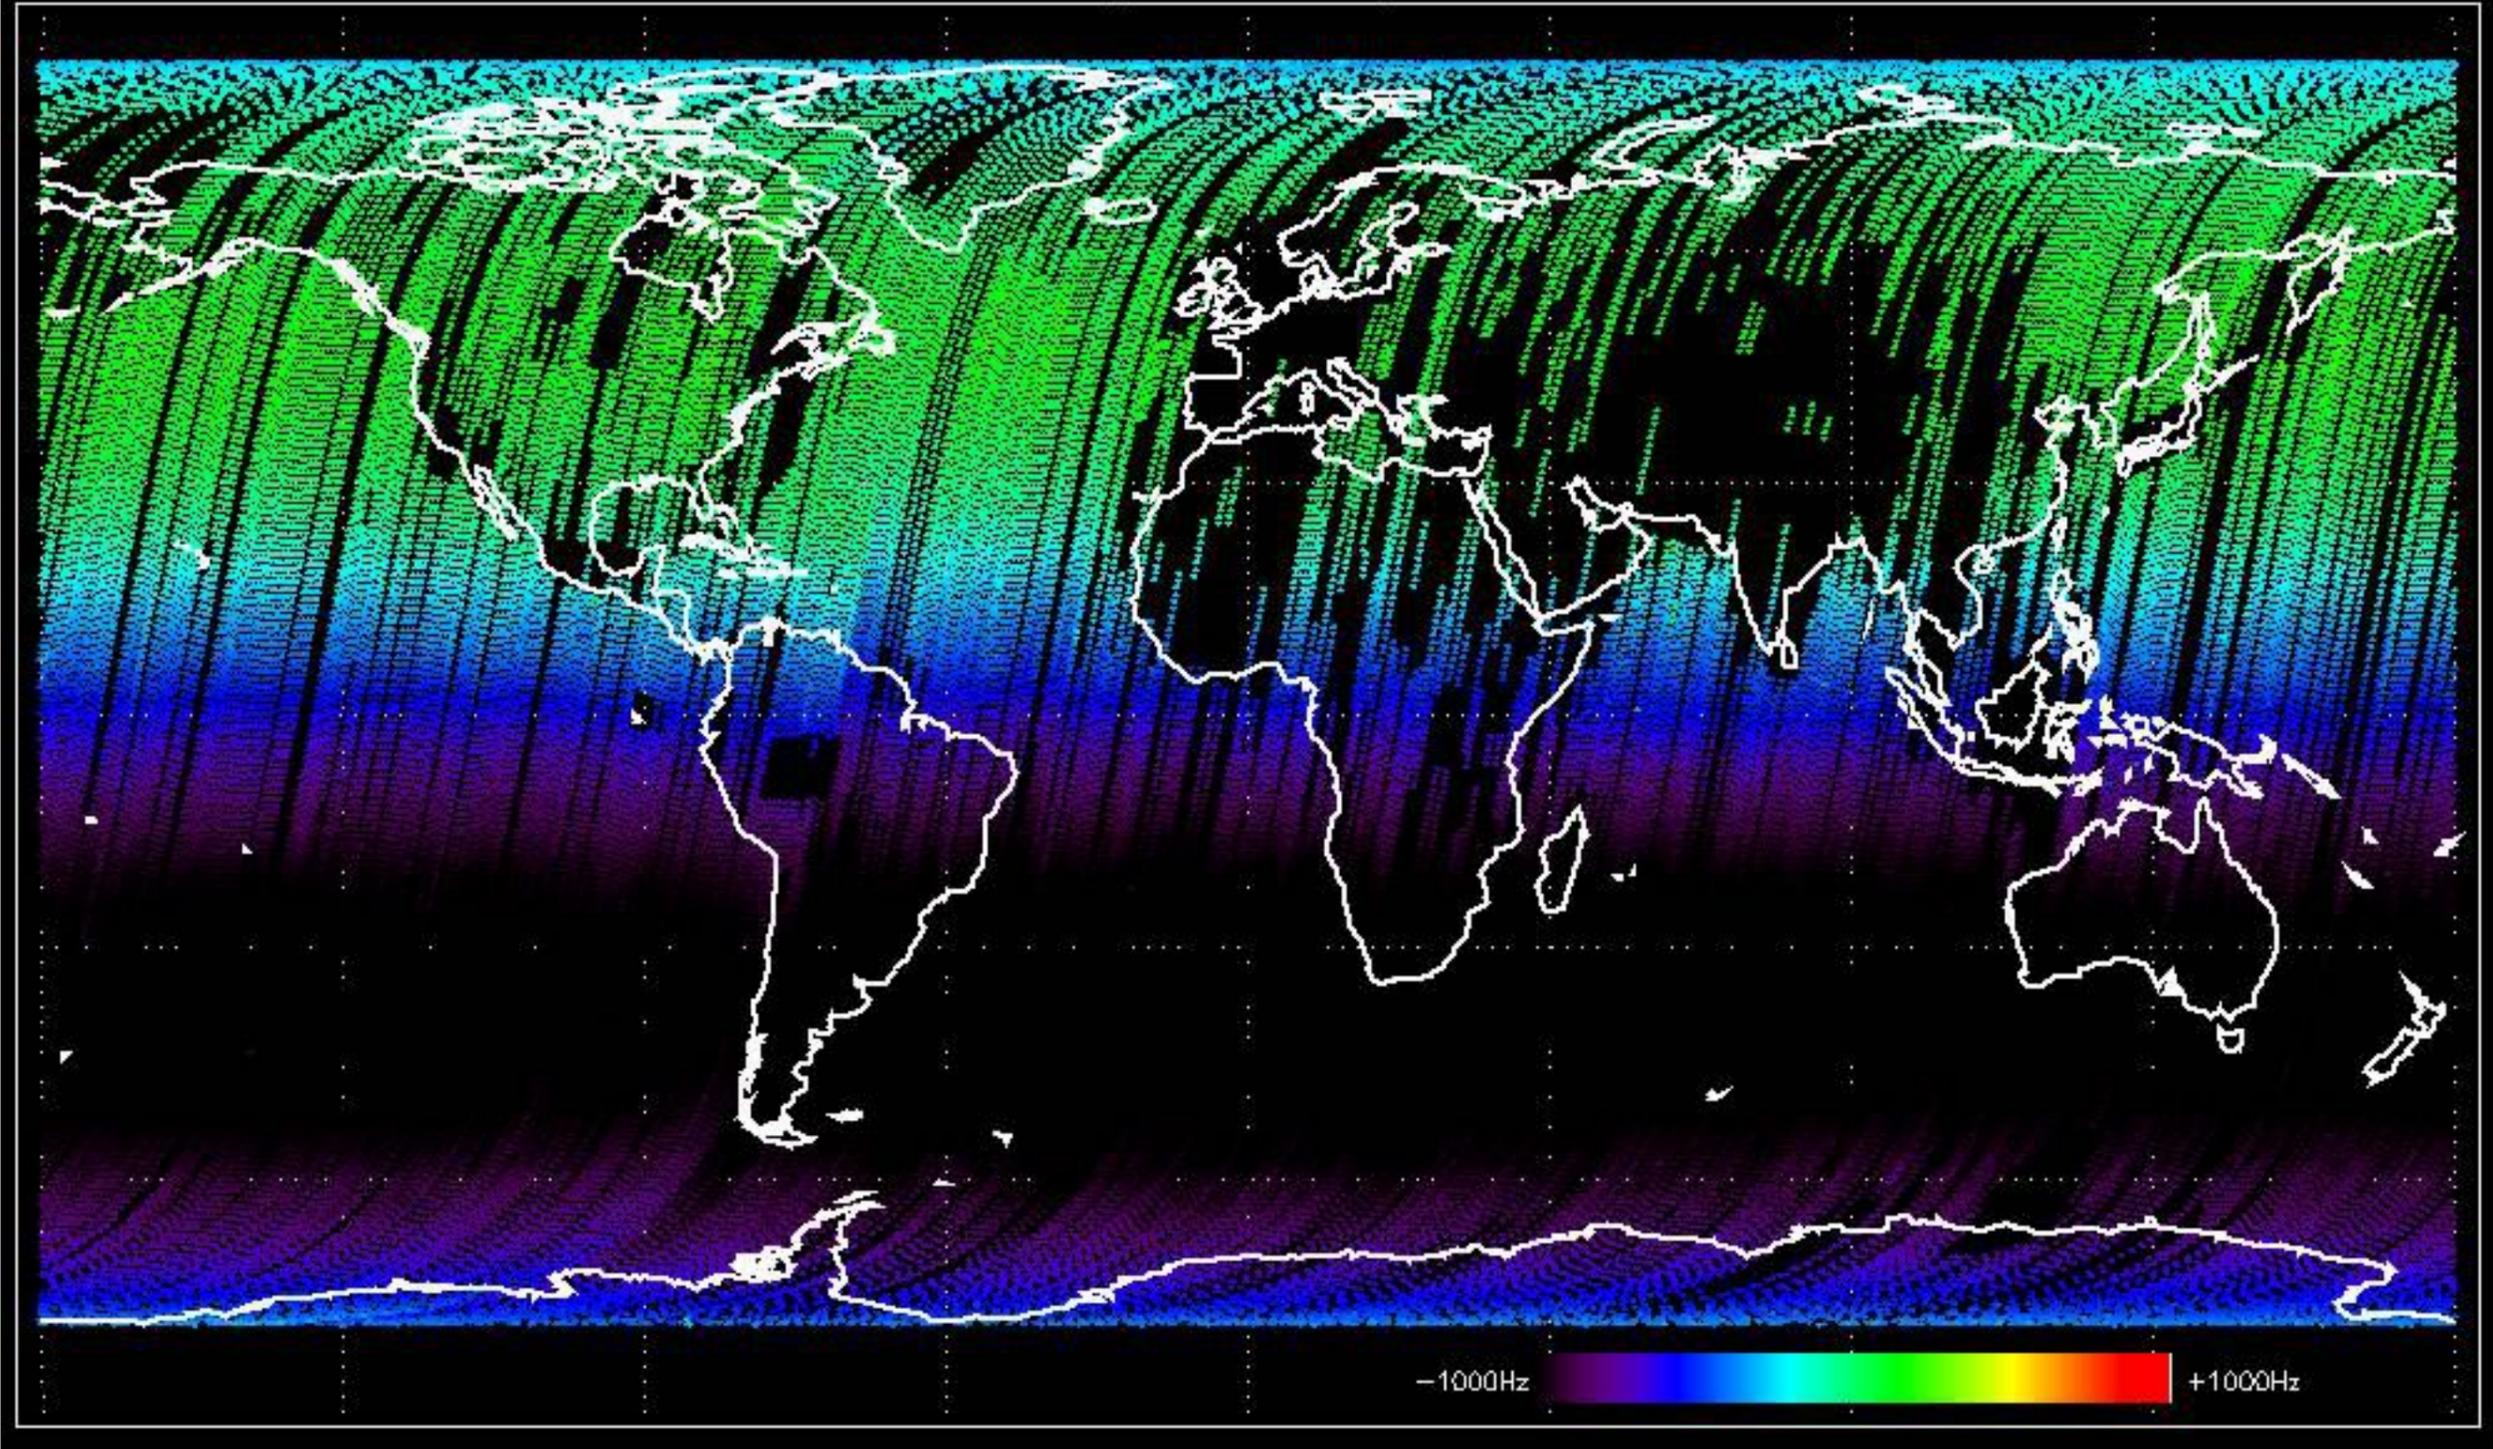


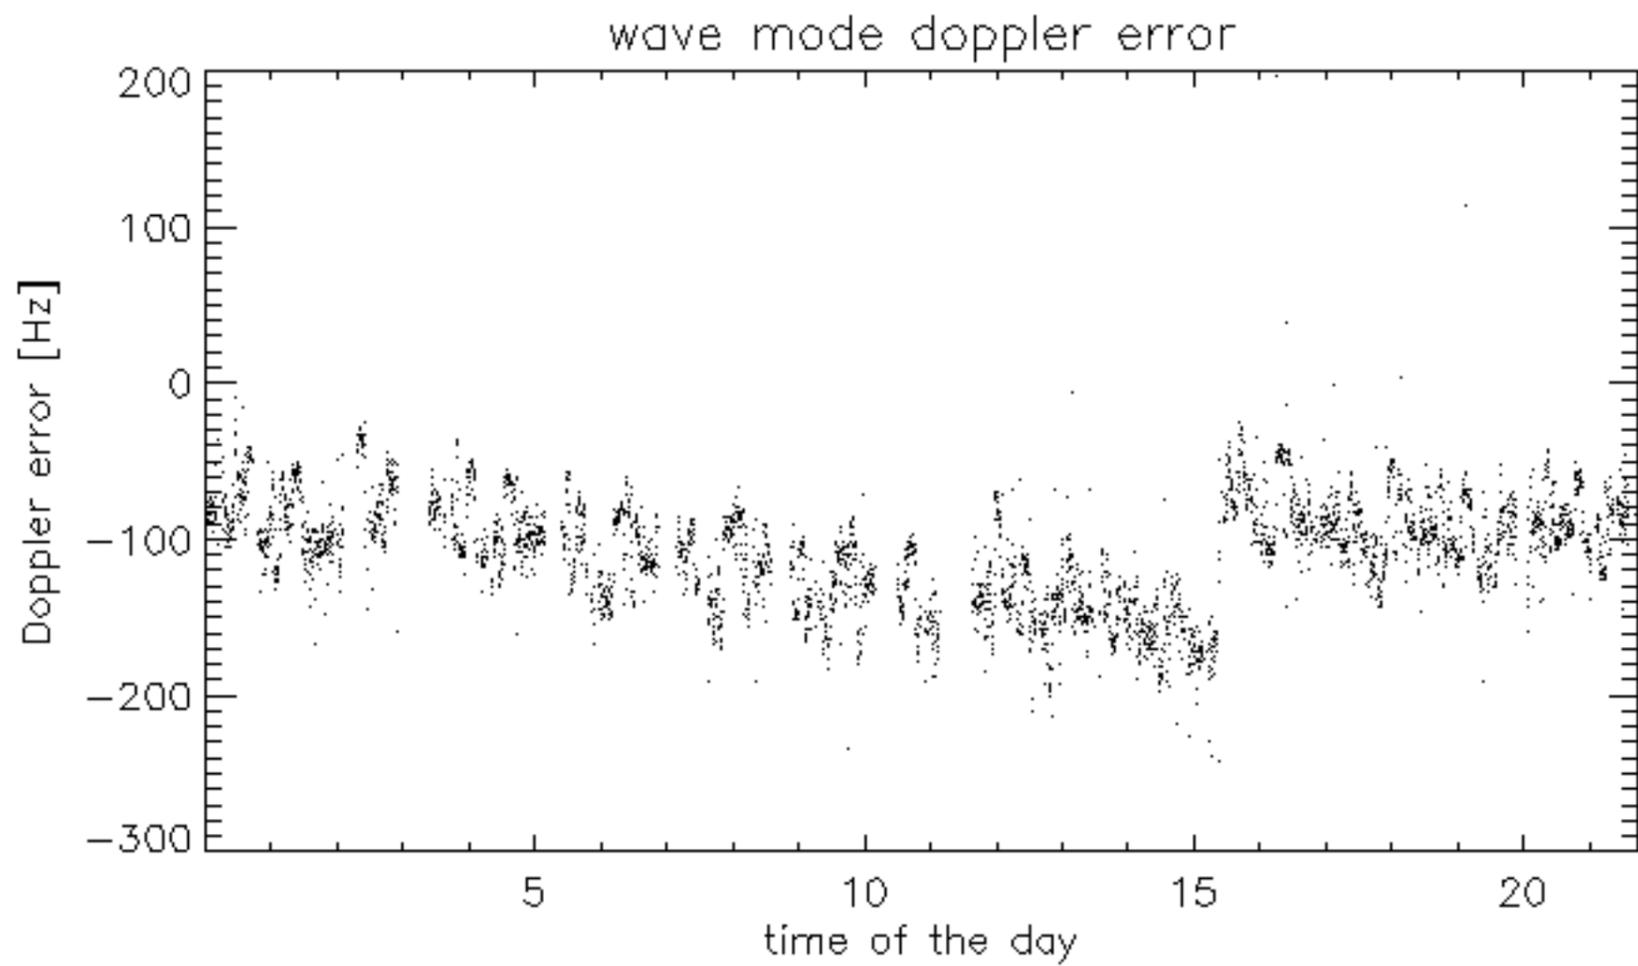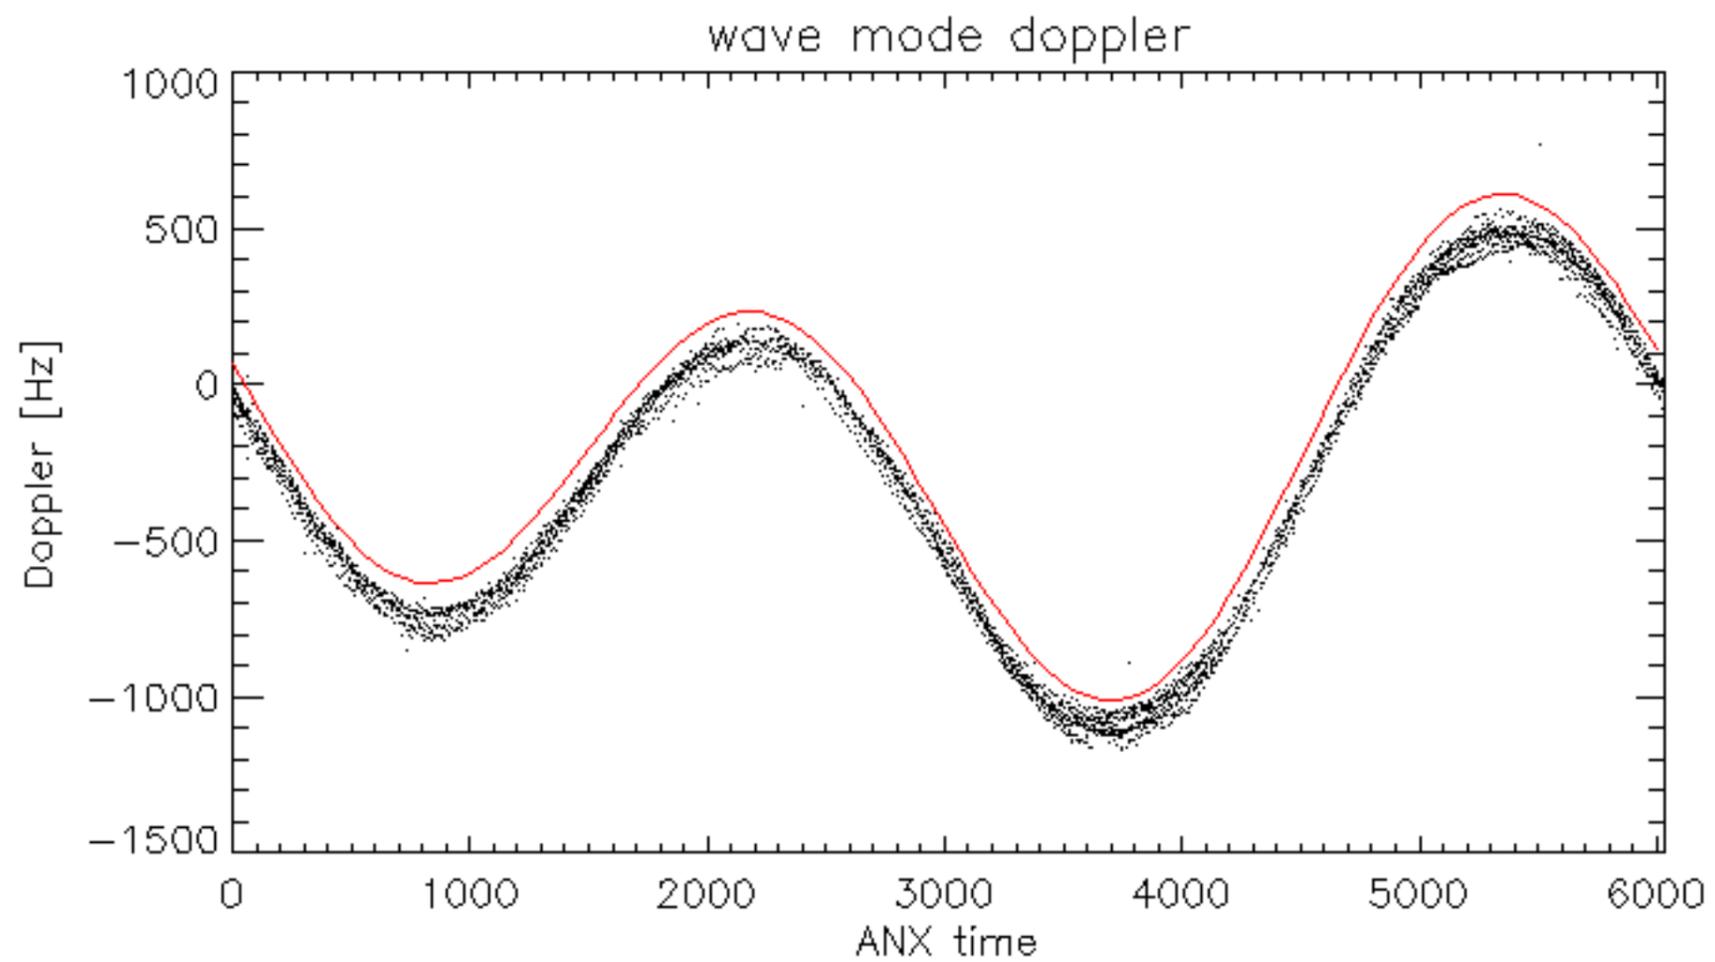

Doppler difference, estimated-predicted 'WVS' 'IS2' 'H/H' -error mean of 53 Hz

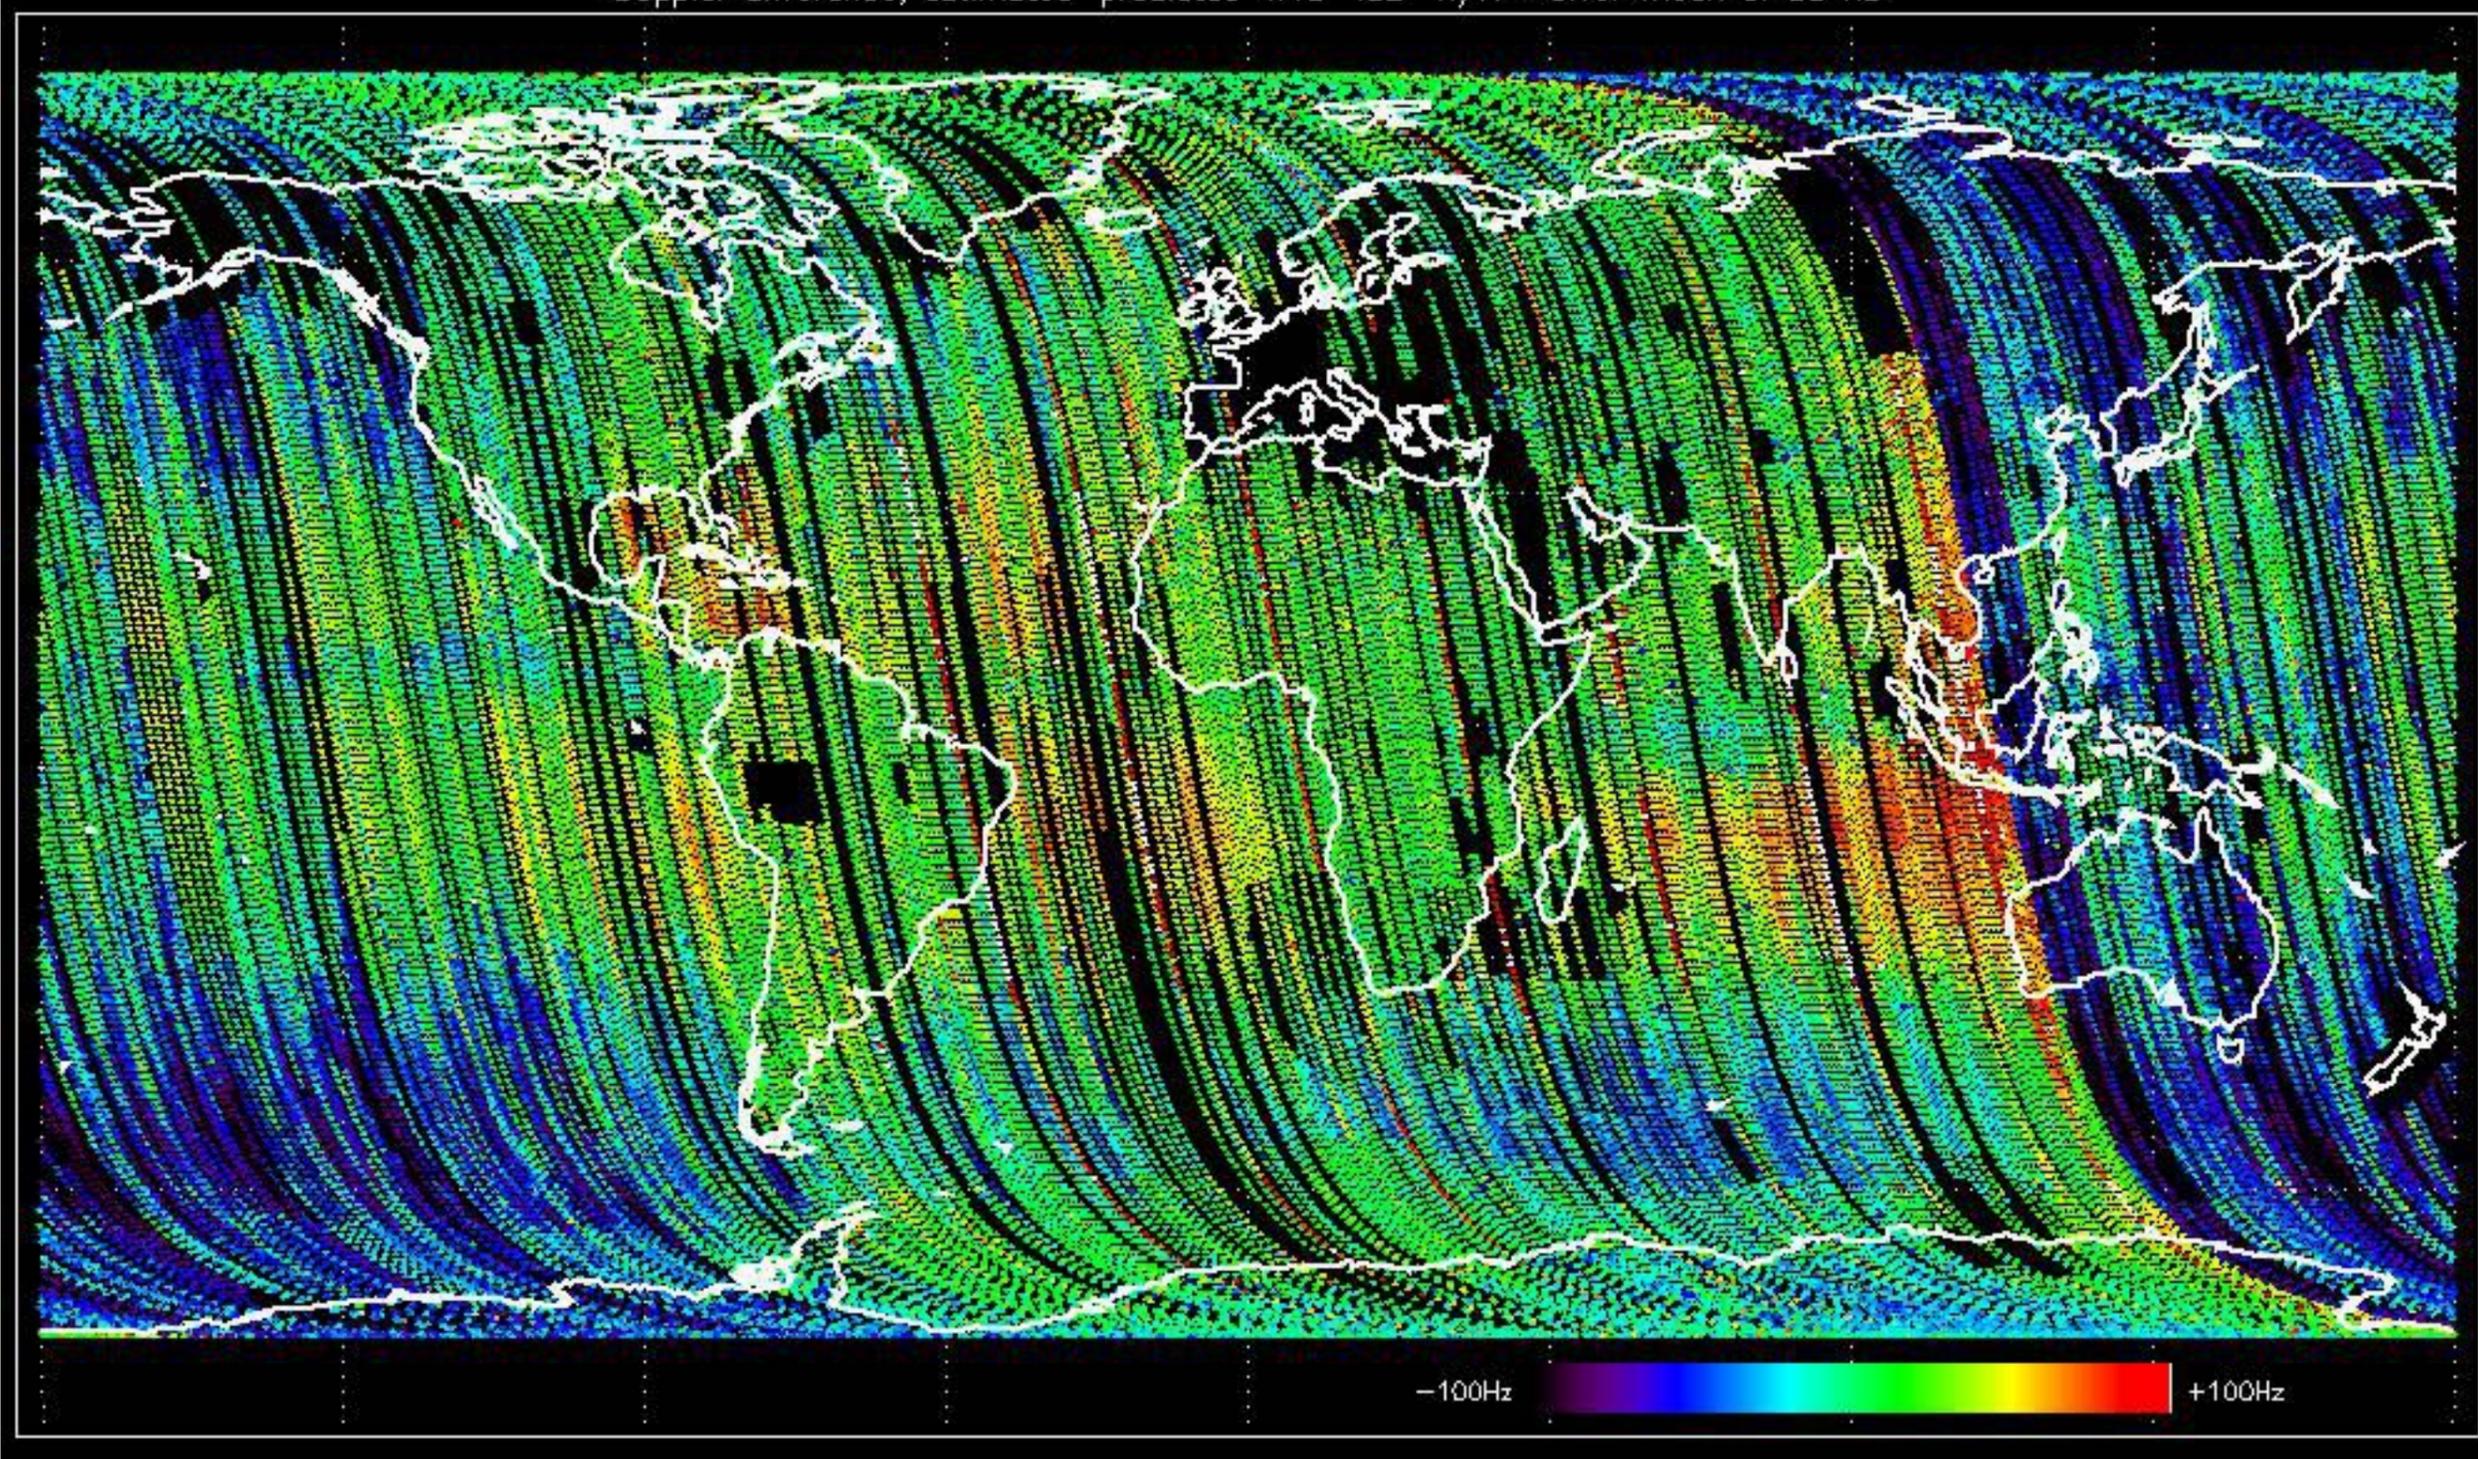

Doppler difference, estimated-predicted 'WS' 'IS2' 'V/V' -error mean of 53 Hz

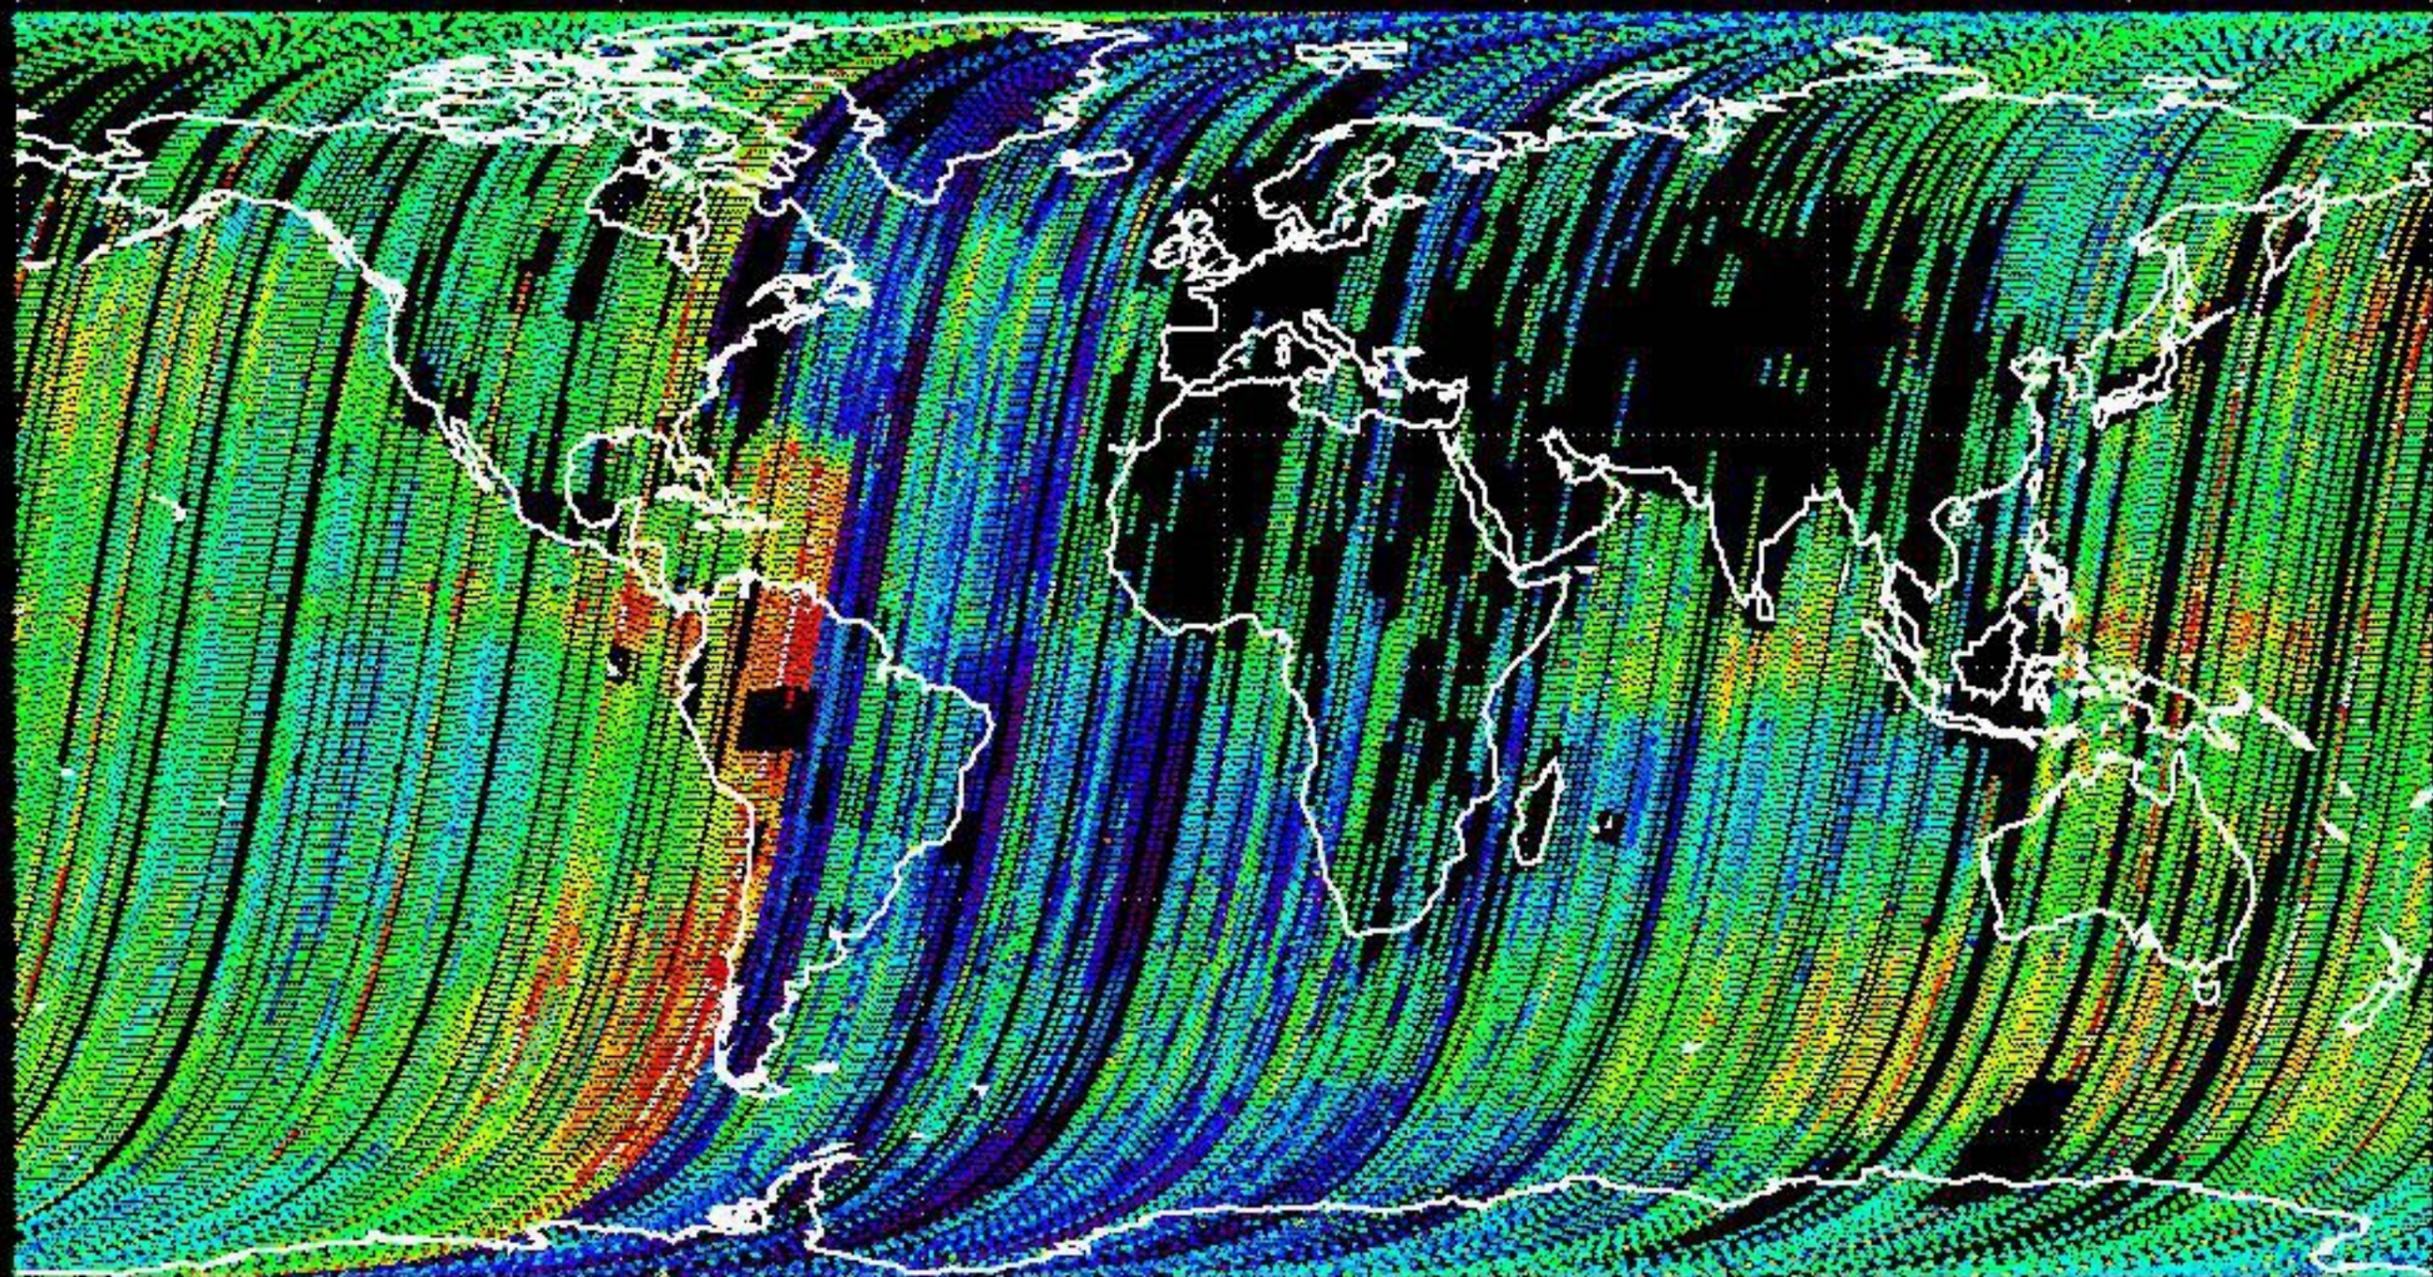

-100Hz

+100Hz

The MS mode provides an internal health check on an individual module basis.
The purpose of this mode is to identify any malfunctioning modules and
to identify modules for which calibration offsets are to be applied.


No anomalies observed on available MS products:


- ASA_MS__0PNPDK20031106_193036_000000152021_00242_08813_0002.N1
- ASA_MS__0PNPDK20031106_193156_000000152021_00242_08813_0003.N1




Stabilization of the B3-3 module drift in transmit phase on H polarisation as shown below.




No anomalies observed.


Reference: 2003-06-12 14:08:52 H RxGain
 Test : 2003-11-06 19:30:36 H

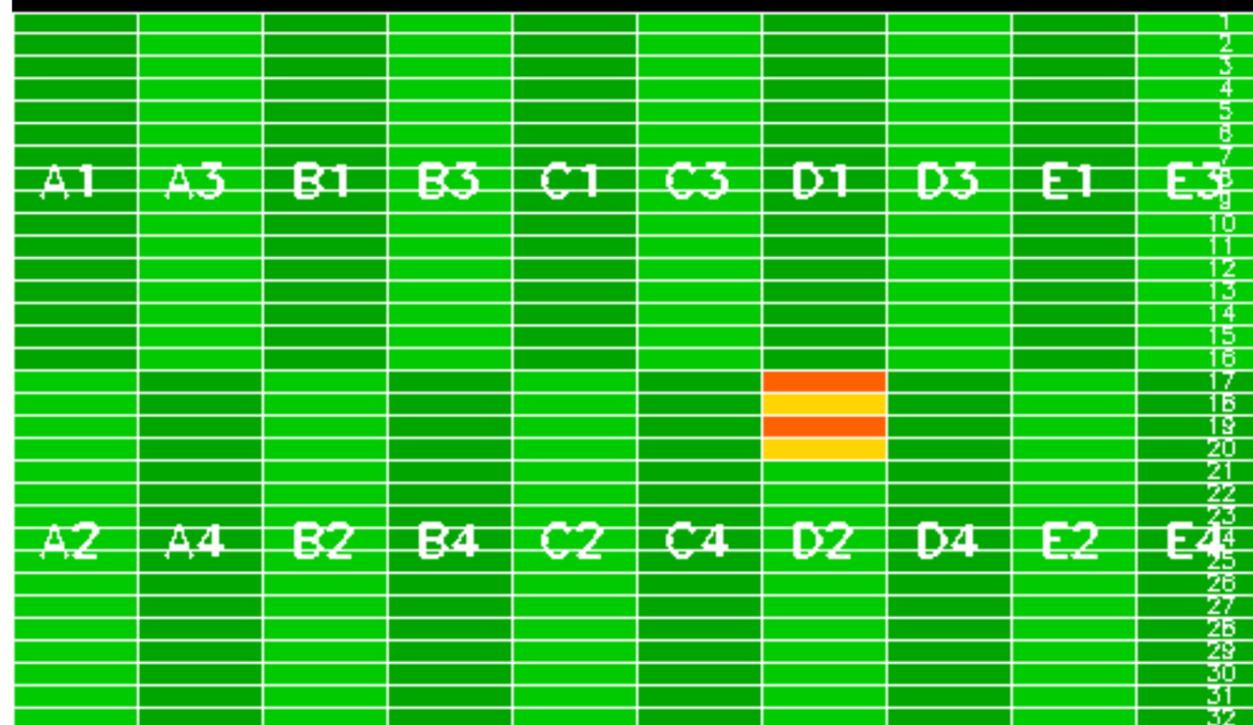

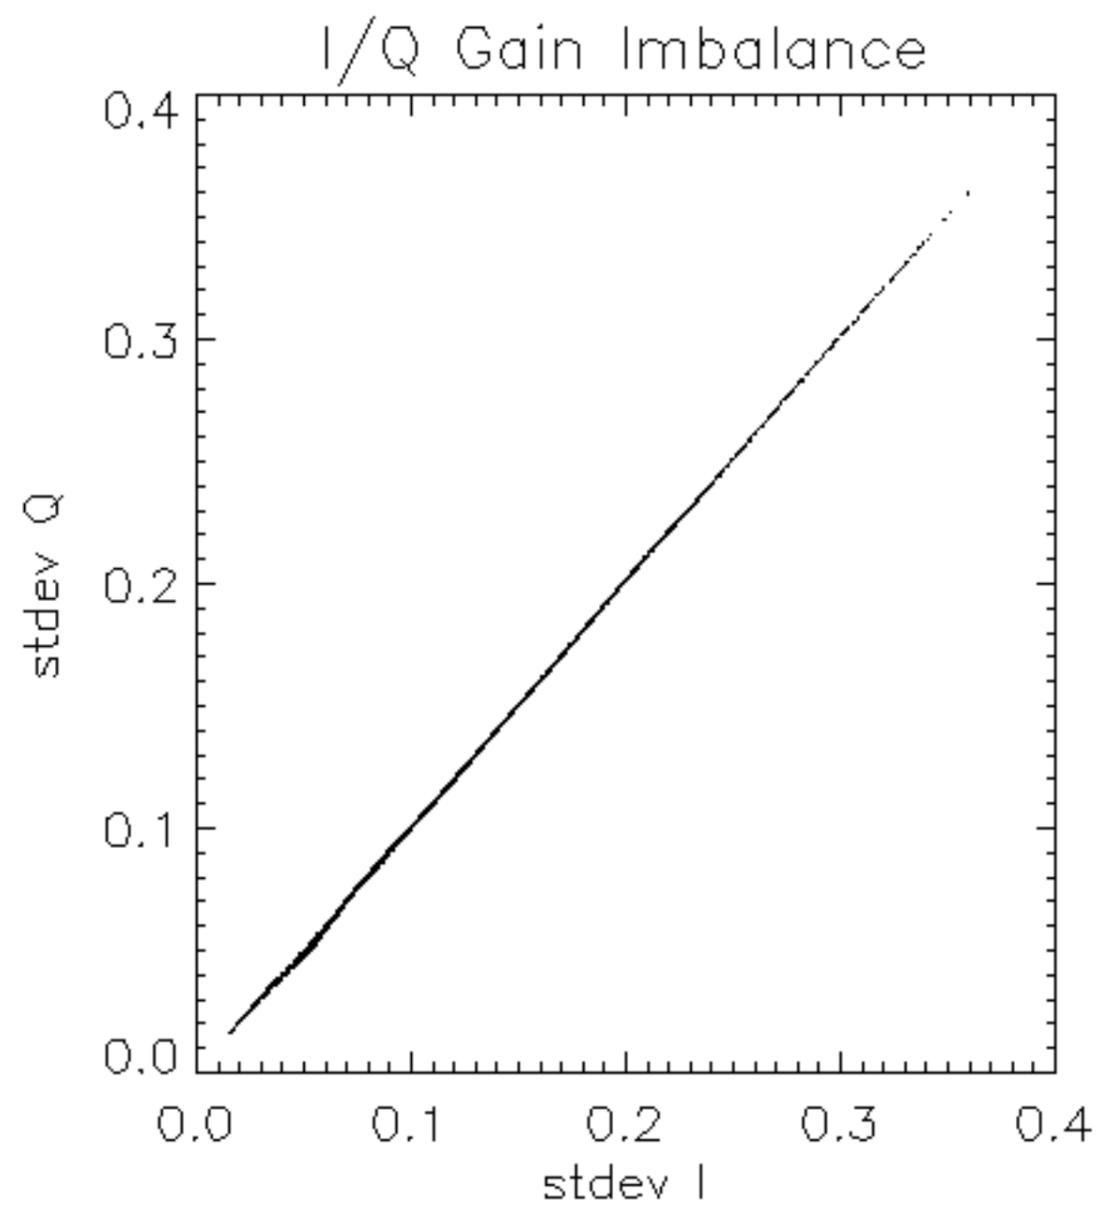

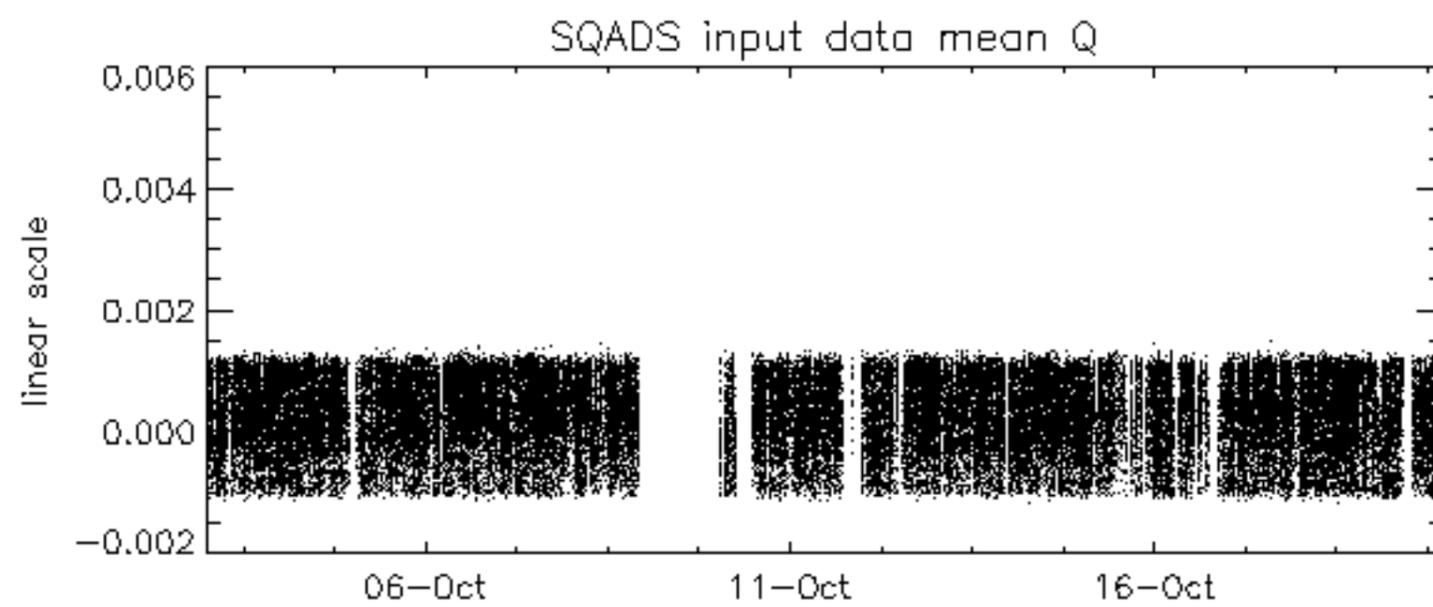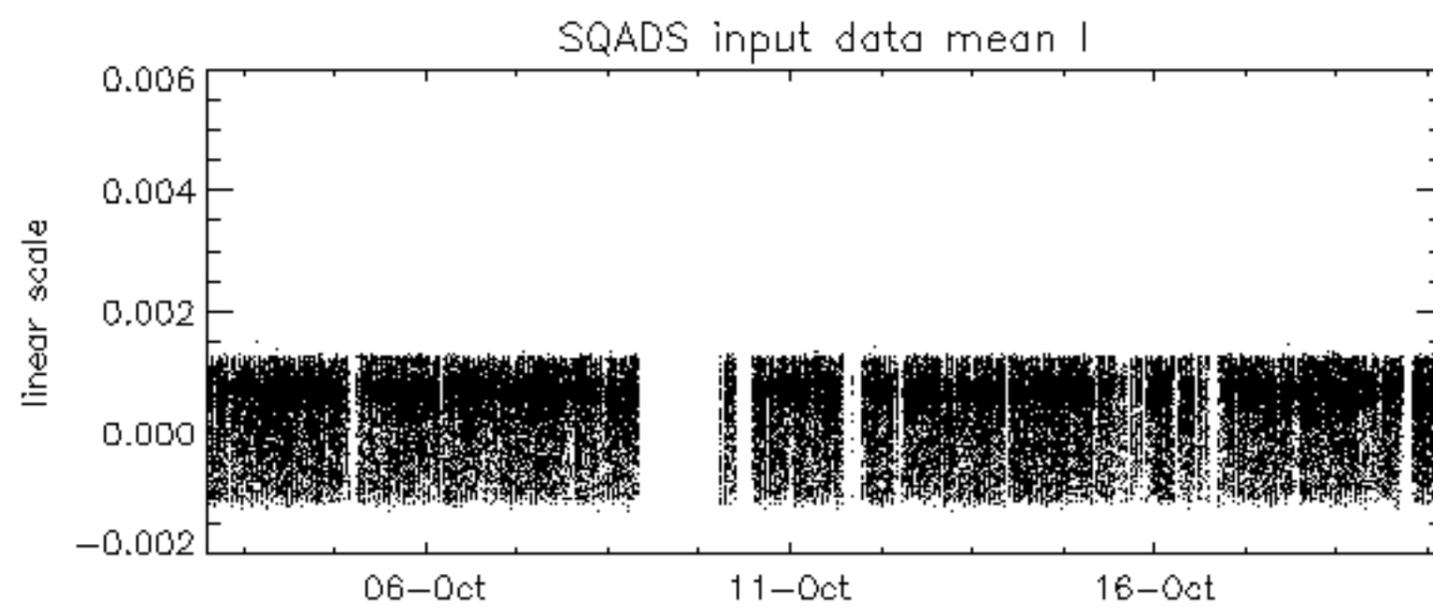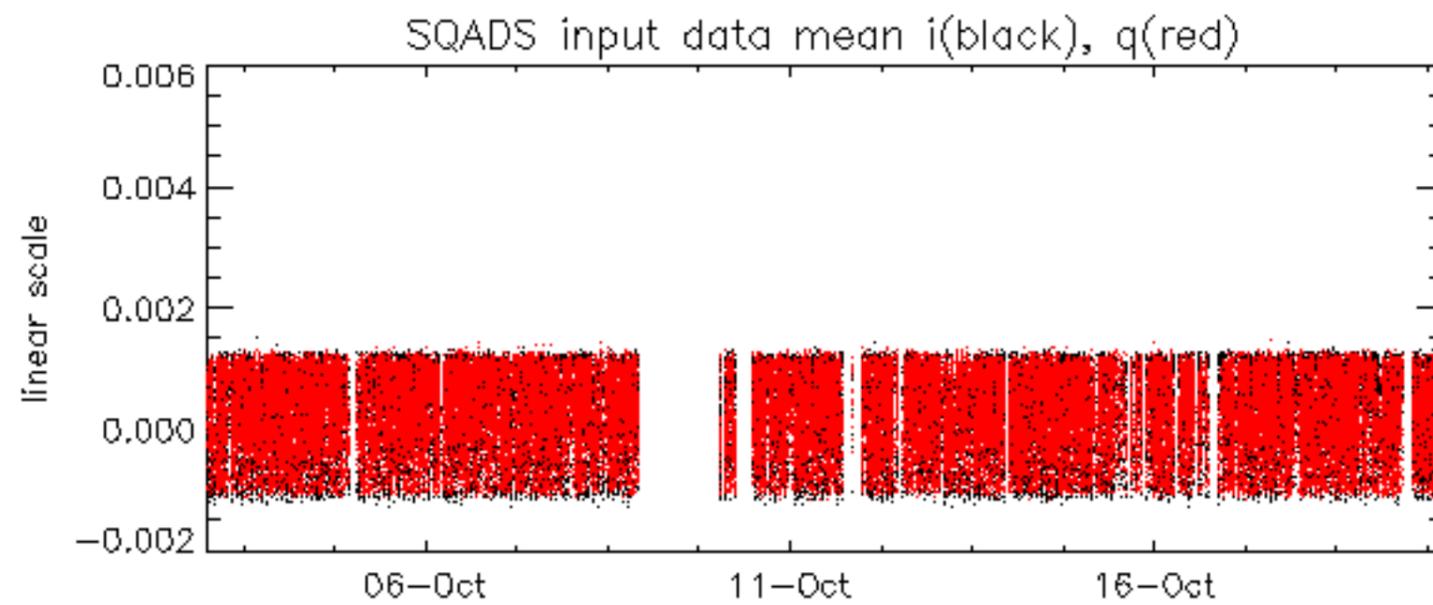

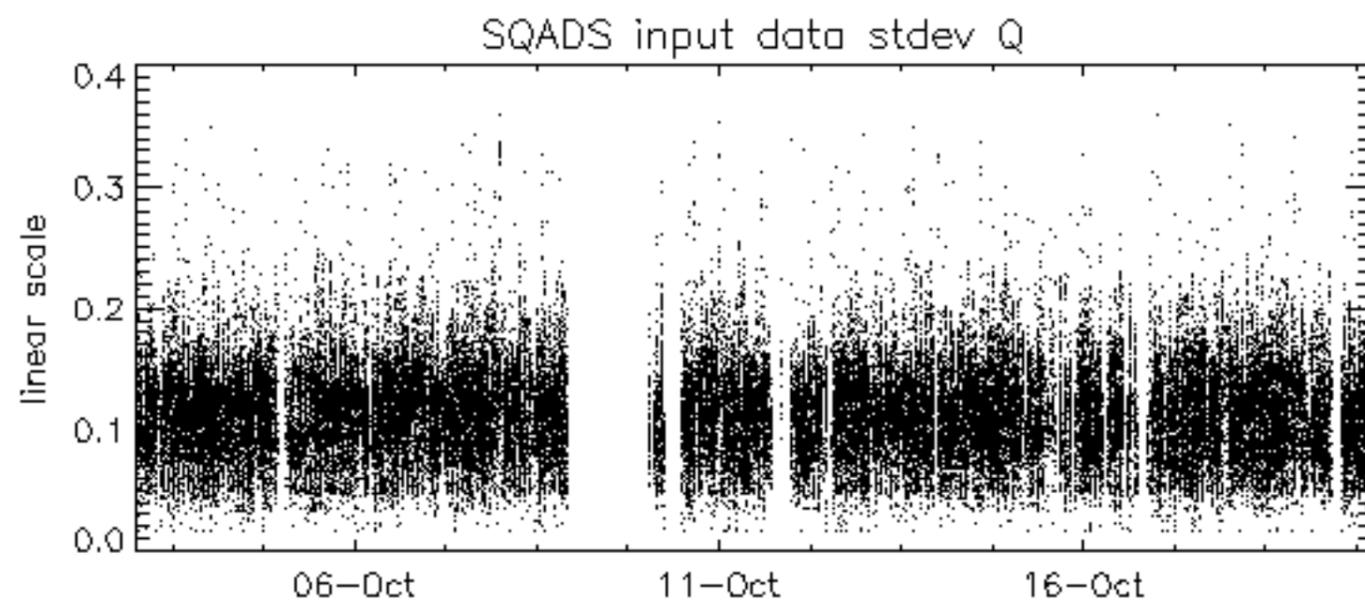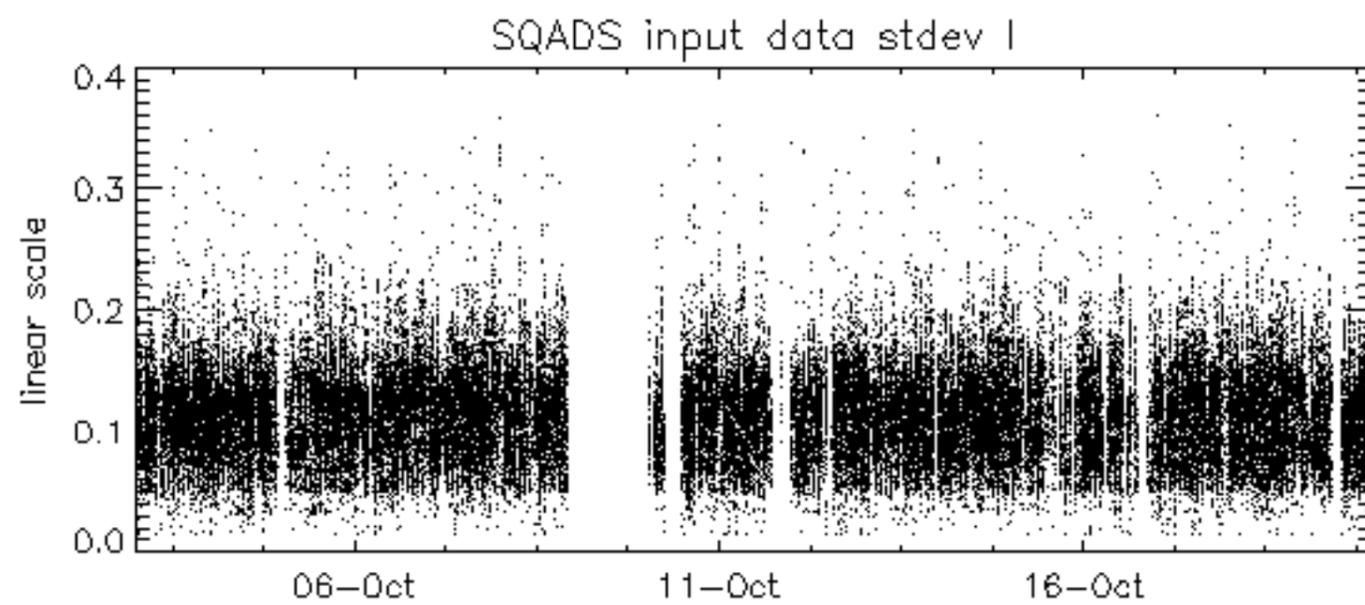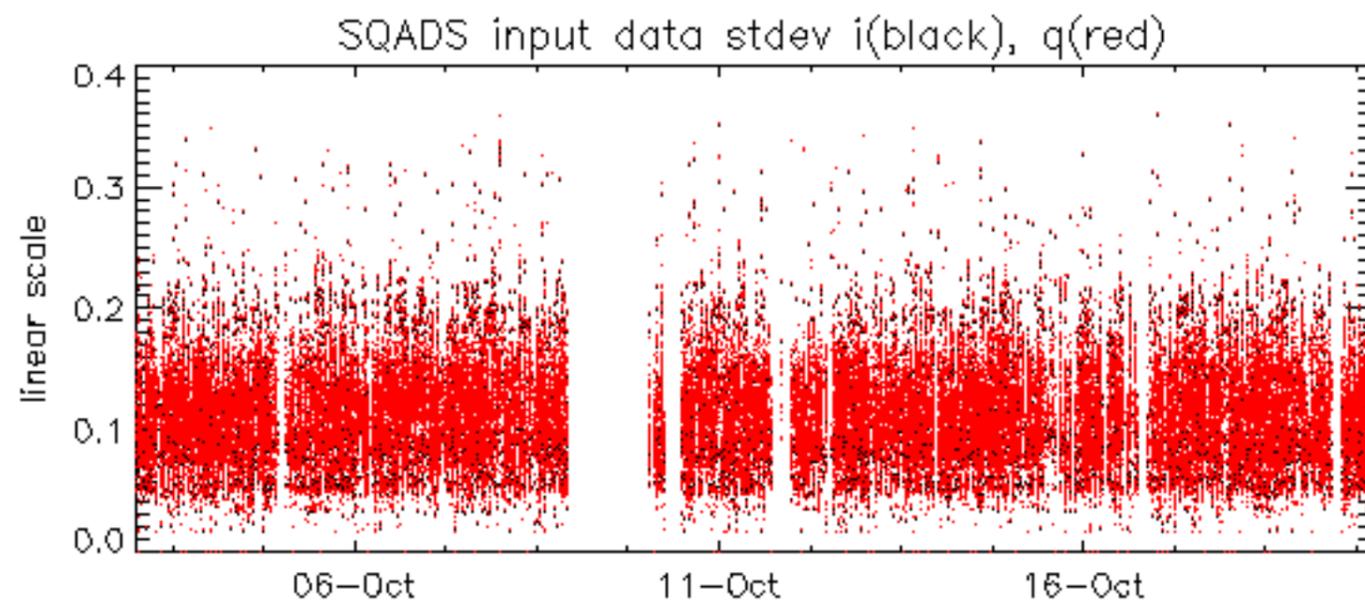

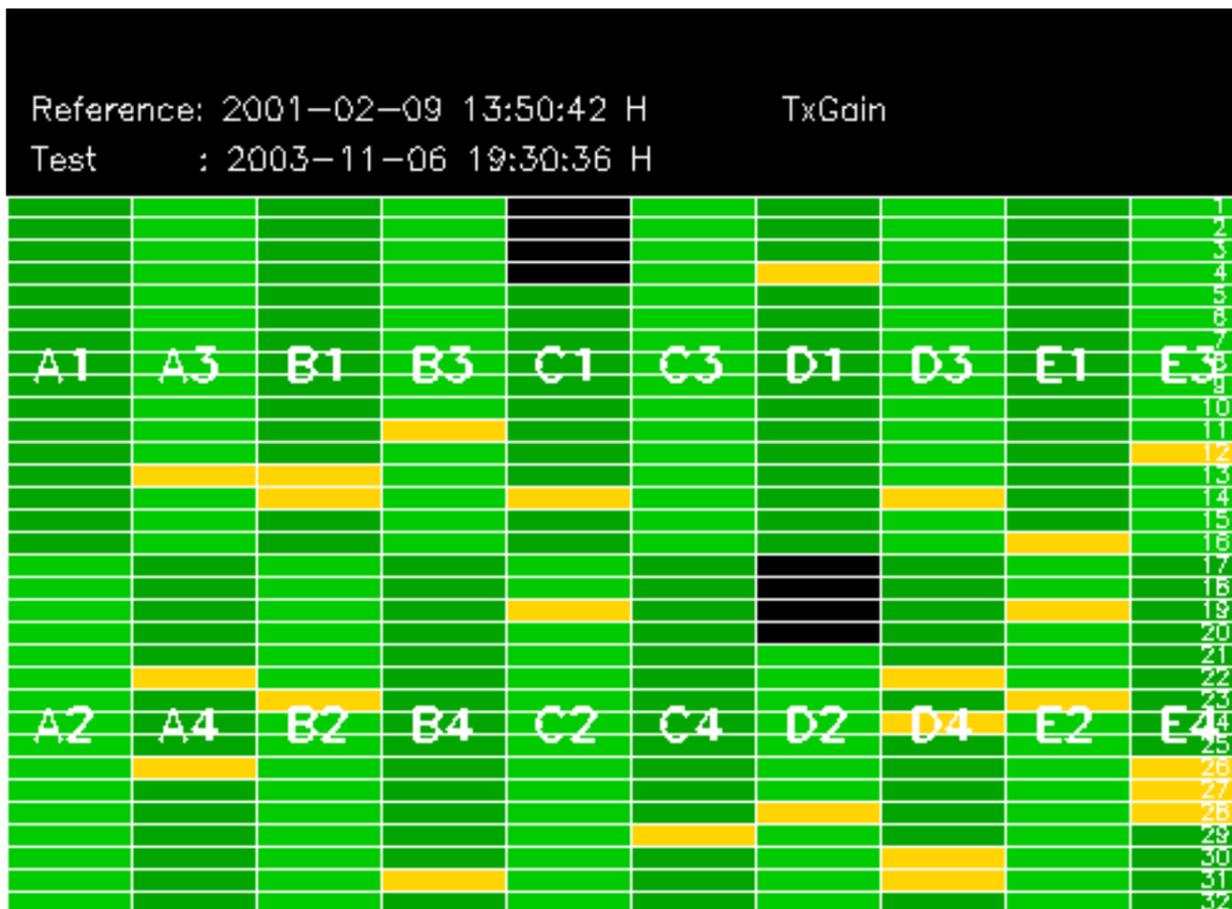

No unavailability during the reported period.