

REPORT OF 040206

1. [Introduction](#)
2. [Summary](#)
 - [Instrument Unavailability](#)
 - [Browse Visual Inspection](#)
 - [Module Stepping Results](#)
 - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
 - [Daily statistics \(row 3 and 24\)](#)
 - [Cyclic statistics \(row 3 and 24\)](#)
 - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
 - [raw data mean I and Q](#)
 - [raw data stdev I and Q](#)
 - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
 - [Unbiased Doppler Error](#)
 - [Absolute Doppler](#)
 - [Doppler evolution versus ANX](#)

1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA_WVS_1P) products, which are the available few hours after the acquisition, on the high rate browse (BP) products and on the Module Stepping (MS) product.

2 - Summary

2.1 - Instrument Unavailability

No unavailabilities during the reported period.

2.2 - Browse Visual Inspection

No anomalies observed on available browse products.

2.3 - Data Analysis

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.

-Nominal Doppler behavior.

3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis.

The purpose of this mode is to identify any malfunctioning modules and to identify modules for which calibration offsets are to be applied.

Last available MS products from 03-Feb-2004: no anomalies observed.

Polarisation	Start Time
V	20040203 192809
H	20040203 192649

MSM in V/V polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
☒	☒
☒	☒
☒	☒
☒	☒

MSM in H/H polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
☒	☒
☒	☒
☒	☒
☒	☒

4 - Internal calibration Results

No anomalies observed.

4.1 - Daily statistics

row	stat	AveP1	AveP2	AveP3
3	mean	-3.65568	-22.4414	-8.14009
	stdev	0.00617459	0.0780368	0.00267021

24	mean	-5.06894	-21.0811	-8.14009
	stdev	0.0145149	0.0805907	0.00267021



4.2 - Cyclic statistics

row	stat	AveP1	AveP2	AveP3
3	mean	-3.68264	-22.4813	-8.14866
	stdev	0.00703033	0.0722370	0.00316627
24	mean	-5.23358	-21.1197	-8.14866
	stdev	0.547714	0.0664560	0.00316627



4.3 - cal pulses monitoring (all rows)



5 - RAW data statistics

No anomalies observed.

5.1 - Input mean I/Q

channel	stat	DSS-B
MEAN I	mean	0.000425732
	stdev	2.89972e-07
MEAN Q	mean	0.000350313
	stdev	3.36147e-07



5.2 - Input stdev I/Q

channel	stat	DSS-B
STDEV I	mean	0.118257
	stdev	0.00136837

STDEV Q	mean	0.118489
	stdev	0.00138286



5.3 - Gain imbalance I/Q



6 - Wave Doppler Analysis

No anomalies observed in Doppler evolution.
Doppler analysis performed over the last 35 days.

6.1 - Unbiased Doppler Error

Evolution of unbiased Doppler error (Real - Expected)

Ascending
Descending

6.2 - Absolute Doppler

Evolution of Absolute Doppler


Ascending
Descending

6.3 - Doppler evolution versus ANX


Evolution Doppler error versus ANX




Average P1 (row 3 & row 24)

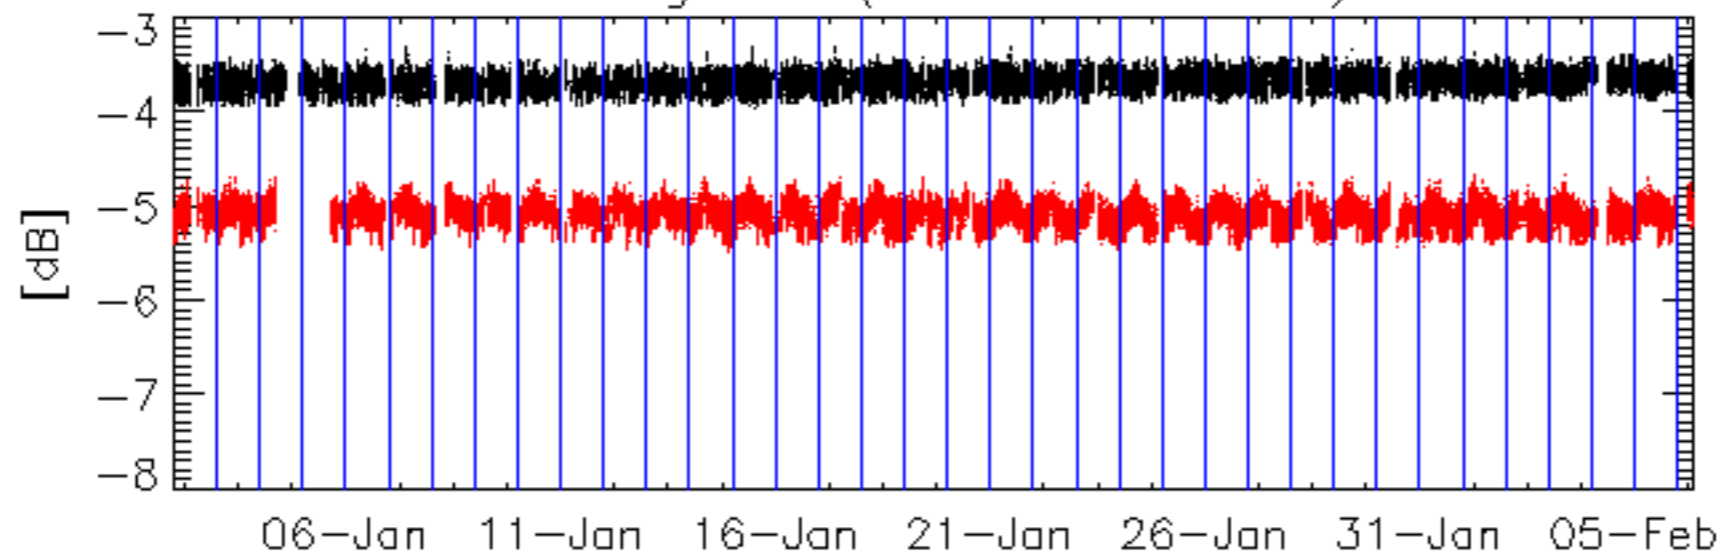


Average P2

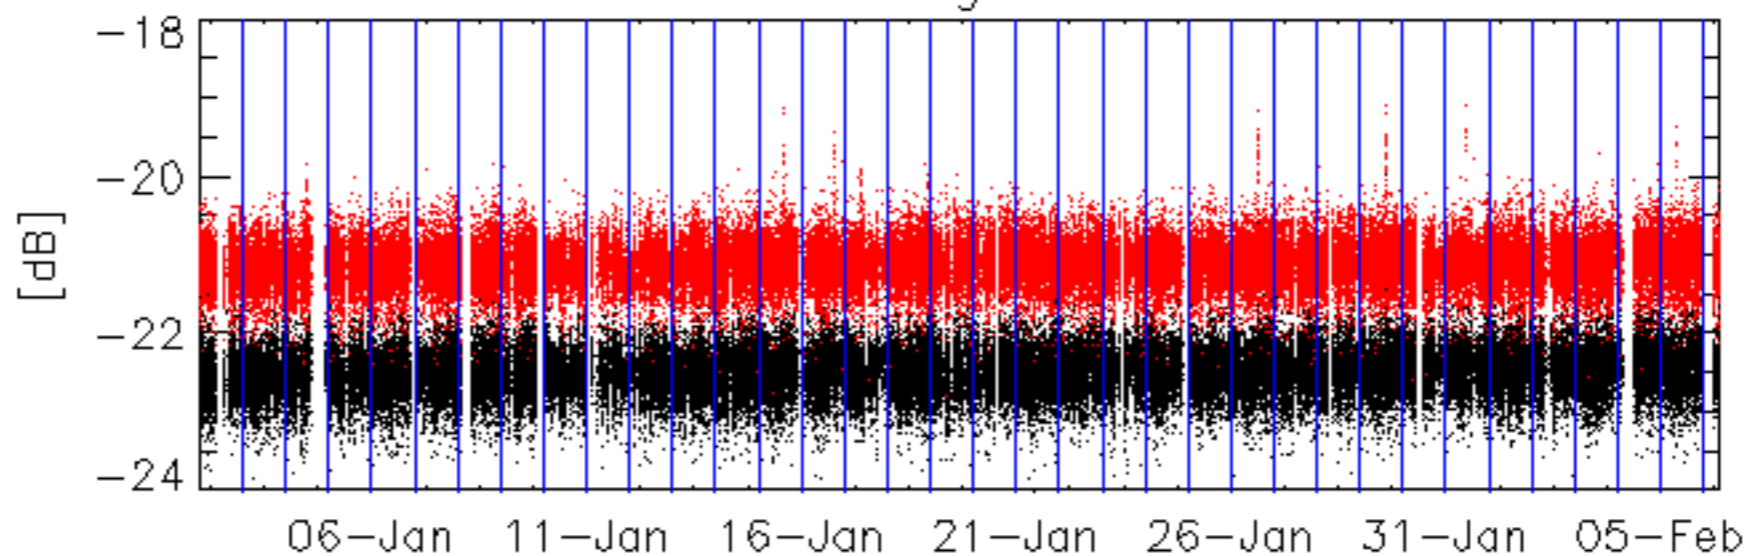

Average P3

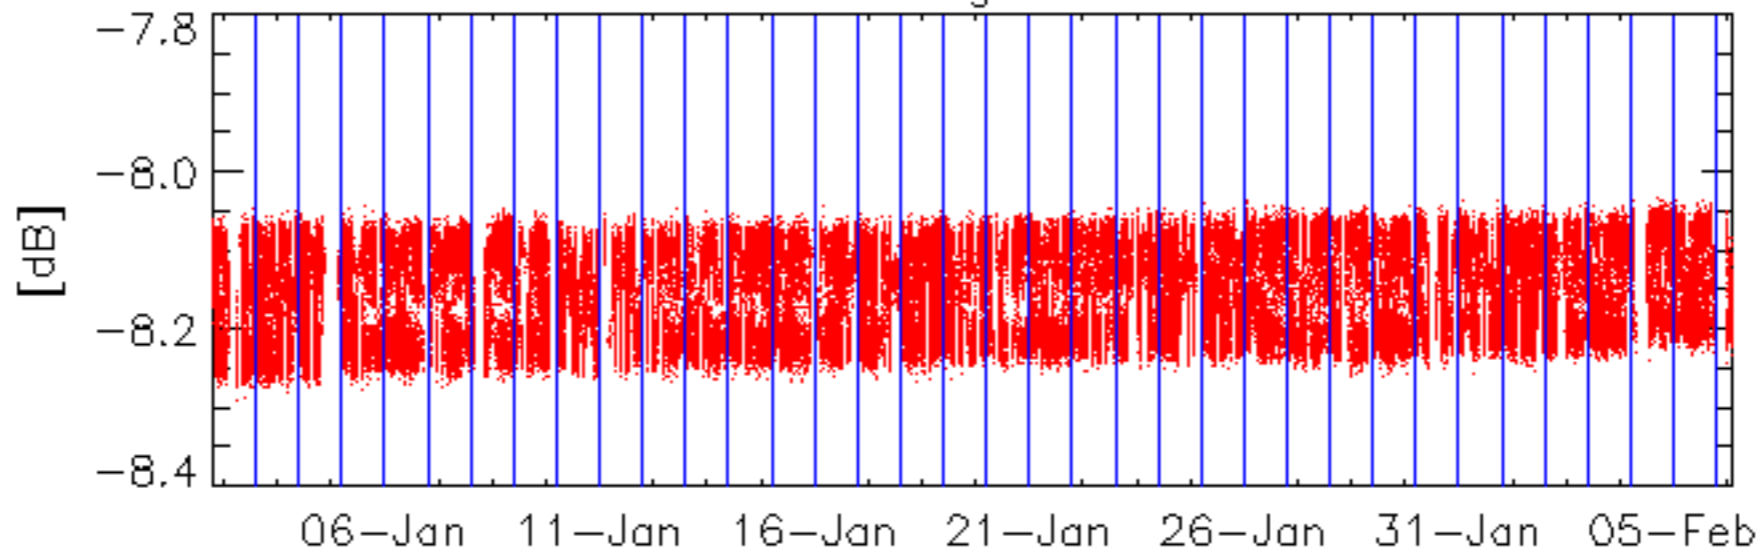


Average P1 (row 3 & row 24)

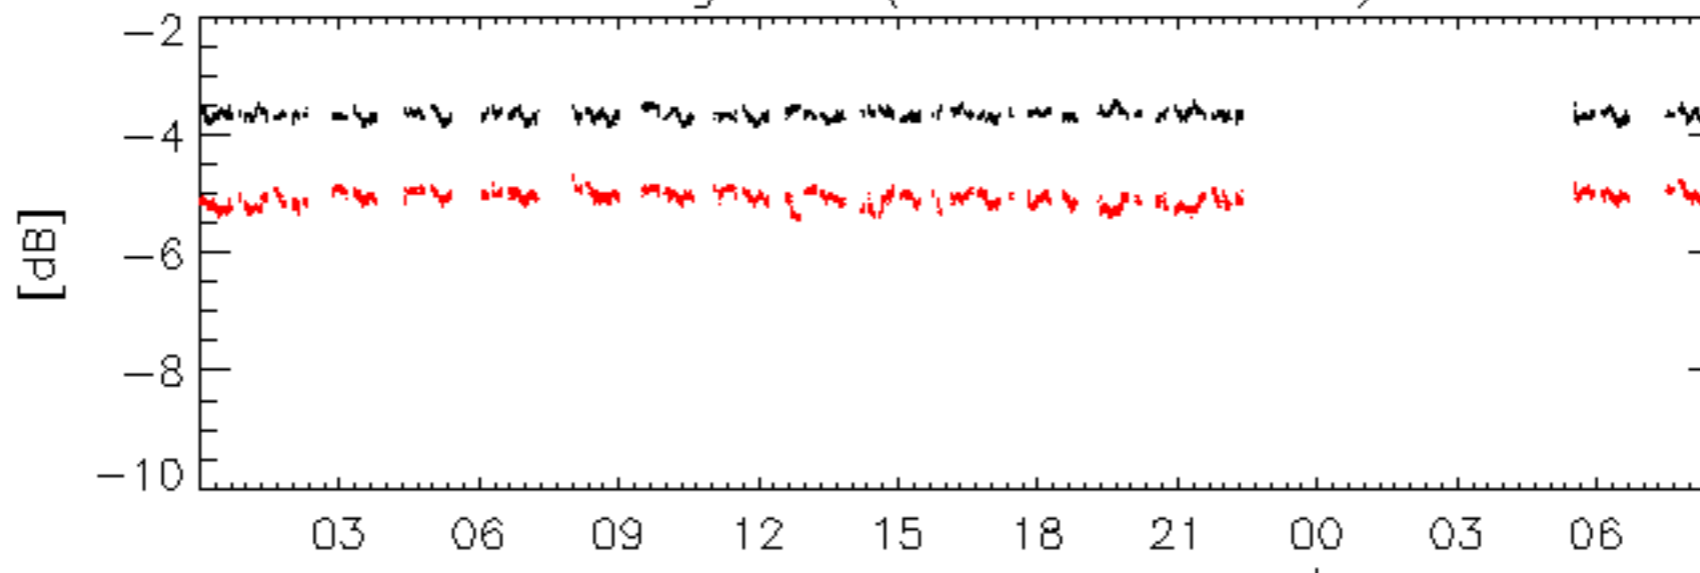


06-Feb

Average P2

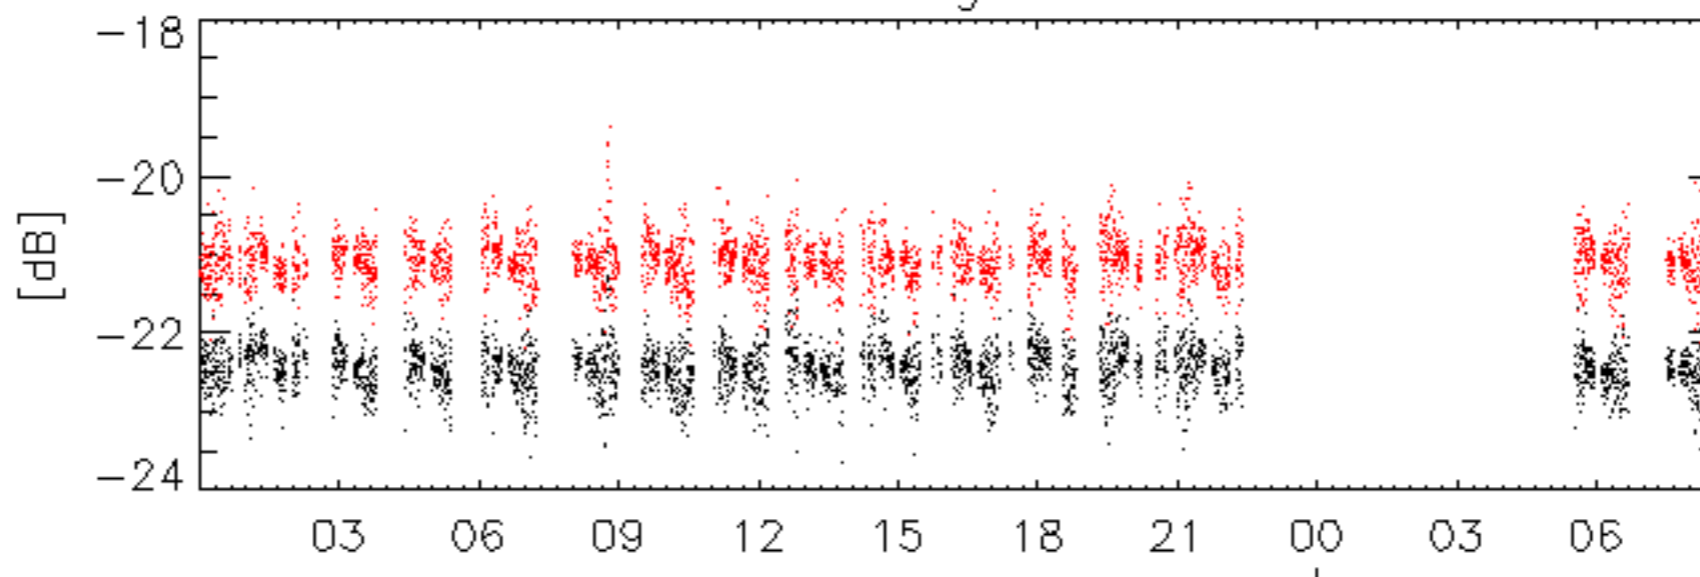

06-Feb


Average P3

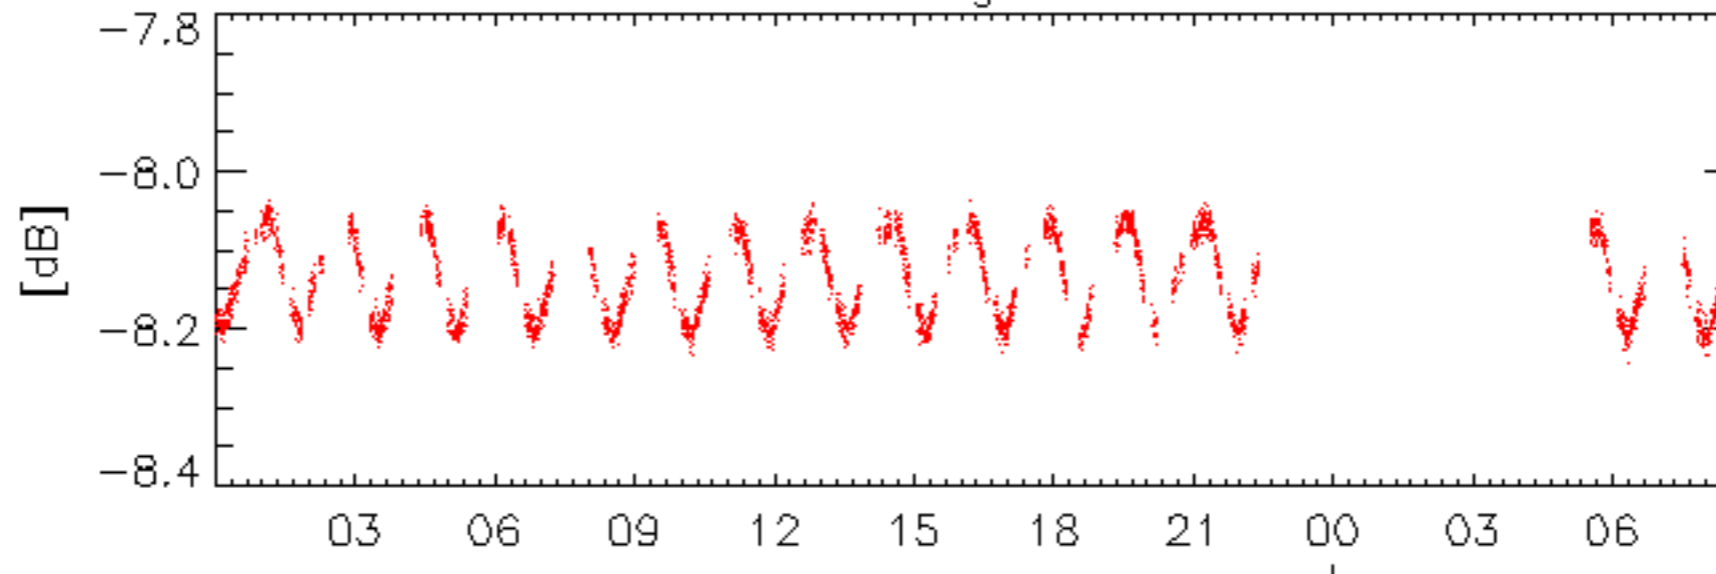

06-Feb

No anomalies observed on available browse products.


No anomalies observed.

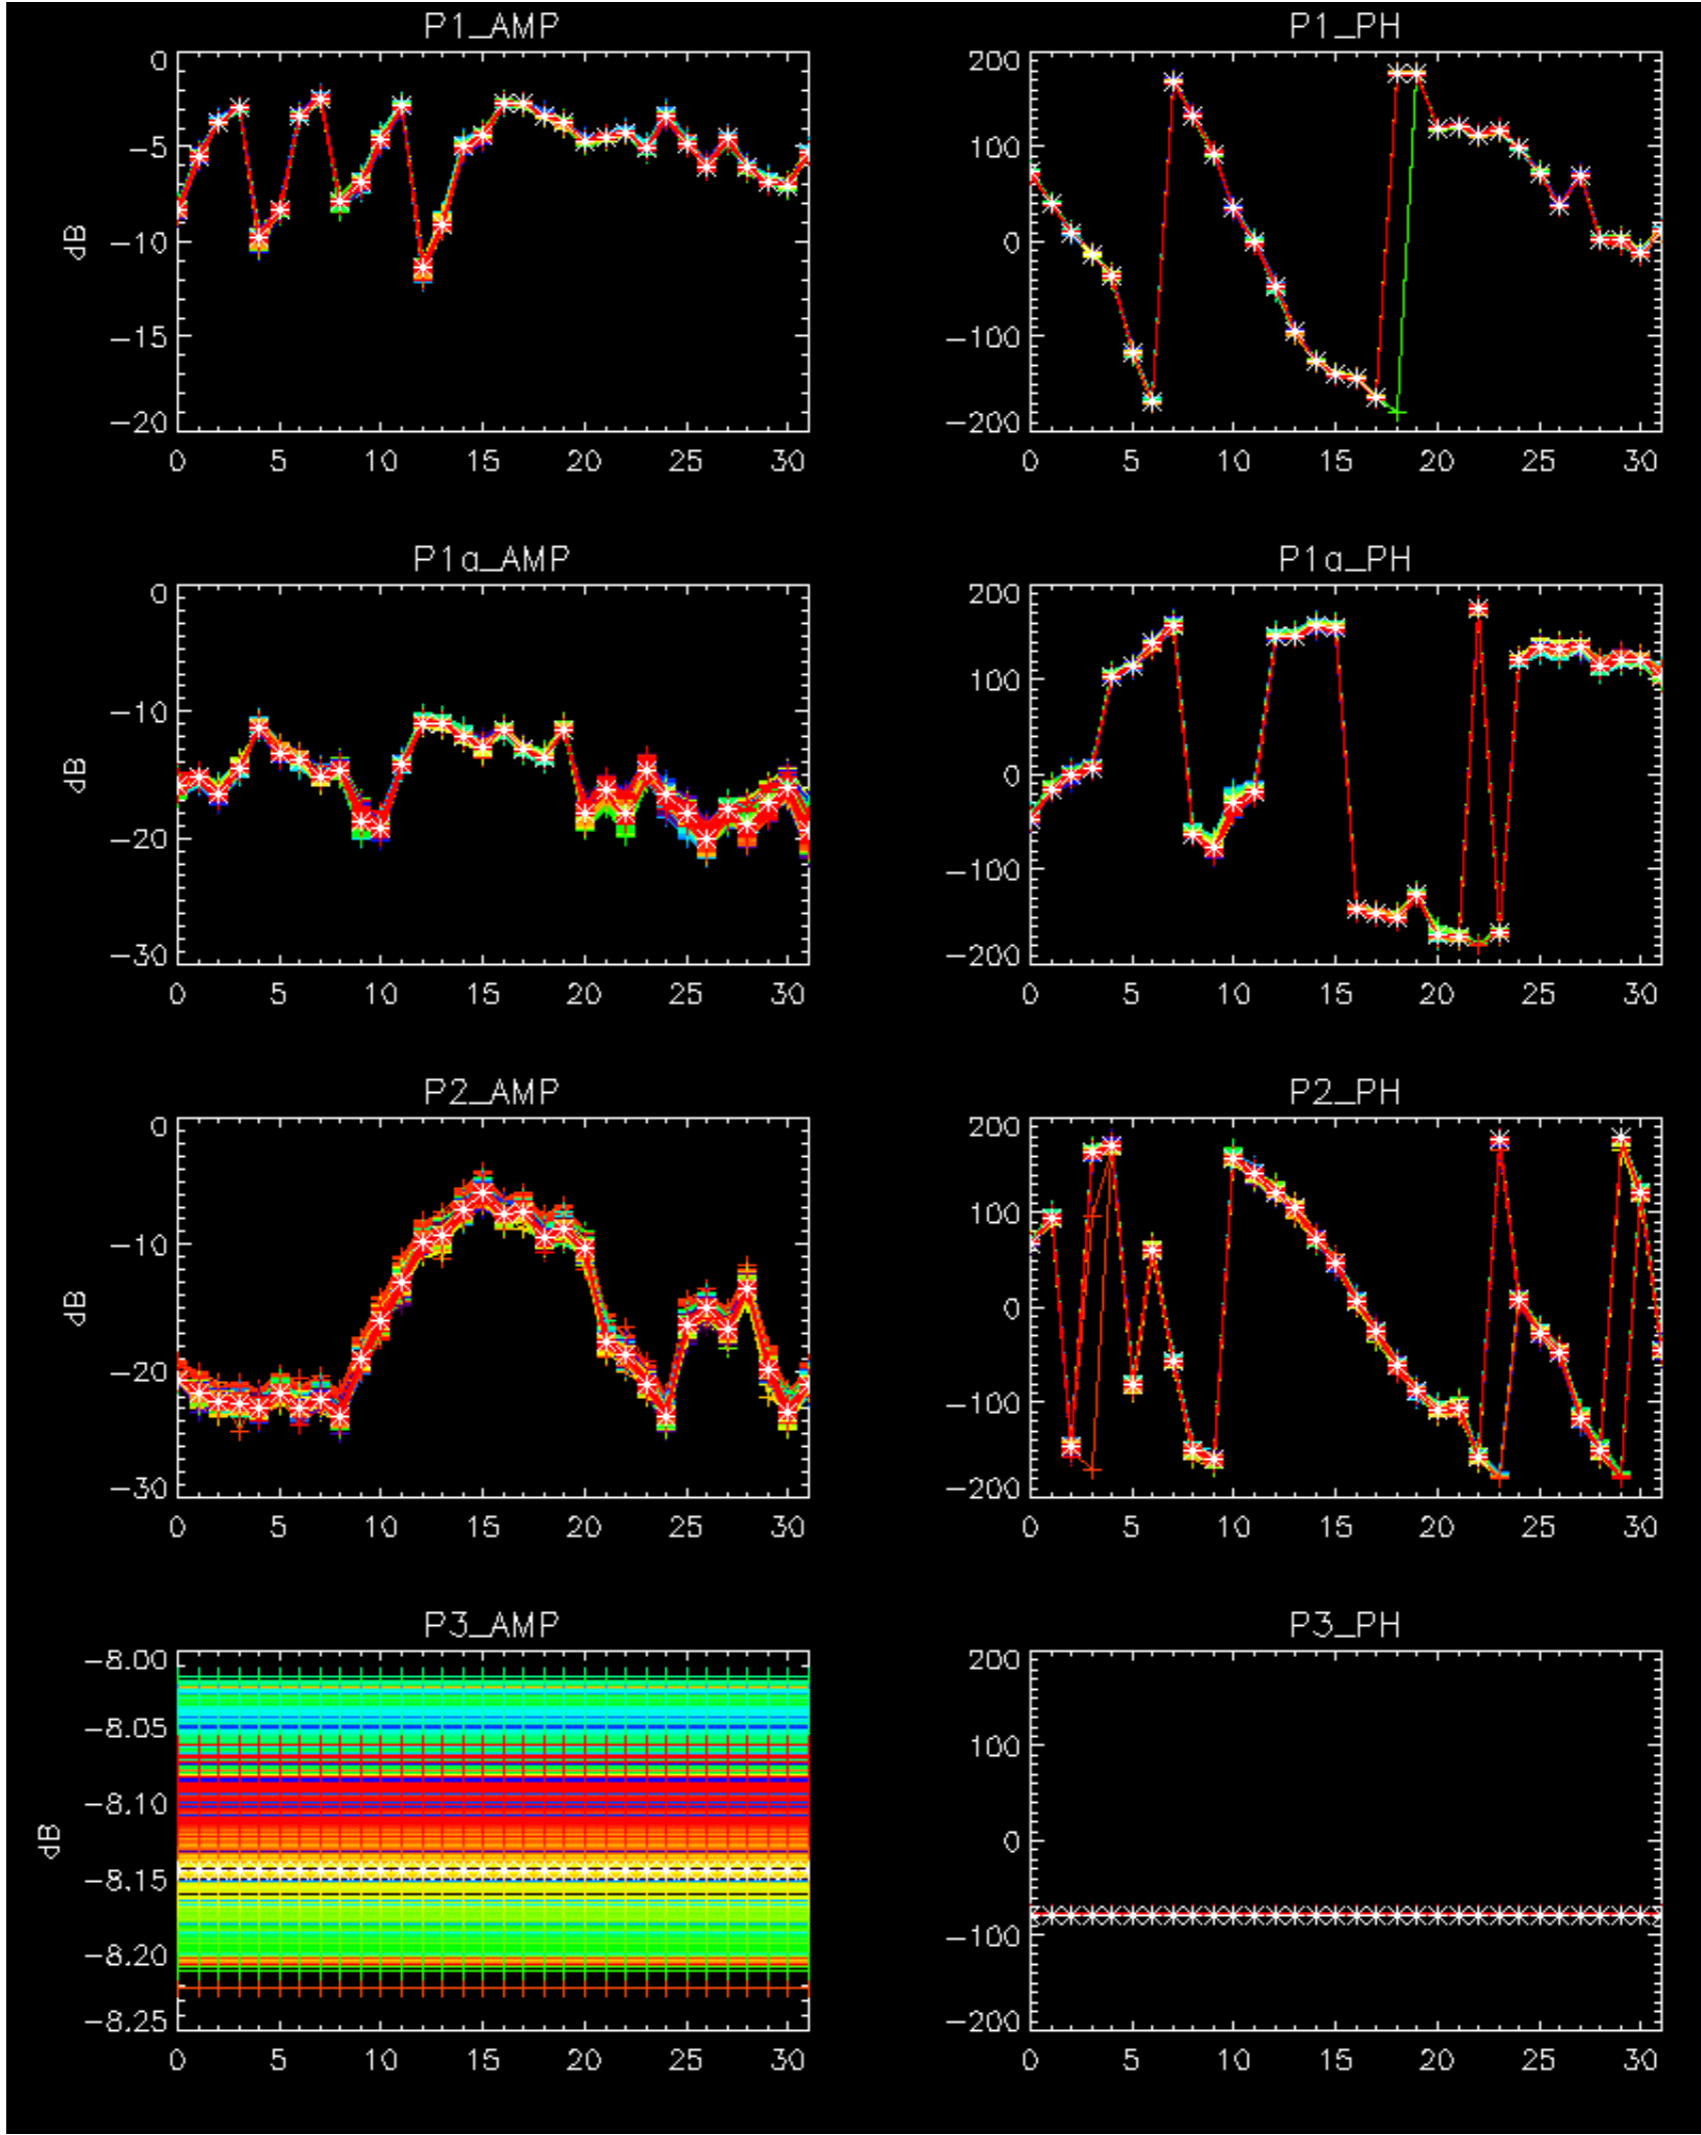


- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.



No anomalies observed in Doppler evolution.
Doppler analysis performed over the last 35 days.

Doppler 'WVS' 'IS2' 'H/H'

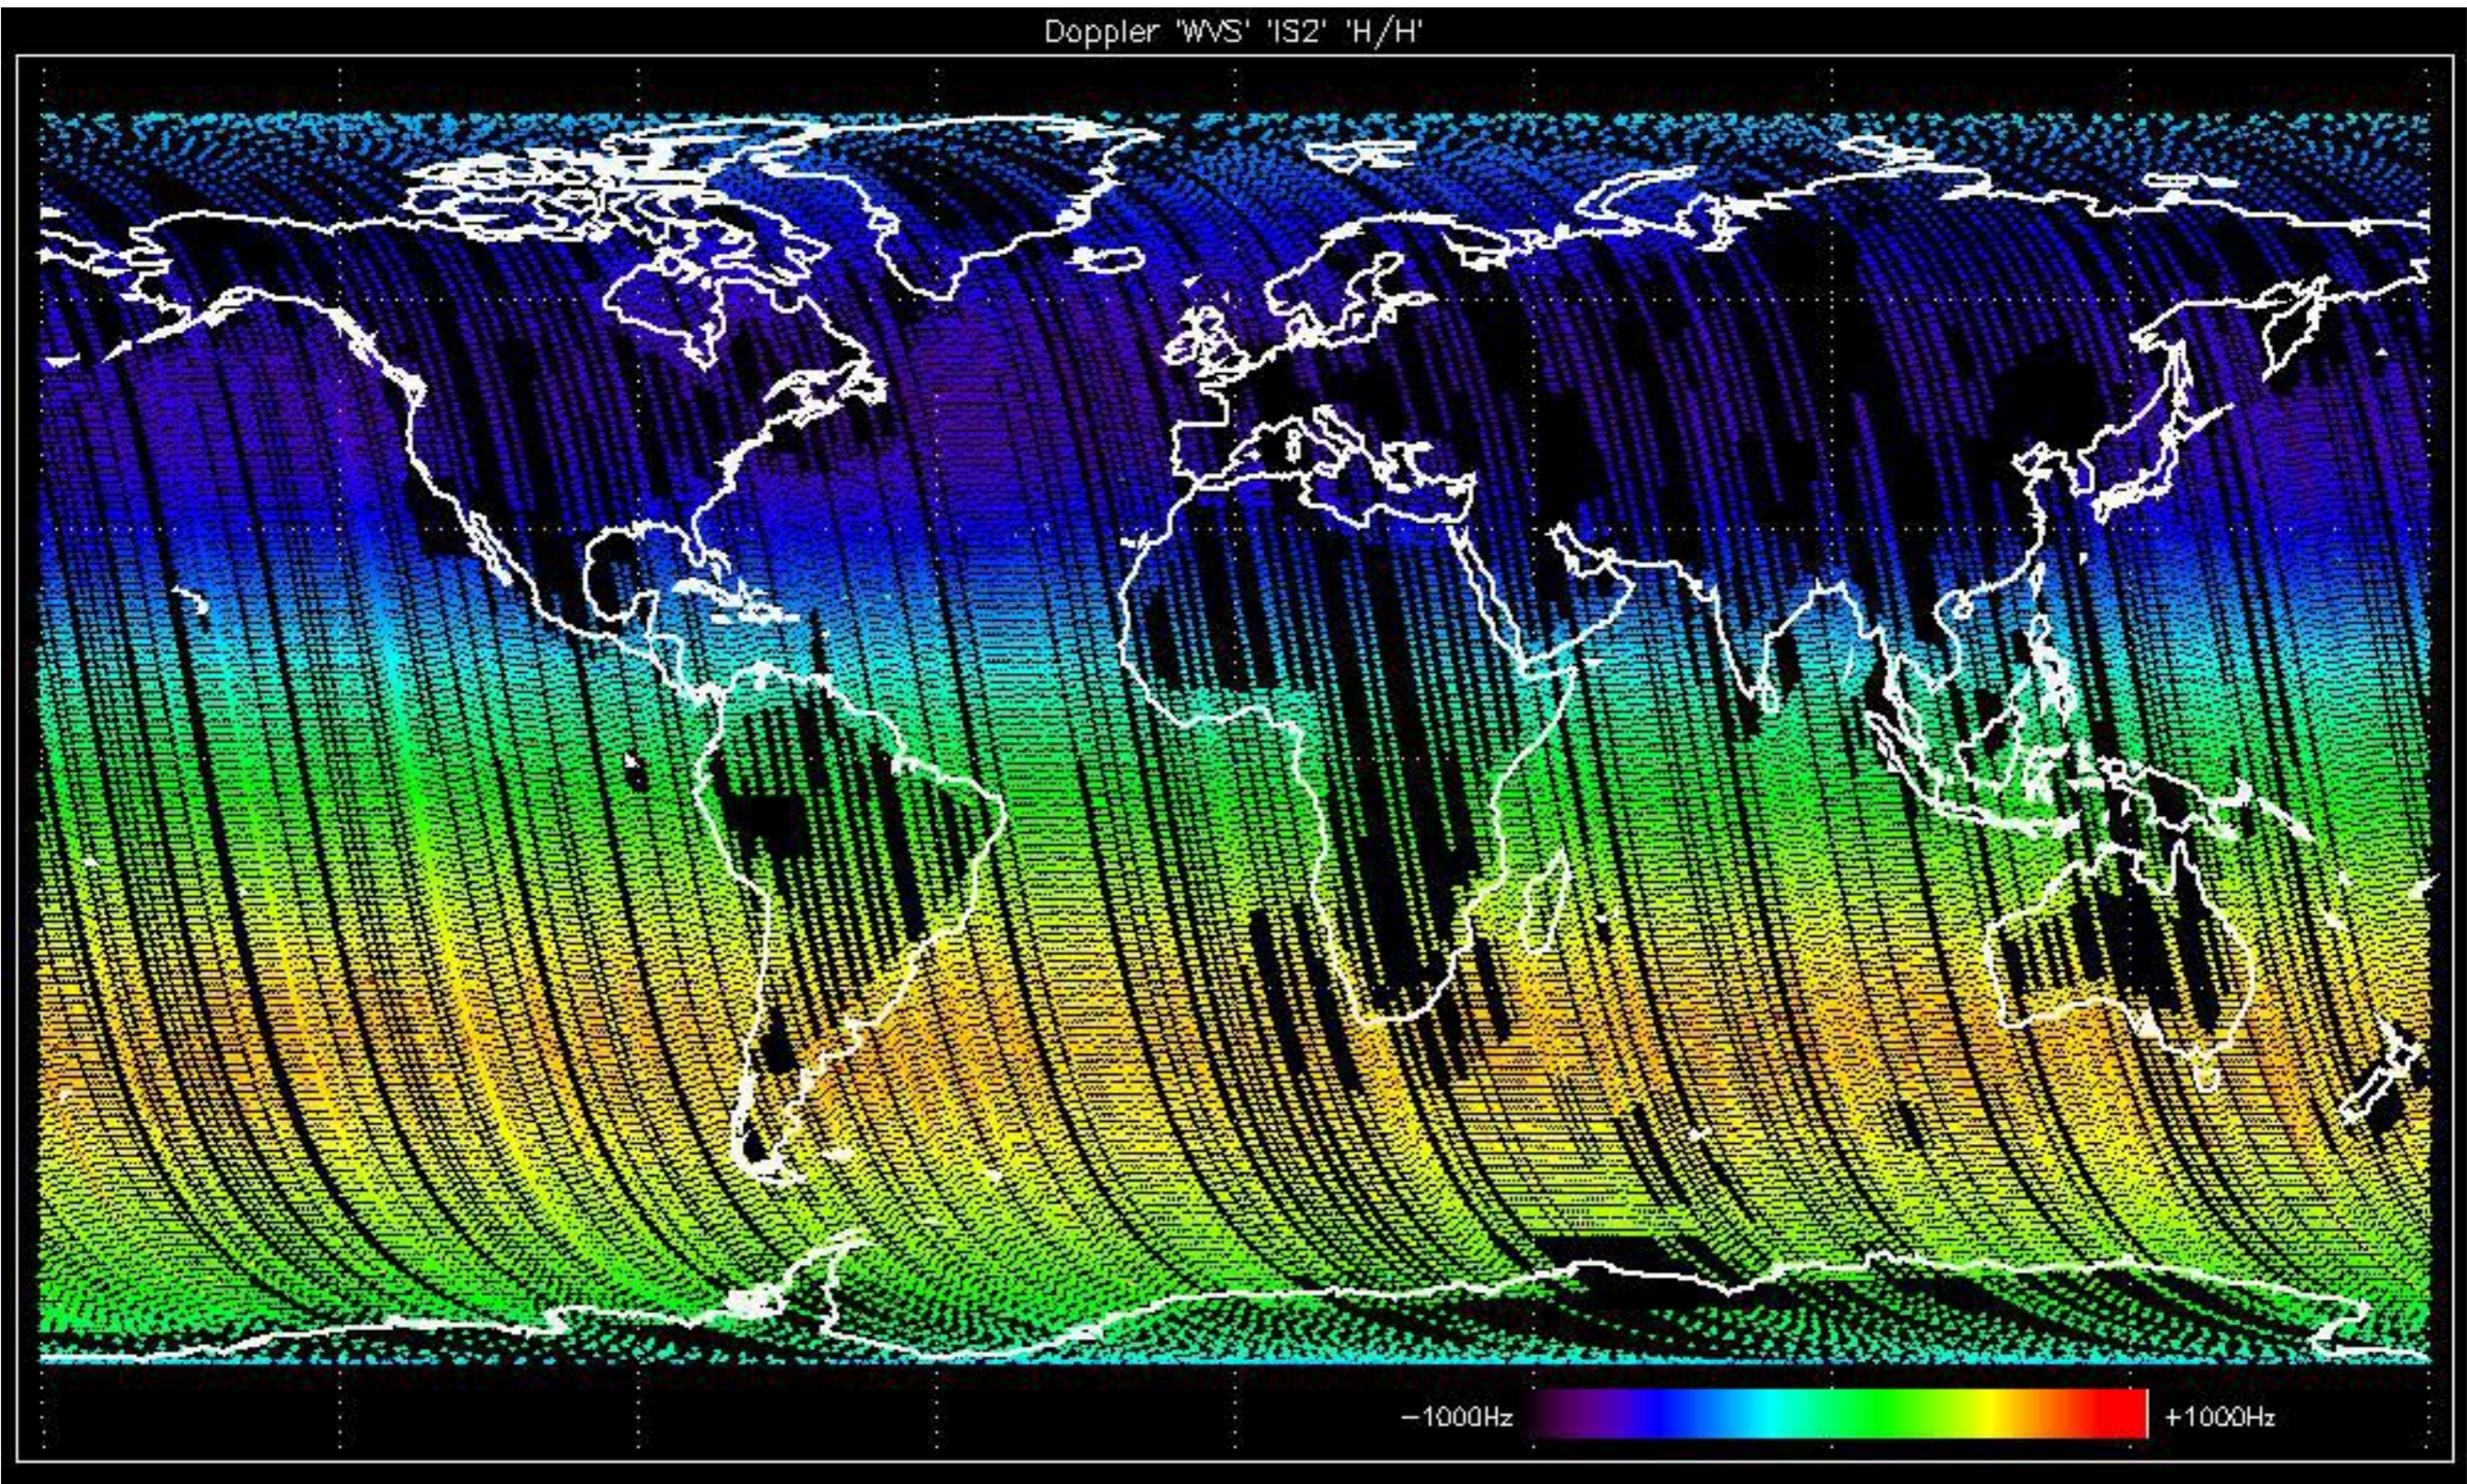


Doppler 'WVS' 'ISZ' 'V/V'

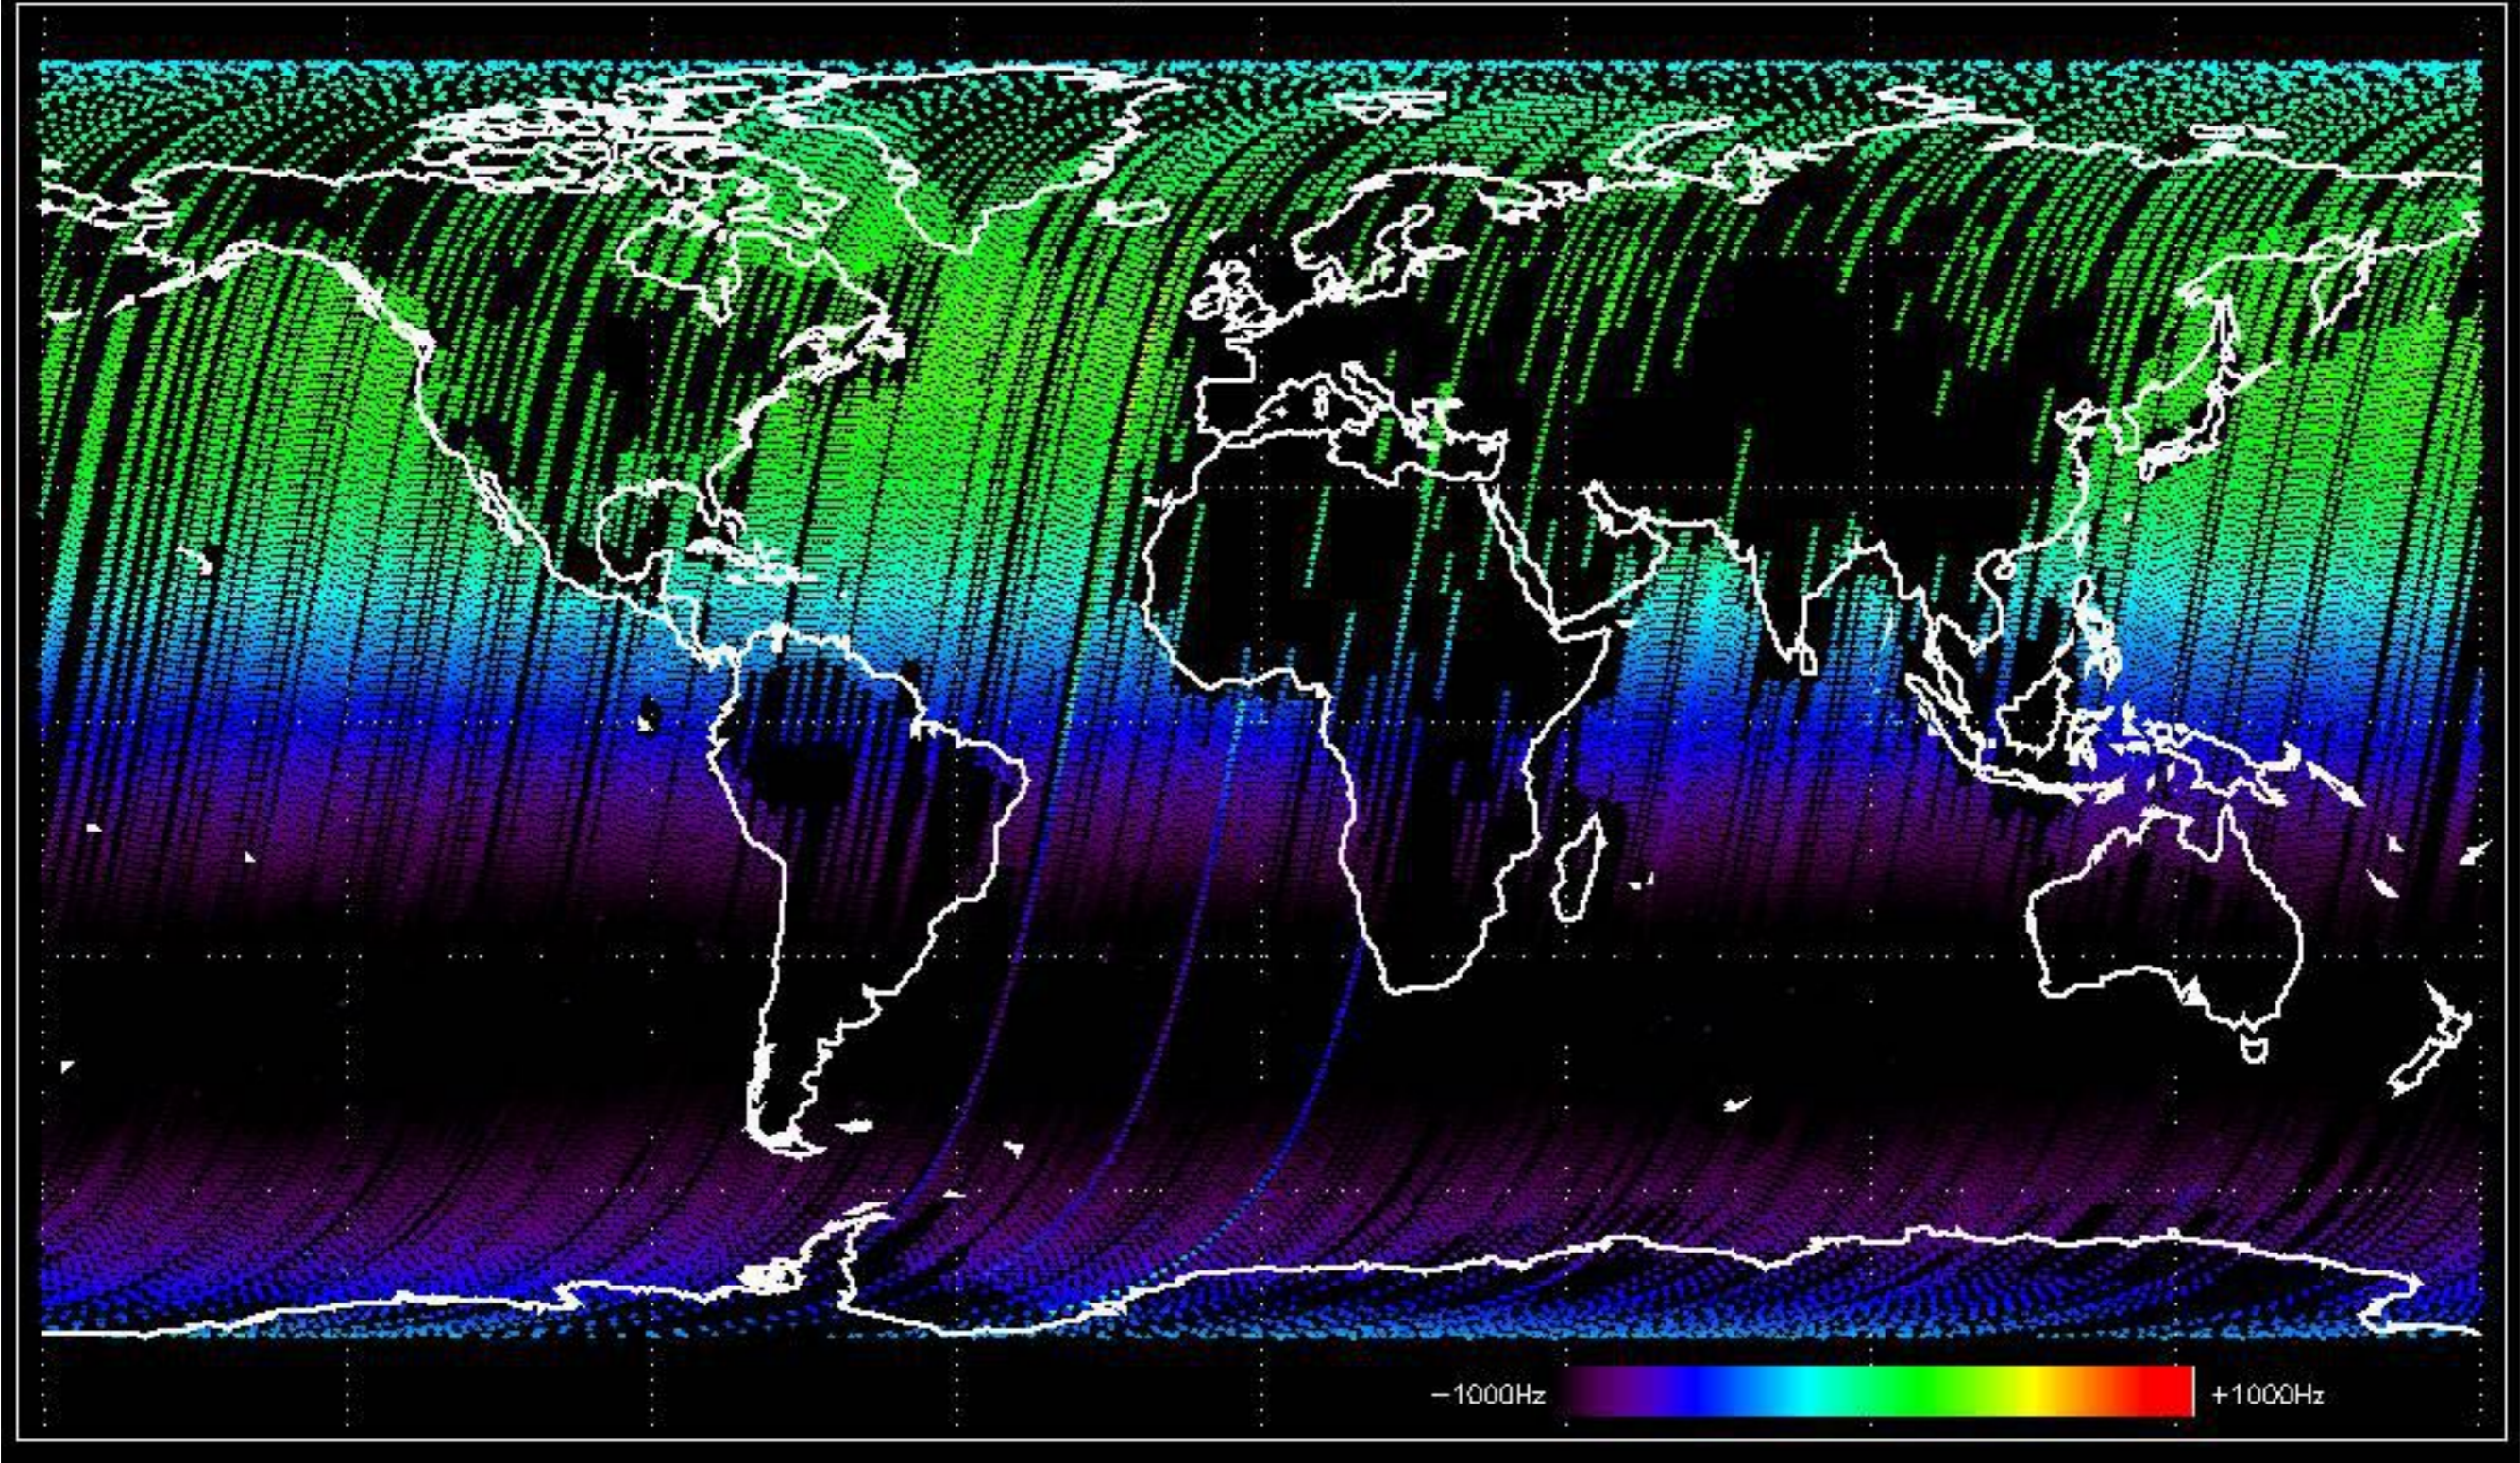


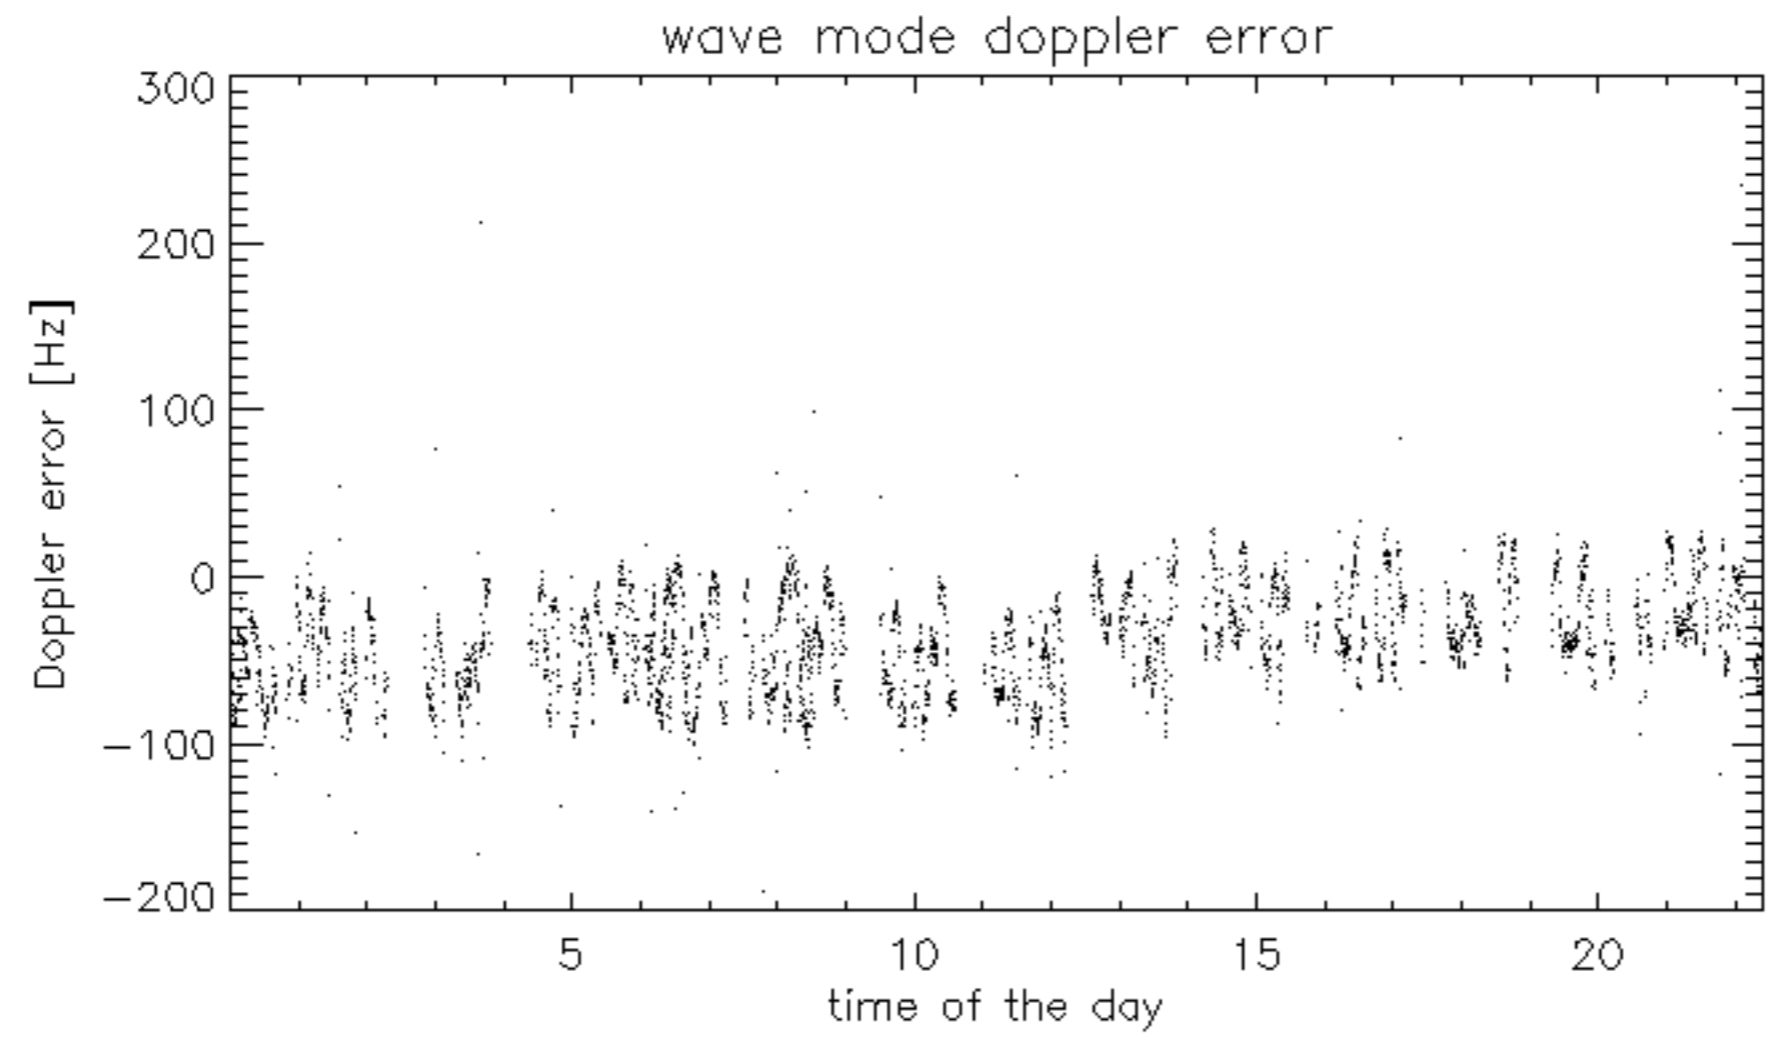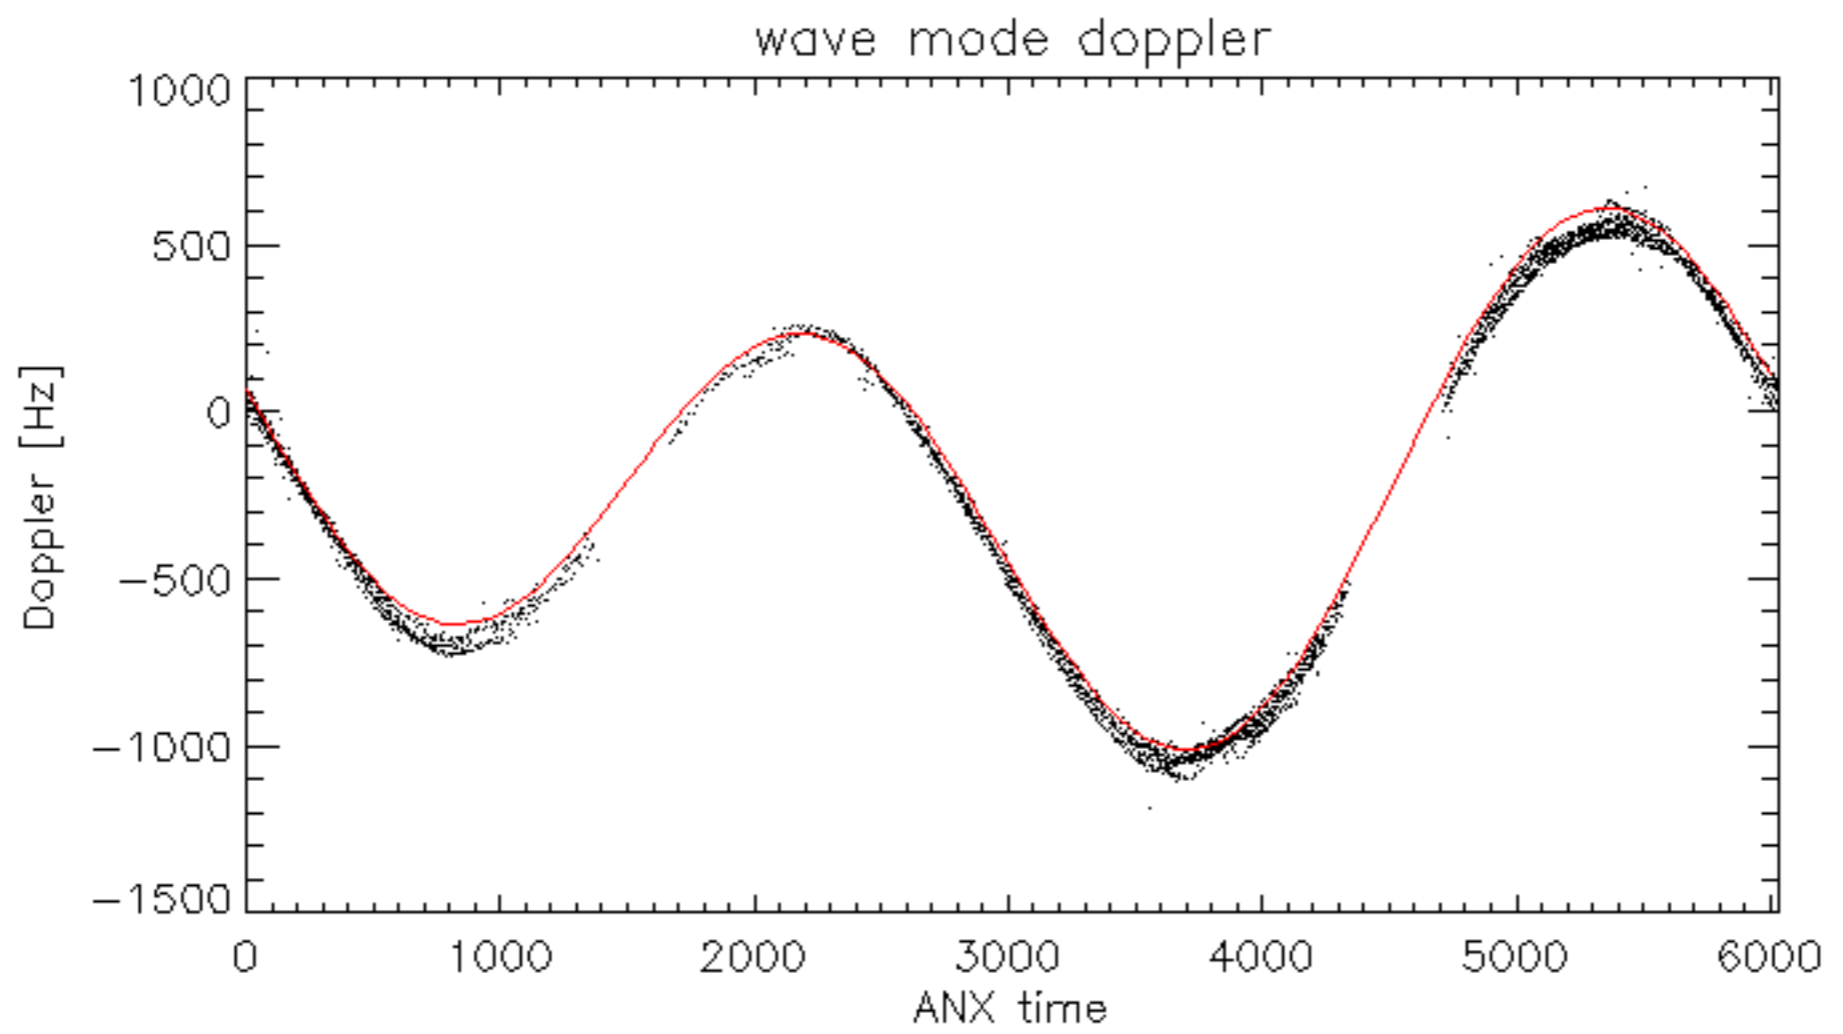

Doppler difference, estimated-predicted 'WVS' 'IS2' 'H/H' -error mean of -34.362340 Hz

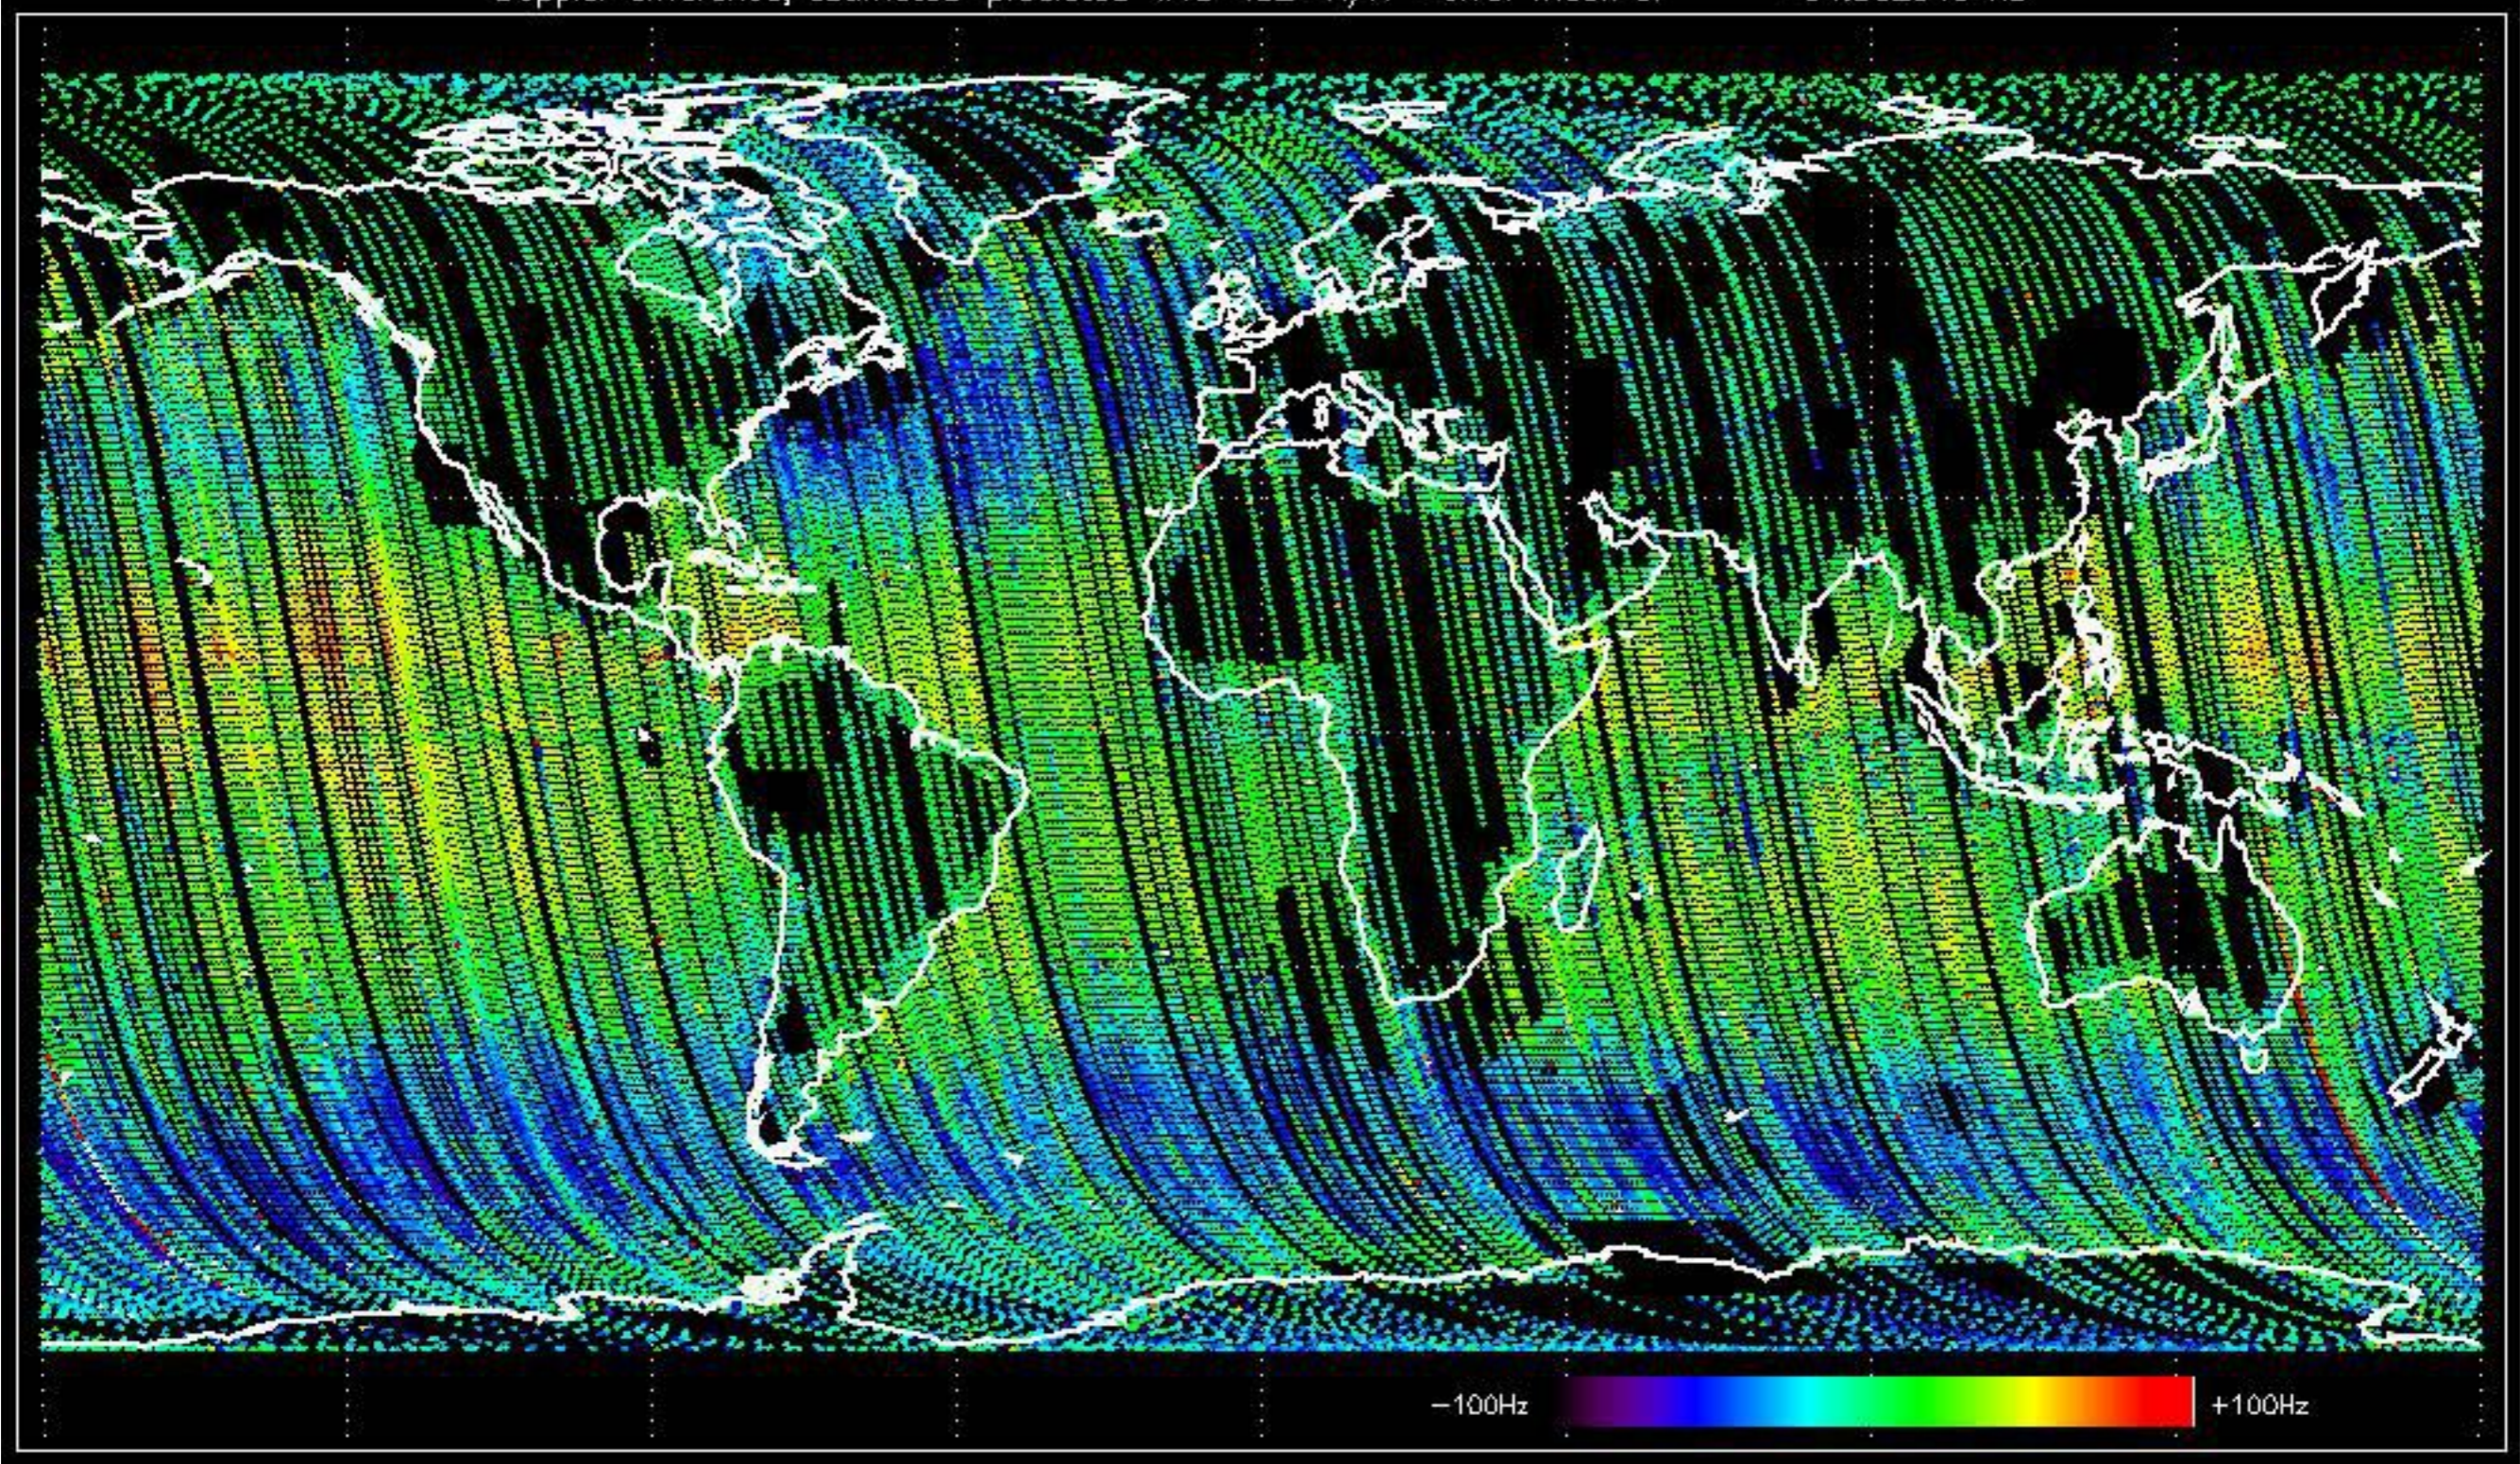





Doppler difference, estimated-predicted 'WVS' 'IS2' 'V/V' -error mean of -31.888010 Hz



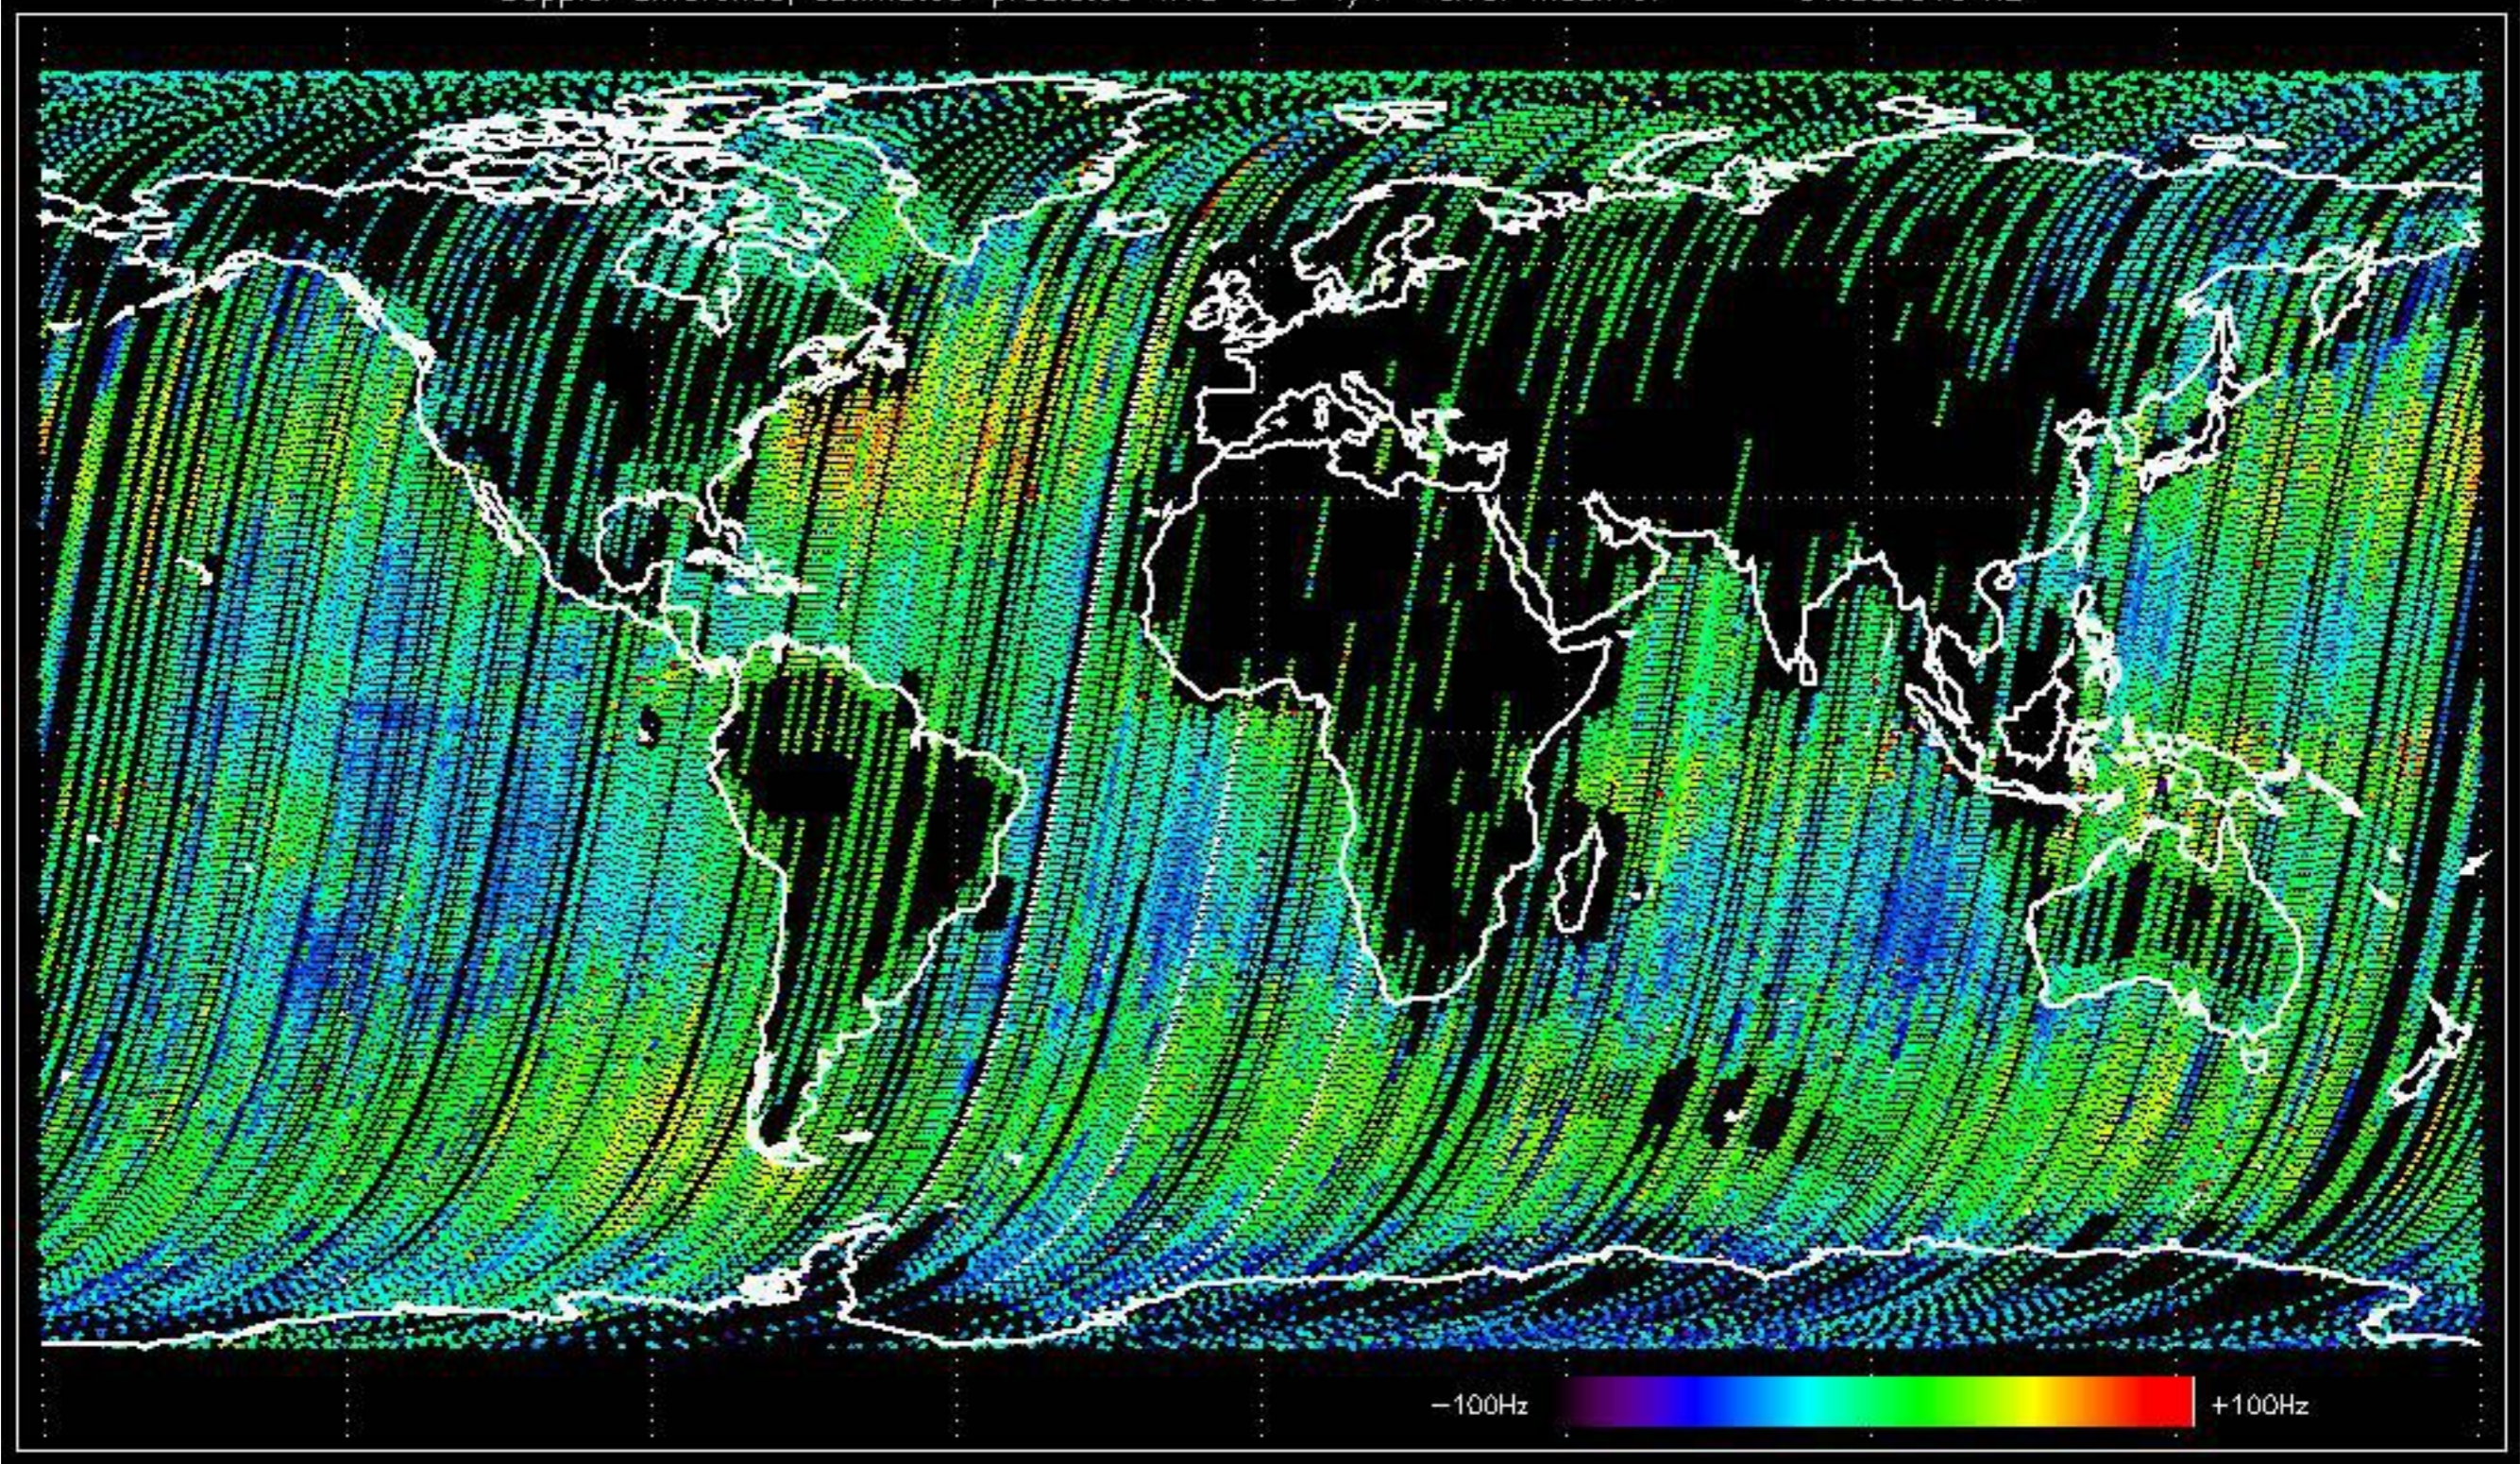


The MS mode provides an internal health check on an individual module basis.
The purpose of this mode is to identify any malfunctioning modules and
to identify modules for which calibration offsets are to be applied.
Last available MS products from 03-Feb-2004: no anomalies observed.

No anomalies observed.

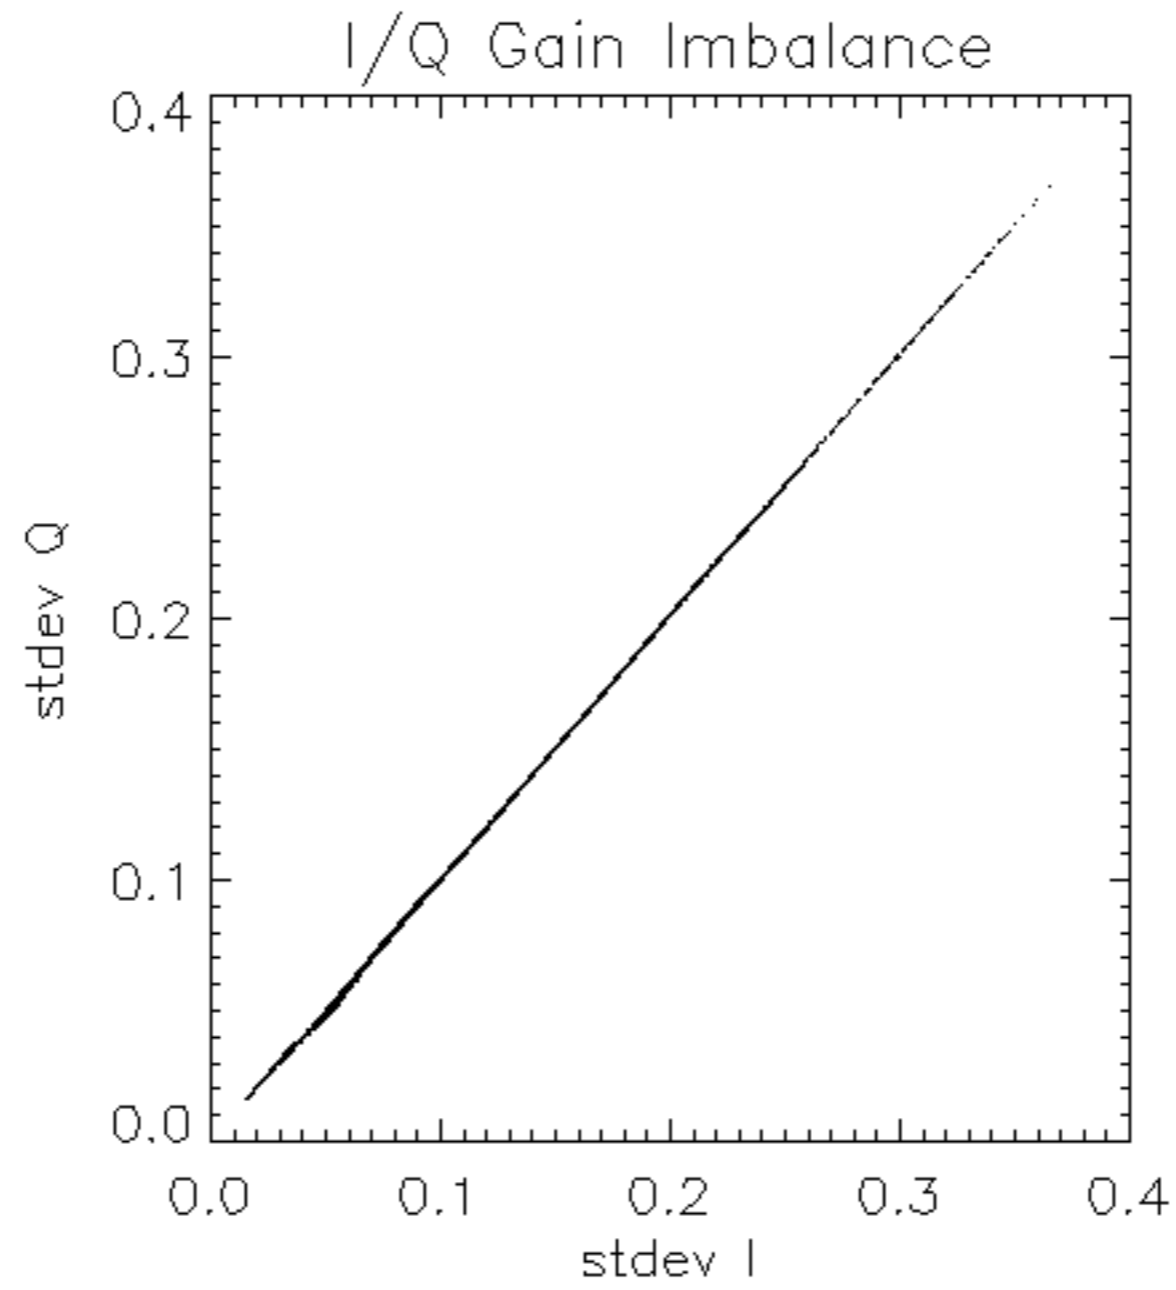

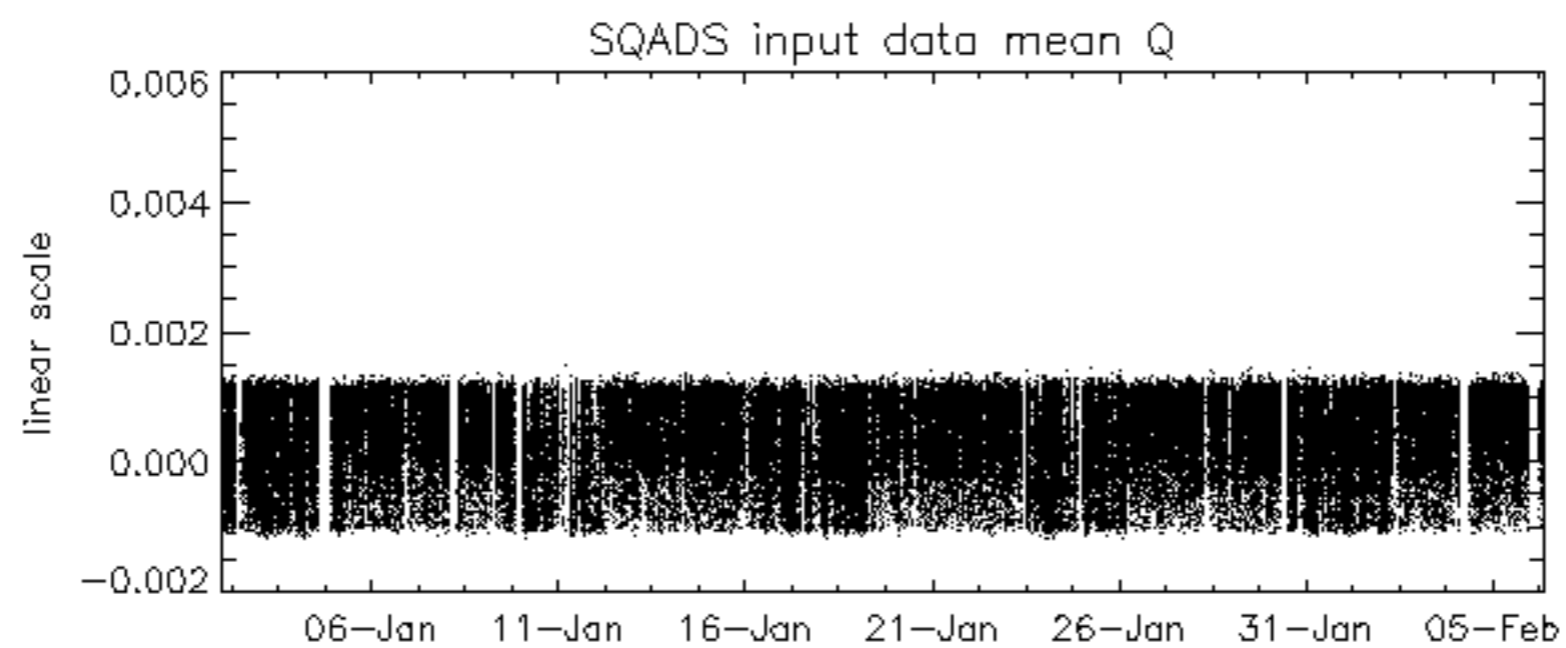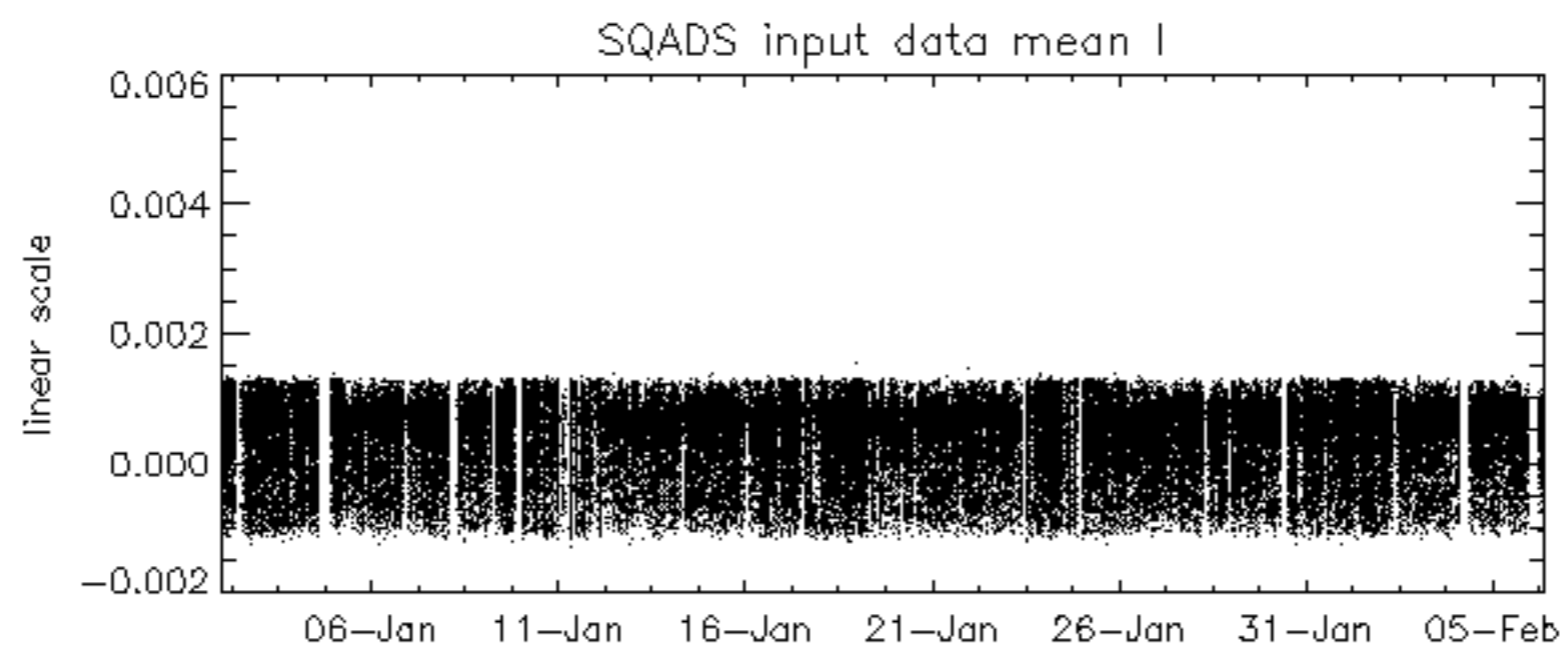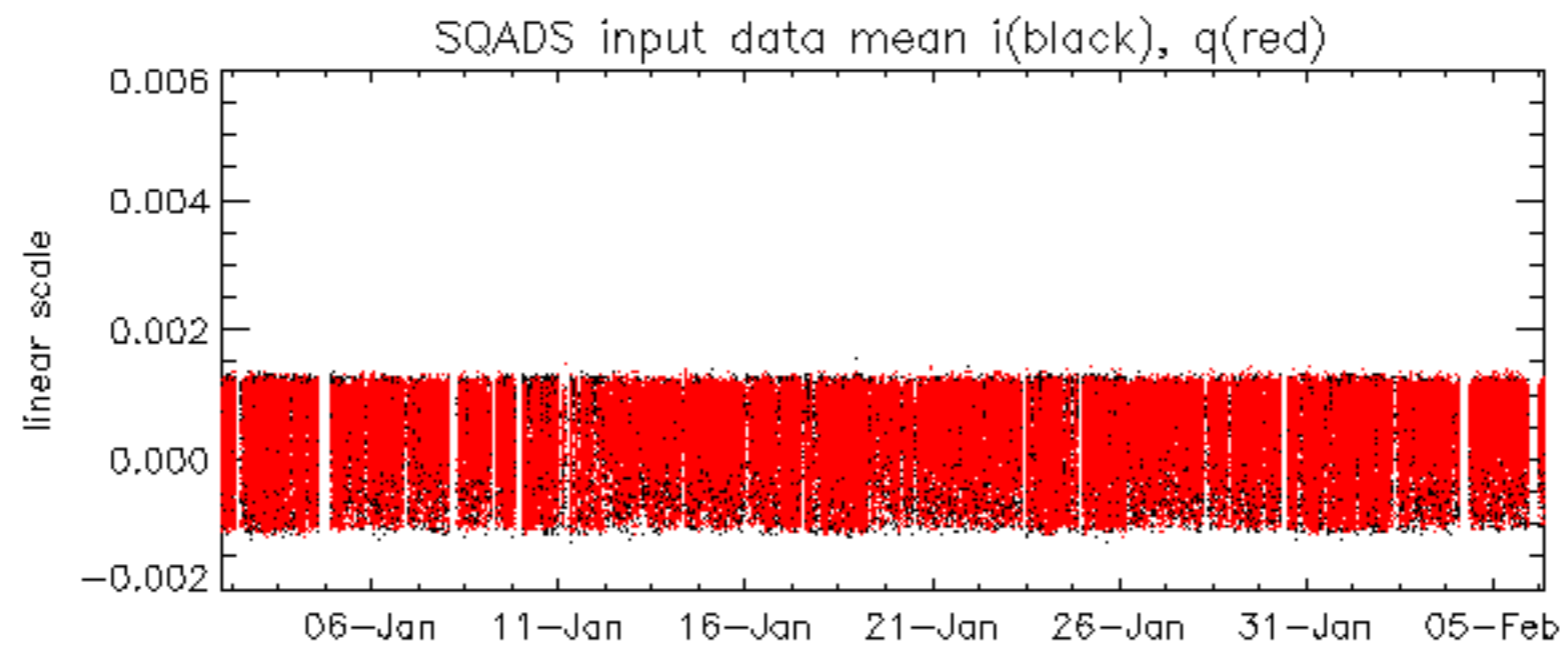

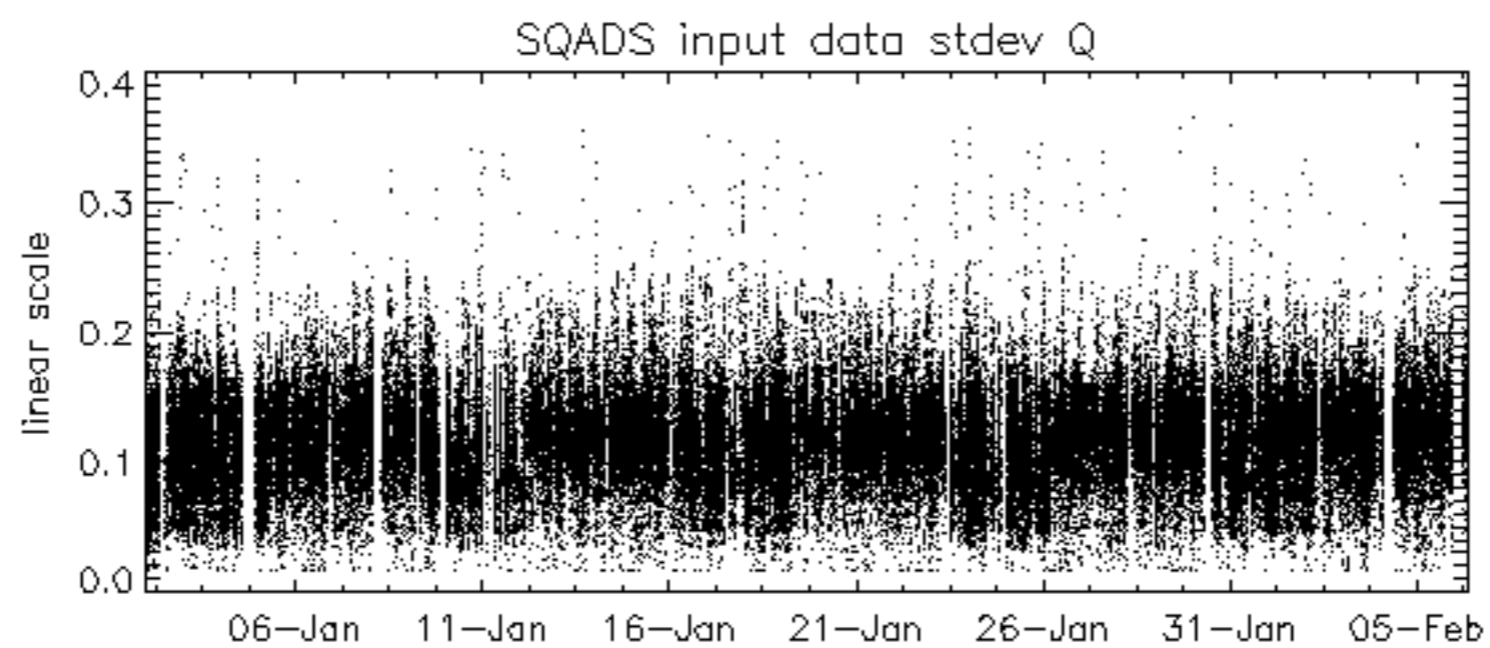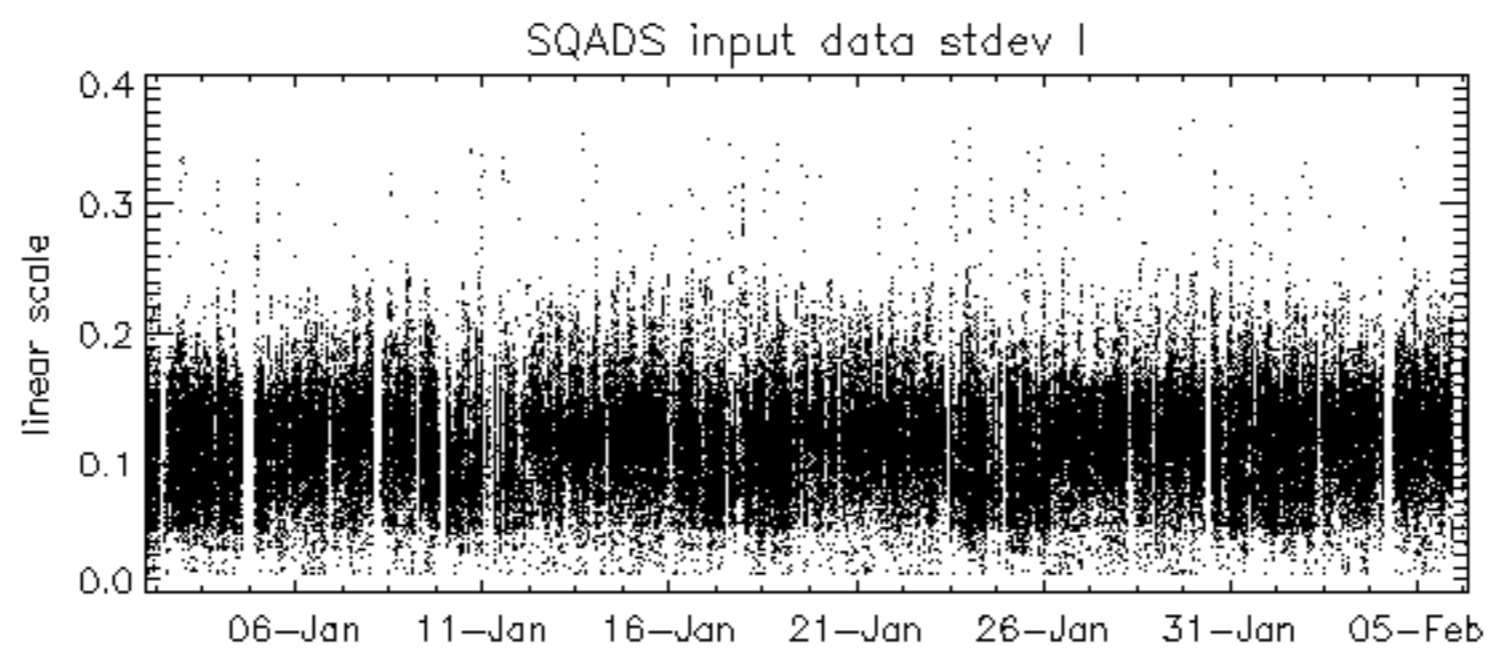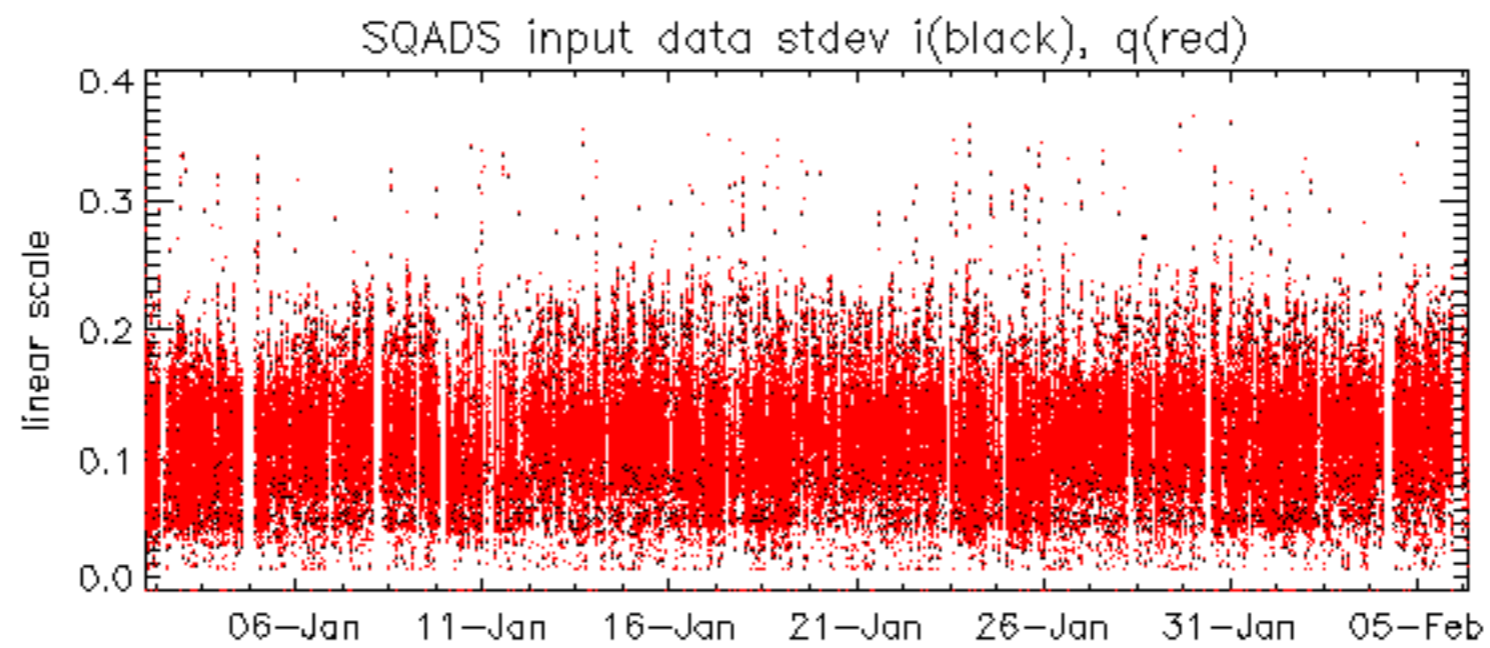

No unavailabilities during the reported period.