

# PRELIMINARY REPORT OF 040208

ATTENTION: This report is automatically generated no comments are provided on data analysis

1. [Introduction](#)
2. [Summary](#)
  - [Instrument Unavailability](#)
  - [Browse Visual Inspection](#)
  - [Module Stepping Results](#)
  - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
  - [Daily statistics \(row 3 and 24\)](#)
  - [Cyclic statistics \(row 3 and 24\)](#)
  - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
  - [raw data mean I and Q](#)
  - [raw data stdev I and Q](#)
  - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
  - [Doppler evolution versus ANX](#)

## 1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA\_WVS\_1P) products, which are the available few hours after the acquisition, on the high rate browse (BP) products and on the Module Stepping (MS) product.

## 2 - Summary

### 2.1 - Instrument Unavailability

No unavailabilities during the reported period.

### 2.2 - Browse Visual Inspection

### 2.3 - Data Analysis

-Stable wave internal calibration pulses gain and phase.

- Stable raw data statistics.
- Nominal Doppler behavior.

### 3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis. The purpose of this mode is to identify any malfunctioning modules and to identify modules for which calibration offsets are to be applied.

No anomalies observed on available MS products:

Polarisation	Start Time
V	20040206 193354
H	20040206 193234

#### MSM in V/V polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
⊗	⊗
⊗	⊗
⊗	⊗
⊗	⊗

#### MSM in H/H polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
⊗	⊗
⊗	⊗
⊗	⊗
⊗	⊗

### 4 - Internal calibration Results

No anomalies observed.

#### 4.1 - Daily statistics

row	stat	AveP1	AveP2	AveP3
3	mean	-3.65040	-22.4177	-8.13655
	stdev	0.00632605	0.0609309	0.00251737

24	mean	-5.11239	-21.0767	-8.13655
	stdev	0.0144315	0.0580864	0.00251737



## 4.2 - Cyclic statistics

row	stat	AveP1	AveP2	AveP3
3	mean	-3.67842	-22.4725	-8.14662
	stdev	0.00694924	0.0720918	0.00309570
24	mean	-5.23514	-21.1137	-8.14662
	stdev	0.544568	0.0667300	0.00309570



## 4.3 - cal pulses monitoring (all rows)



## 5 - RAW data statistics

No anomalies observed.

### 5.1 - Input mean I/Q

channel	stat	DSS-B
MEAN I	mean	0.000425590
	stdev	2.87952e-07
MEAN Q	mean	0.000353213
	stdev	3.32016e-07



### 5.2 - Input stdev I/Q

channel	stat	DSS-B
STDEV I	mean	0.118641
	stdev	0.00137144

STDEV Q	mean	0.118873
	stdev	0.00138618



### 5.3 - Gain imbalance I/Q



## 6 - Wave Doppler Analysis


Preliminary report. The data is not yet controlled

### 6.1 - Doppler evolution versus ANX


Evolution Doppler error versus ANX




Average P1 (row 3 & row 24)

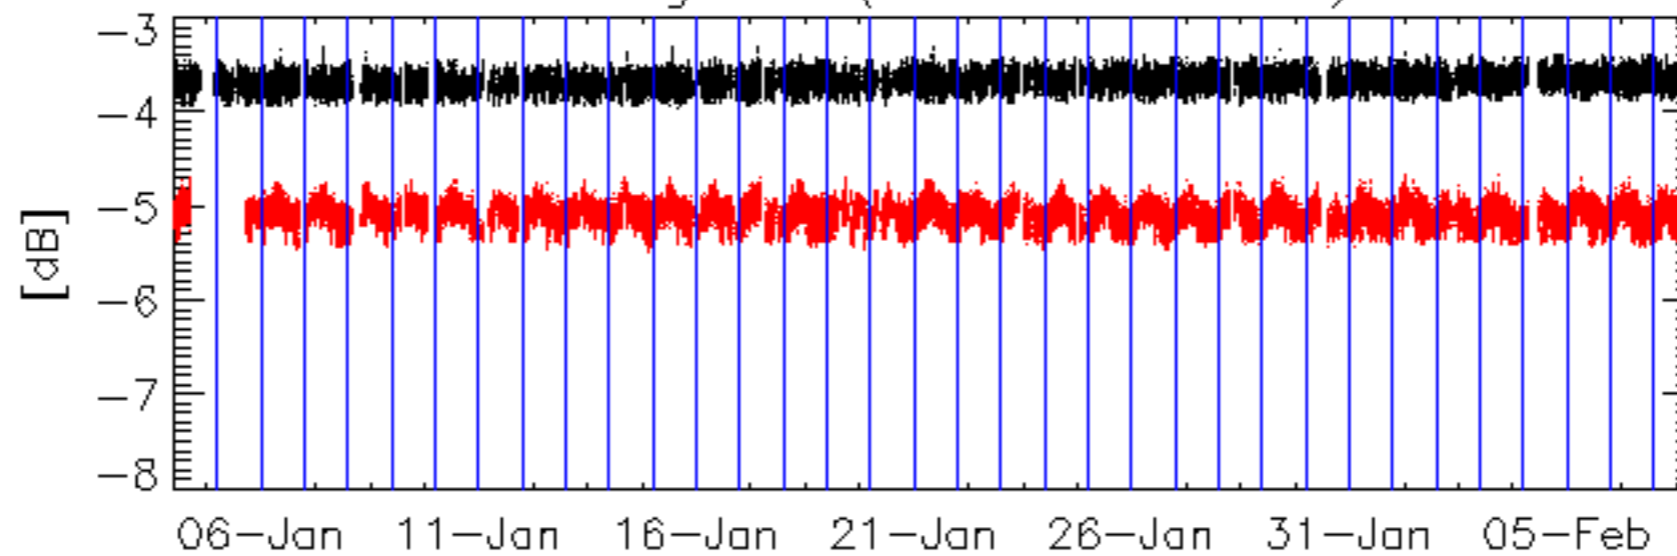


Average P2

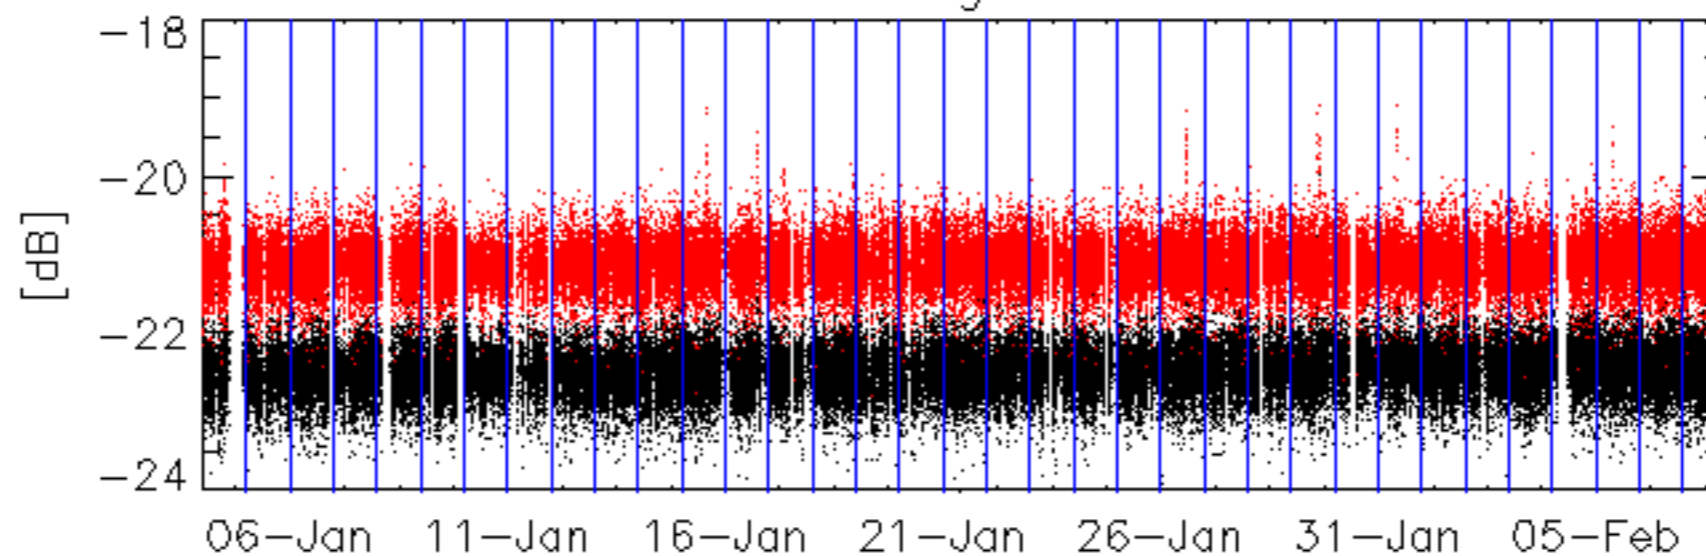

Average P3

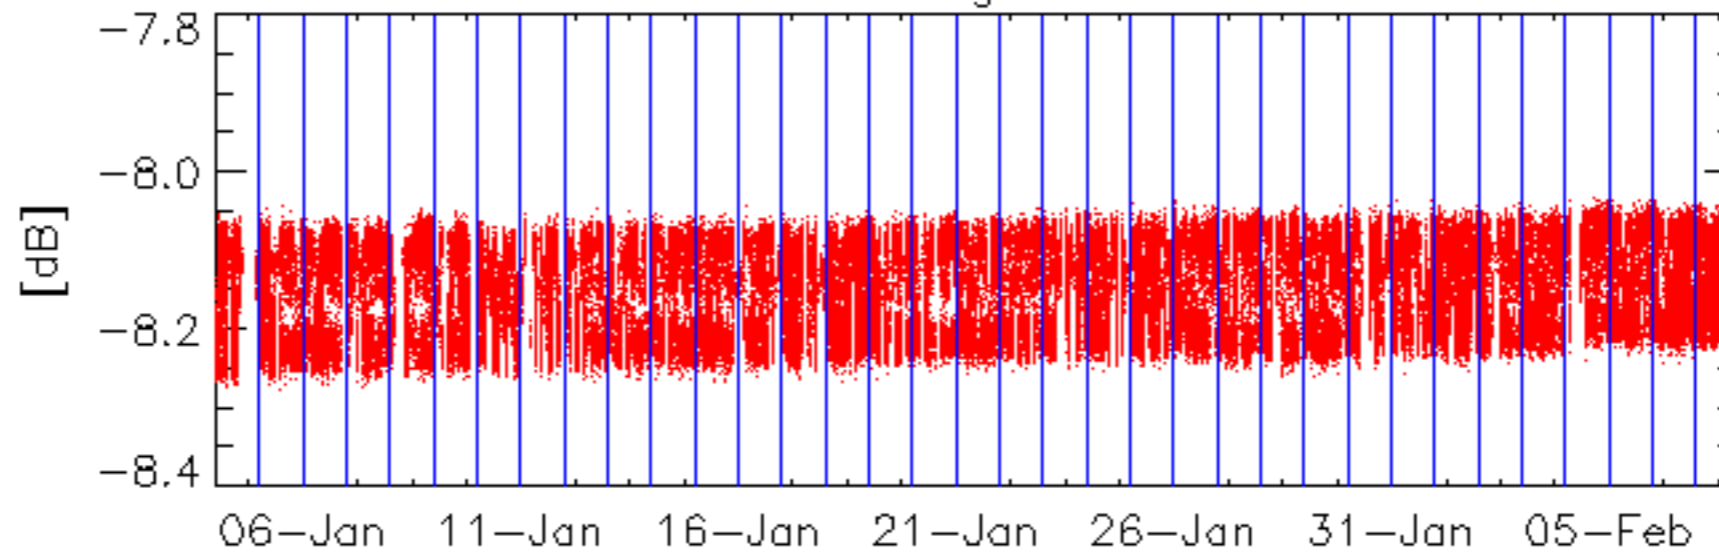


Average P1 (row 3 & row 24)

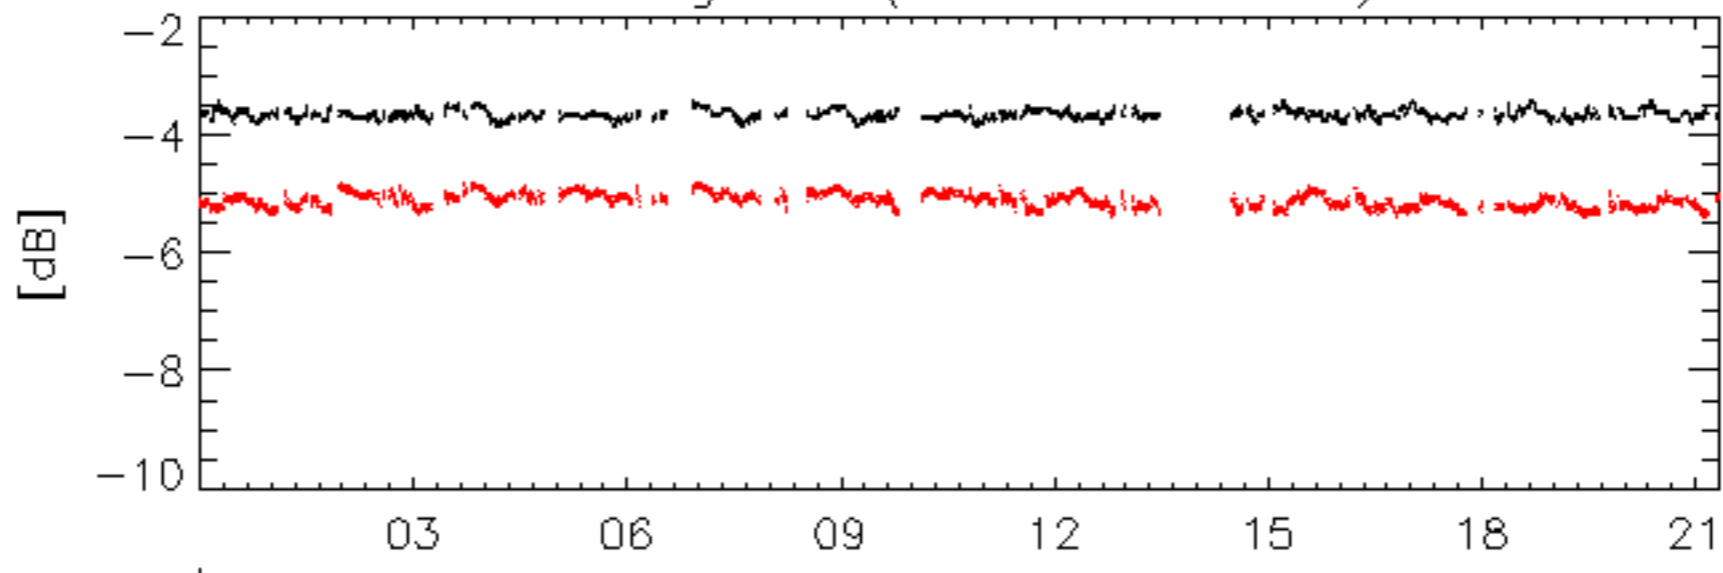


07-Feb

Average P2

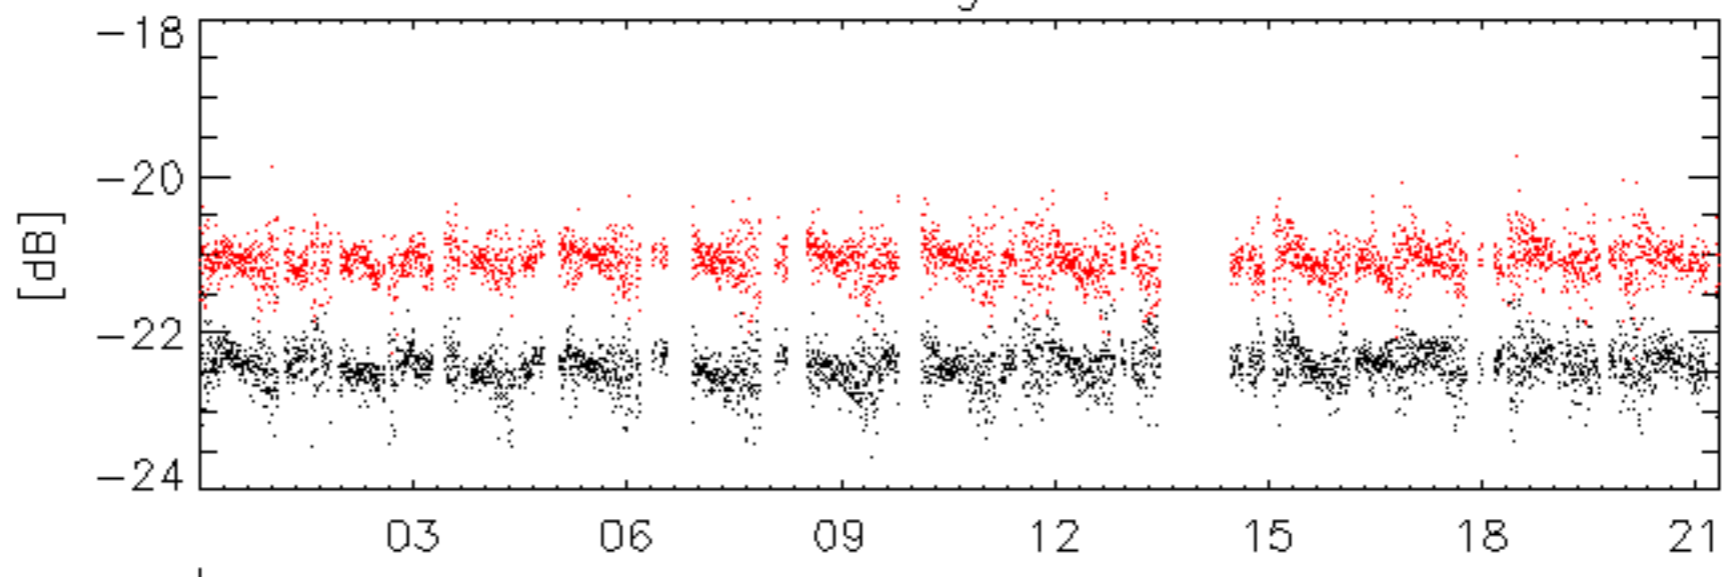


07-Feb

Average P3

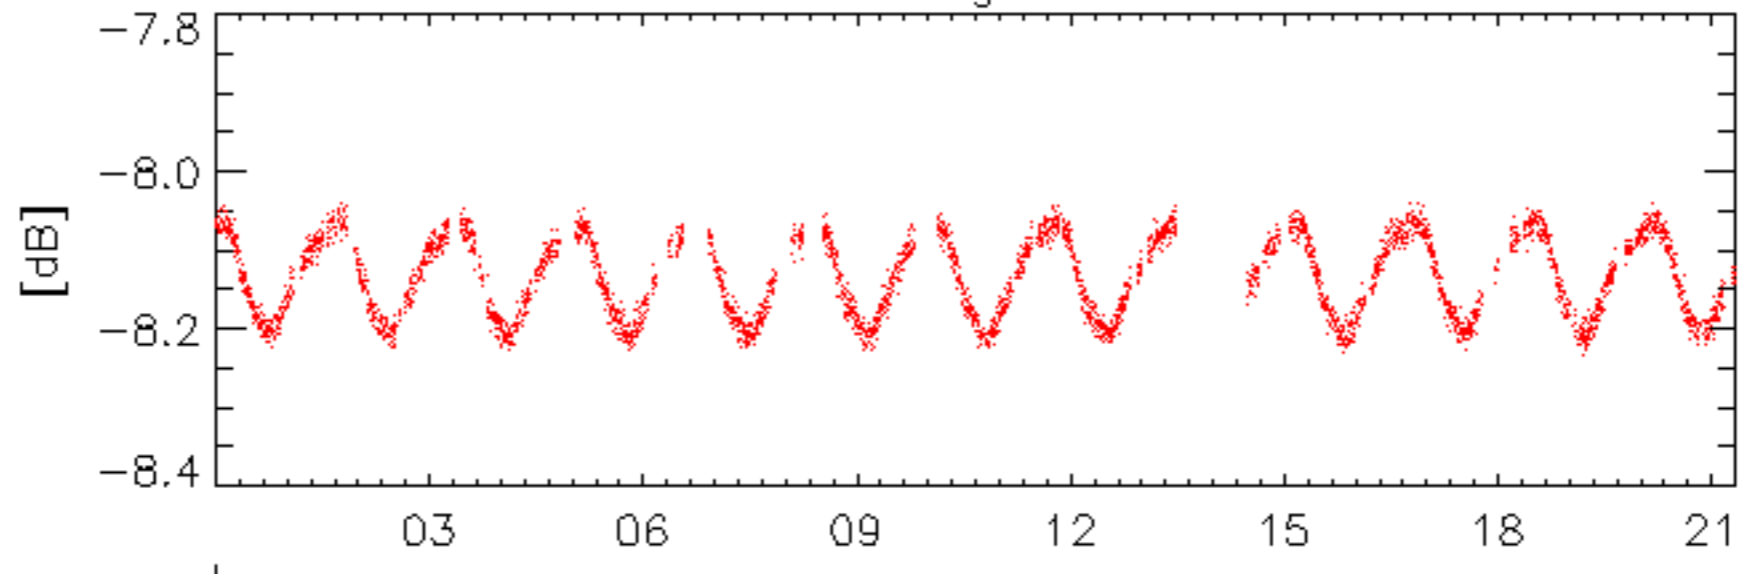

07-Feb

No anomalies observed.

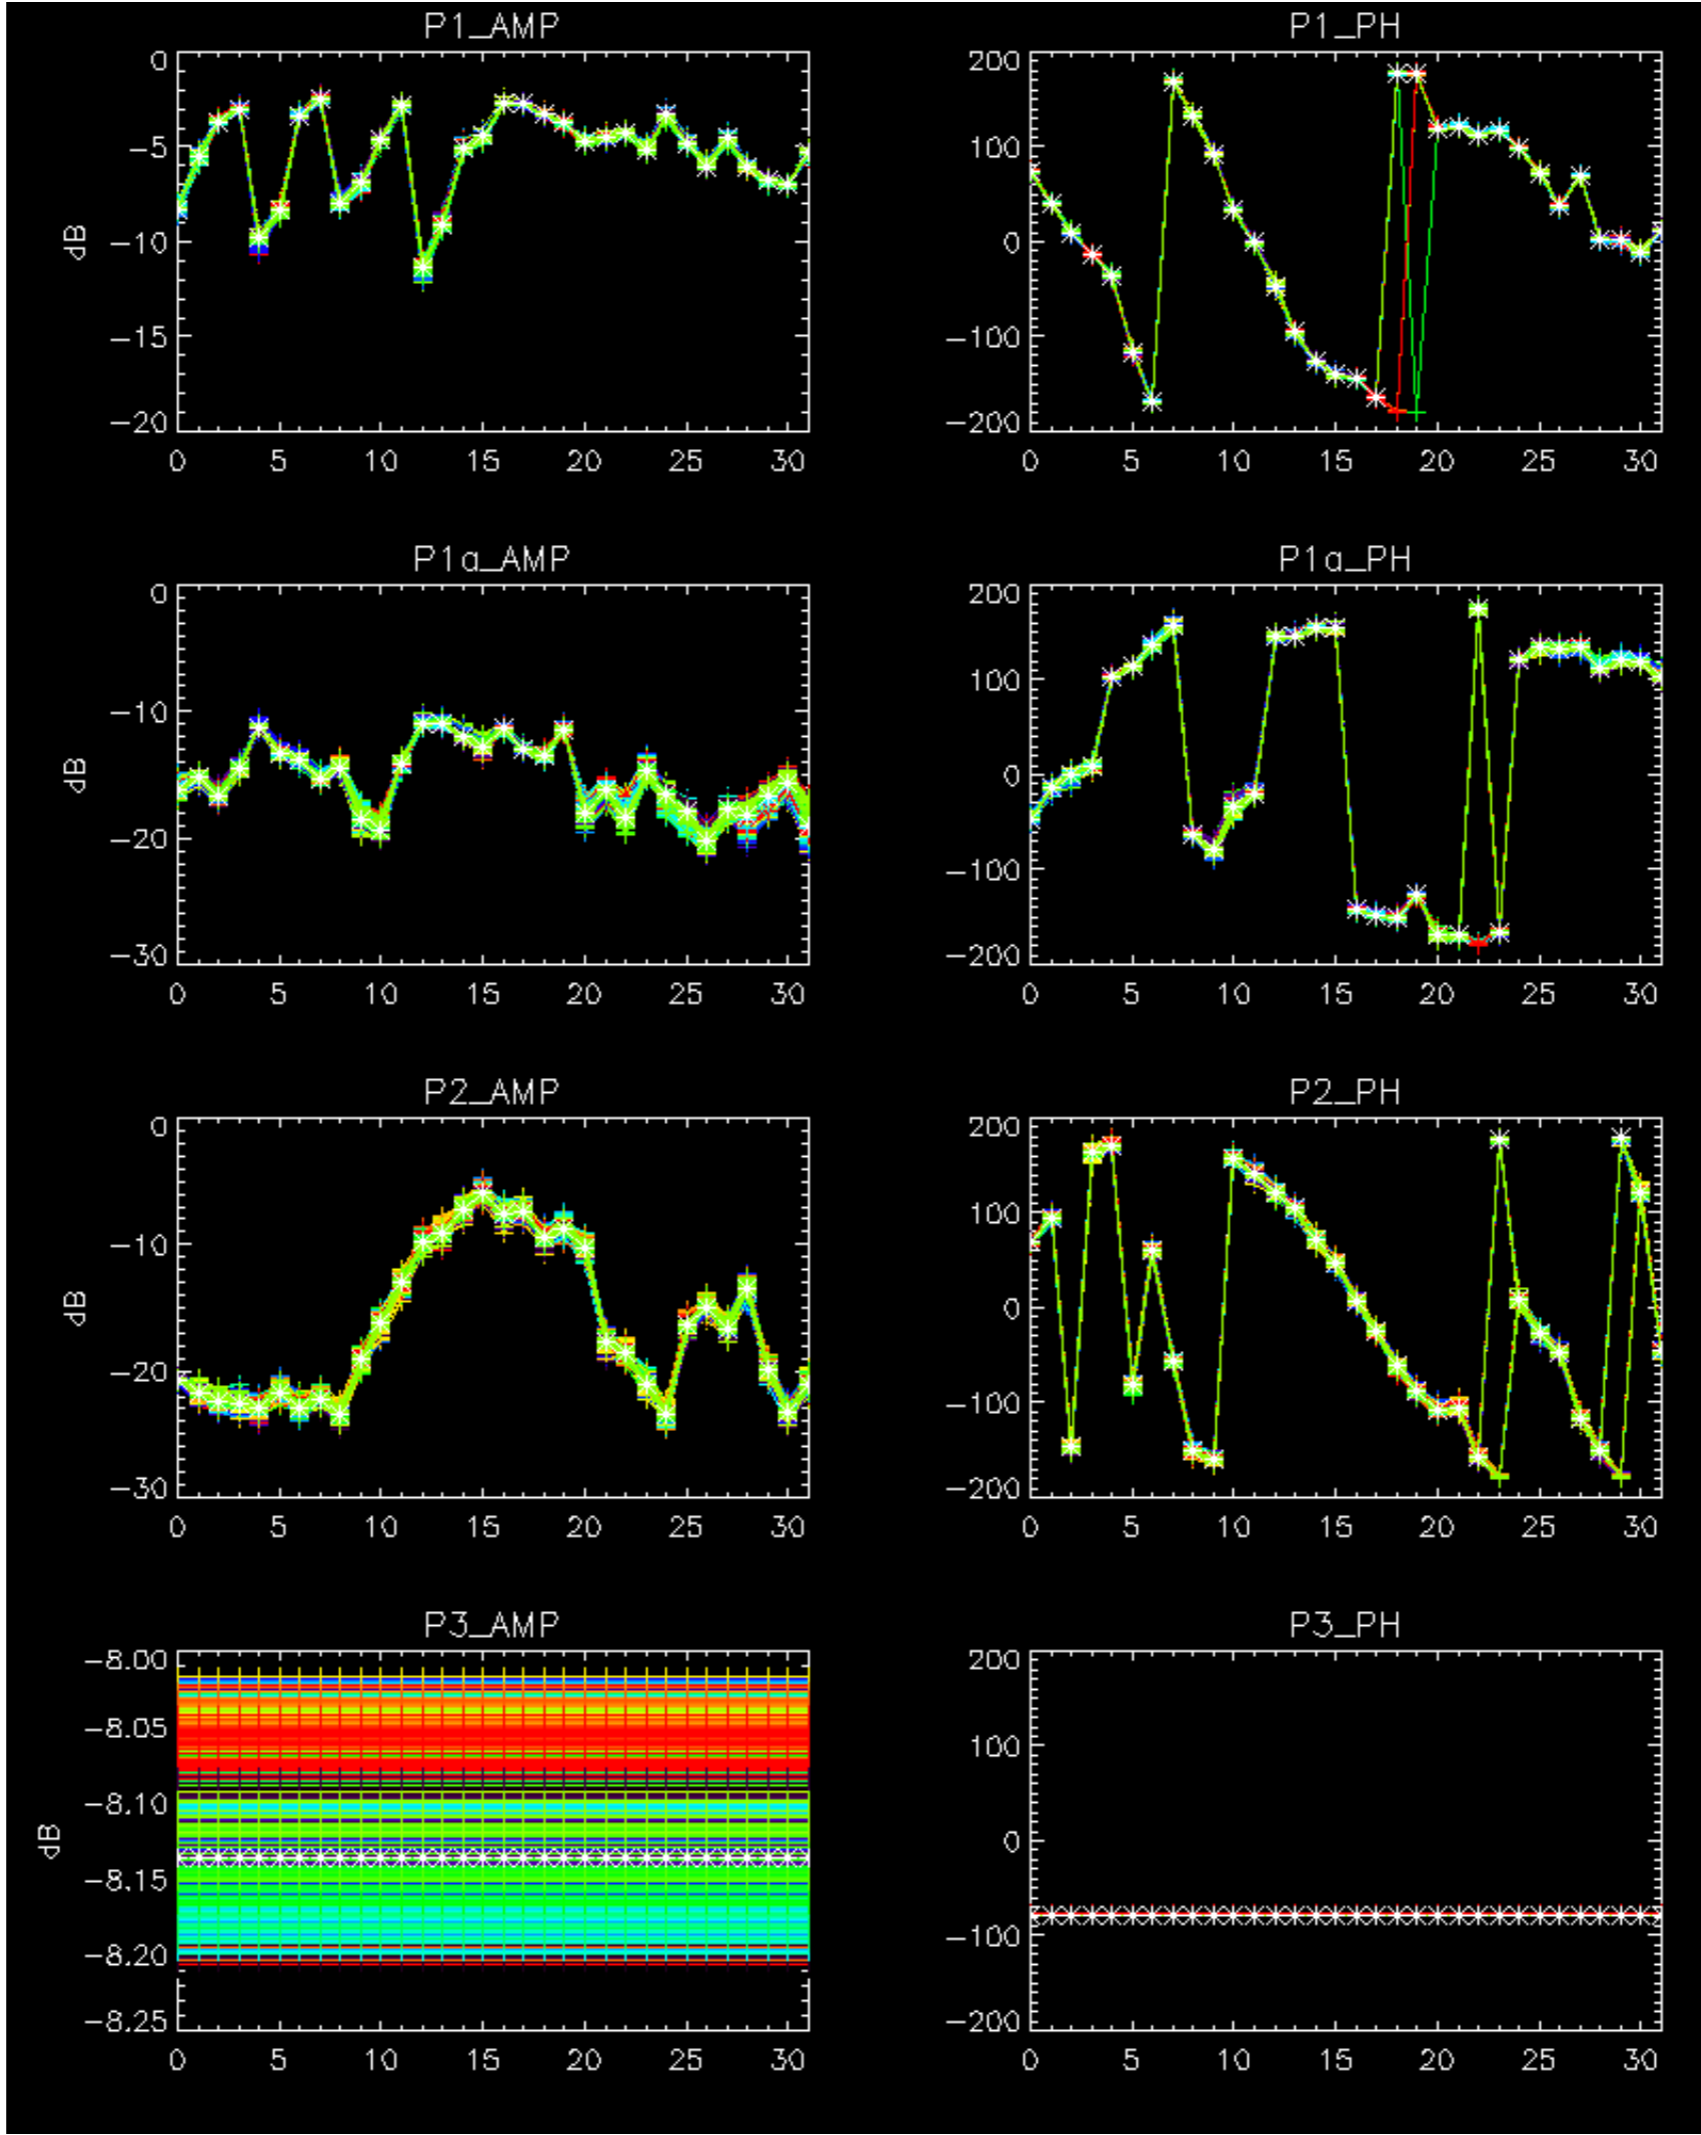





- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.





Doppler 'WVS' 'IS2' 'H/H'

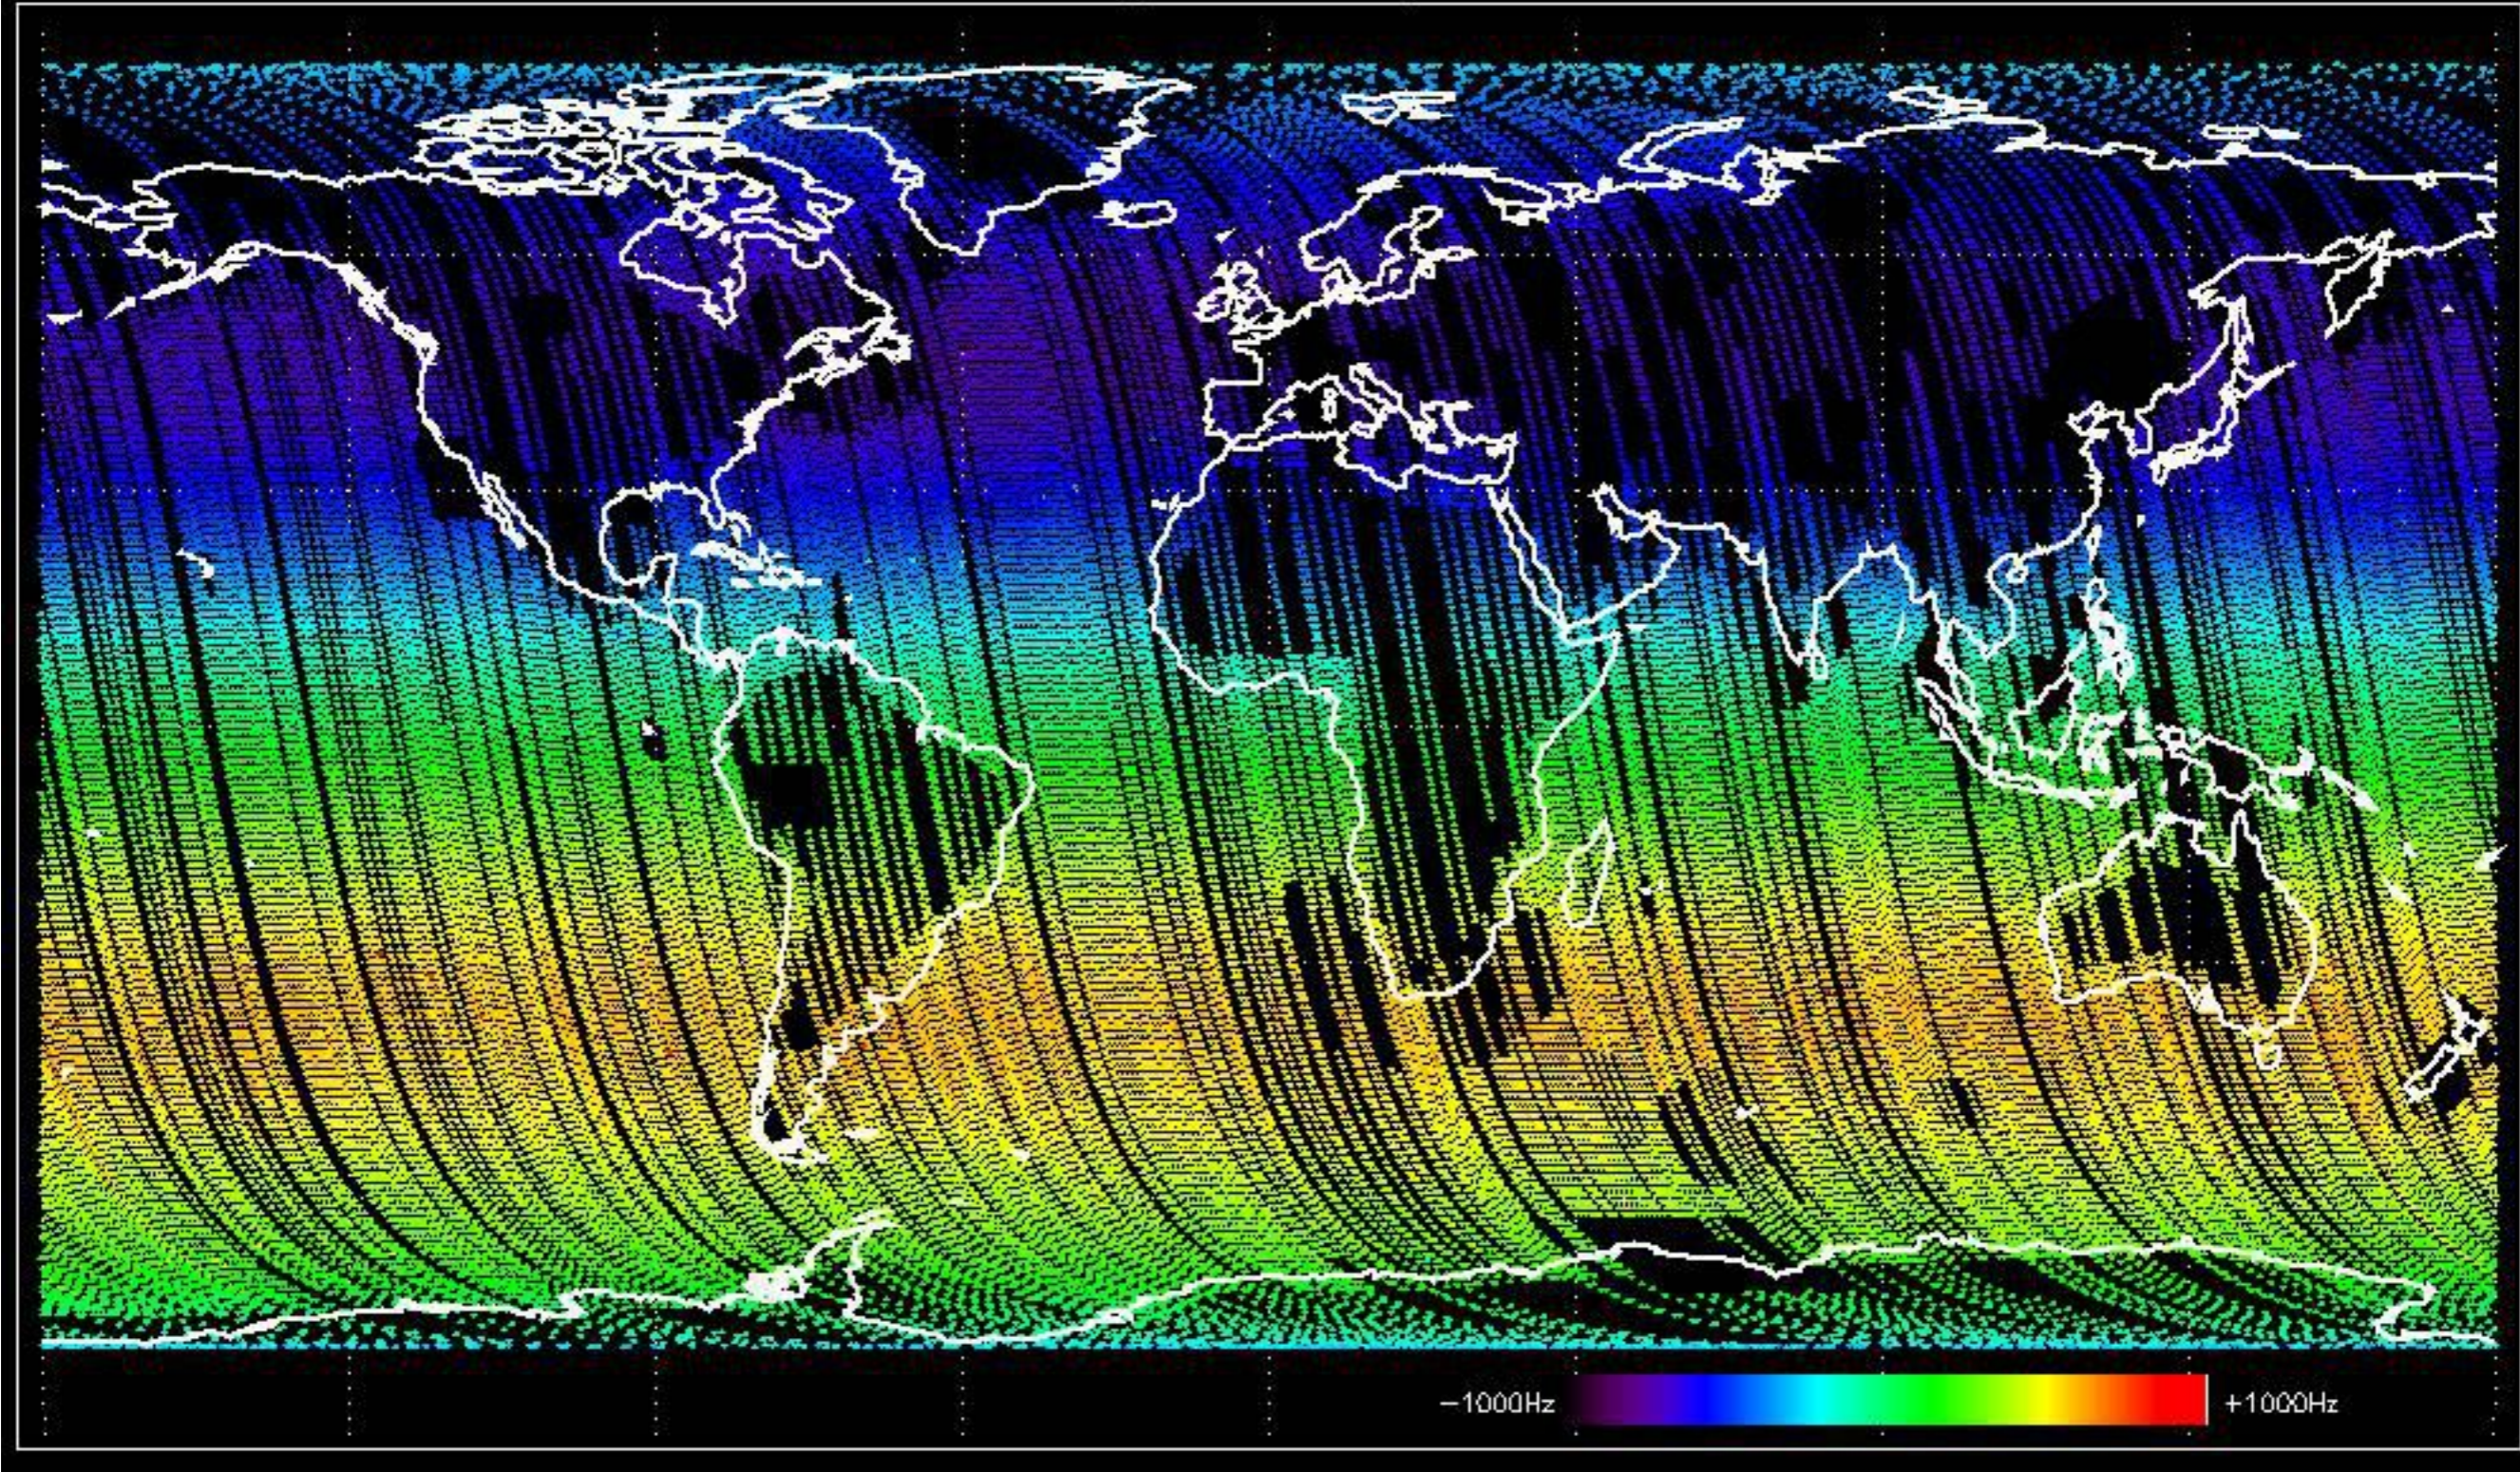


Doppler 'WVS' 'IS2' 'V/V'

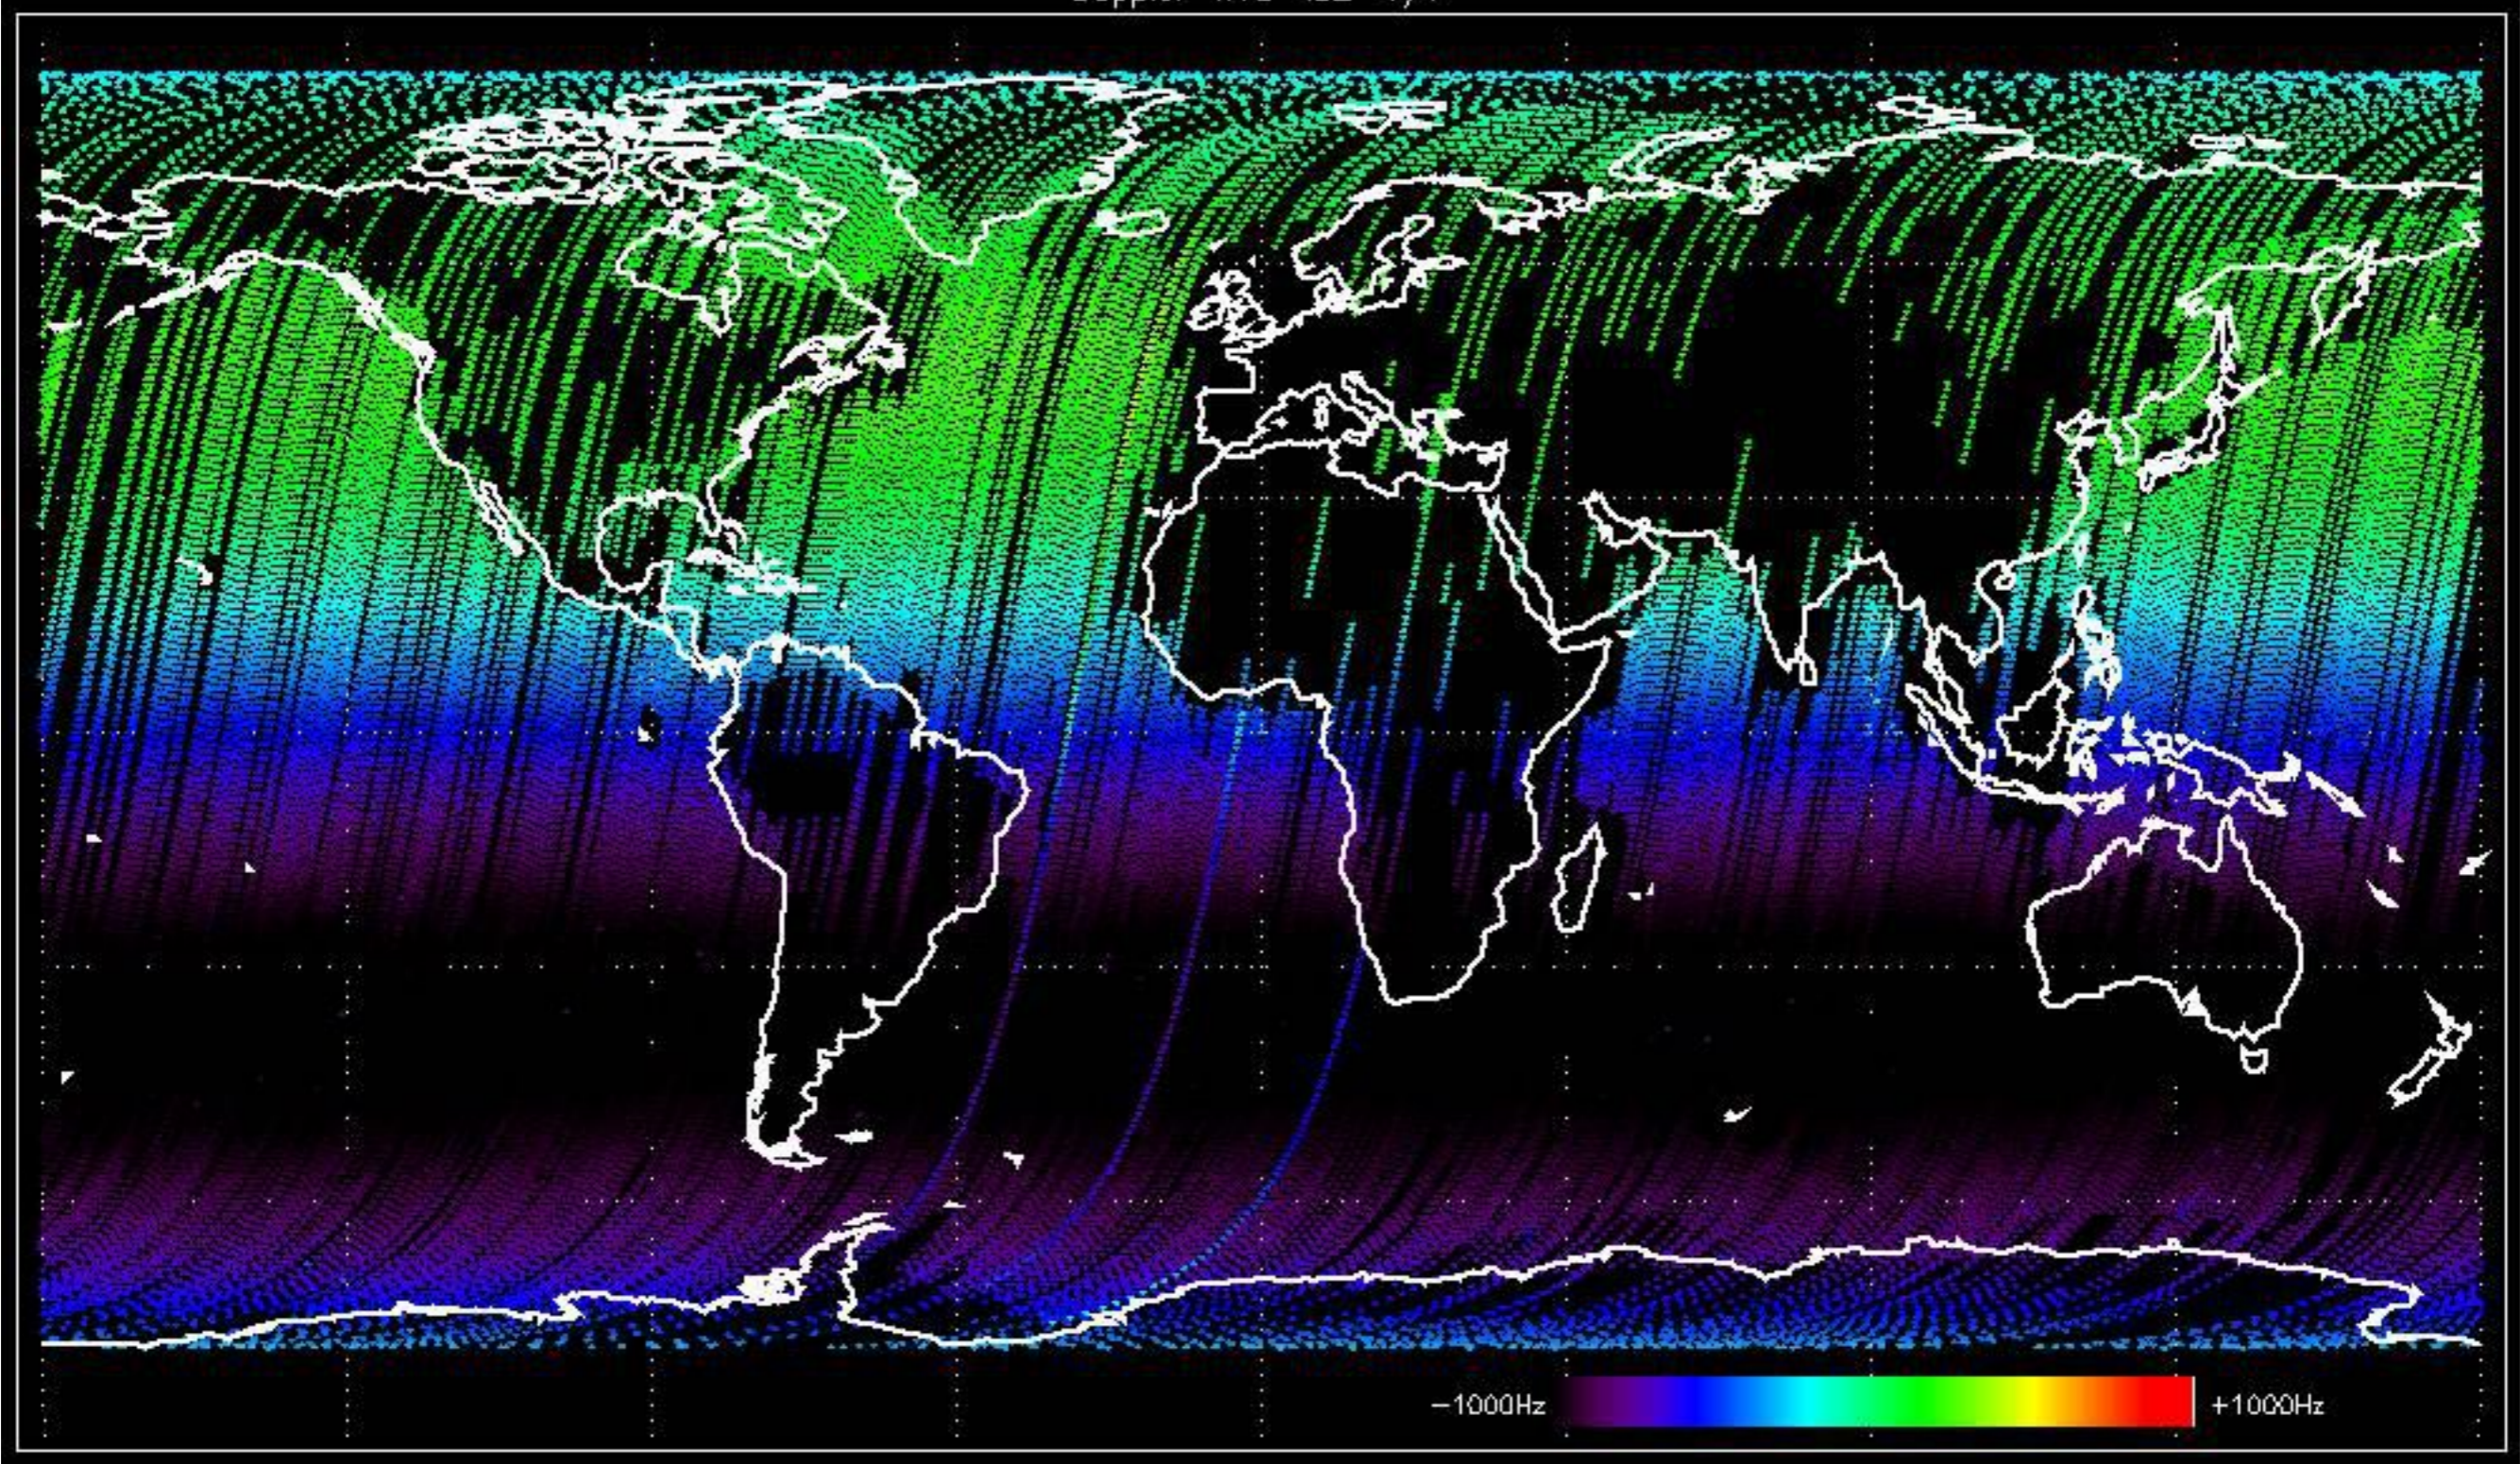


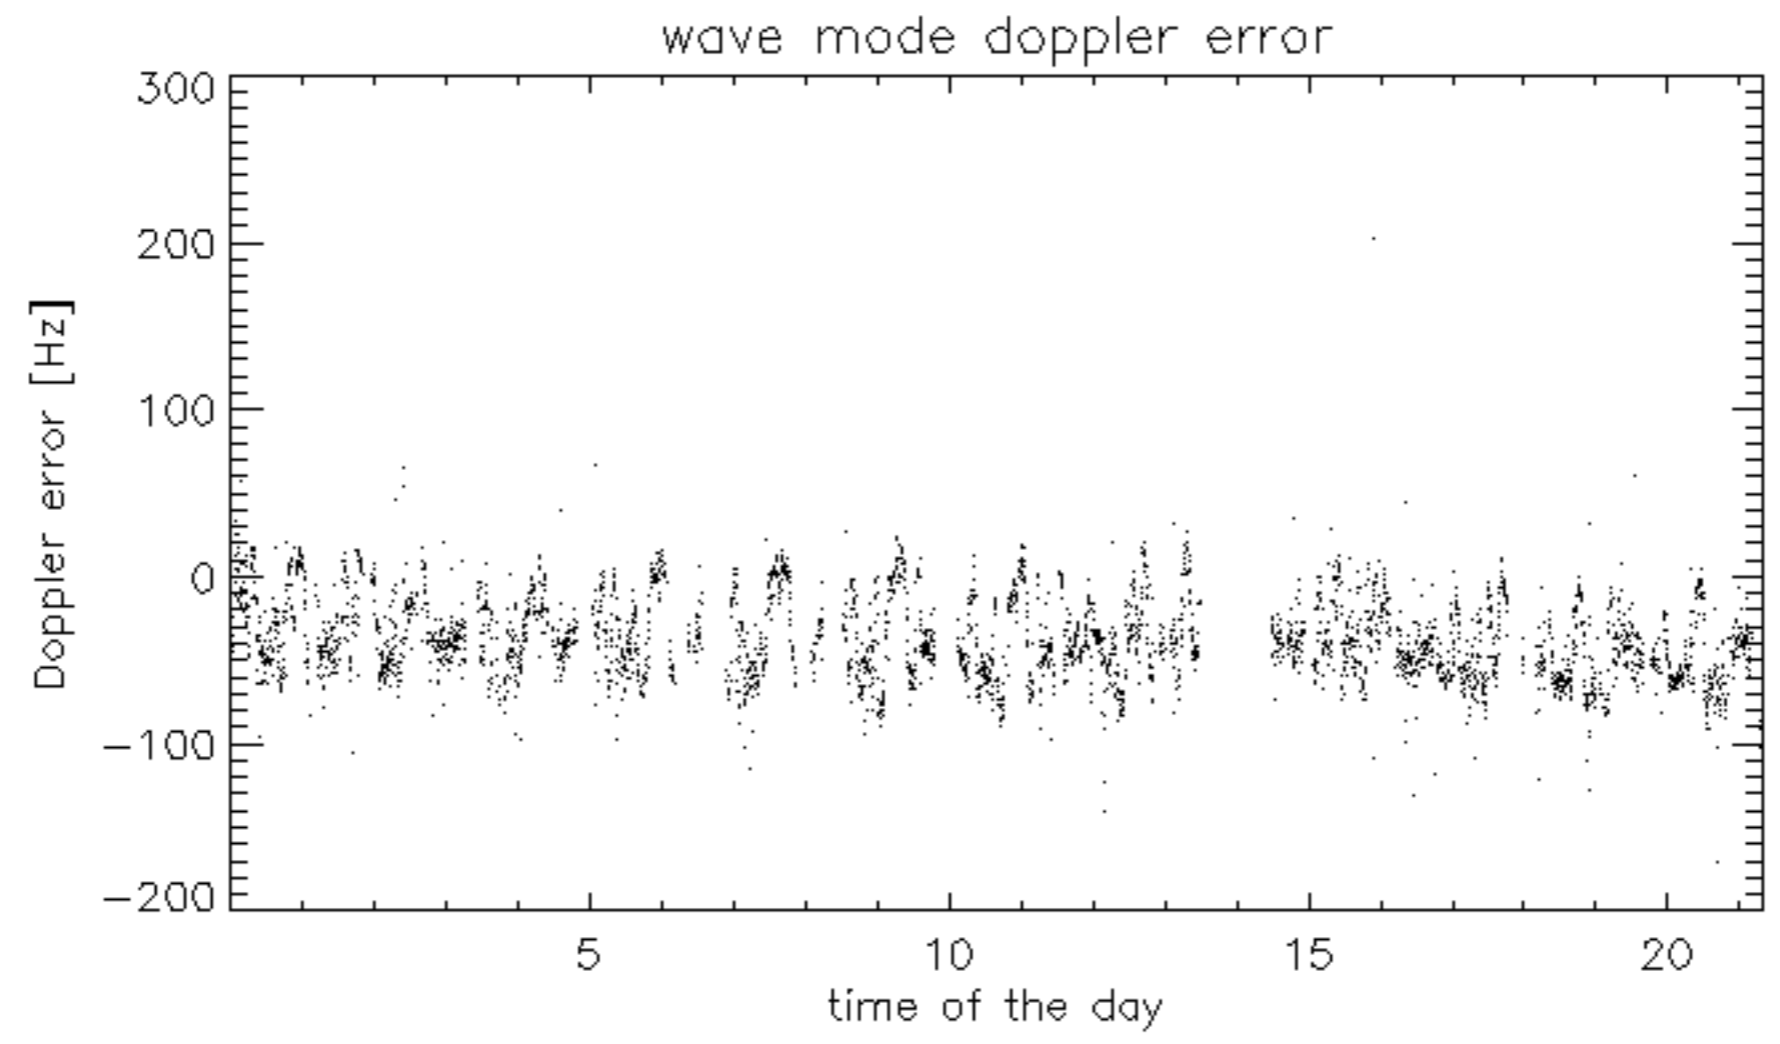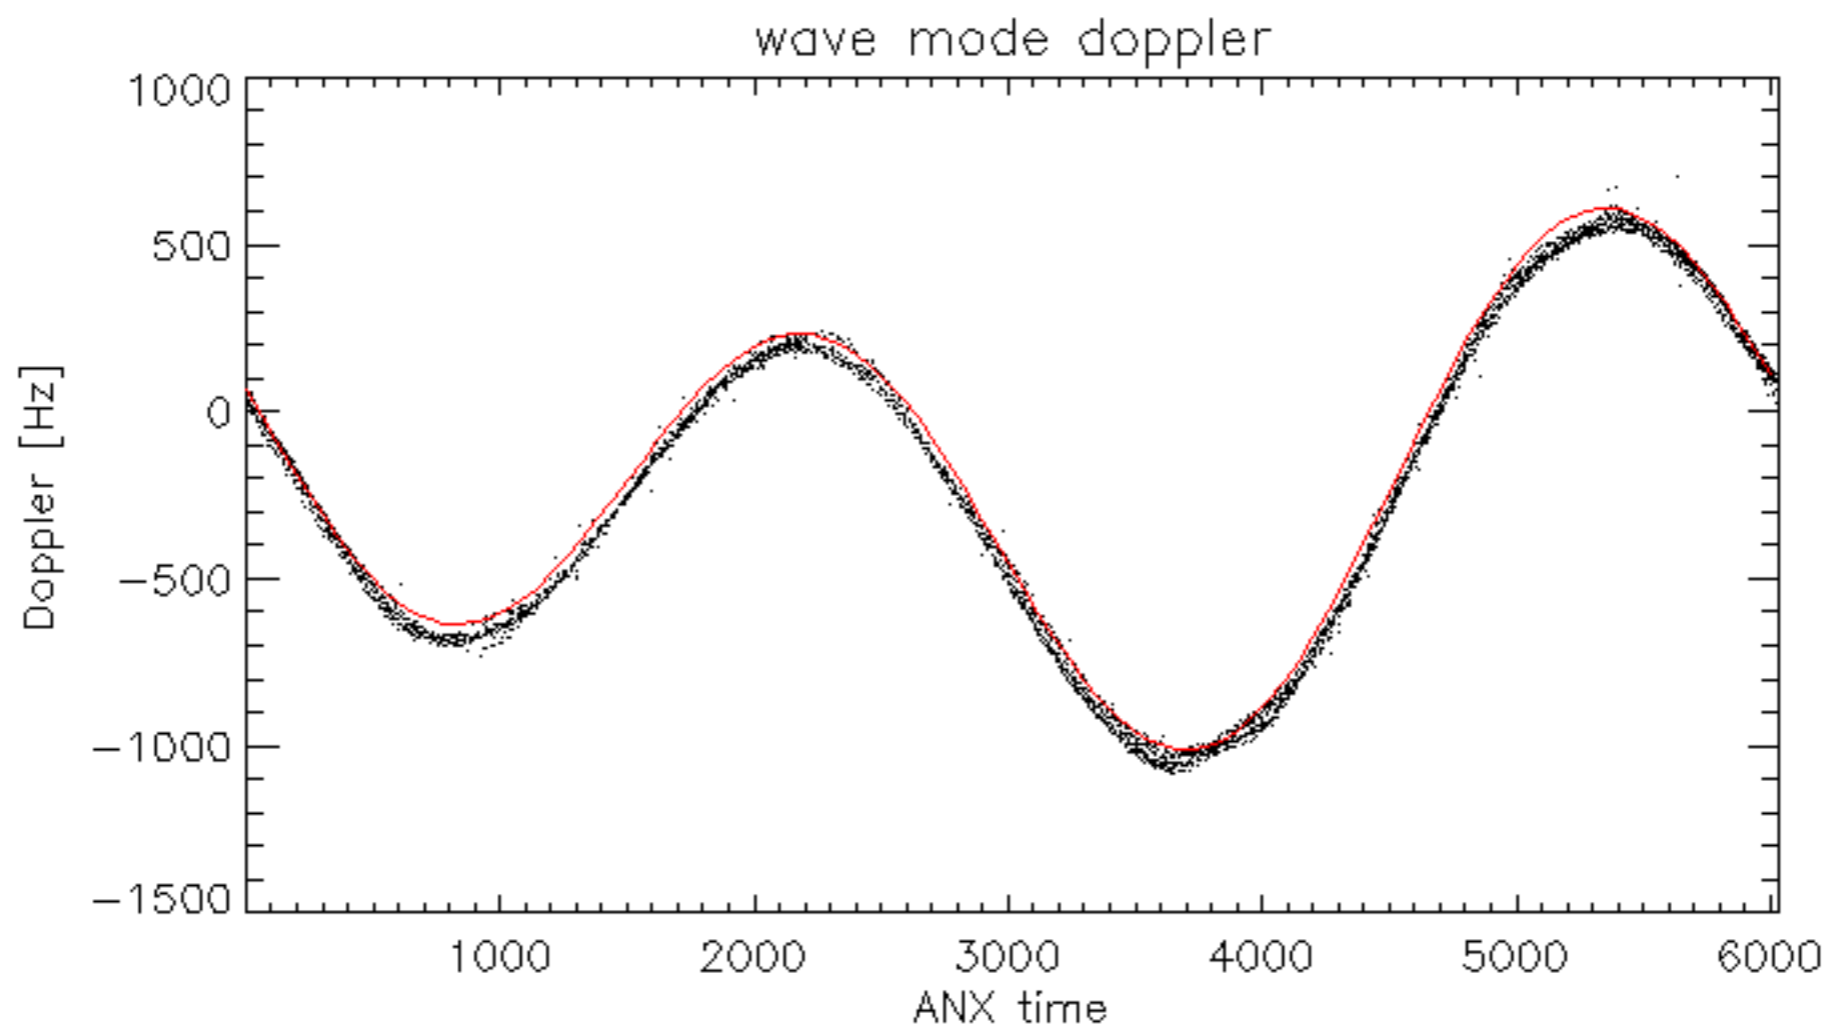

Doppler difference, estimated-predicted 'WVS' 'IS2' 'H/H' -error mean of -34.309488 Hz

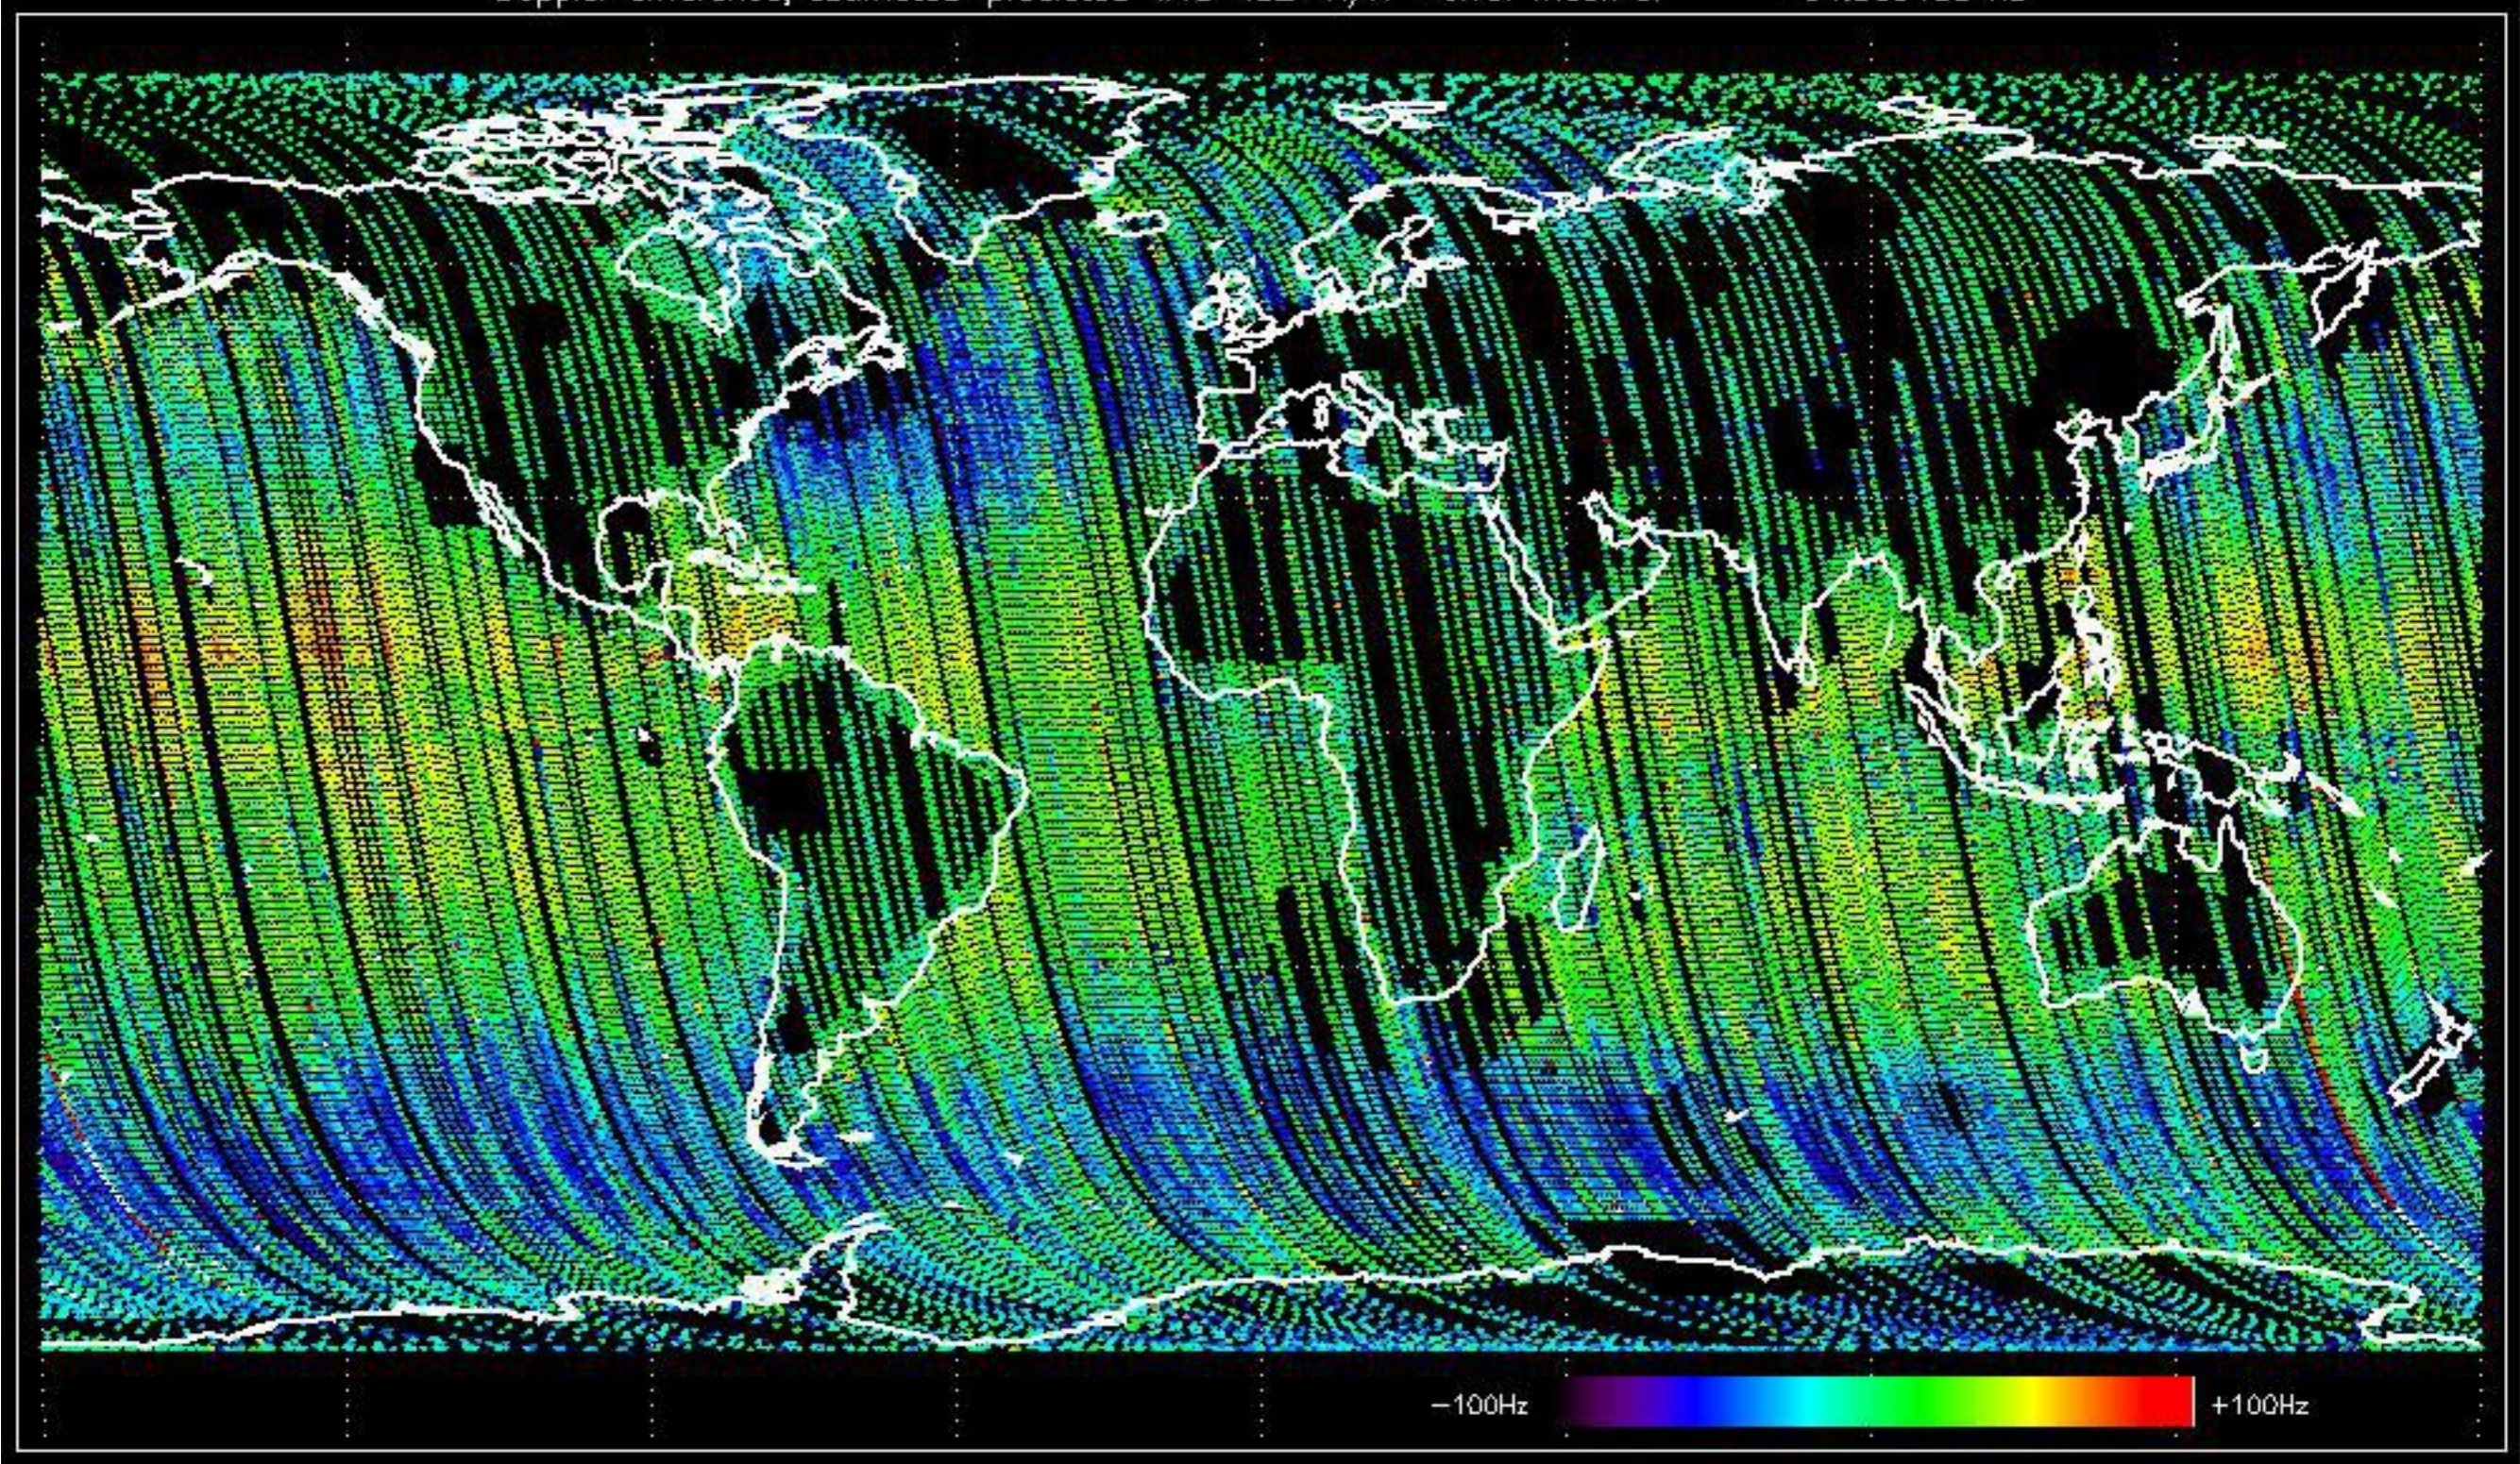

Doppler difference, estimated-predicted 'WVS' 'IS2' 'V/V' -error mean of -32.016314 Hz

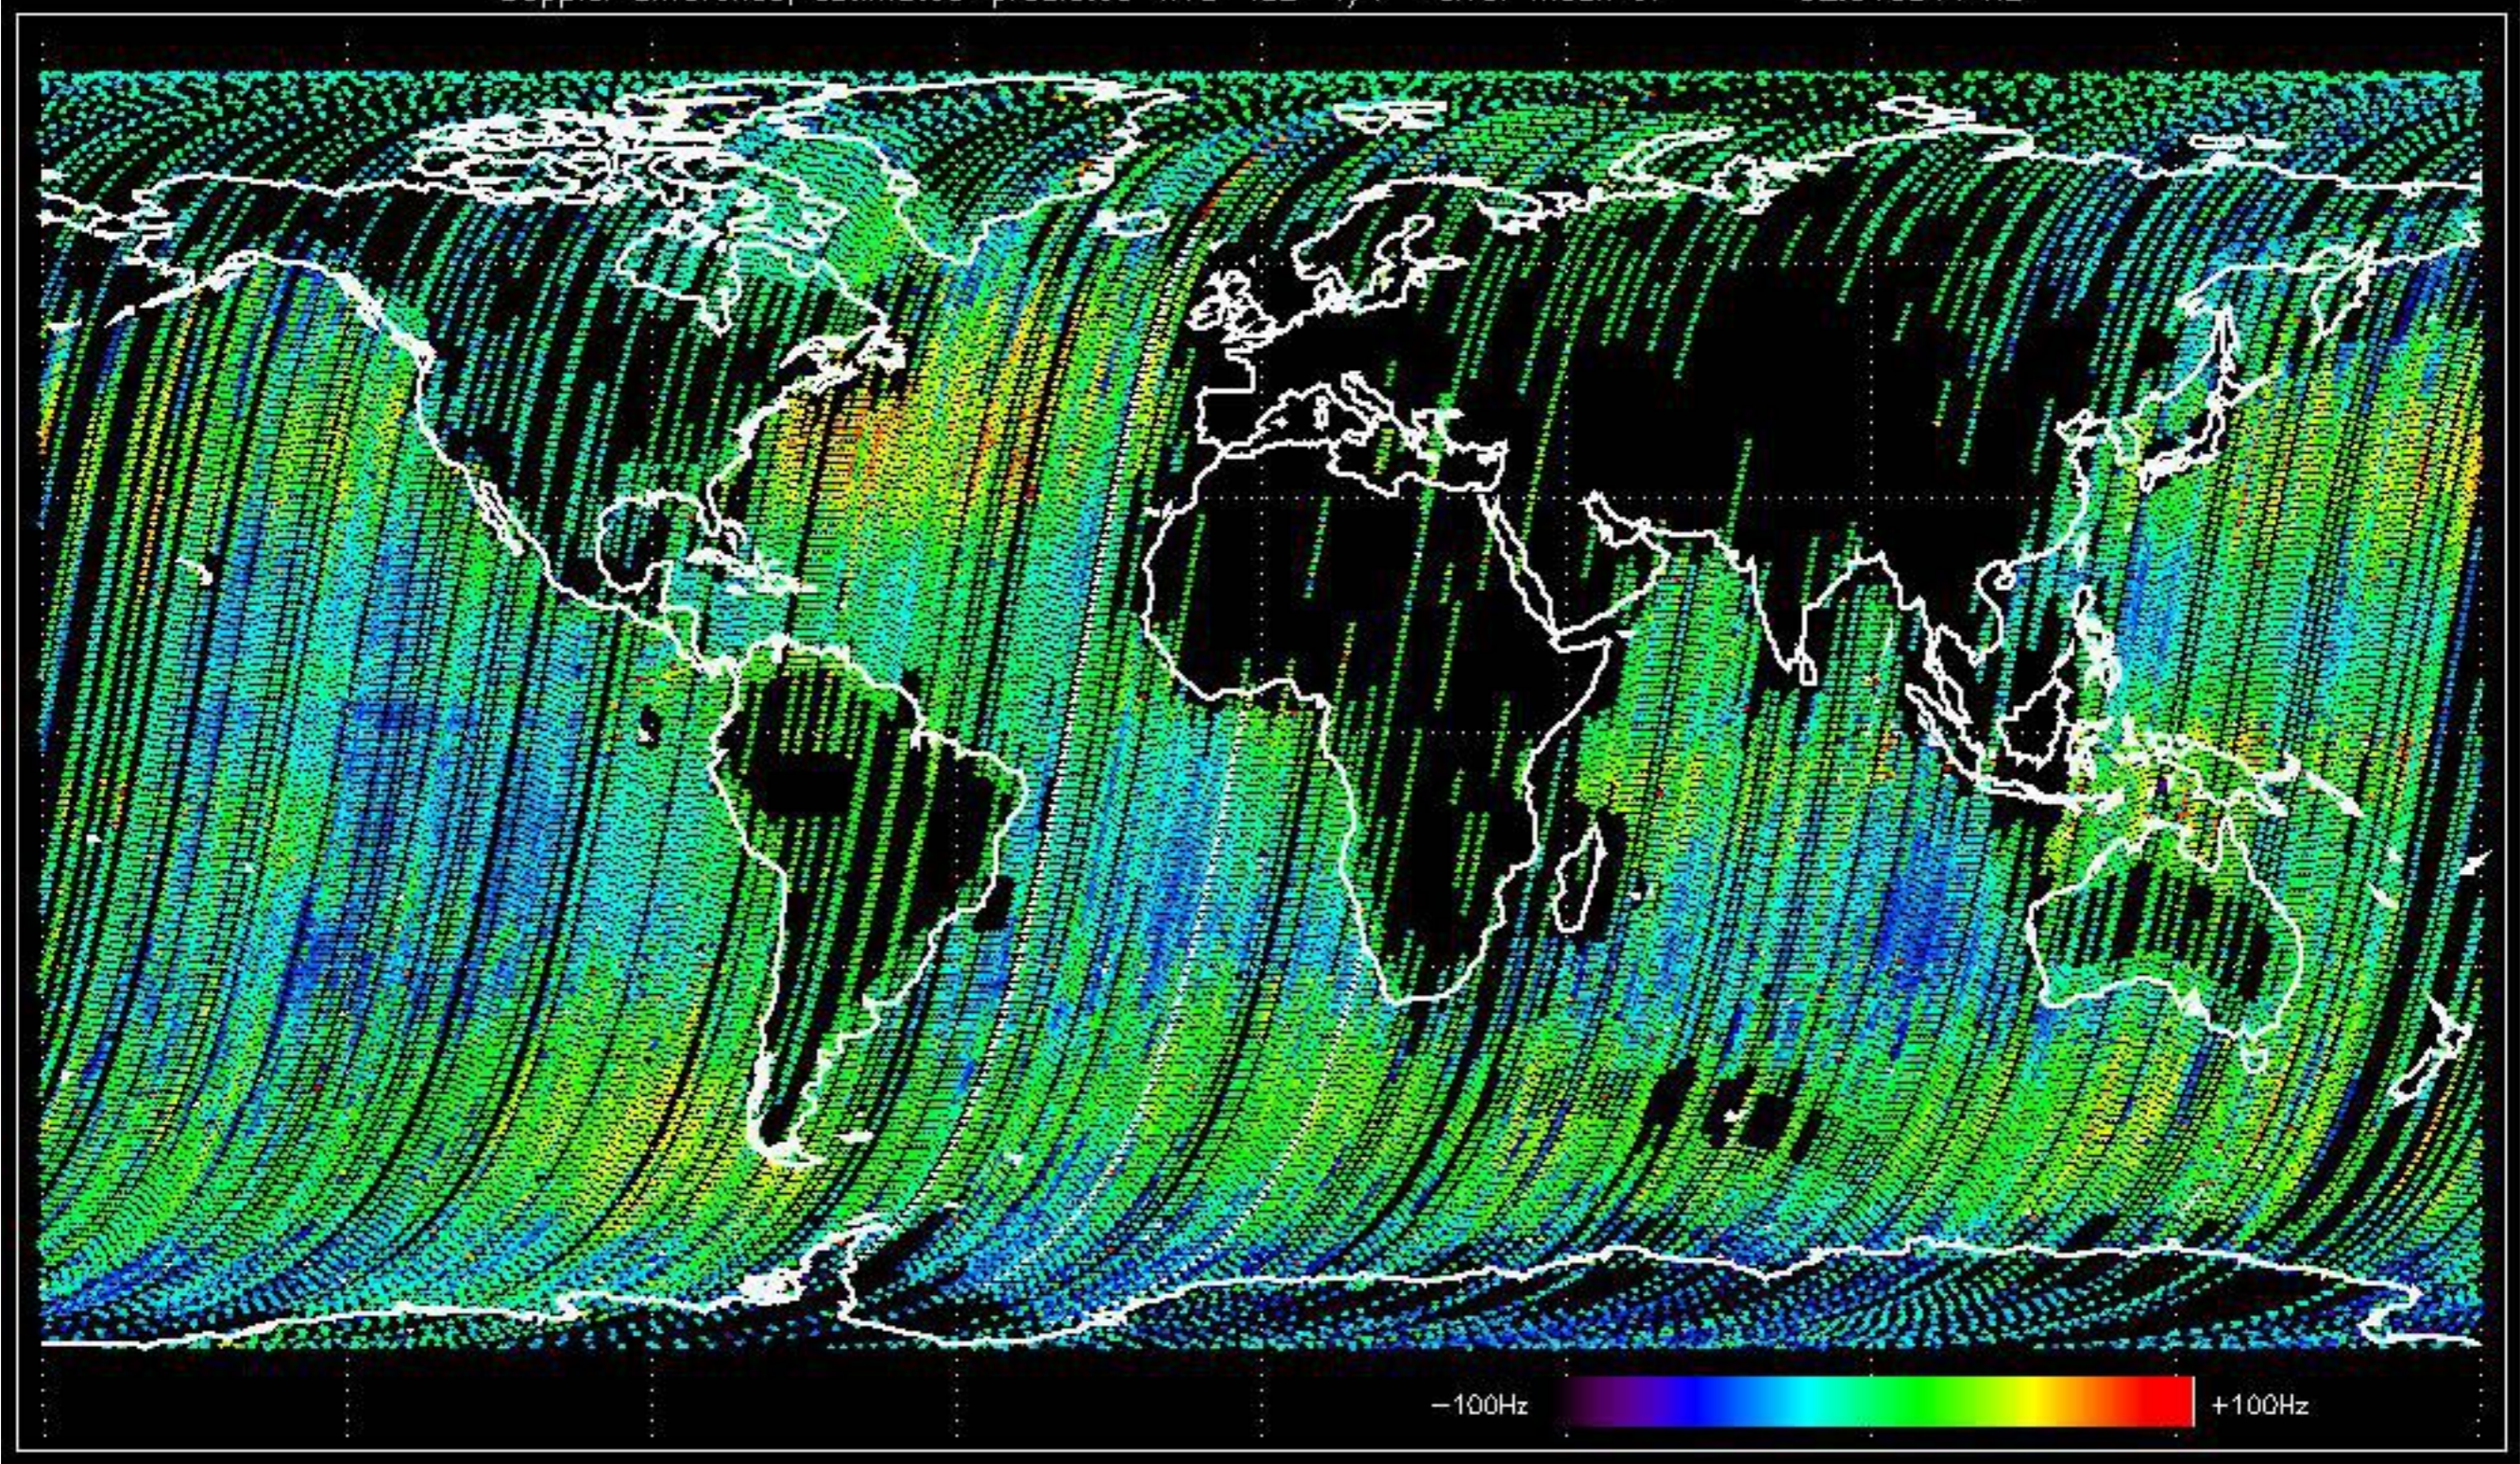

The MS mode provides an internal health check on an individual module basis.  
The purpose of this mode is to identify to identify any malfunctioning modules and  
to identify modules foe which calibration offsets are to be applied.  
No anomalies observed on available MS products:



No anomalies observed.


























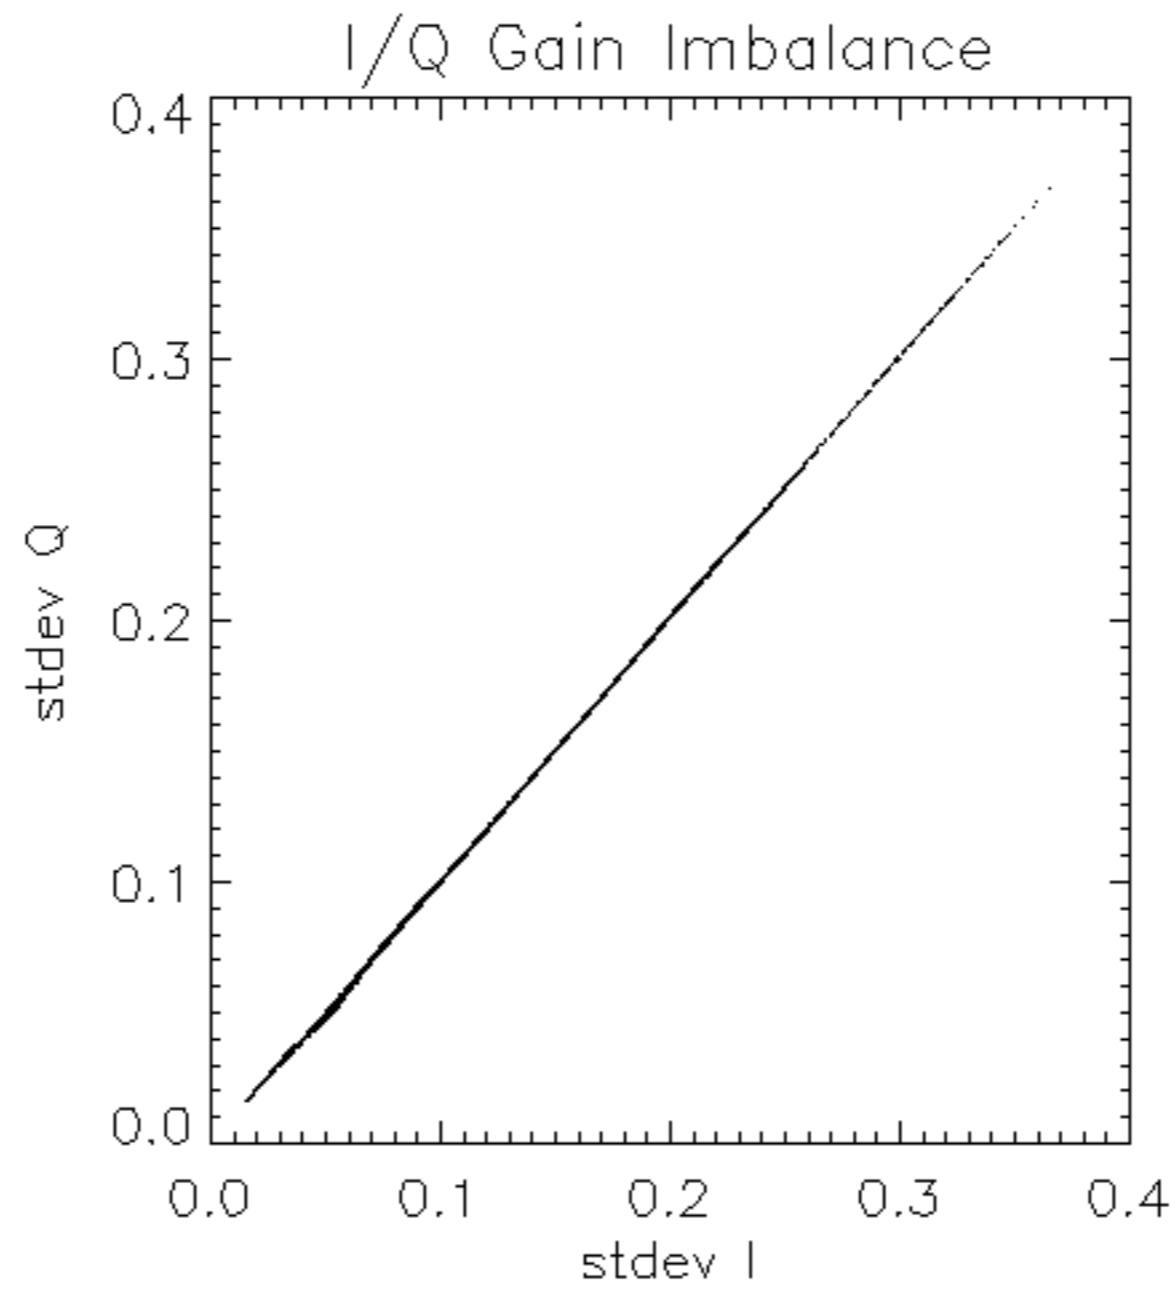

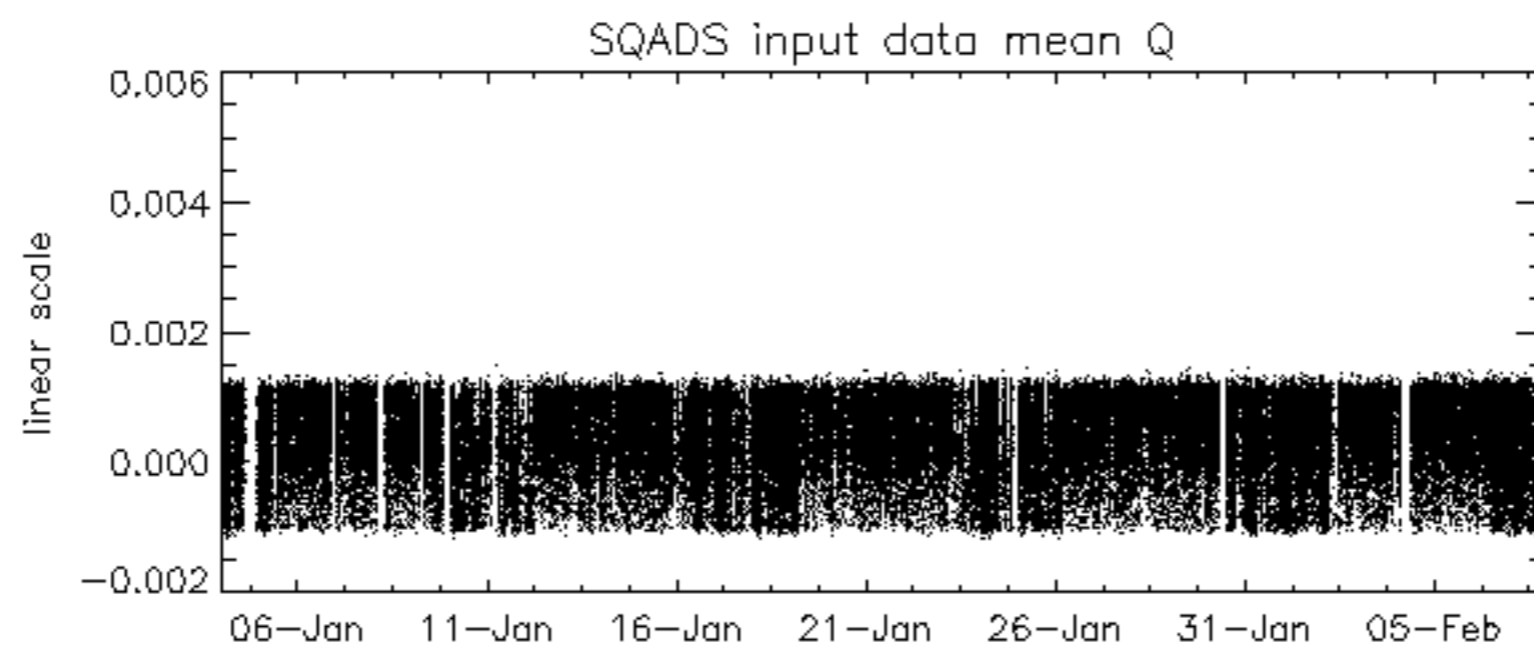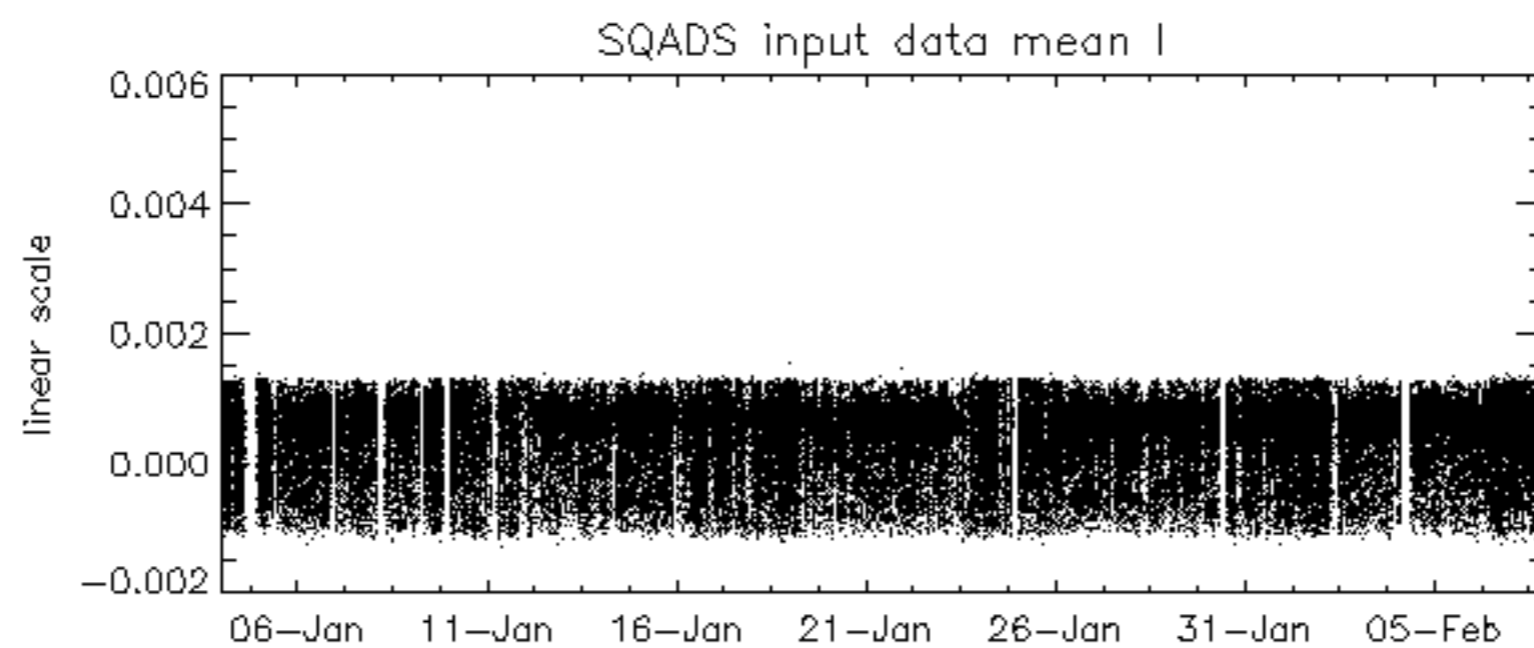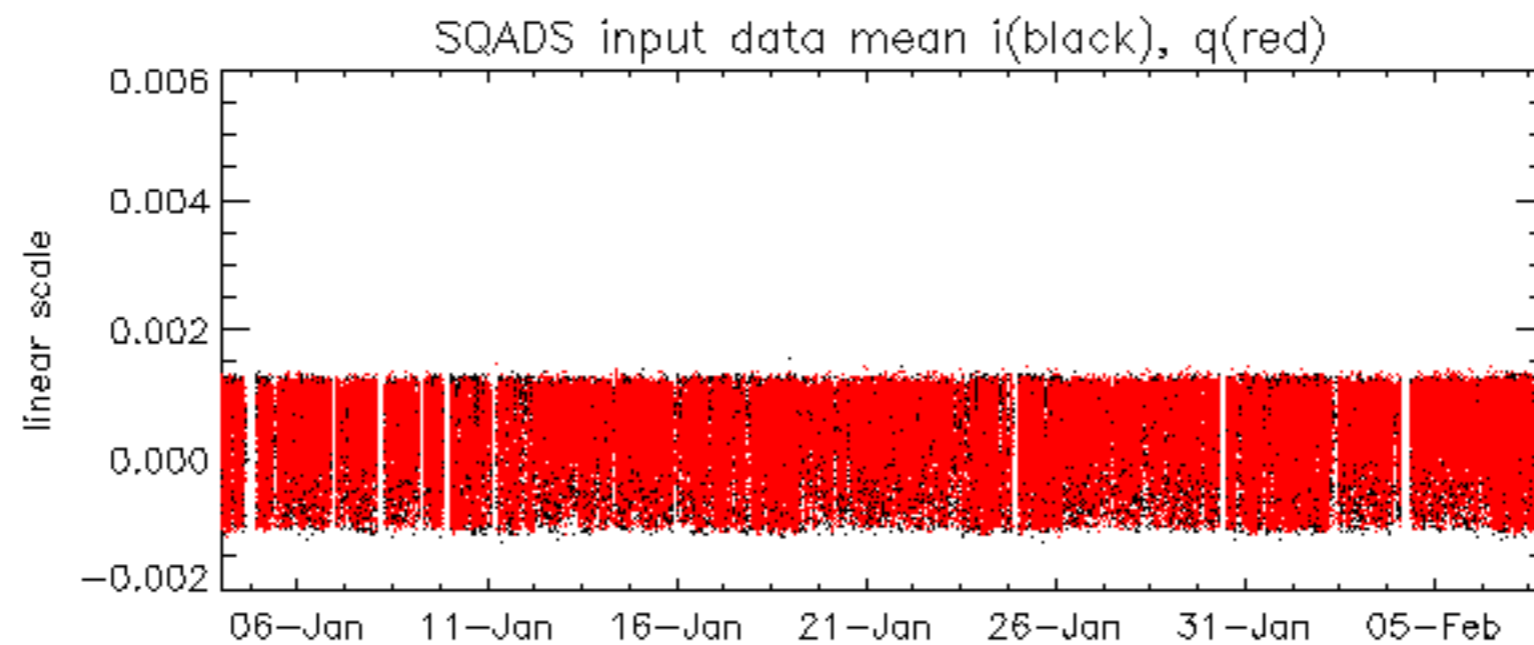

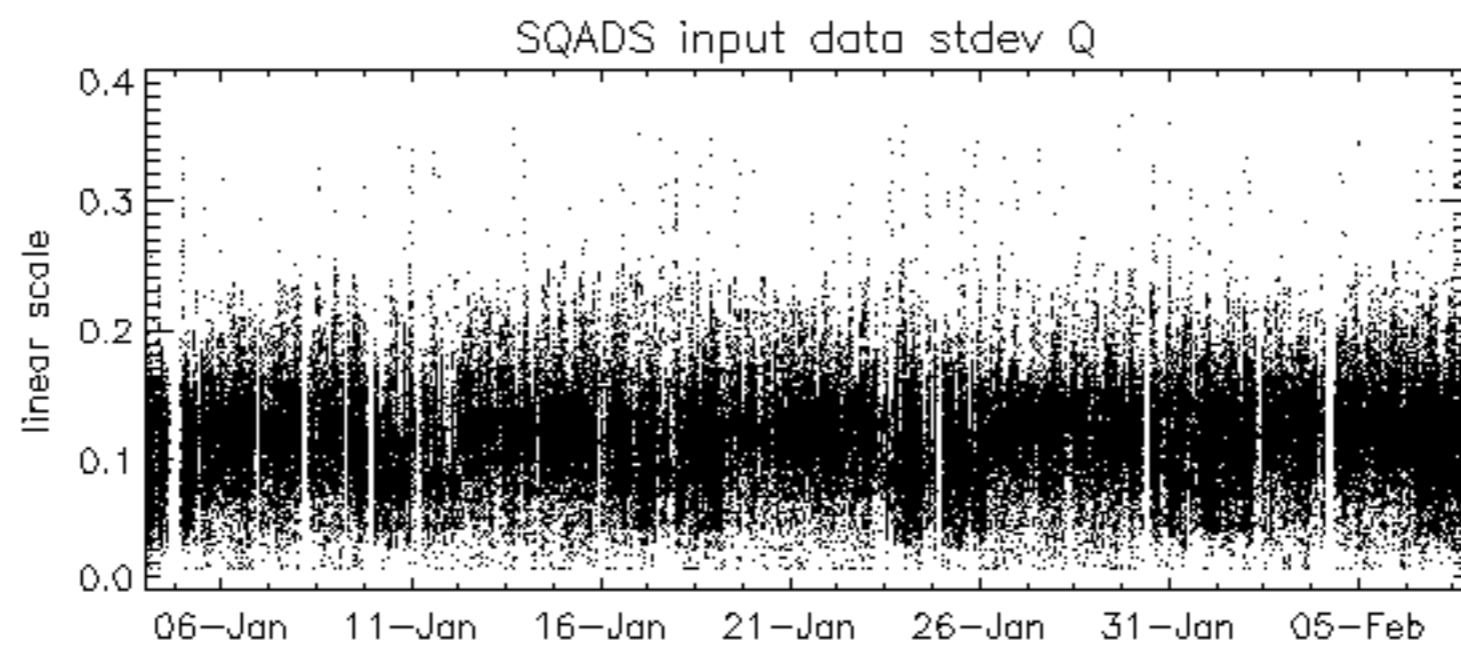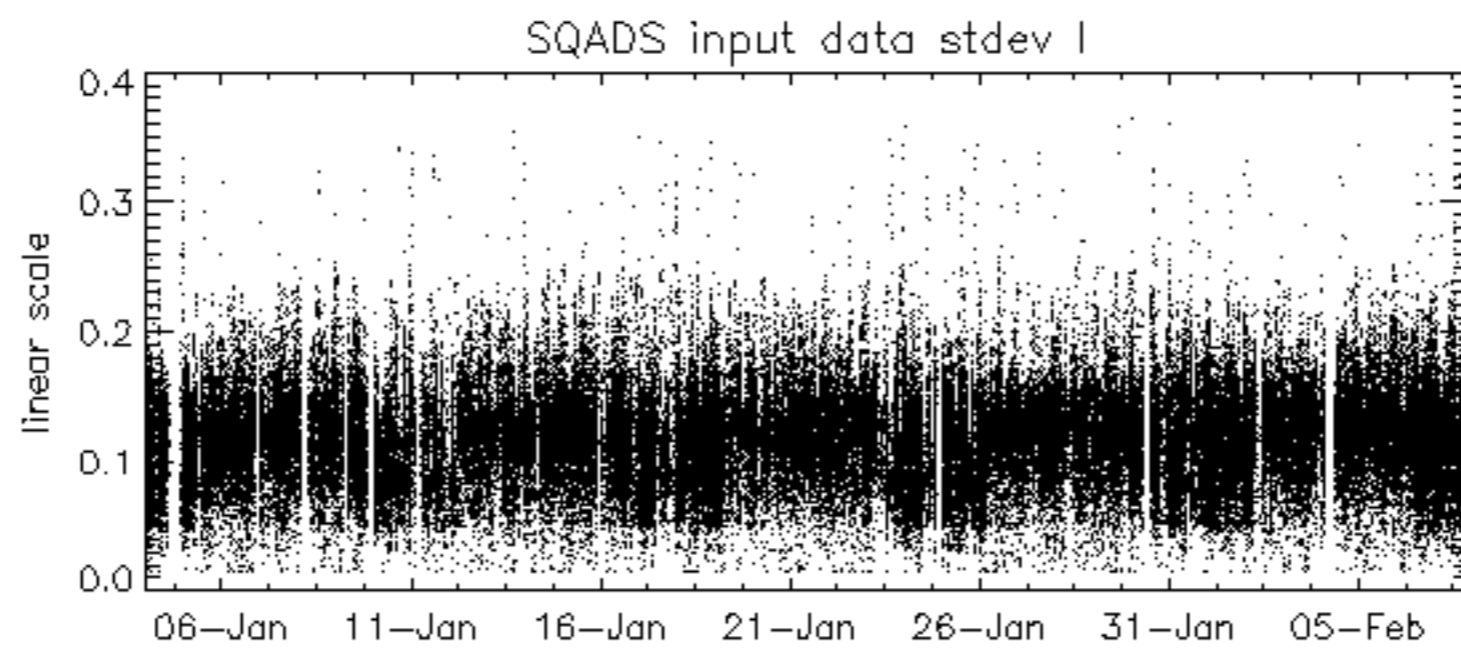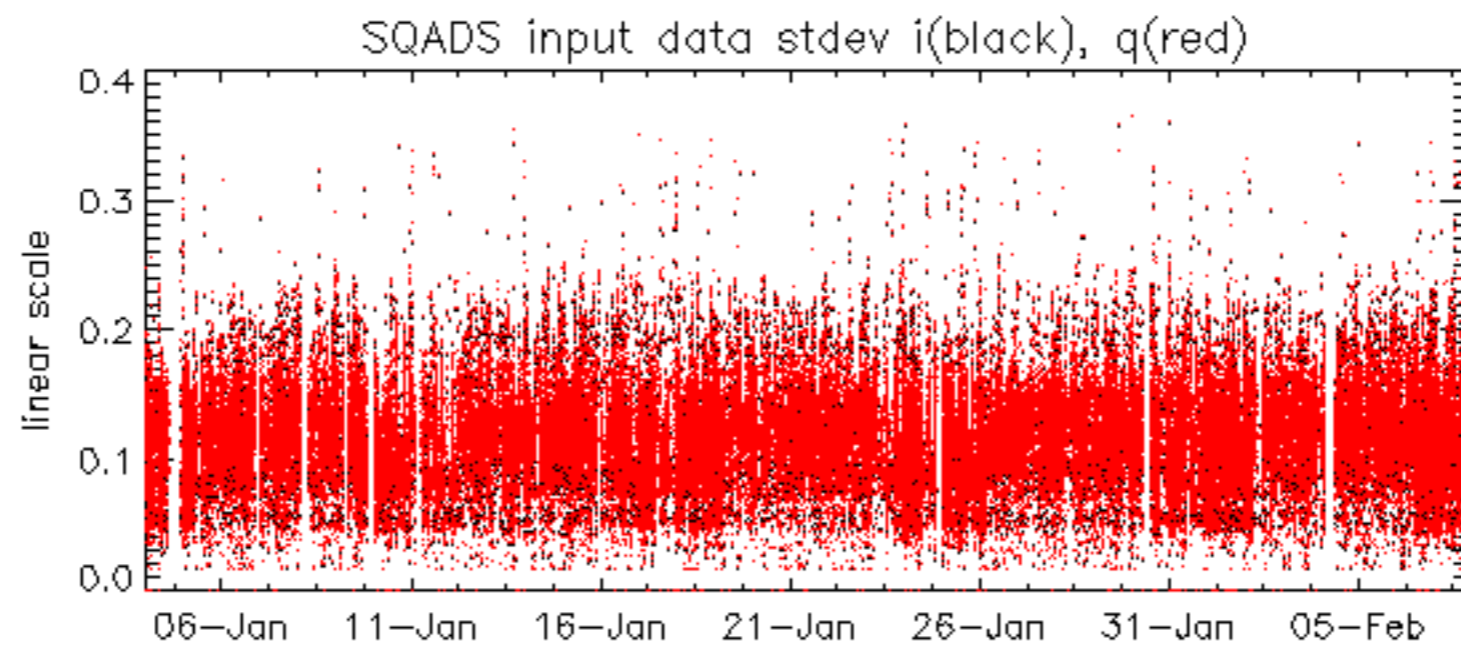



















No unavailabilities during the reported period.