

# REPORT OF 040315

last update on Mon Mar 15 14:19:00 GMT 2004

1. [Introduction](#)
2. [Summary](#)
  - [Instrument Unavailability](#)
  - [Browse Visual Inspection](#)
  - [Module Stepping Results](#)
  - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
  - [Daily statistics](#)
  - [Cyclic statistics](#)
  - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
  - [raw data mean I and Q](#)
  - [raw data stdev I and Q](#)
  - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
  - [Unbiased Doppler Error](#)
  - [Absolute Doppler](#)
  - [Doppler evolution versus ANX](#)

## 1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA\_WVS\_1P) products, which are the available few hours after the acquisition, on the high rate browse (BP) products and on the Module Stepping (MS) product.

## 2 - Summary

### 2.1 - Instrument Unavailability

No unavailabilities during the reported period.

### 2.2 - Browse Visual Inspection

No anomalies observed on available browse products

### 2.3 - Data Analysis

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.

### 3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis. The purpose of this mode is to identify any malfunctioning modules and to identify modules for which calibration offsets are to be applied.

No anomalies observed on available MS products:

Polarisation	Start Time
V	20040314 201119
H	20040314 200959

#### MSM in V/V polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
⊗	⊗
⊗	⊗
⊗	⊗
⊗	⊗

#### MSM in H/H polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
⊗	⊗
⊗	⊗
⊗	⊗
⊗	⊗

### 4 - Internal calibration Results

No anomalies observed.

#### 4.1 - Daily statistics

⊗

## 4.2 - Cyclic statistics



## 4.3 - cal pulses monitoring (all rows)



## 5 - RAW data statistics

No anomalies observed.

### 5.1 - Input mean I/Q

channel	stat	DSS-B
MEAN I	mean	0.000470907
	stdev	2.34483e-07
MEAN Q	mean	0.000494548
	stdev	2.59877e-07



### 5.2 - Input stdev I/Q

channel	stat	DSS-B
STDEV I	mean	0.127301
	stdev	0.00111410
STDEV Q	mean	0.127529
	stdev	0.00112687



### 5.3 - Gain imbalance I/Q



## 6 - Wave Doppler Analysis

Preliminary report. The data is not yet controlled

### 6.1 - Unbiased Doppler Error

#### Evolution of unbiased Doppler error (Real - Expected)

Ascending
-----------

Descending
------------

### 6.2 - Absolute Doppler

#### Evolution of Absolute Doppler




Ascending
-----------


Descending
------------

### 6.3 - Doppler evolution versus ANX

#### Evolution Doppler error versus ANX



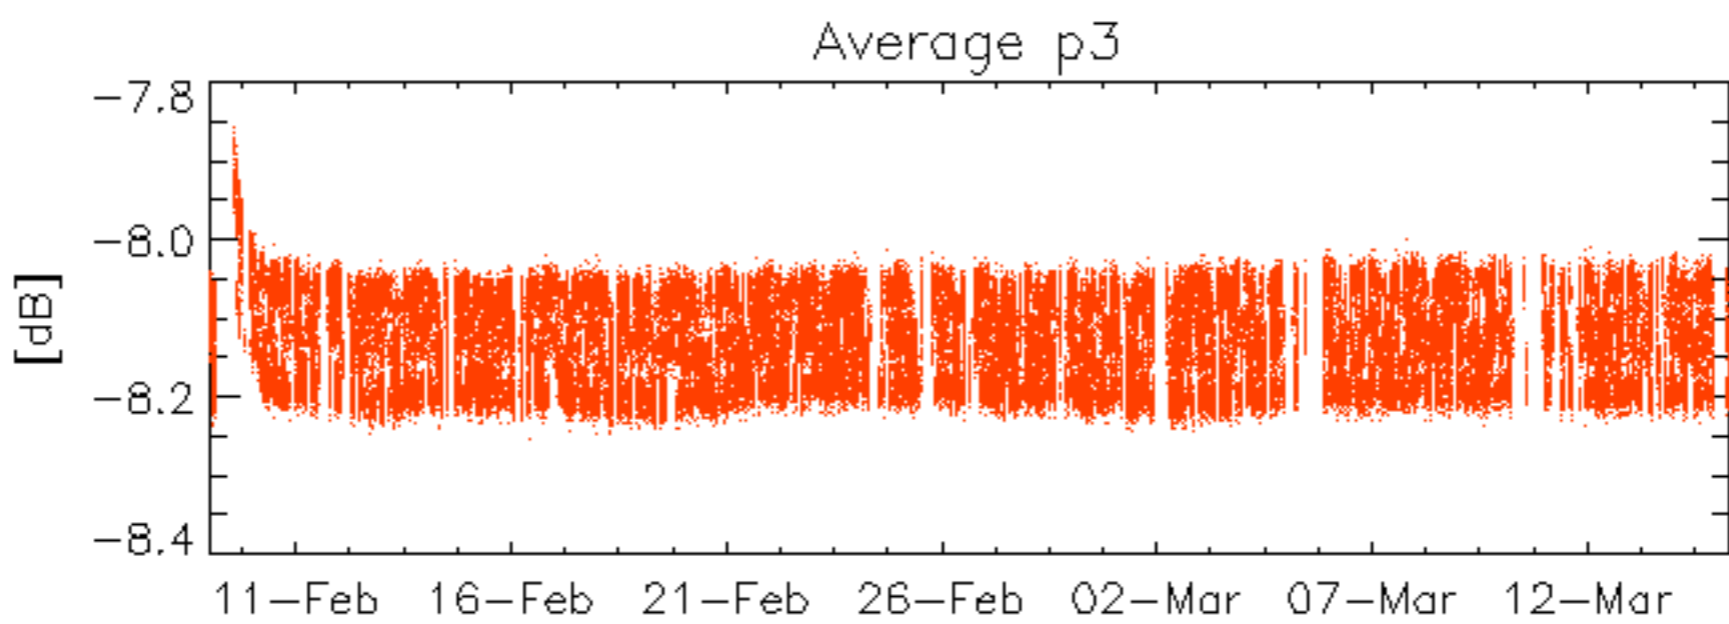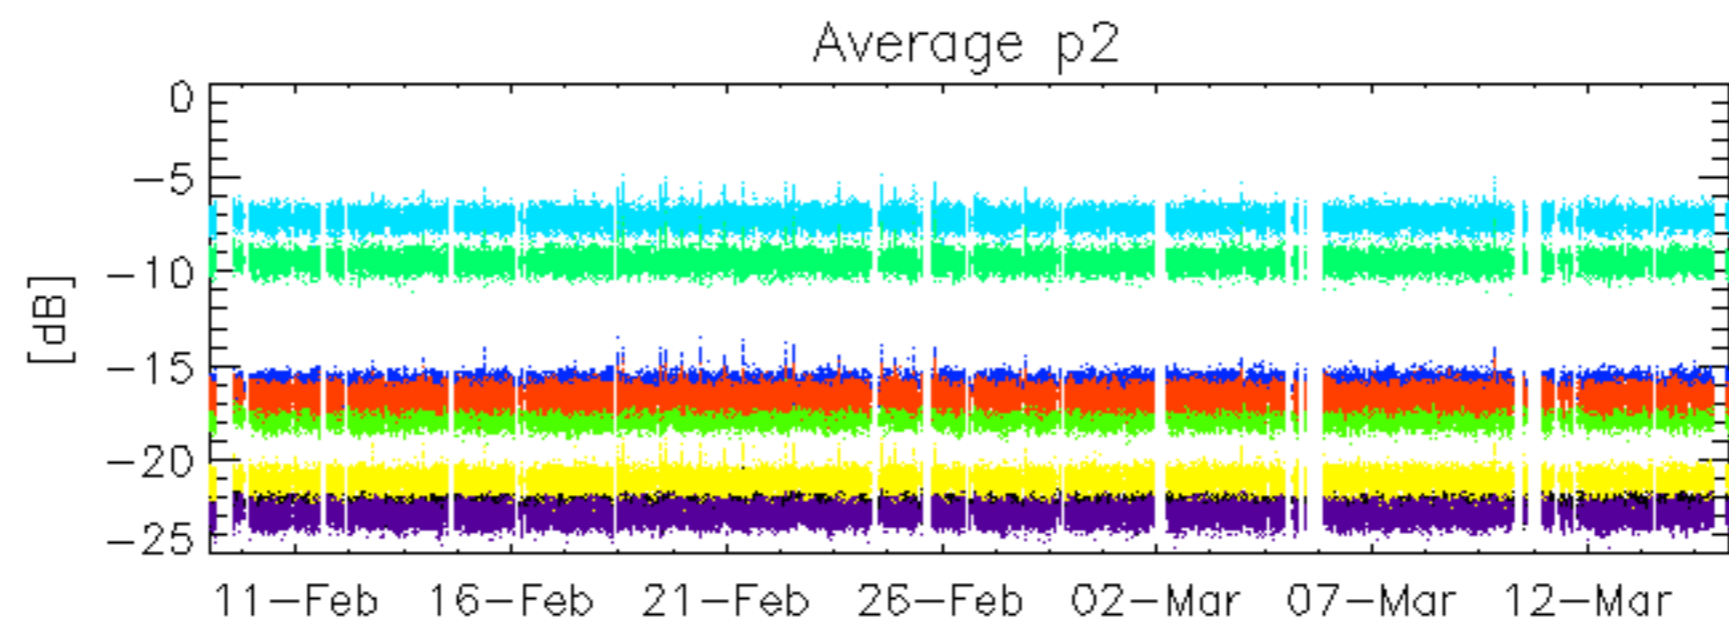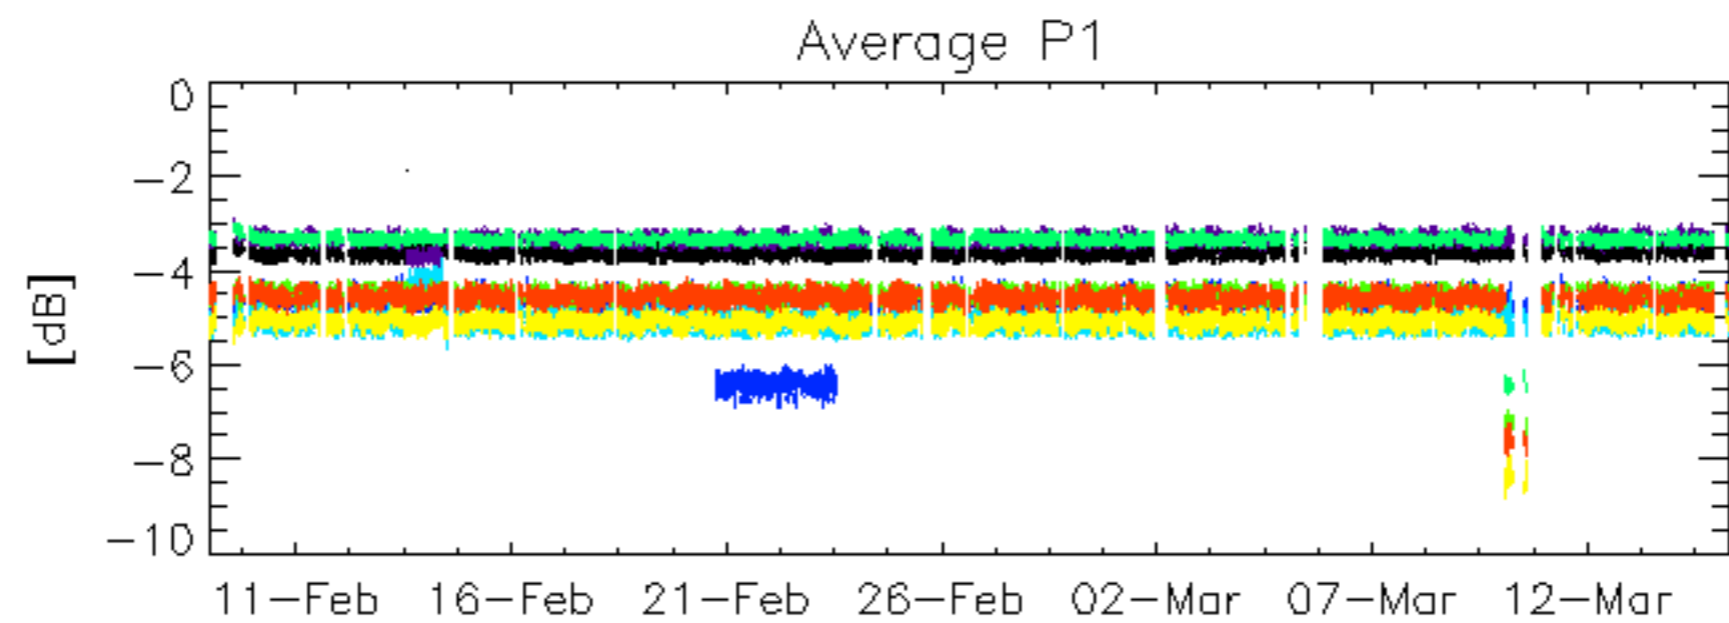

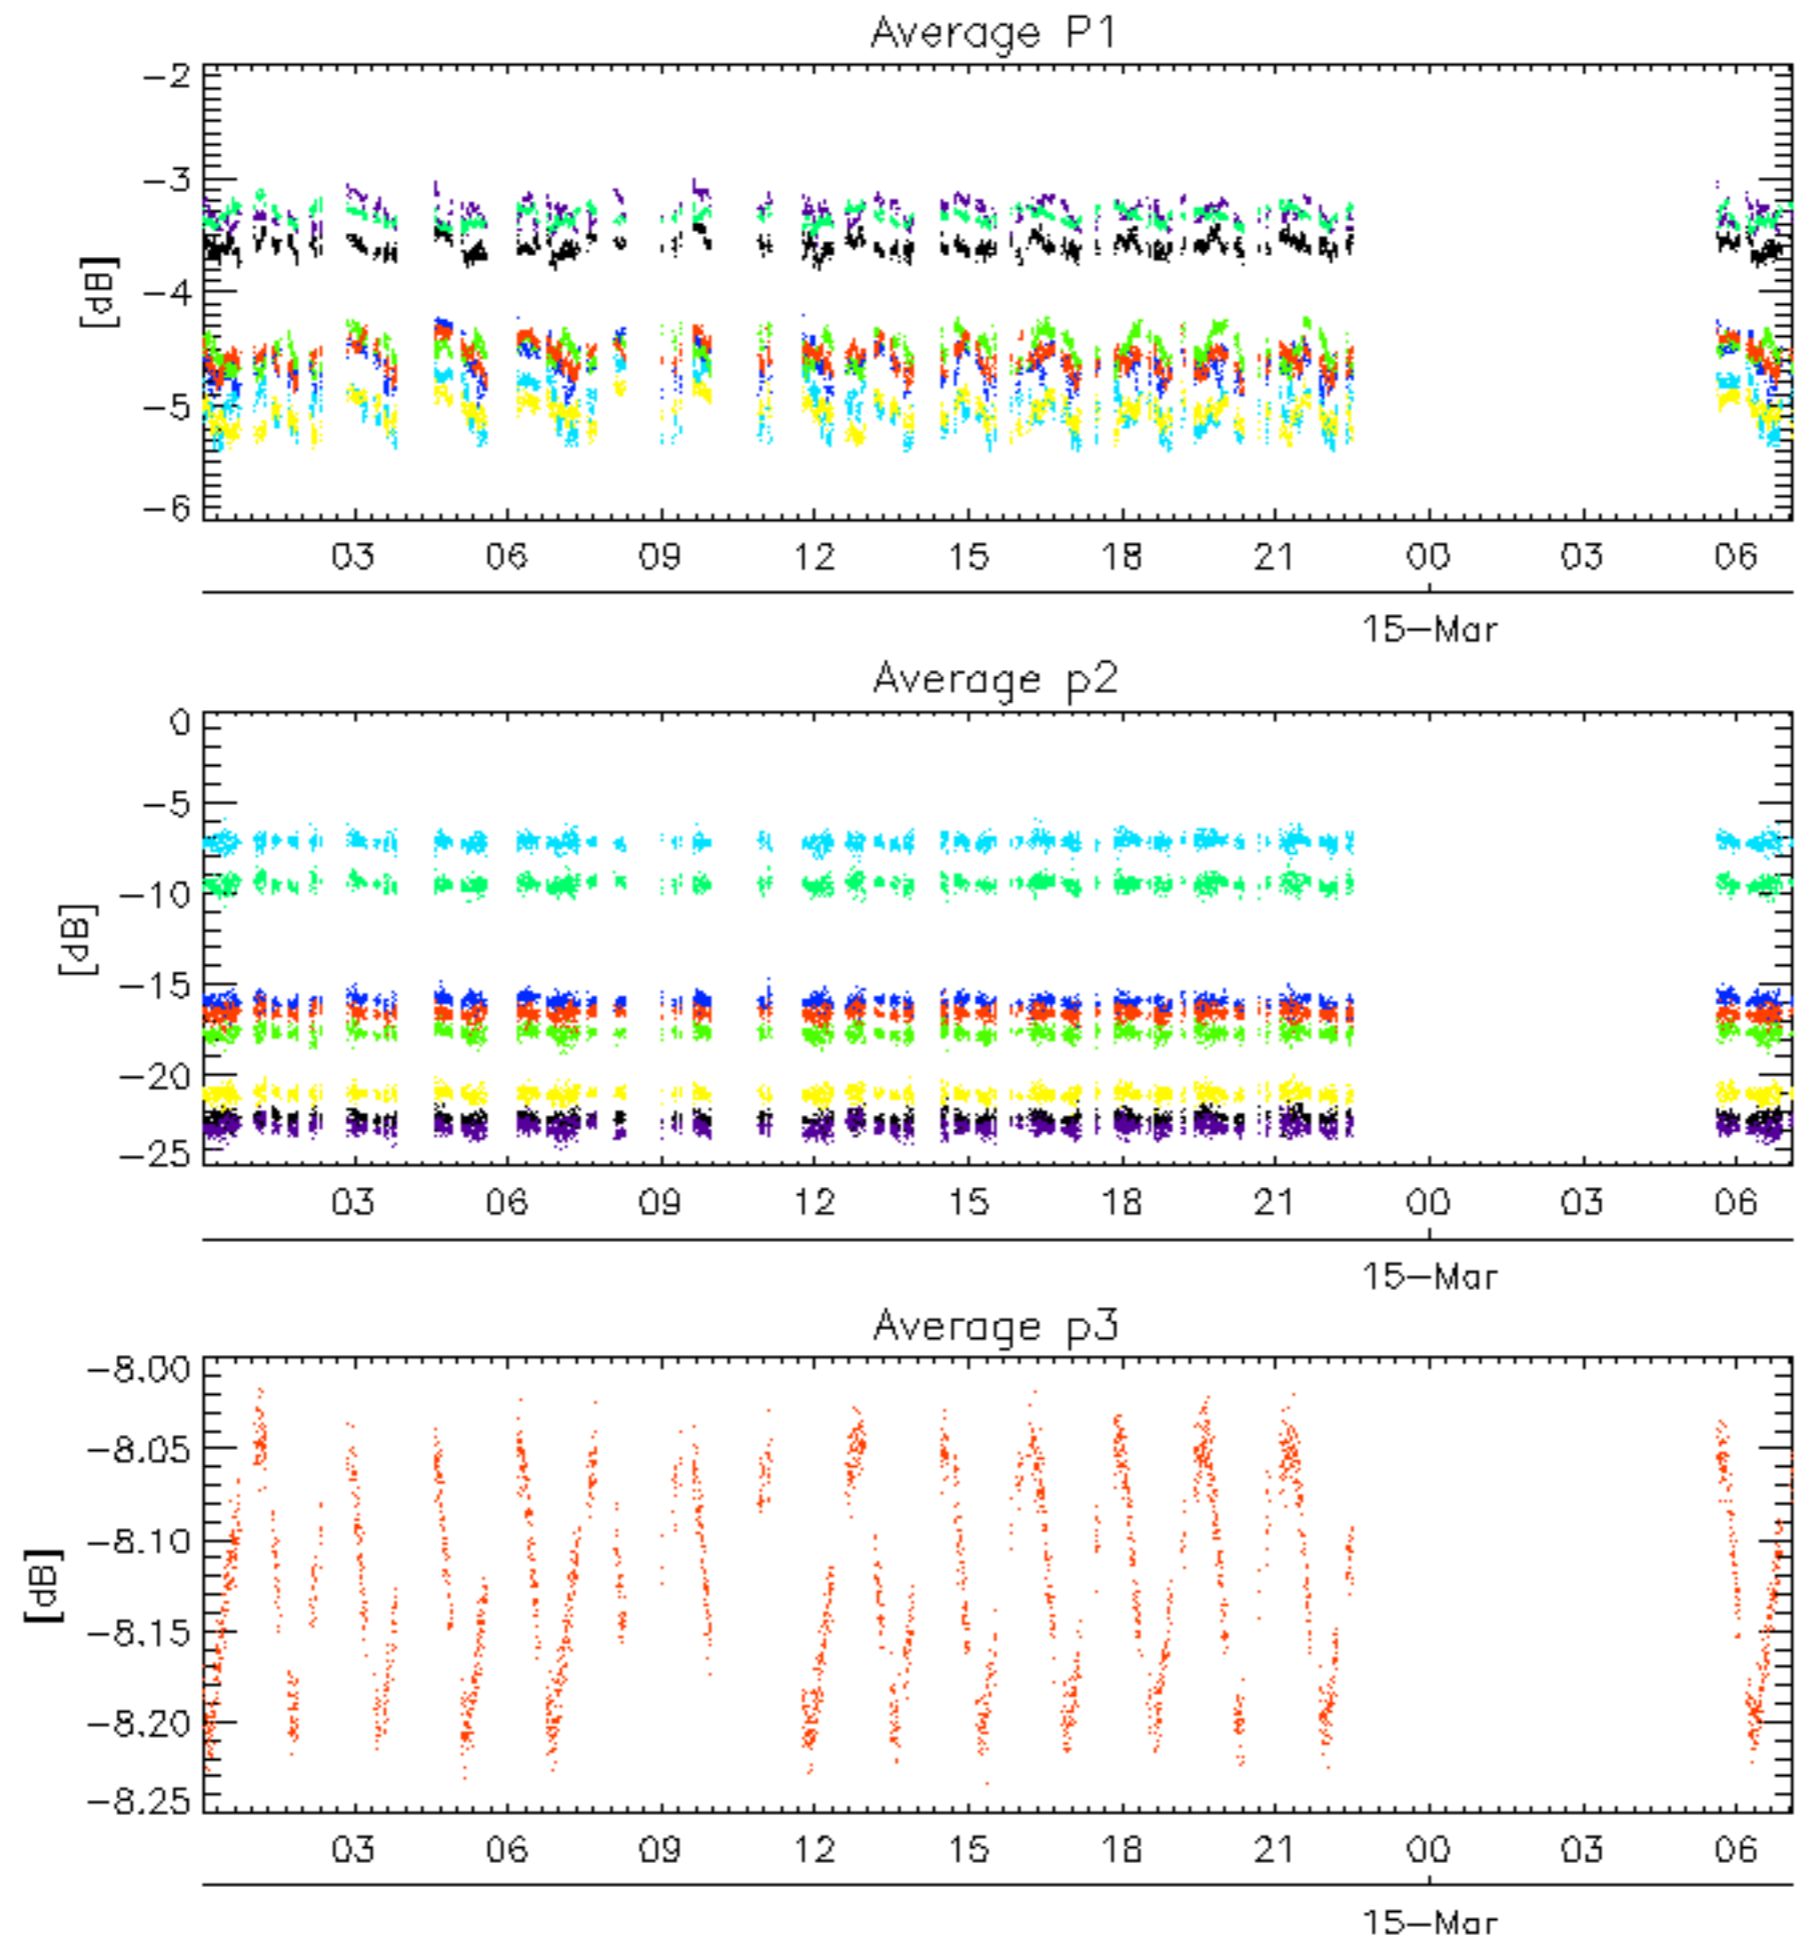


rows: **3** **7** **11** **15** **19** **22** **24** **28**

No anomalies observed on available browse products

No anomalies observed.



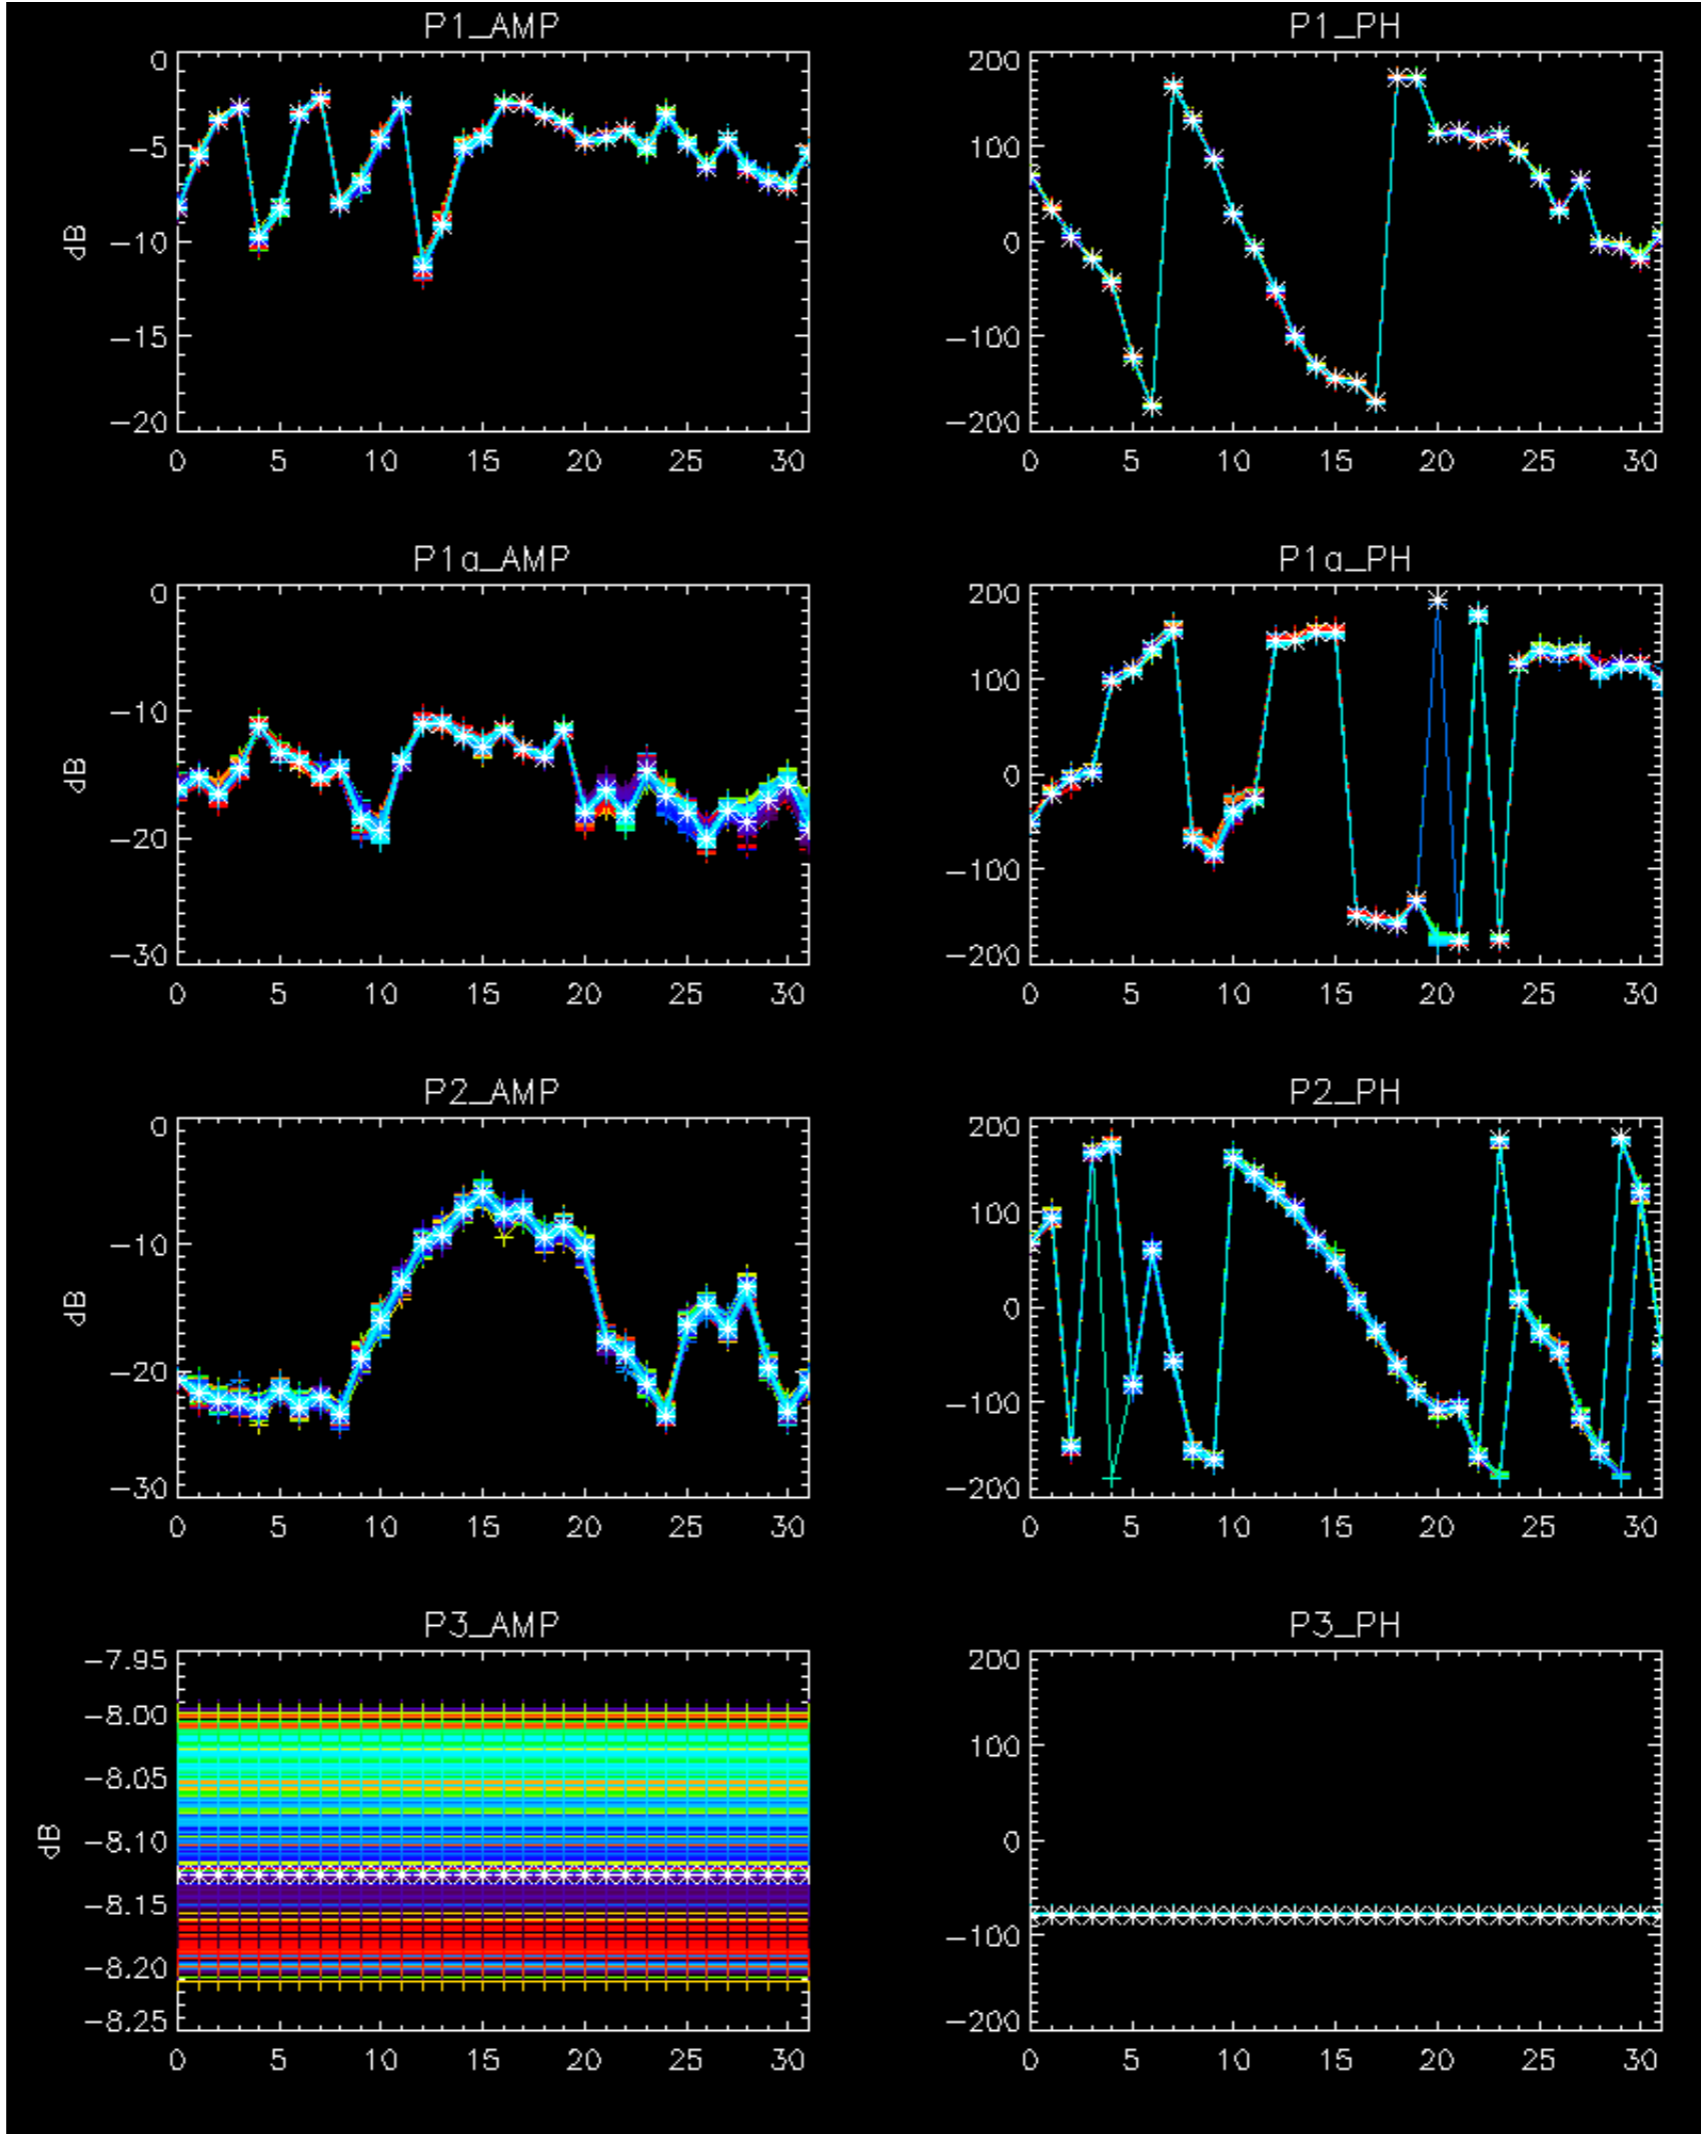


- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.






Doppler 'WVS' 'IS2' 'H/H'


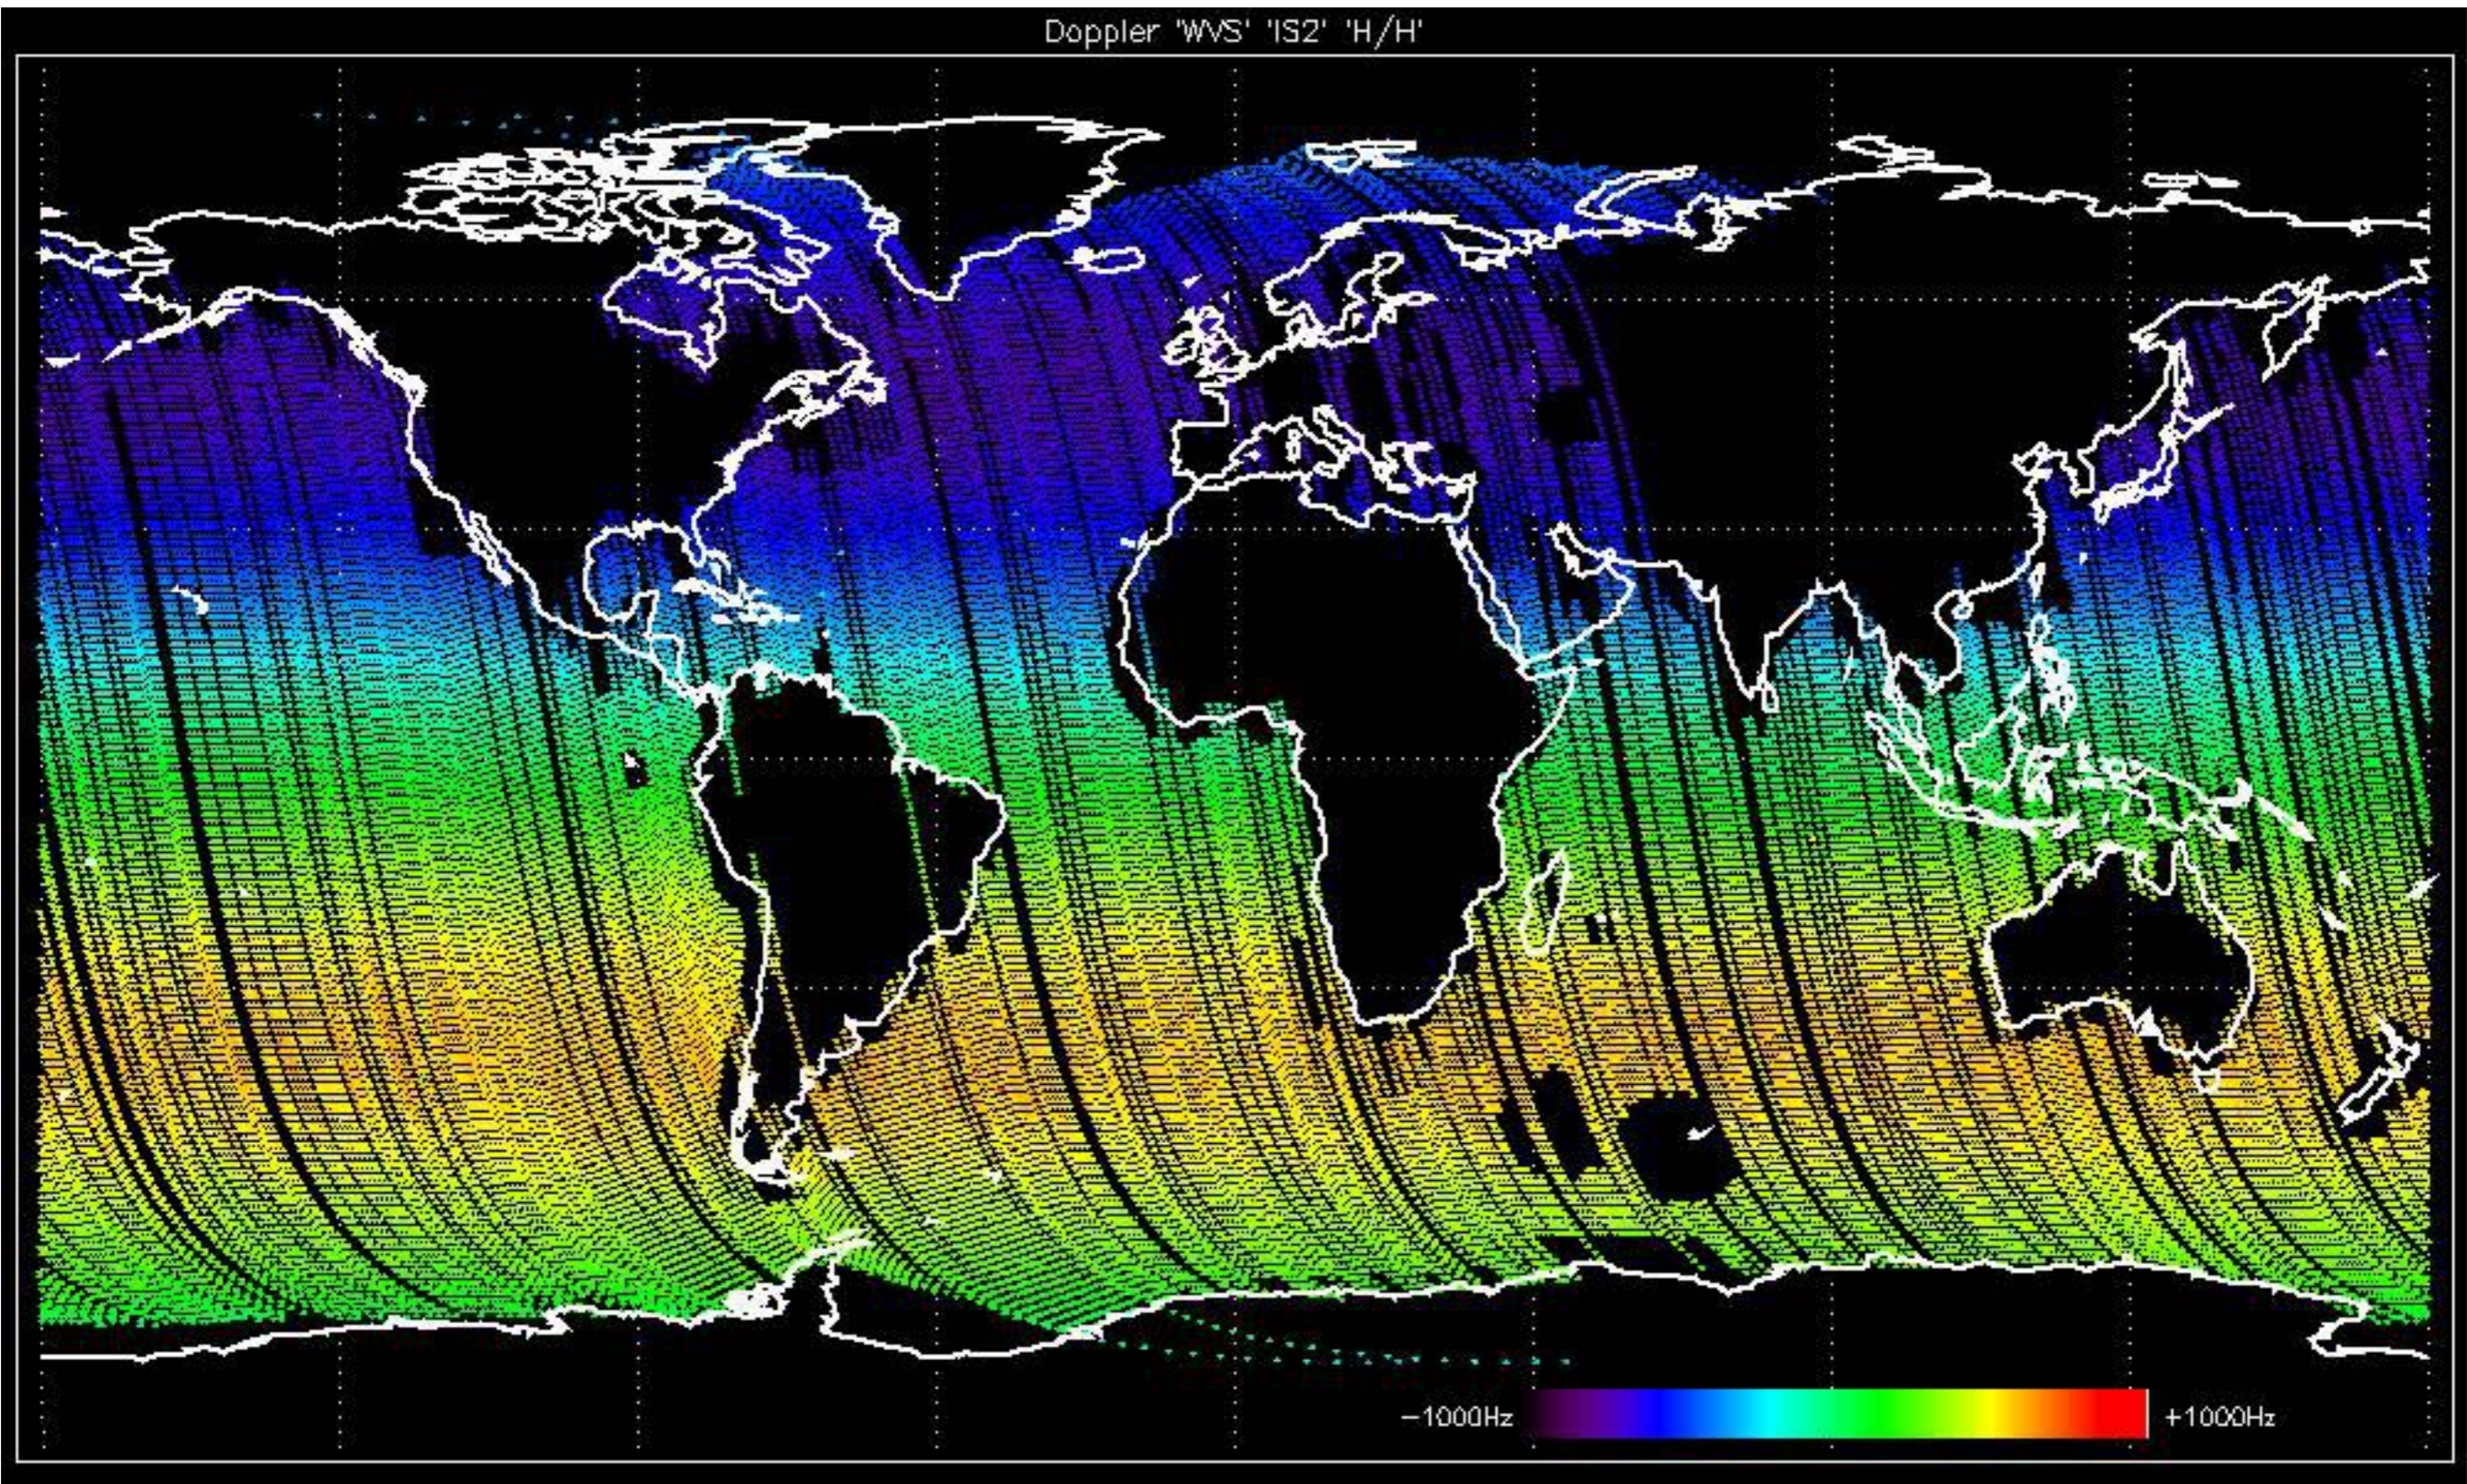




Doppler 'WVS' 'ISZ' 'V/V'

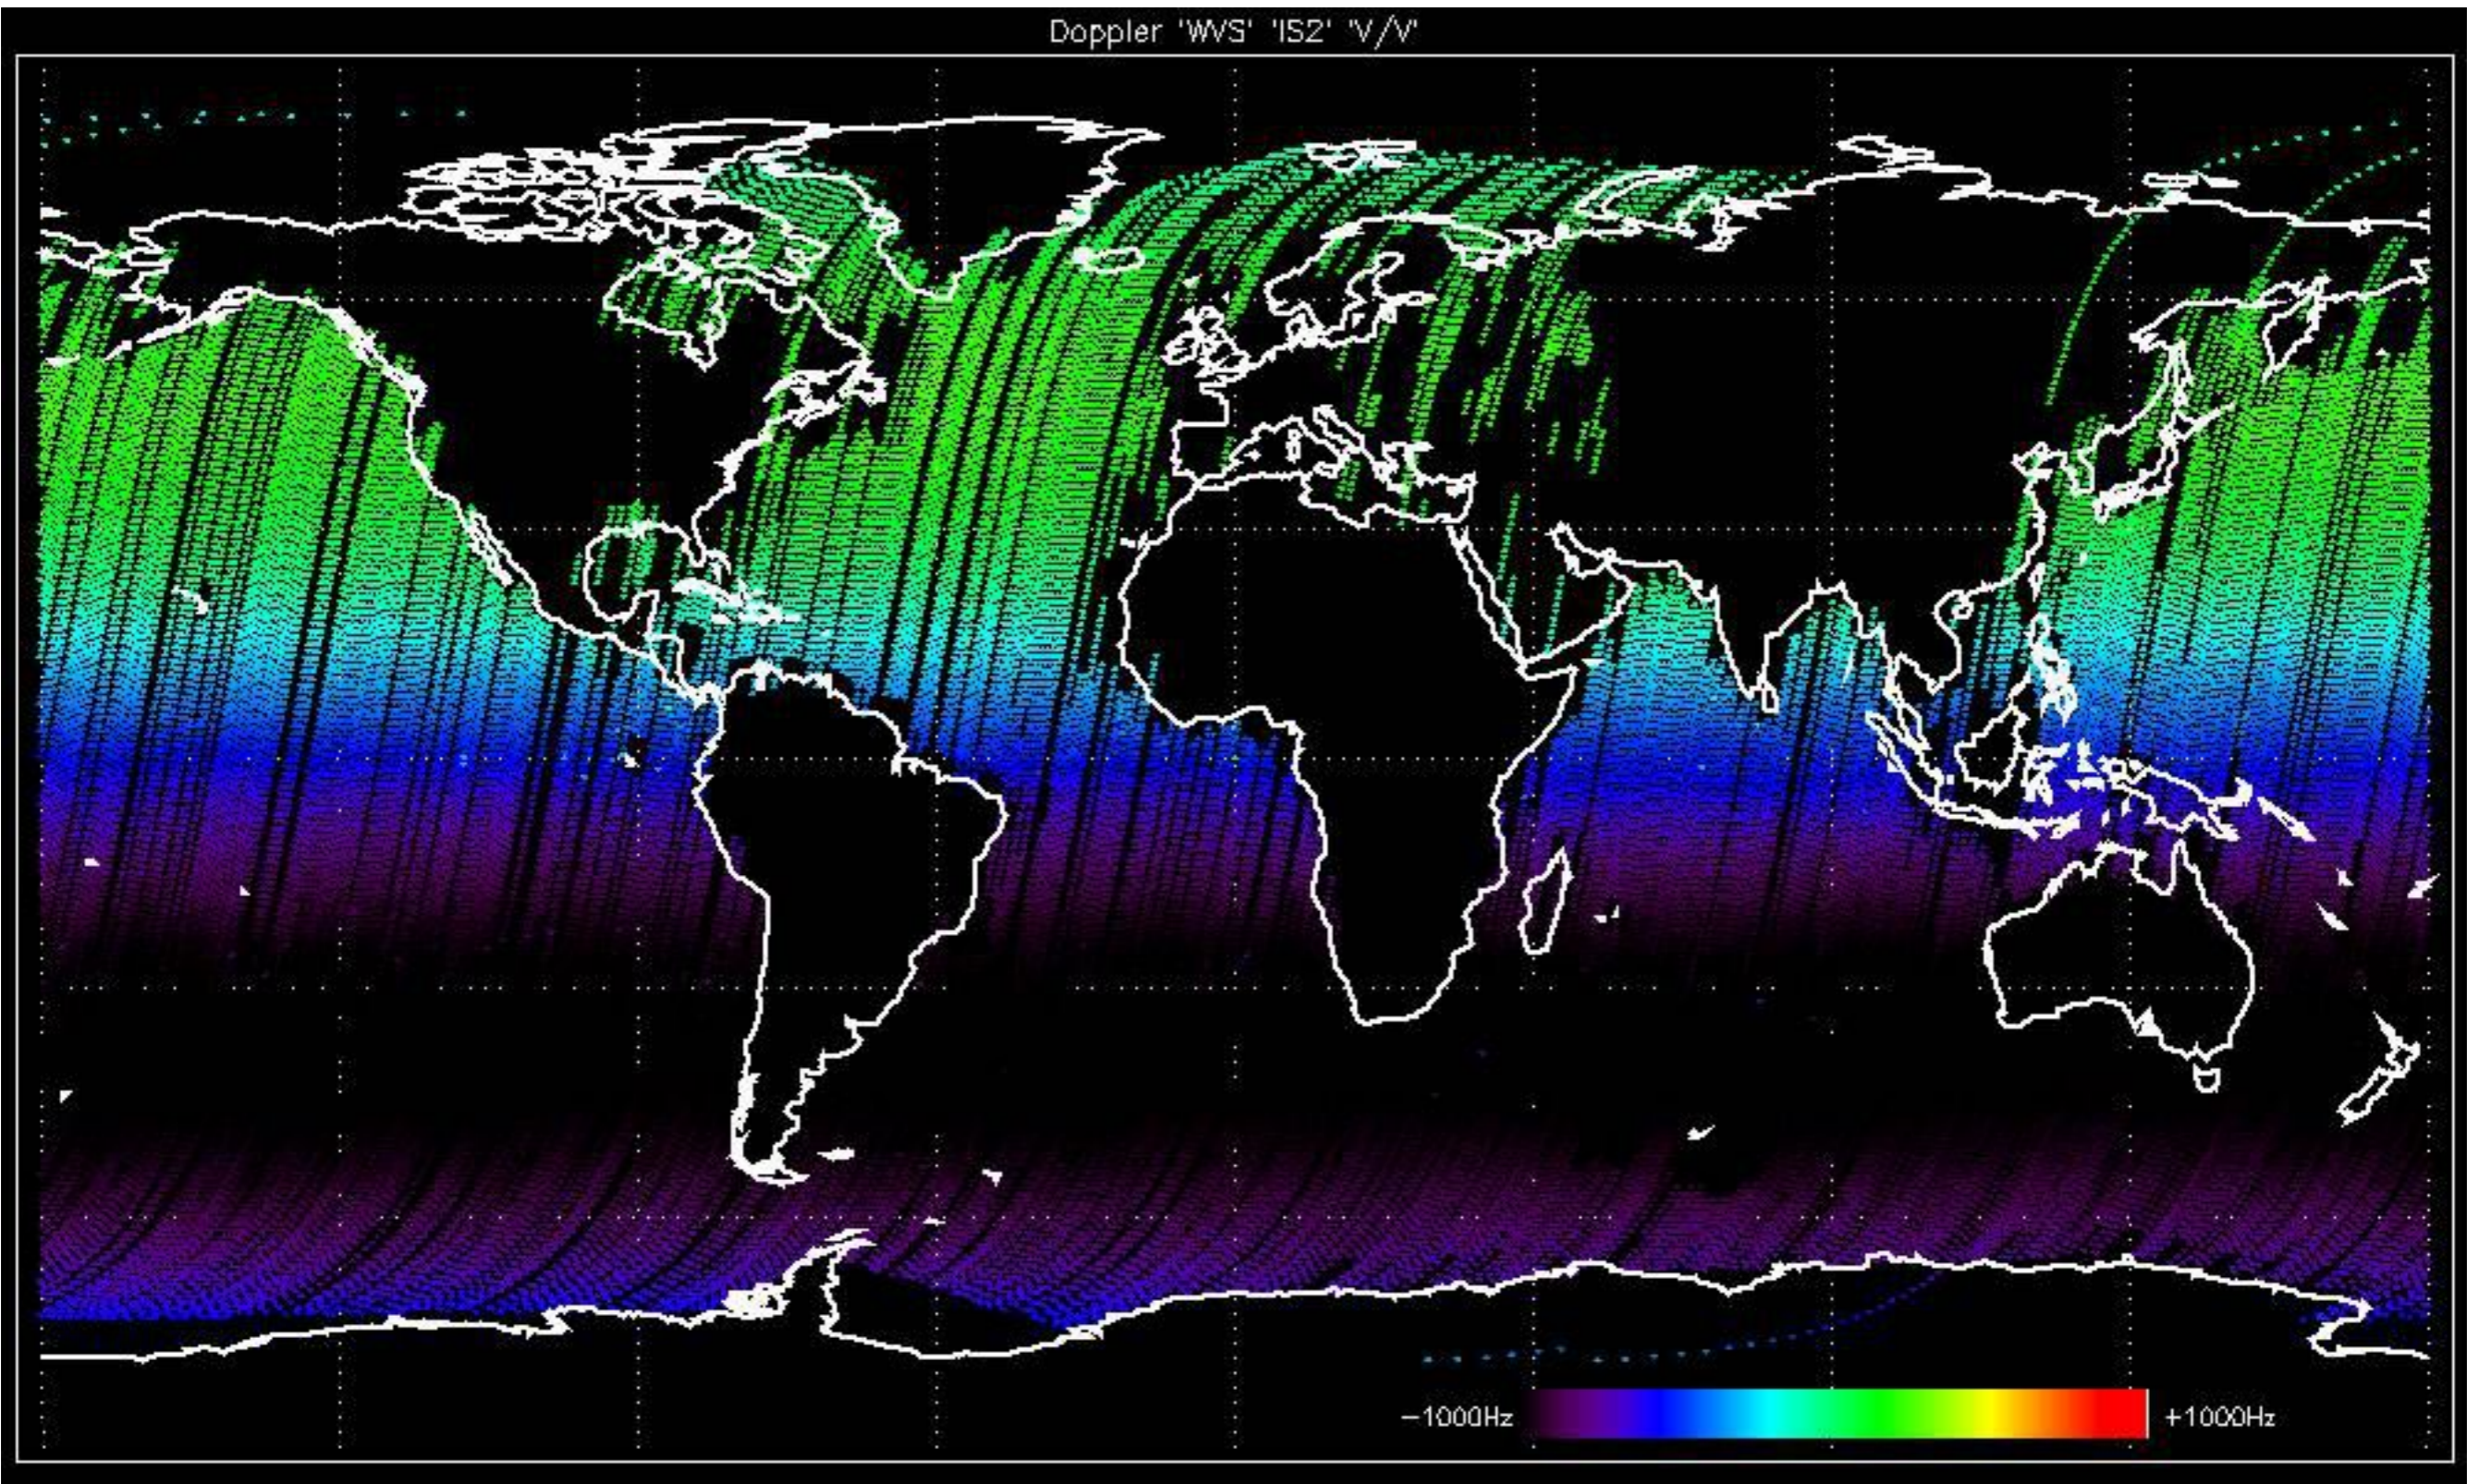




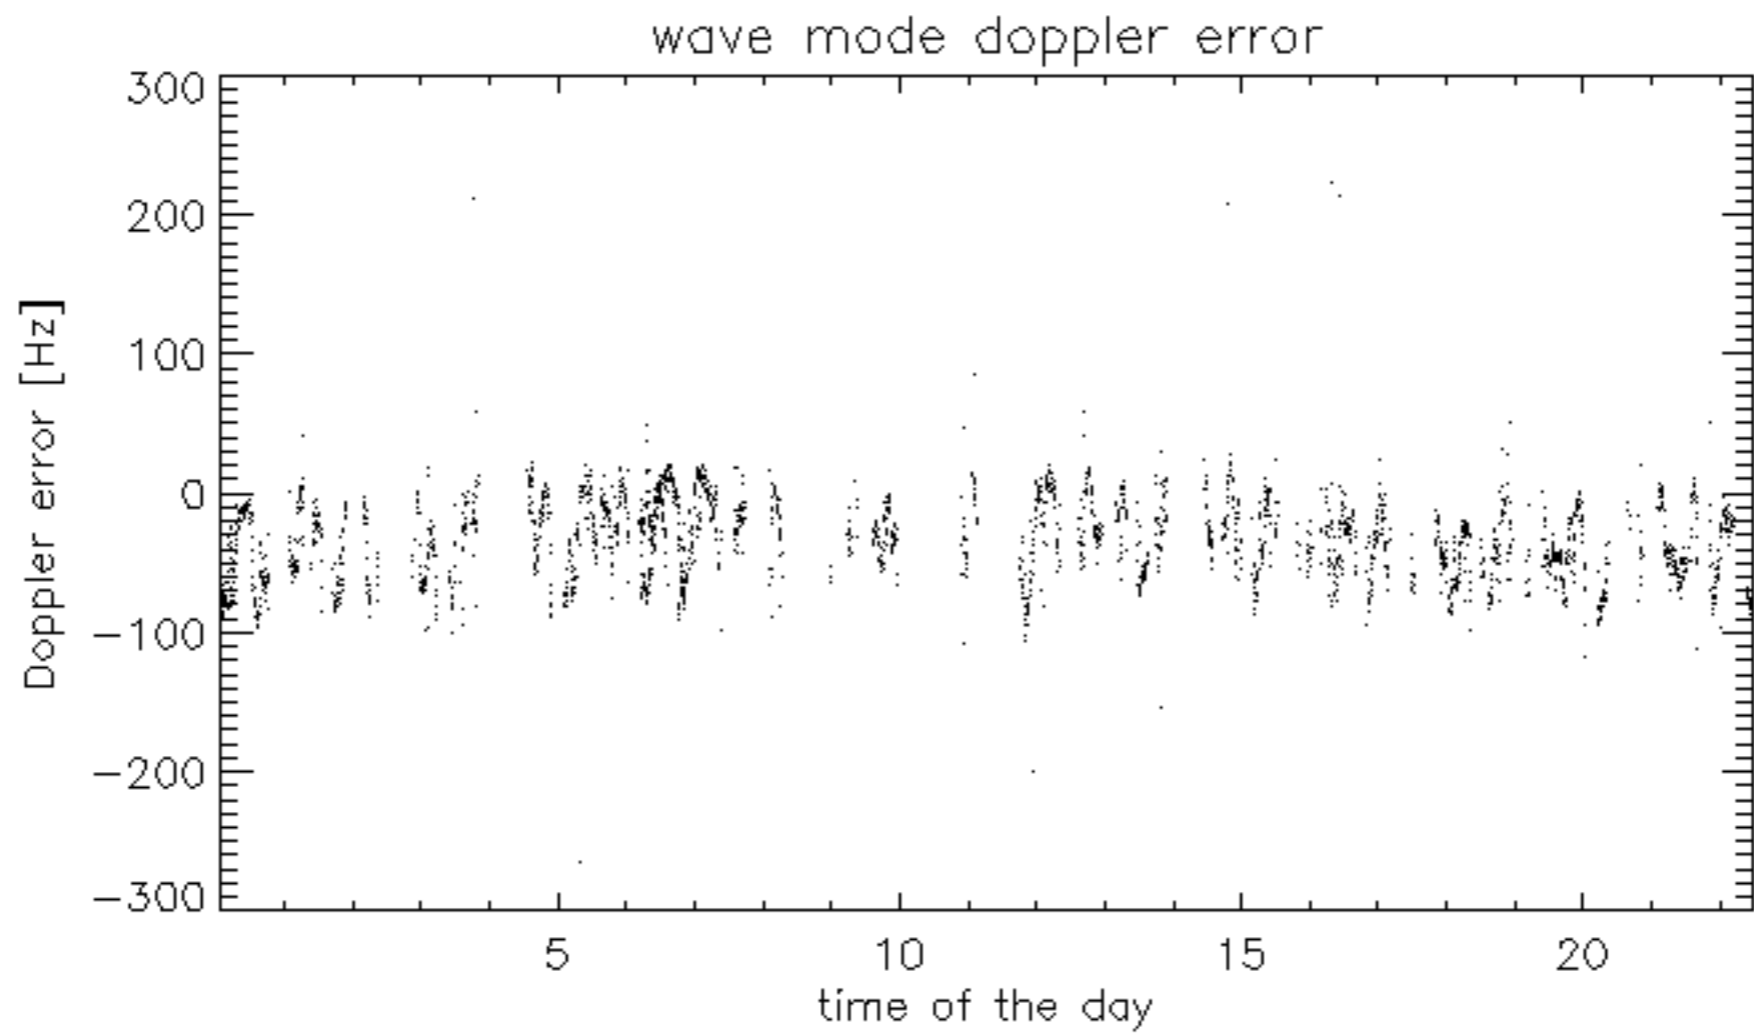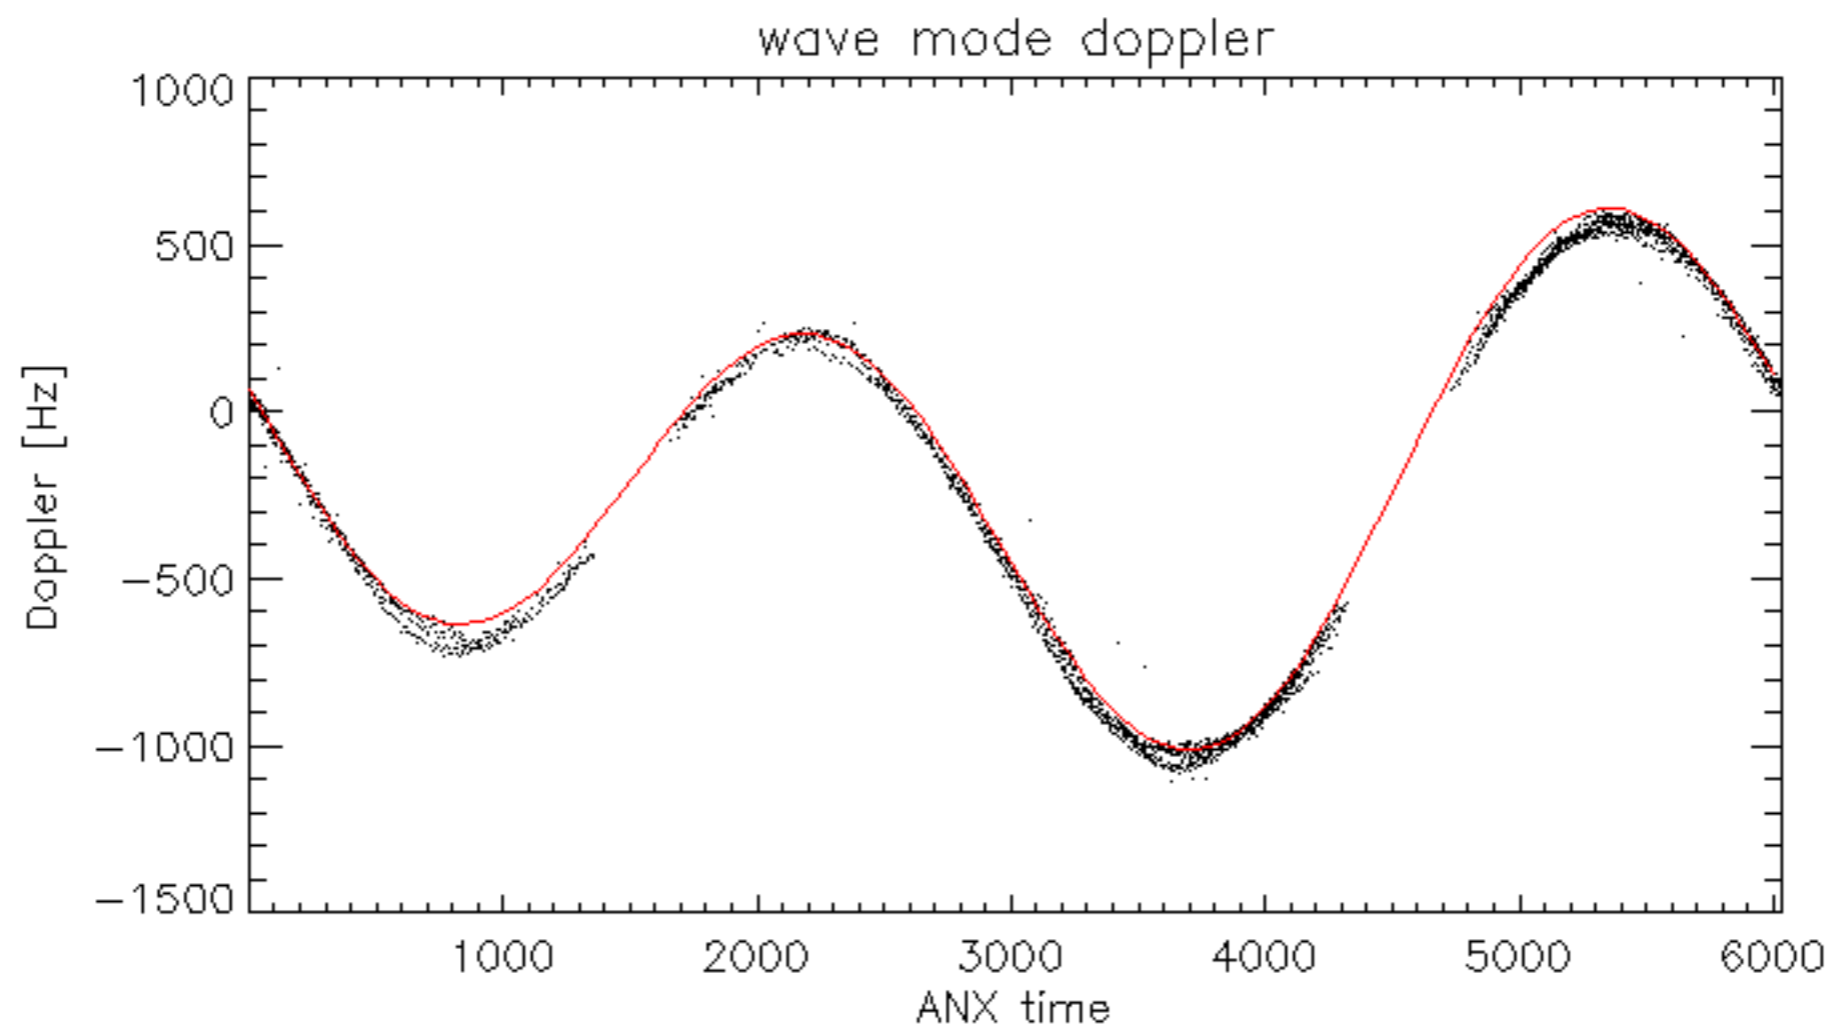




Doppler difference, estimated-predicted 'WVS' 'IS2' 'H/H' -error mean of -30.421756 Hz

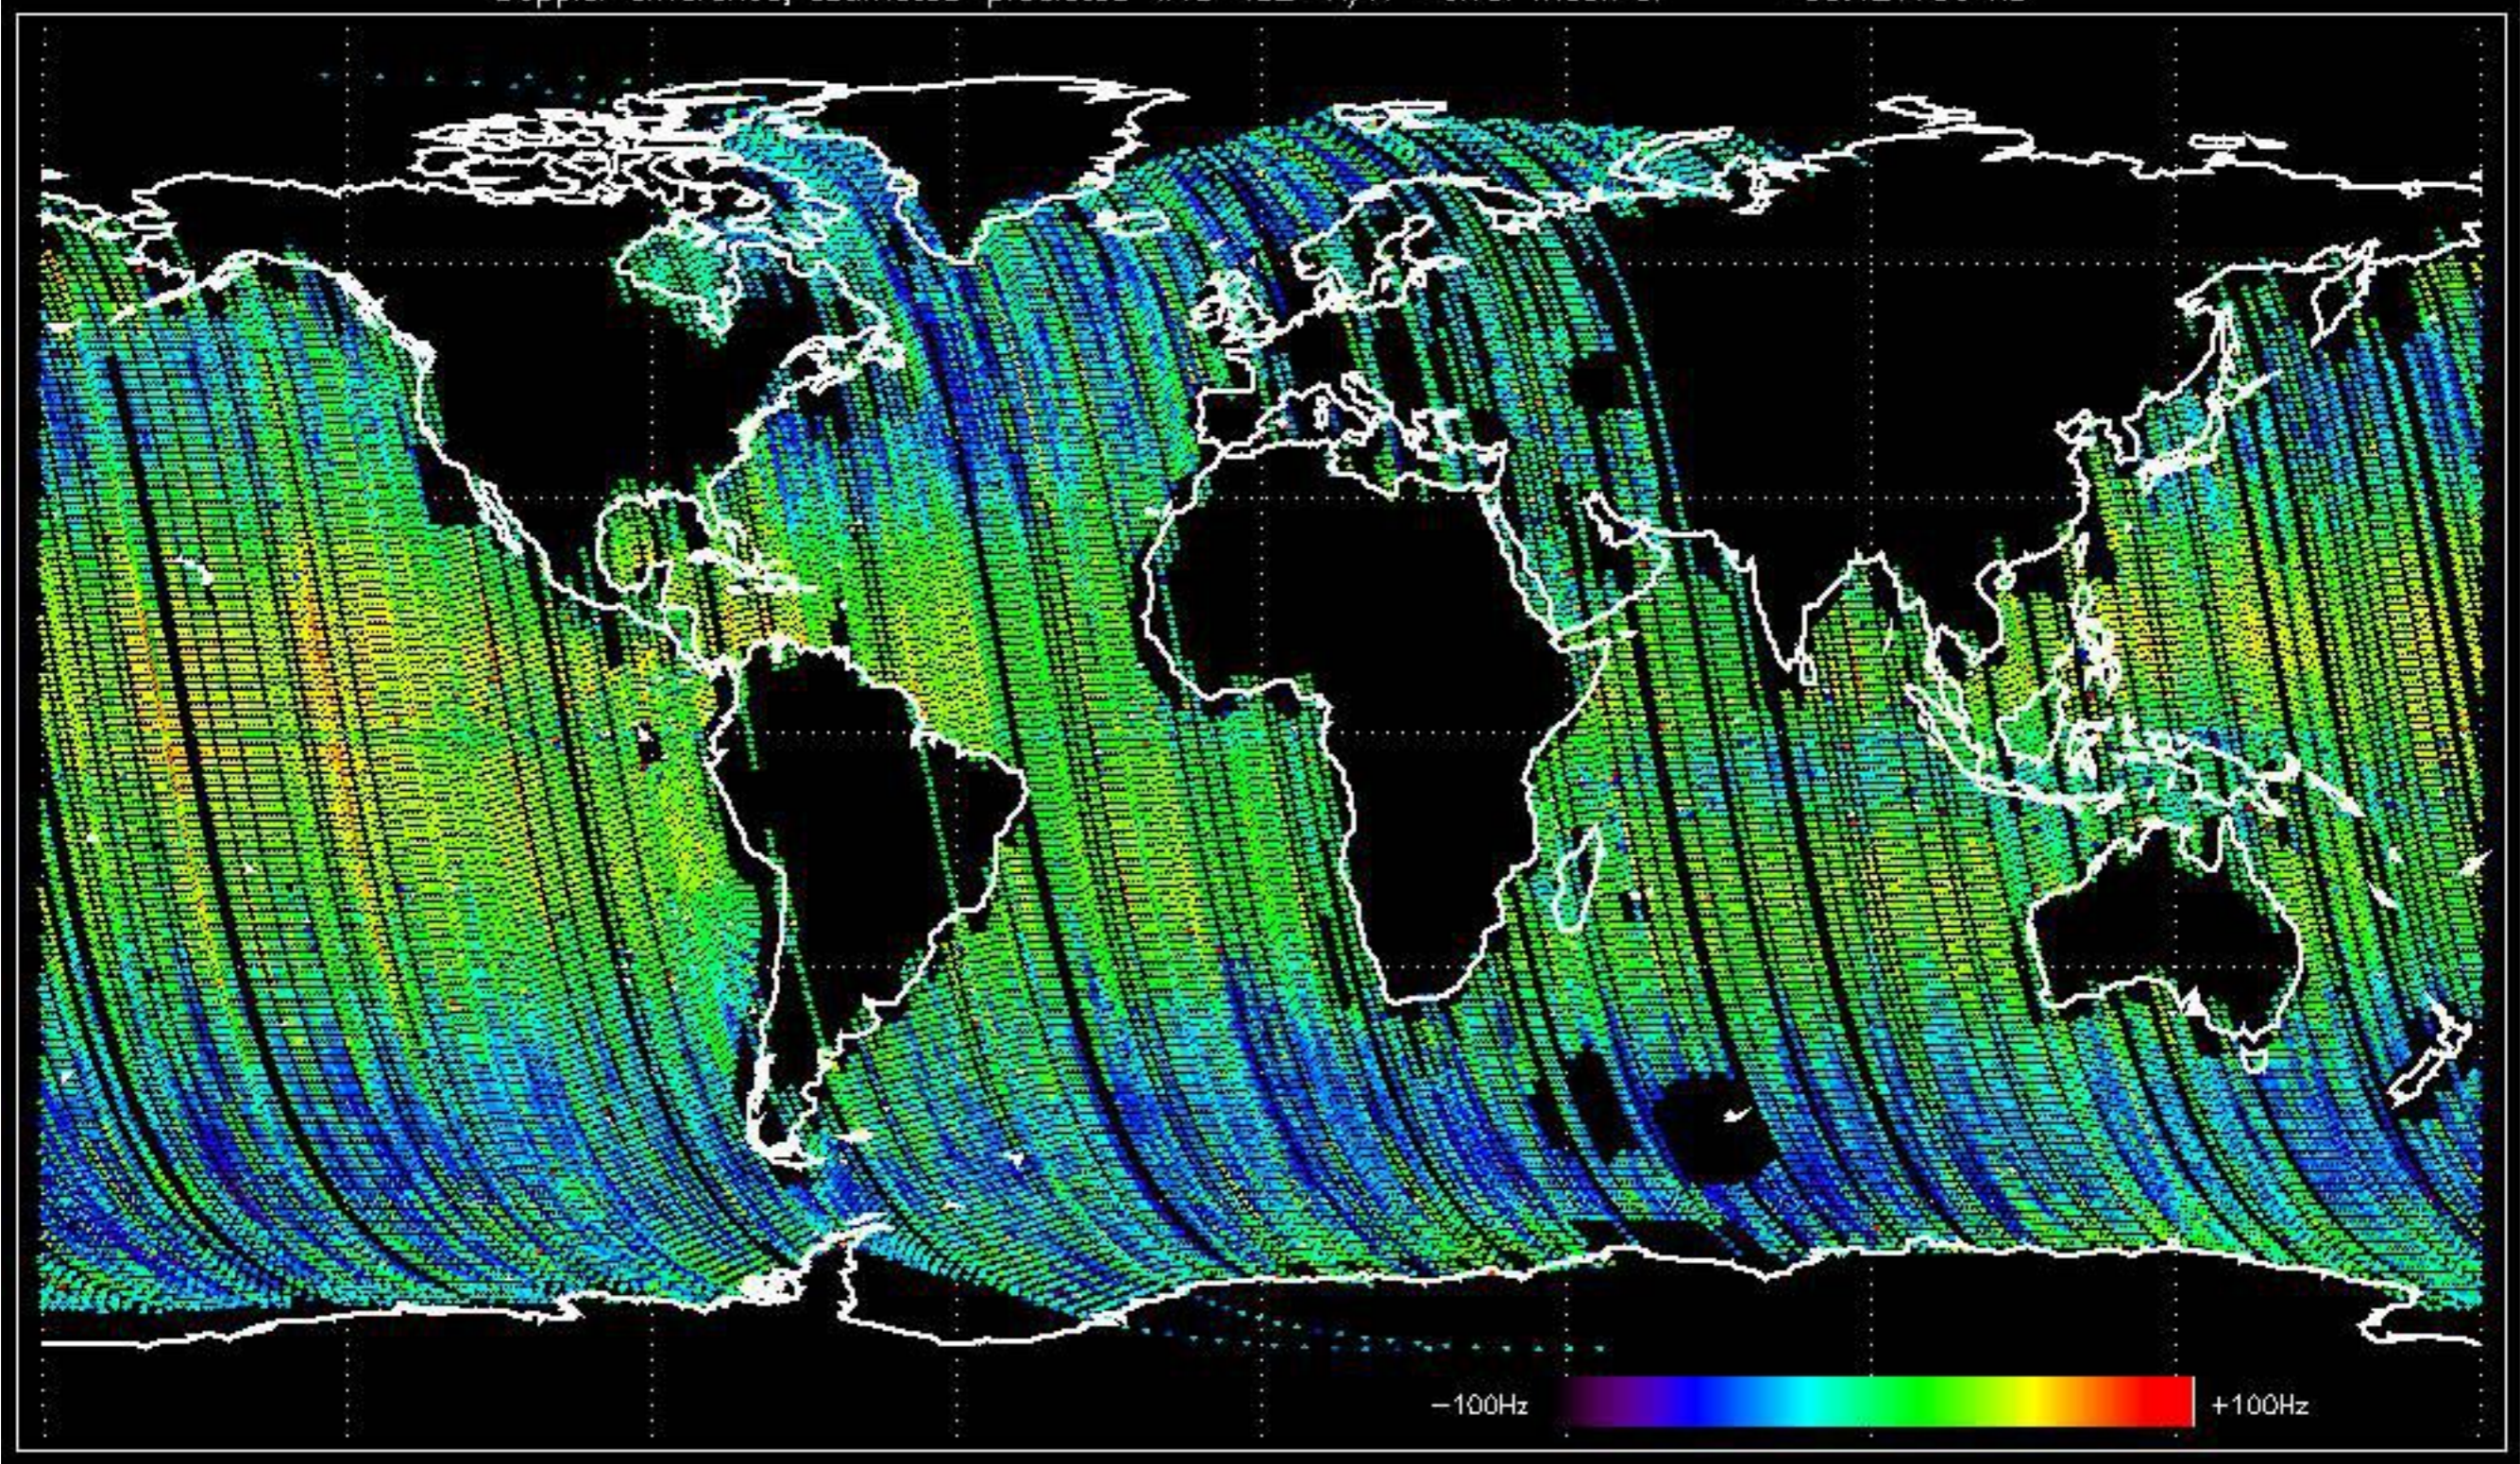



Doppler difference, estimated-predicted 'WVS' 'IS2' 'V/V' -error mean of -27.841848 Hz

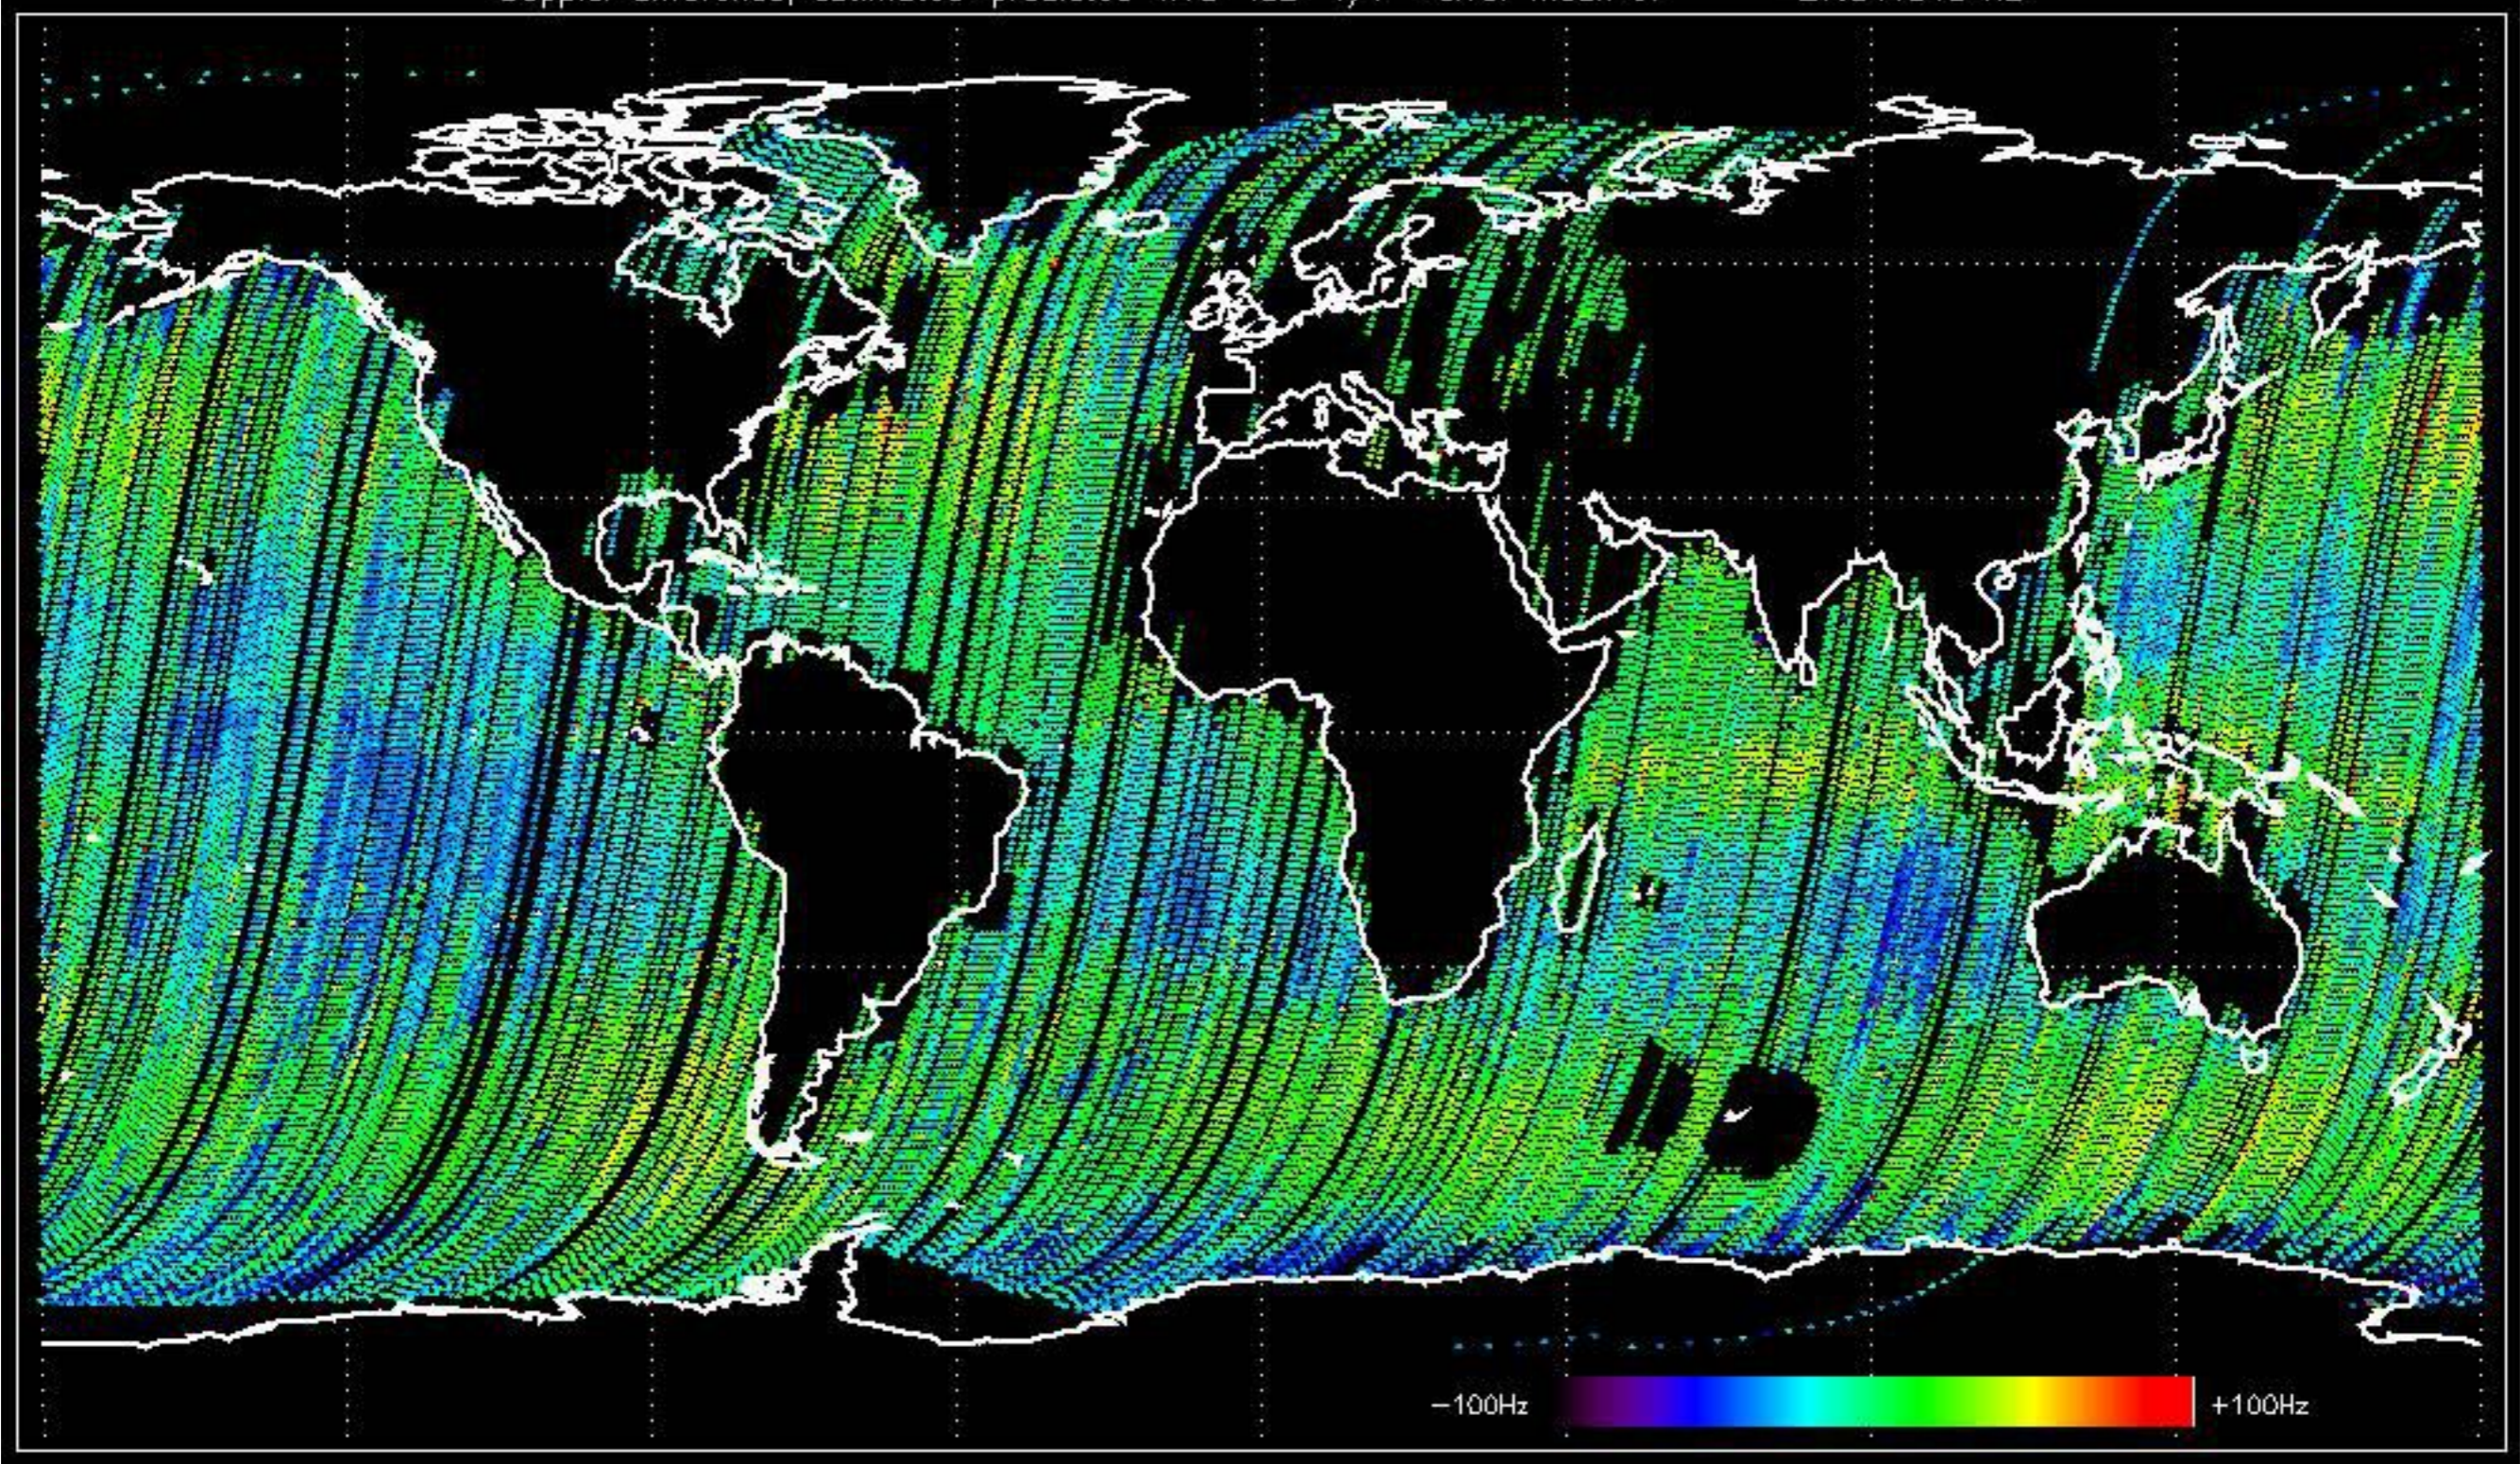



The MS mode provides an internal health check on an individual module basis.  
The purpose of this mode is to identify to identify any malfunctioning modules and  
to identify modules for which calibration offsets are to be applied.  
No anomalies observed on available MS products:

No anomalies observed.
















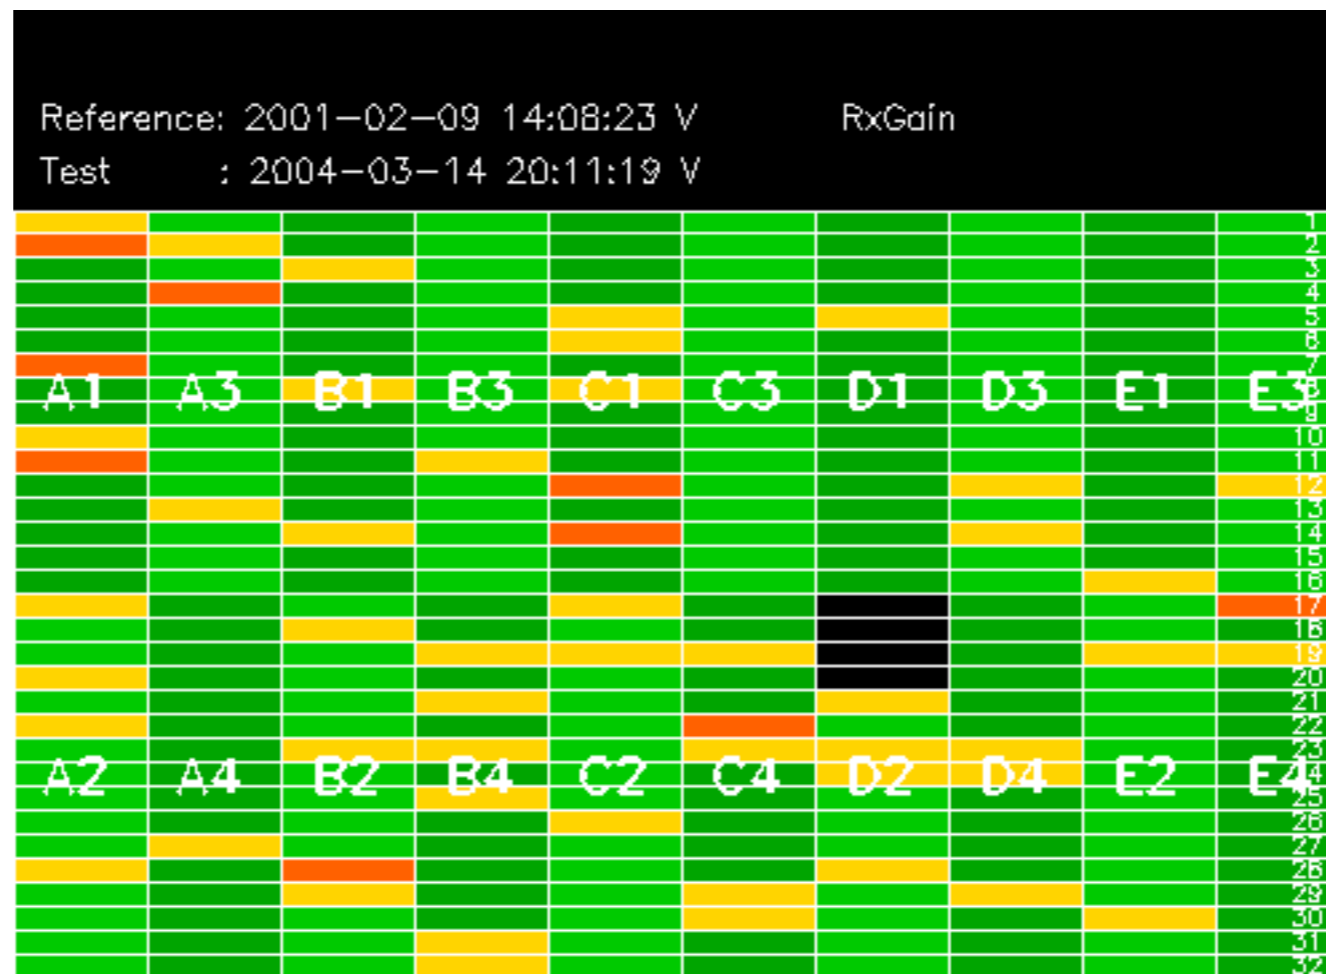




























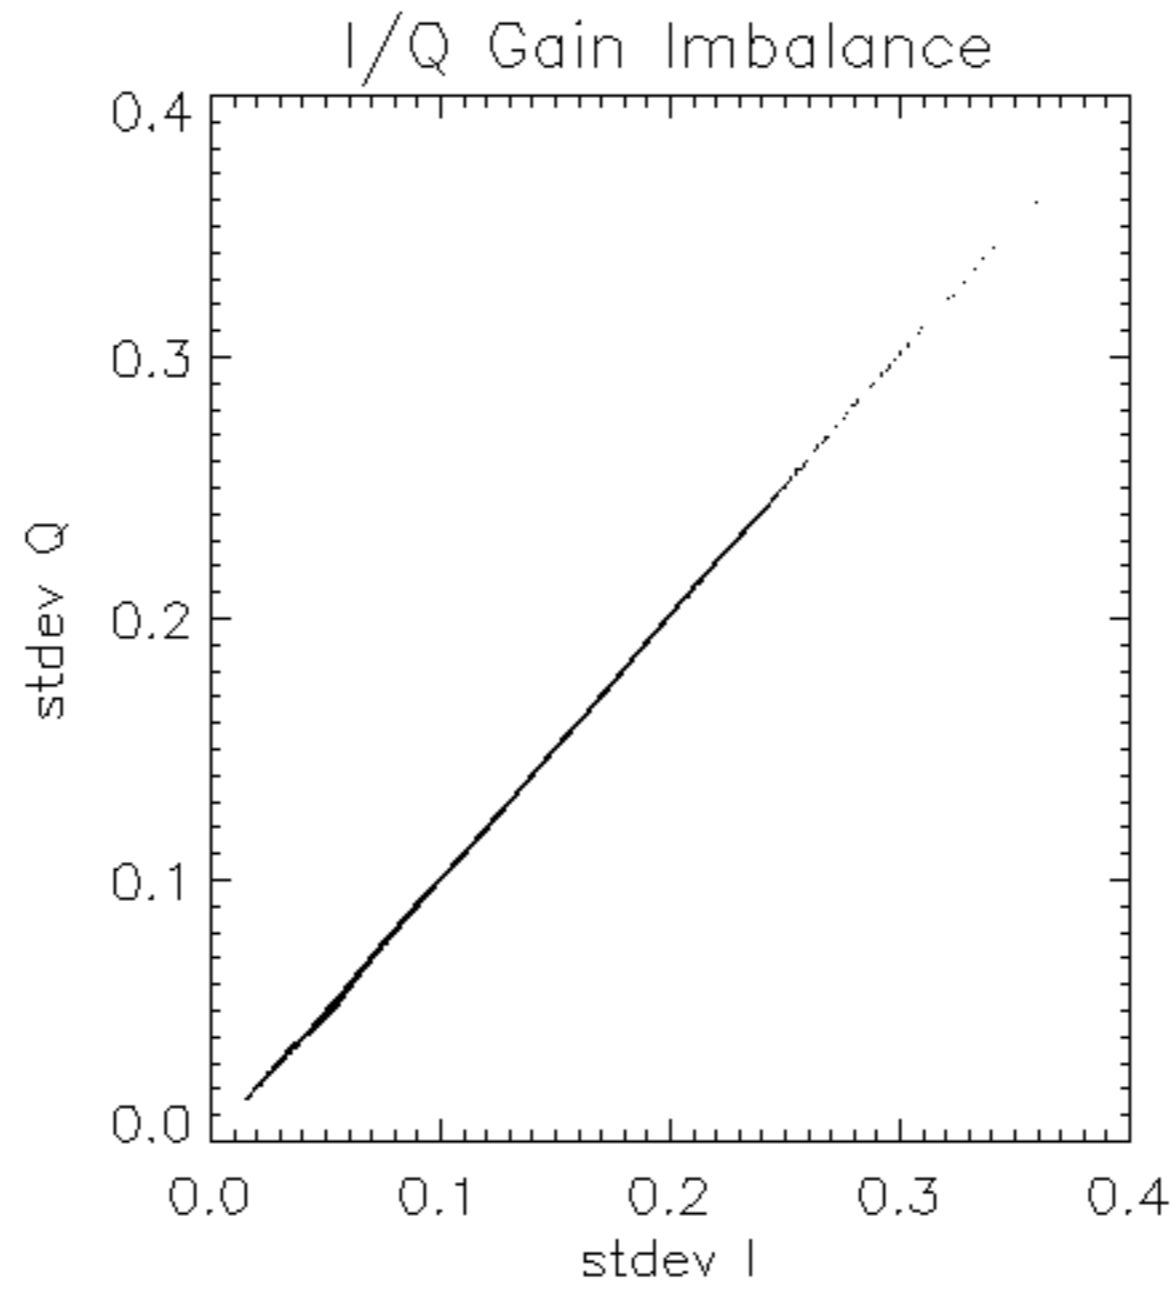

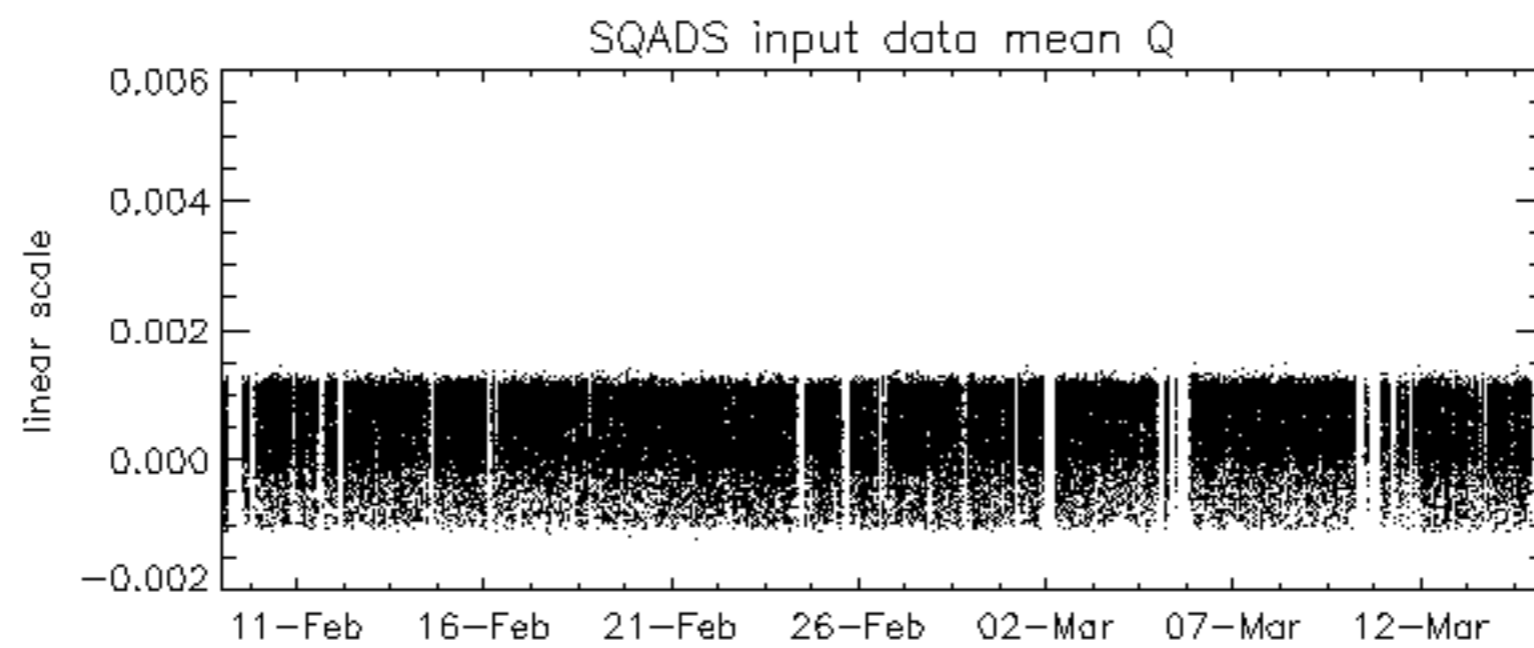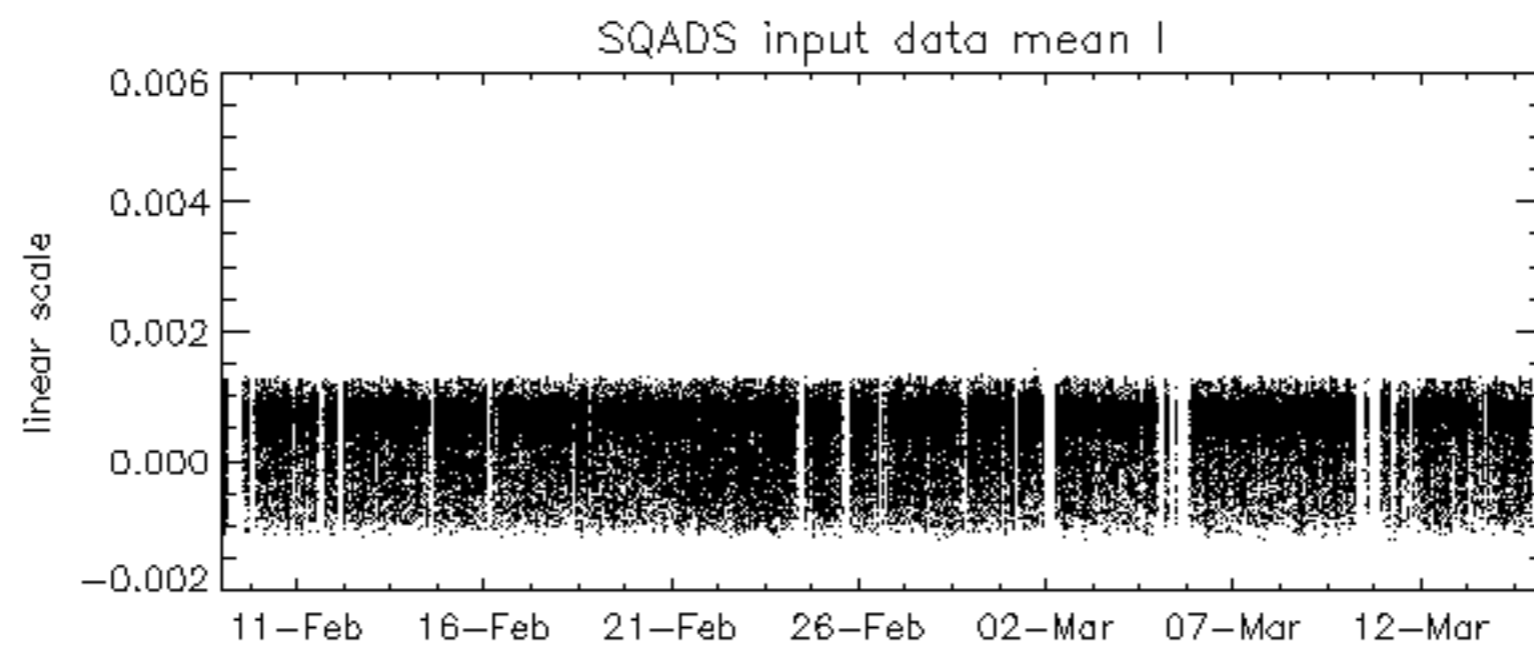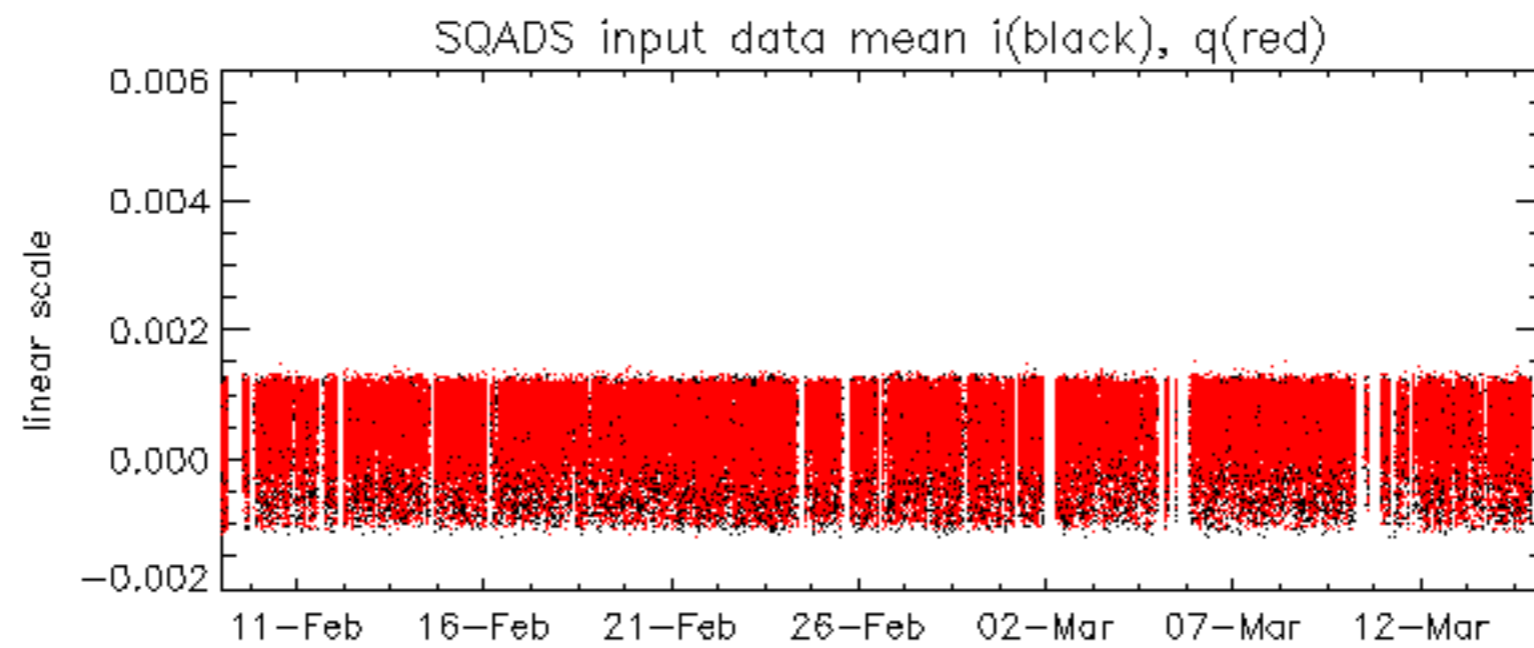

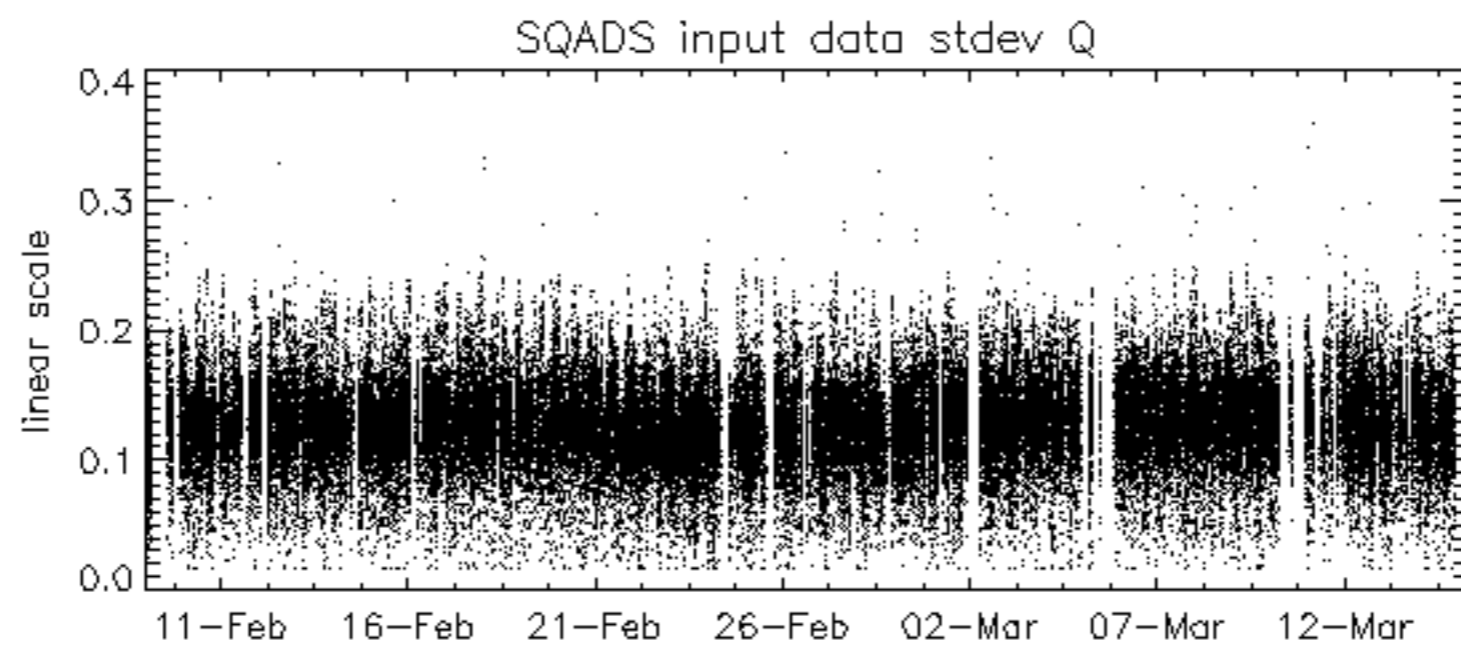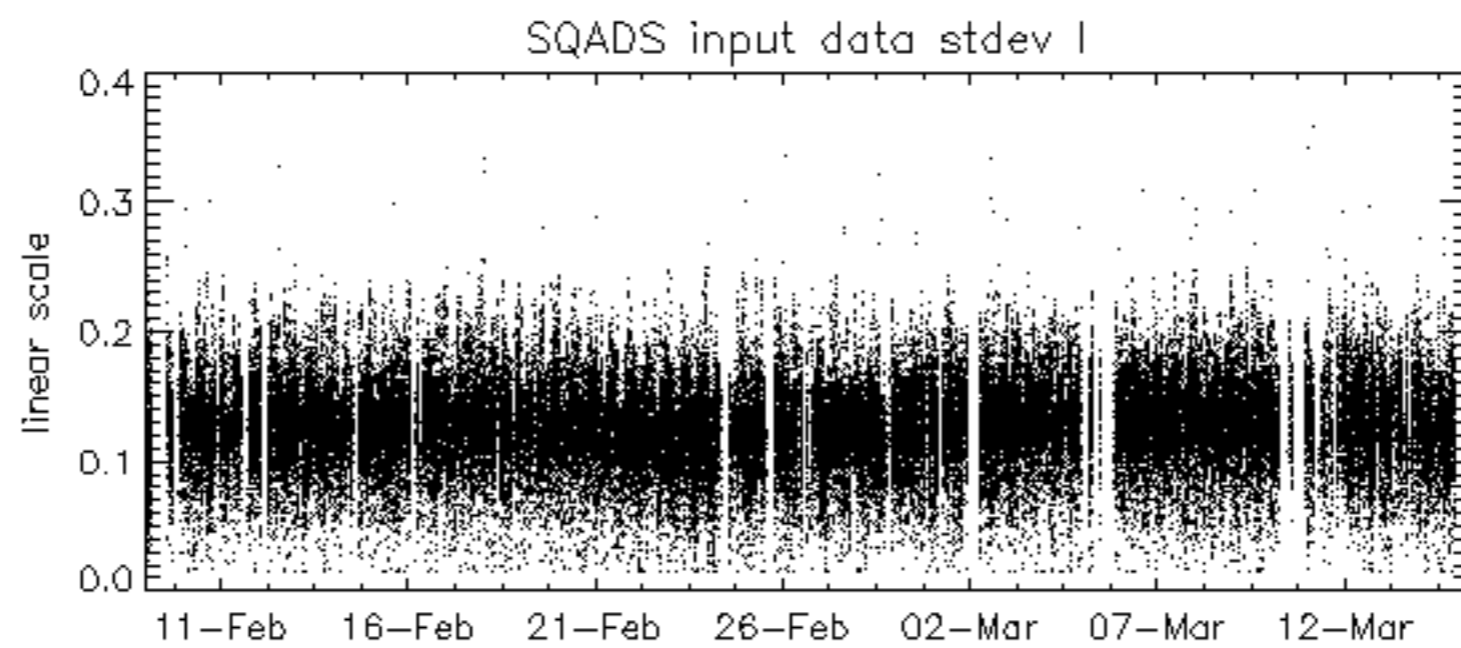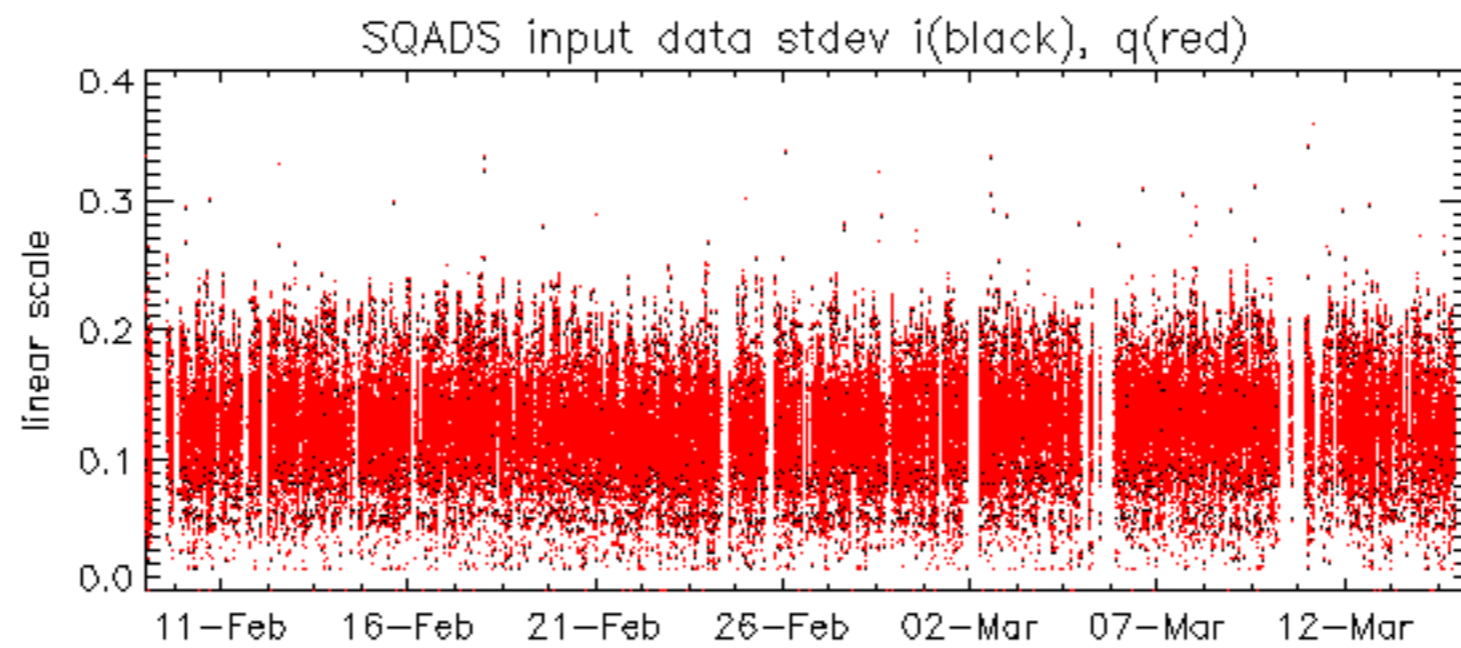


























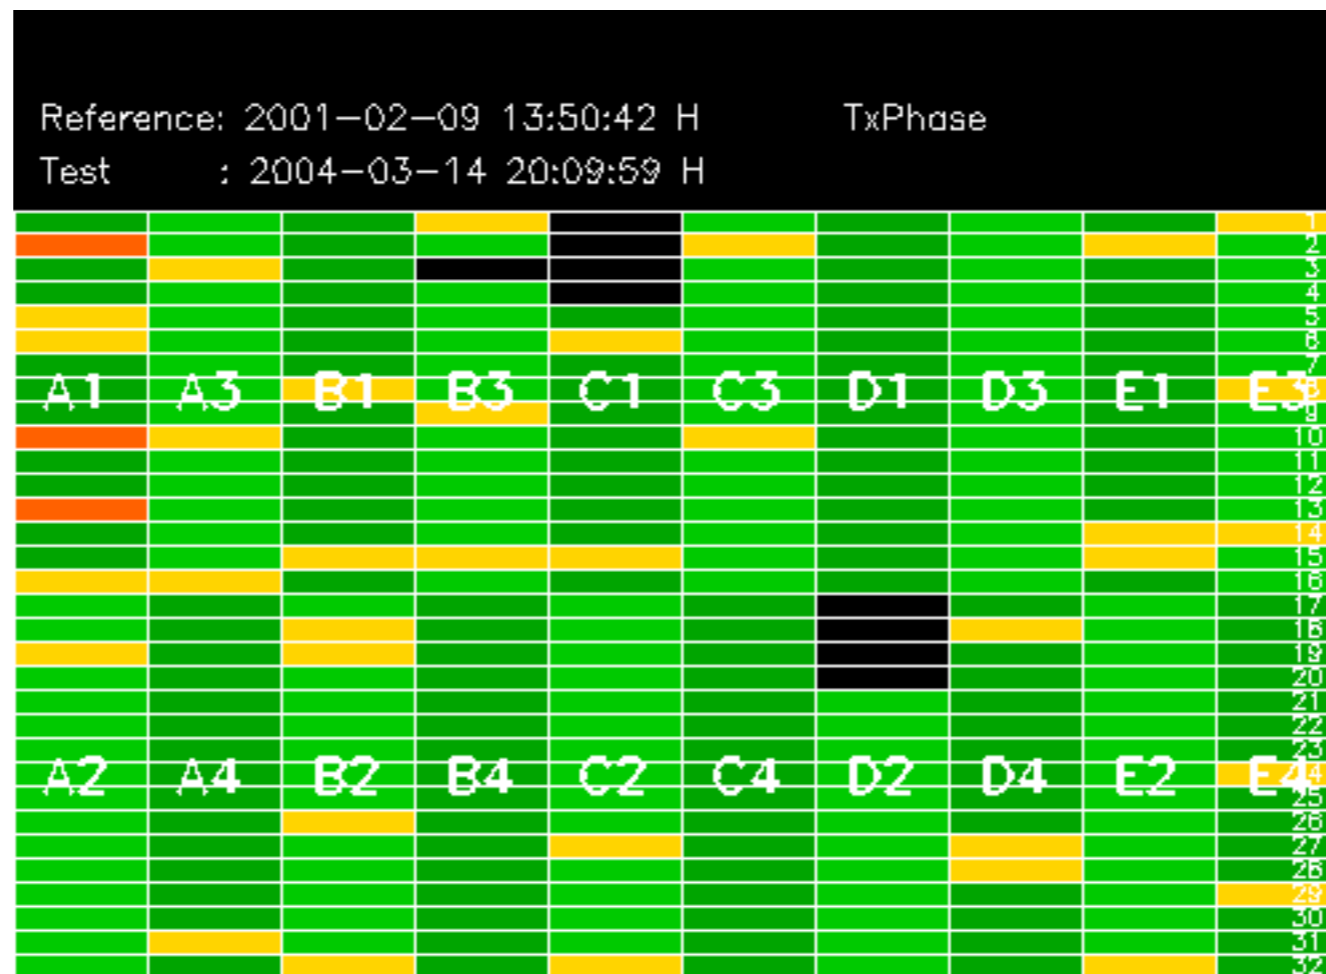













No unavailabilities during the reported period.