

REPORT OF 040318

last update on Thu Mar 18 15:51:15 GMT 2004

1. [Introduction](#)
2. [Summary](#)
 - [Instrument Unavailability](#)
 - [Browse Visual Inspection](#)
 - [Module Stepping Results](#)
 - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
 - [Daily statistics](#)
 - [Cyclic statistics](#)
 - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
 - [raw data mean I and Q](#)
 - [raw data stdev I and Q](#)
 - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
 - [Unbiased Doppler Error](#)
 - [Absolute Doppler](#)
 - [Doppler evolution versus ANX](#)

1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA_WVS_1P) products, which are the available few hours after the acquisition, on the high rate browse (BP) products and on the Module Stepping (MS) product.

2 - Summary

2.1 - Instrument Unavailability

No unavailabilities during the reported period.

2.2 - Browse Visual Inspection

No anomalies observed on available browse products

2.3 - Data Analysis

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.

3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis. The purpose of this mode is to identify any malfunctioning modules and to identify modules for which calibration offsets are to be applied.

No anomalies observed on available MS products:

Polarisation	Start Time
V	20040317 201704
H	20040317 201544

MSM in V/V polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
⊗	⊗
⊗	⊗
⊗	⊗
⊗	⊗

MSM in H/H polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
⊗	⊗
⊗	⊗
⊗	⊗
⊗	⊗

4 - Internal calibration Results

No anomalies observed.

4.1 - Daily statistics

⊗

4.2 - Cyclic statistics



P1 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P1	-3.616630	0.005996	0.043700
7	P1	-3.330421	0.012606	0.080266
11	P1	-4.794765	0.262143	0.383149
15	P1	-4.994797	0.047954	-0.080059
19	P1	-3.346526	0.072383	-0.081391
22	P1	-4.543663	0.070359	-0.074369
24	P1	-5.106616	0.090165	-0.035008
28	P1	-4.574454	0.076134	-0.104976

P2 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P2	-22.382797	0.081950	-0.026498
7	P2	-22.905022	0.127755	-0.015124
11	P2	-16.037039	0.151169	0.045542
15	P2	-7.179990	0.090178	0.020190
19	P2	-9.476816	0.161500	-0.000252
22	P2	-17.682783	0.101823	0.048267
24	P2	-21.039515	0.109385	-0.030049
28	P2	-16.596815	0.087380	0.004990

P3 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P3	-8.128822	0.002994	0.005643
7	P3	-8.128812	0.002994	0.005610
11	P3	-8.128804	0.002994	0.005584
15	P3	-8.128795	0.002995	0.005521
19	P3	-8.128791	0.002995	0.005515
22	P3	-8.128789	0.002995	0.005508
24	P3	-8.128798	0.002994	0.005555

4.3 - cal pulses monitoring (all rows)



5 - RAW data statistics

No anomalies observed.

5.1 - Input mean I/Q

channel	stat	DSS-B
MEAN I	mean	0.000470909
	stdev	2.34770e-07
MEAN Q	mean	0.000493841
	stdev	2.59932e-07



5.2 - Input stdev I/Q

channel	stat	DSS-B
STDEV I	mean	0.127415
	stdev	0.00111827
STDEV Q	mean	0.127646
	stdev	0.00113112



5.3 - Gain imbalance I/Q



6 - Wave Doppler Analysis

6.1 - Unbiased Doppler Error

Evolution of unbiased Doppler error (Real - Expected)

Ascending

Descending

6.2 - Absolute Doppler

Evolution of Absolute Doppler




Ascending

Descending

6.3 - Doppler evolution versus ANX


Evolution Doppler error versus ANX



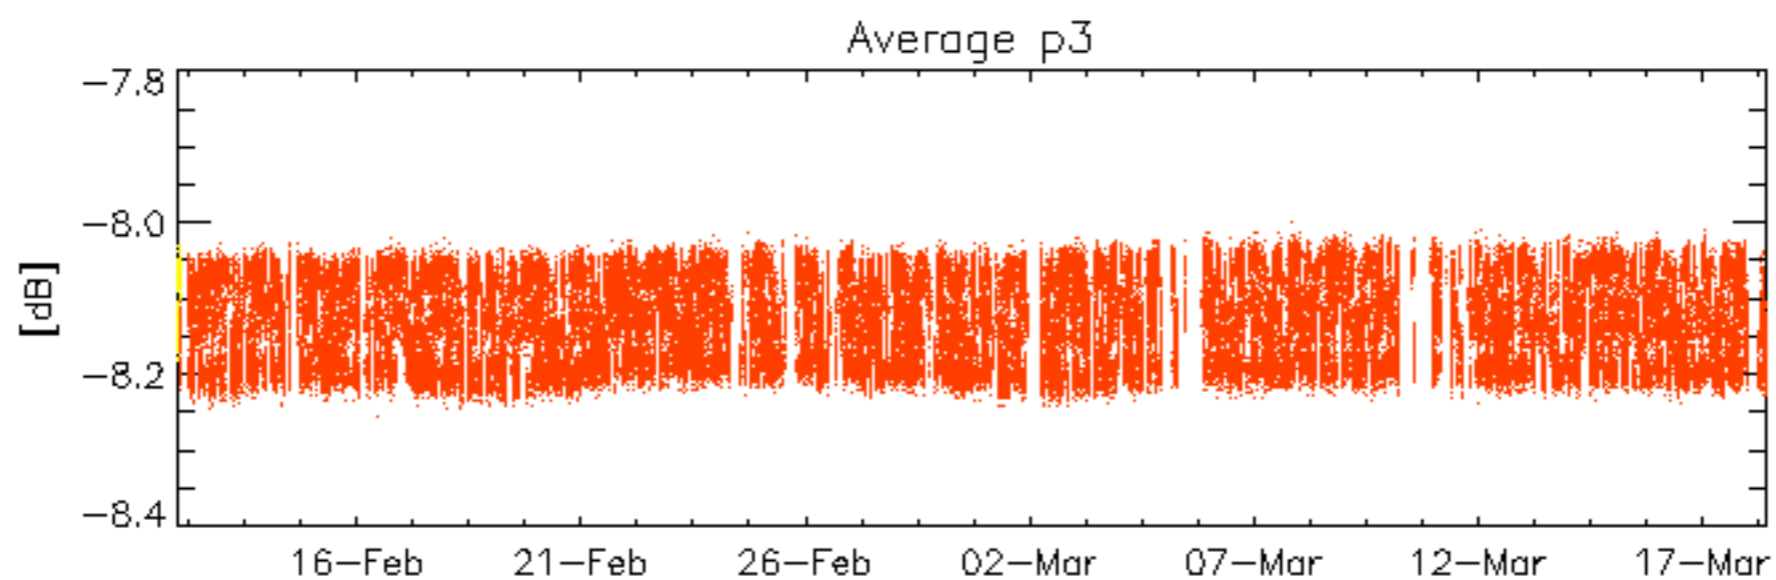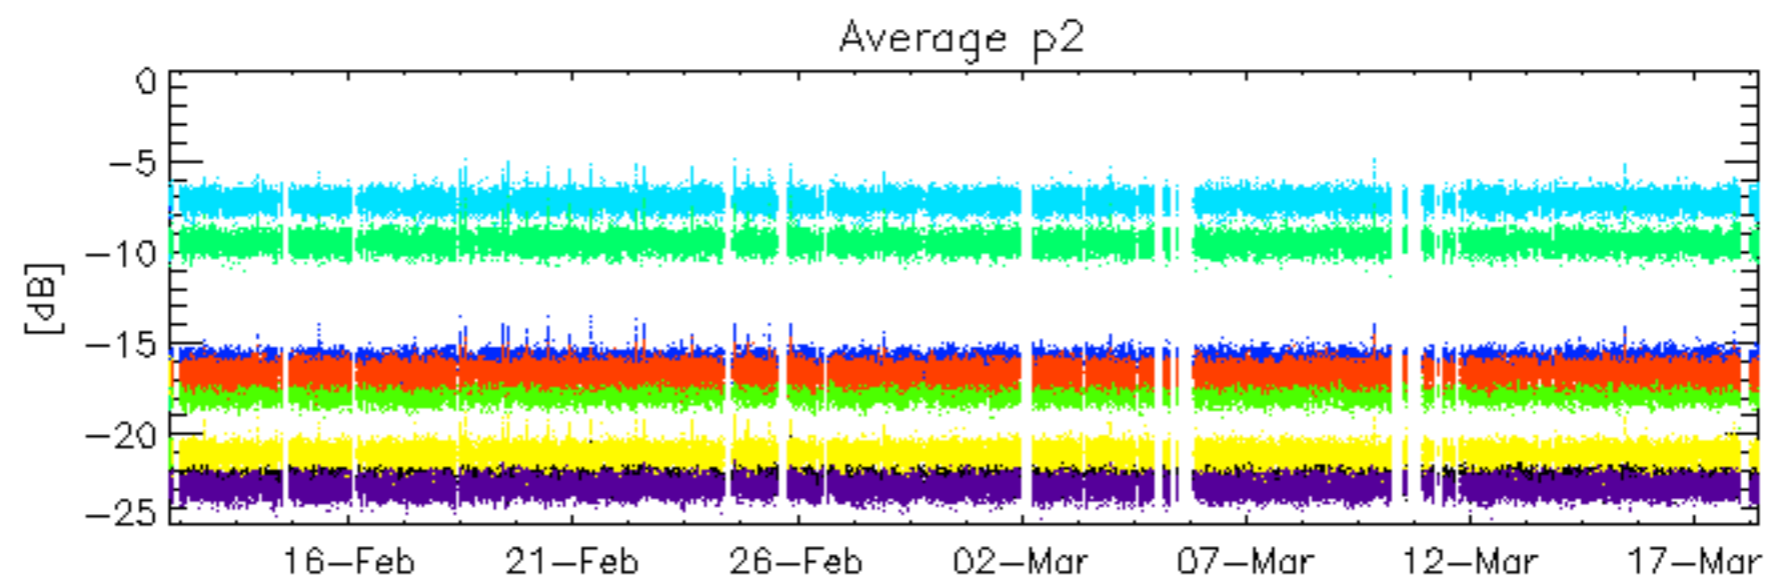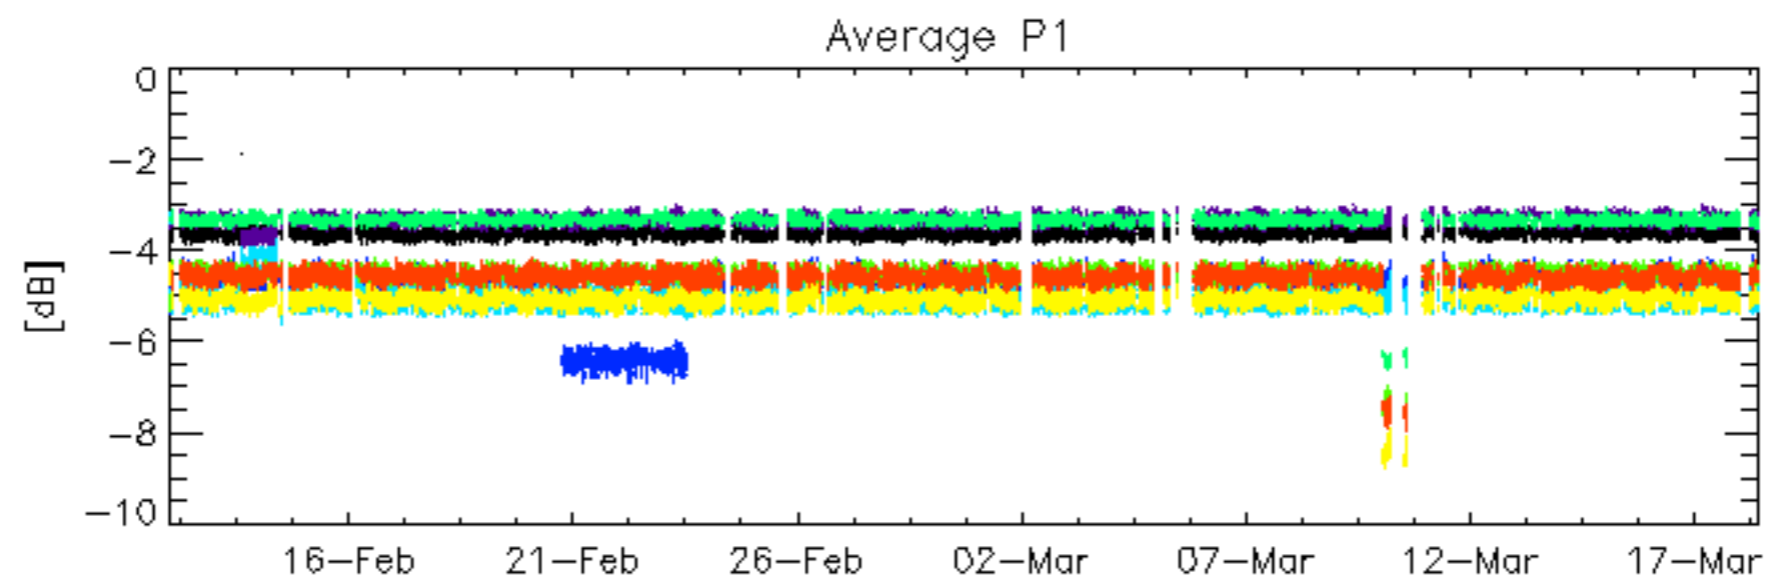


rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 28


Average P1

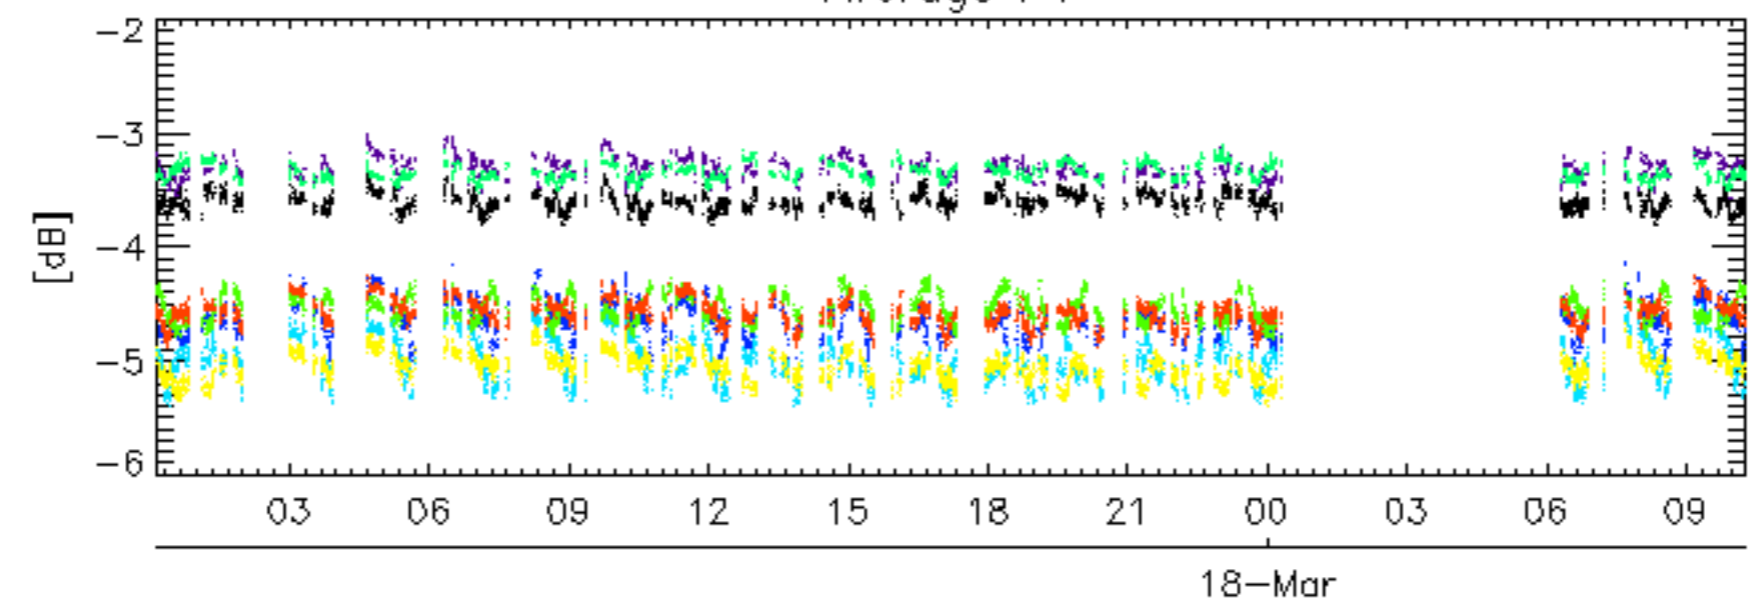

Average p2

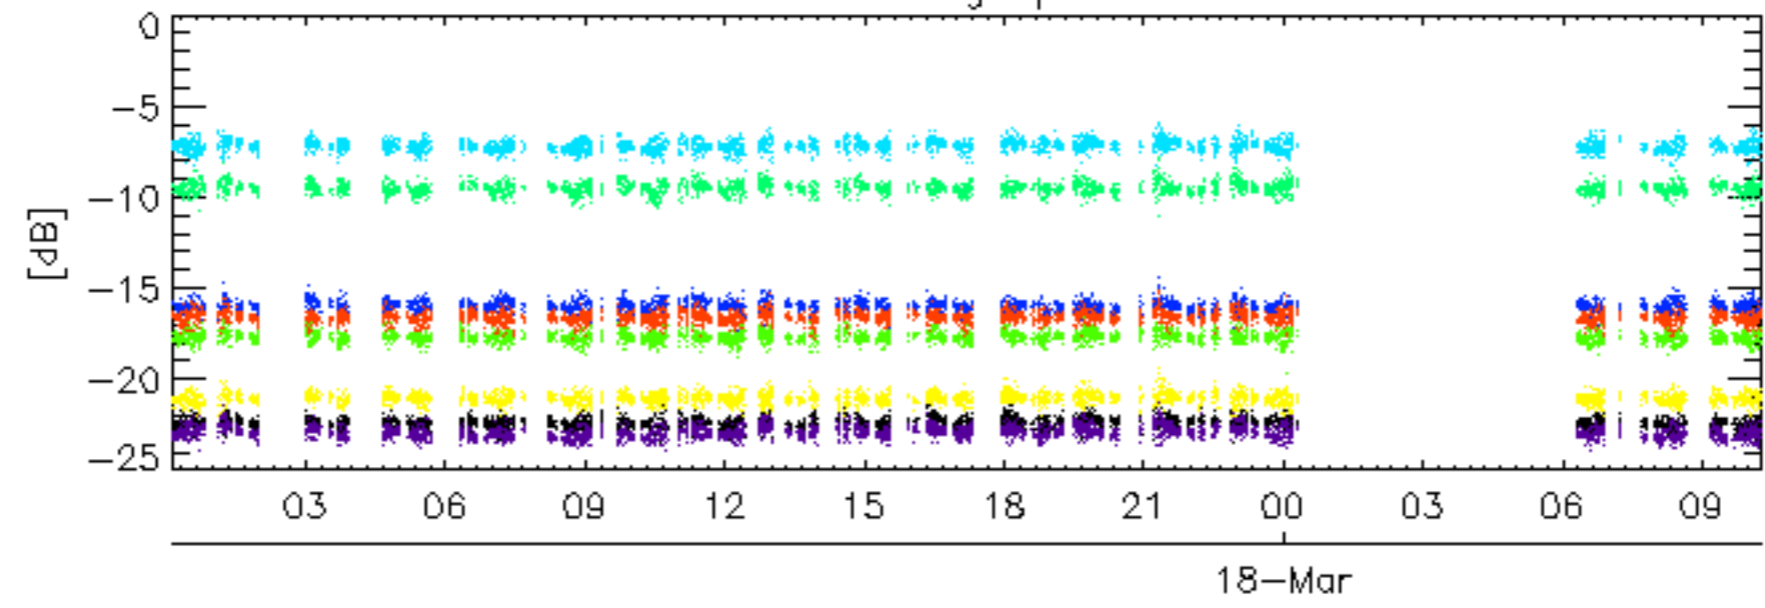


Average p3

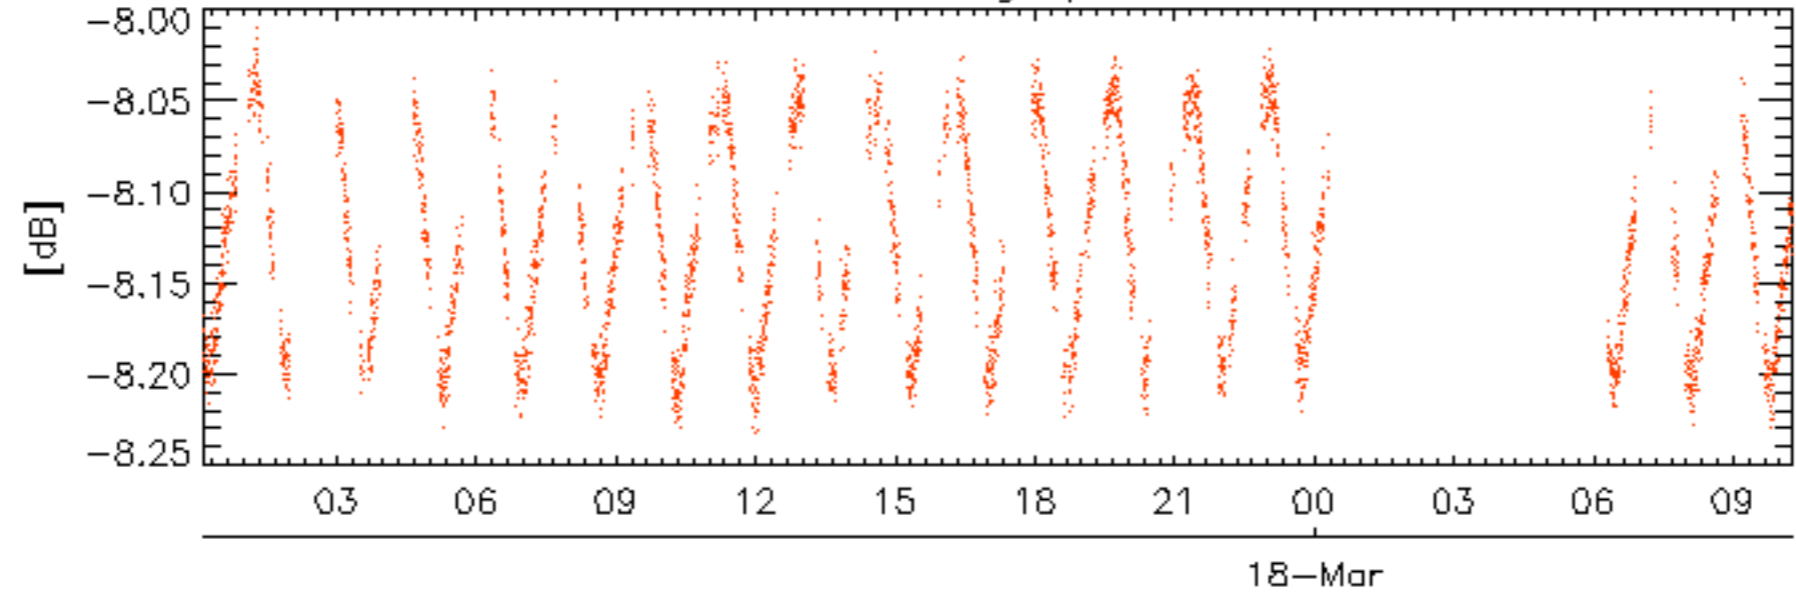

rows: **3** **7** **11** **15** **19** **22** **24** **28**


No anomalies observed on available browse products

No anomalies observed.

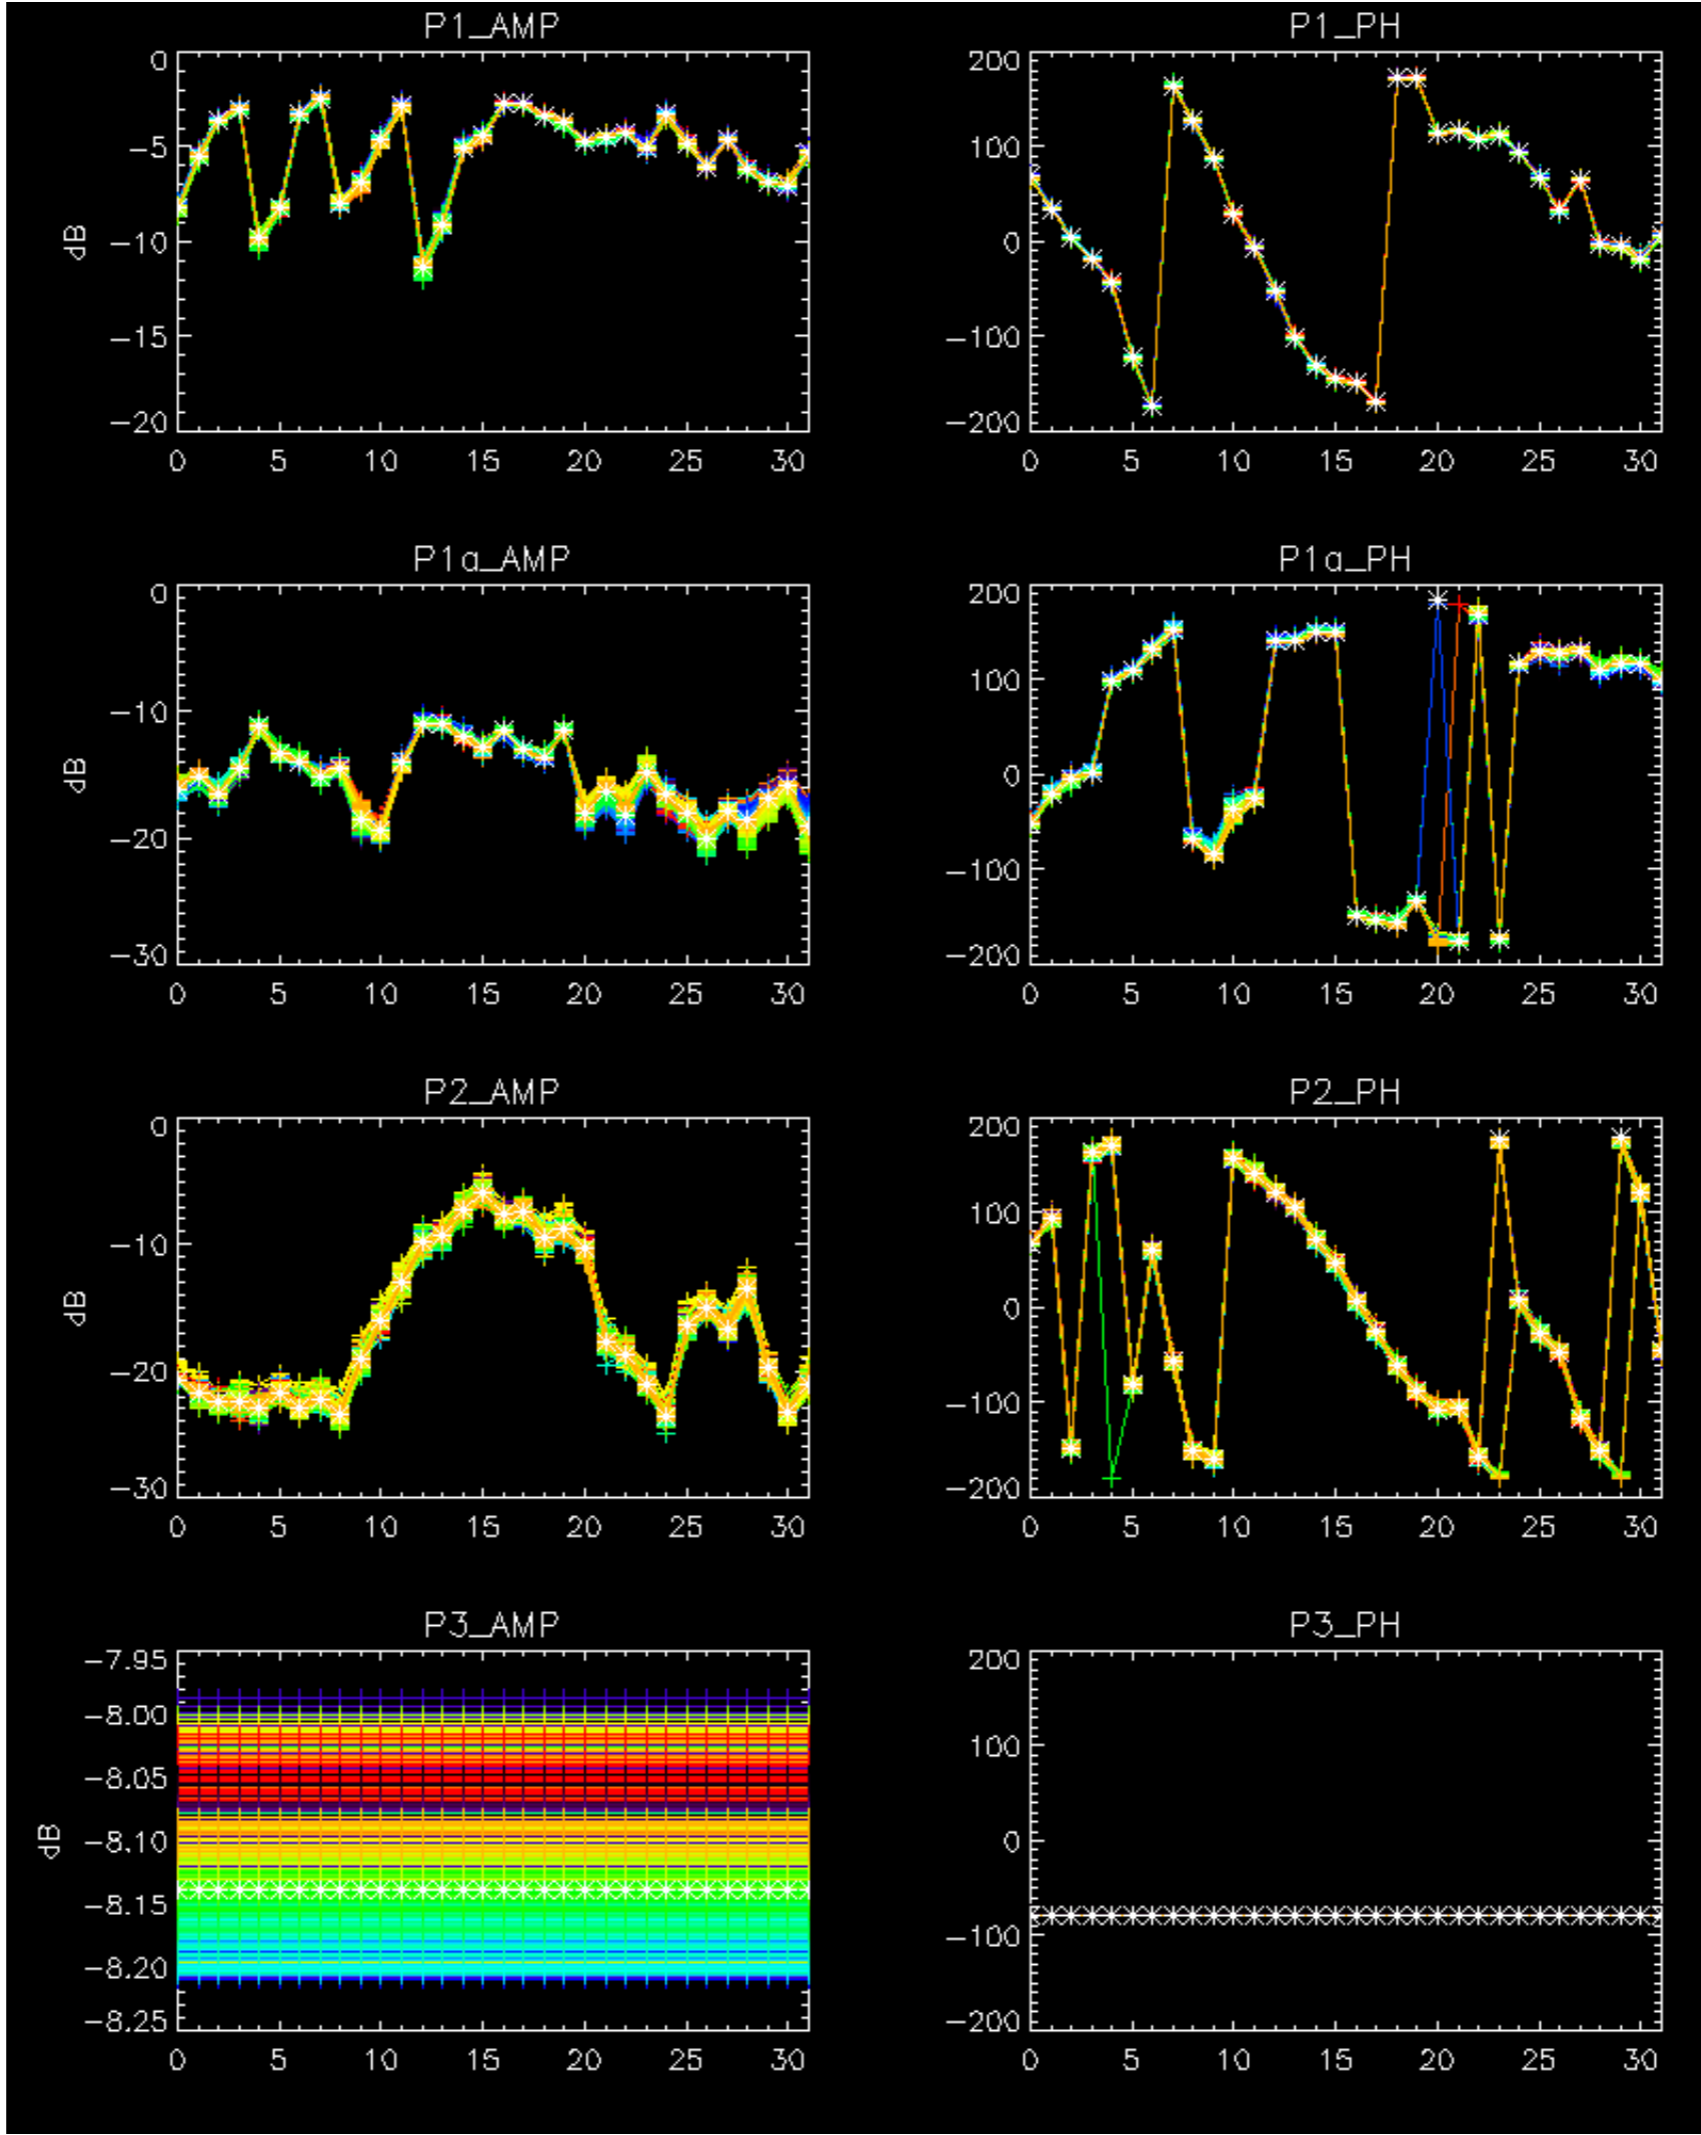




- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.

Doppler 'WVS' 'IS2' 'H/H'

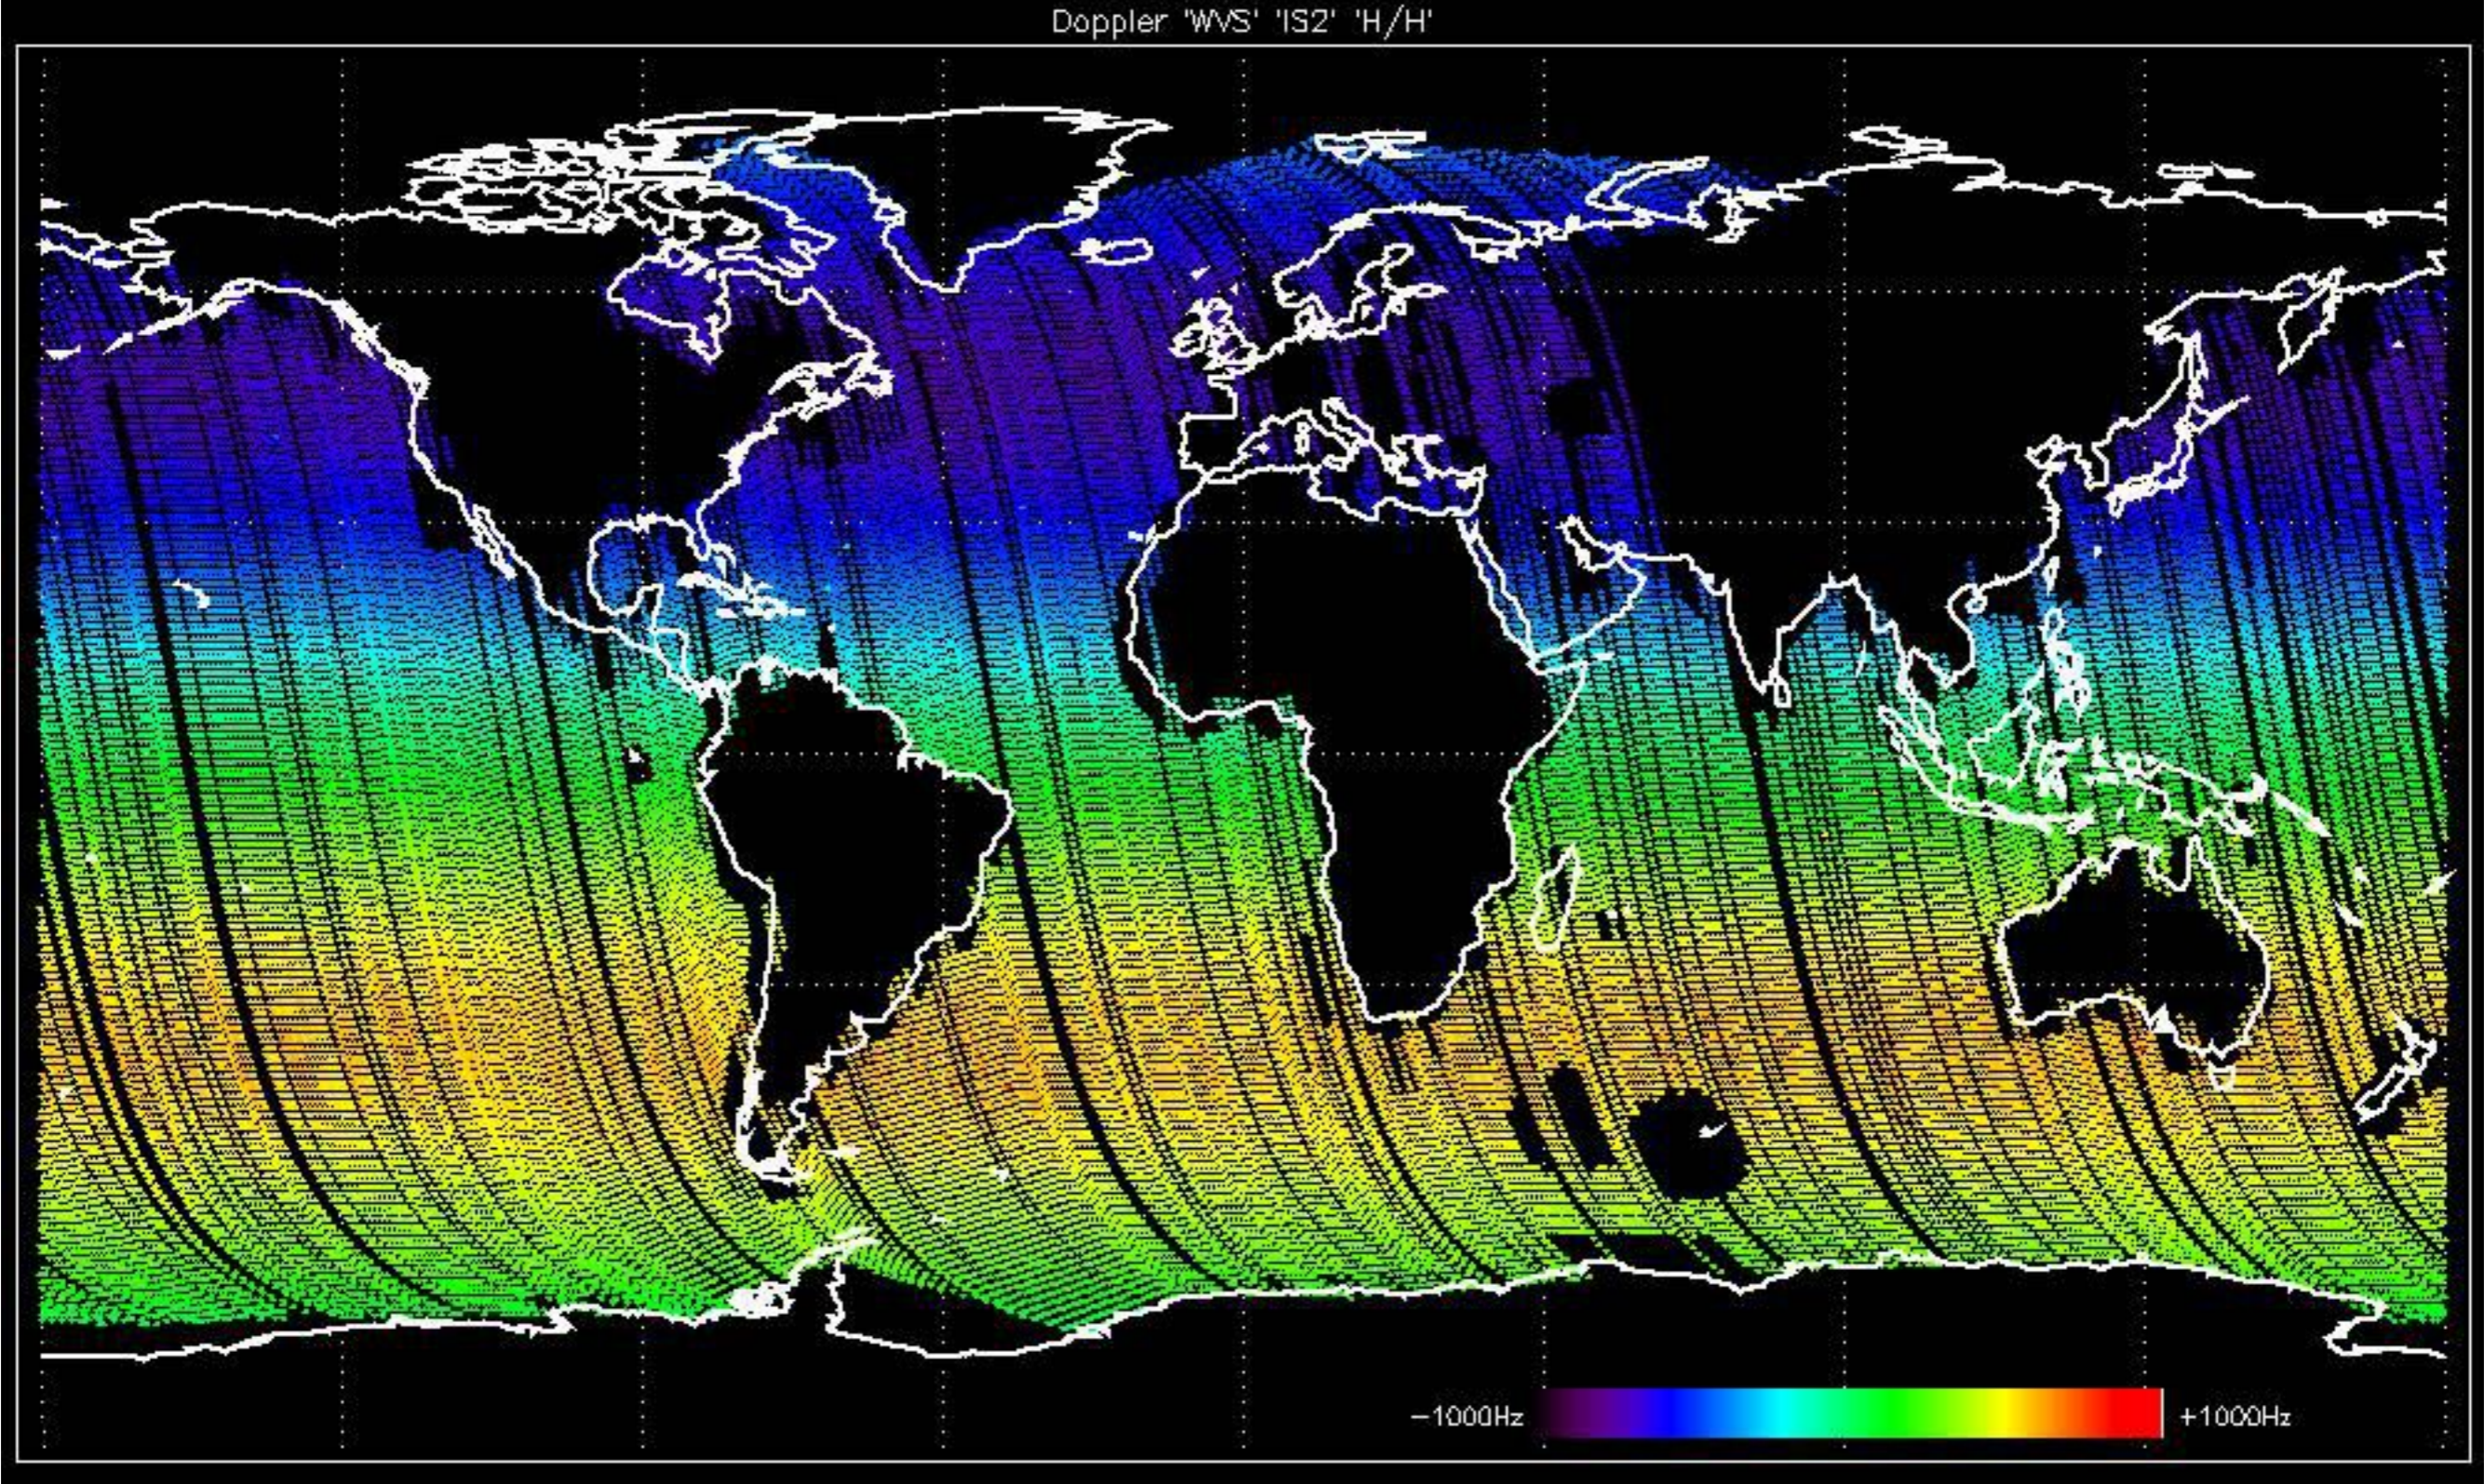


Doppler 'WVS' 'IS2' 'V/V'

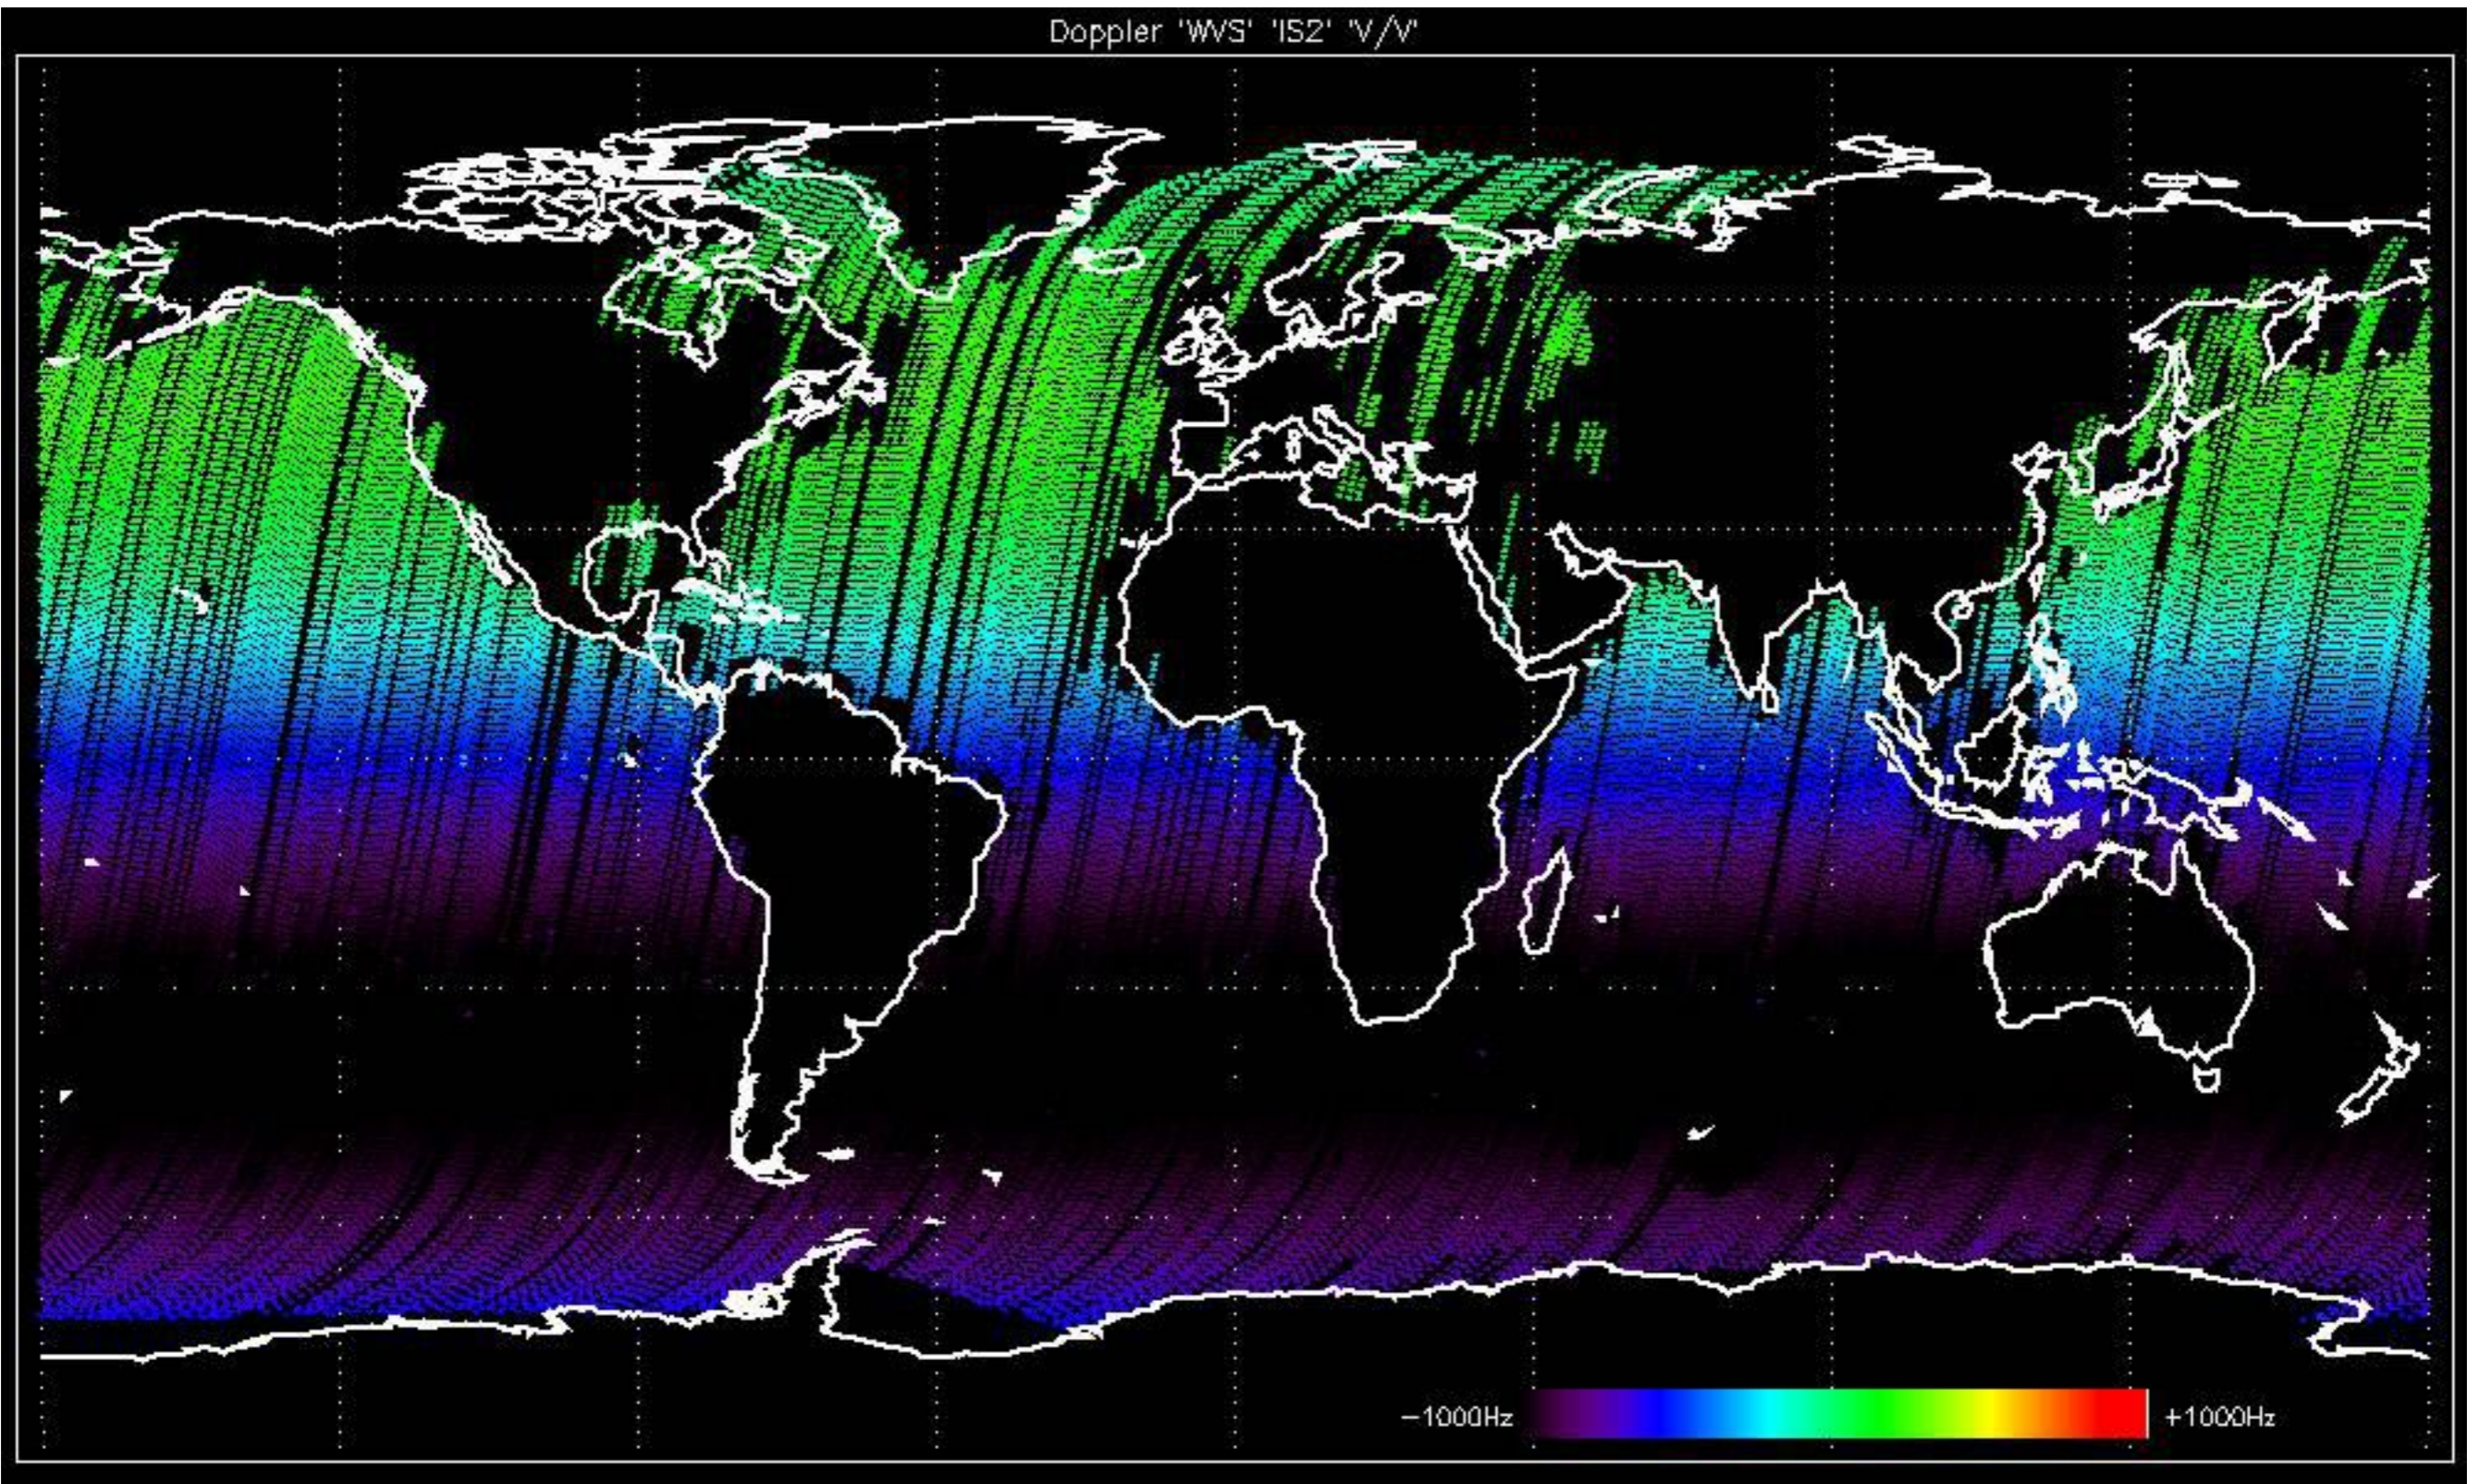


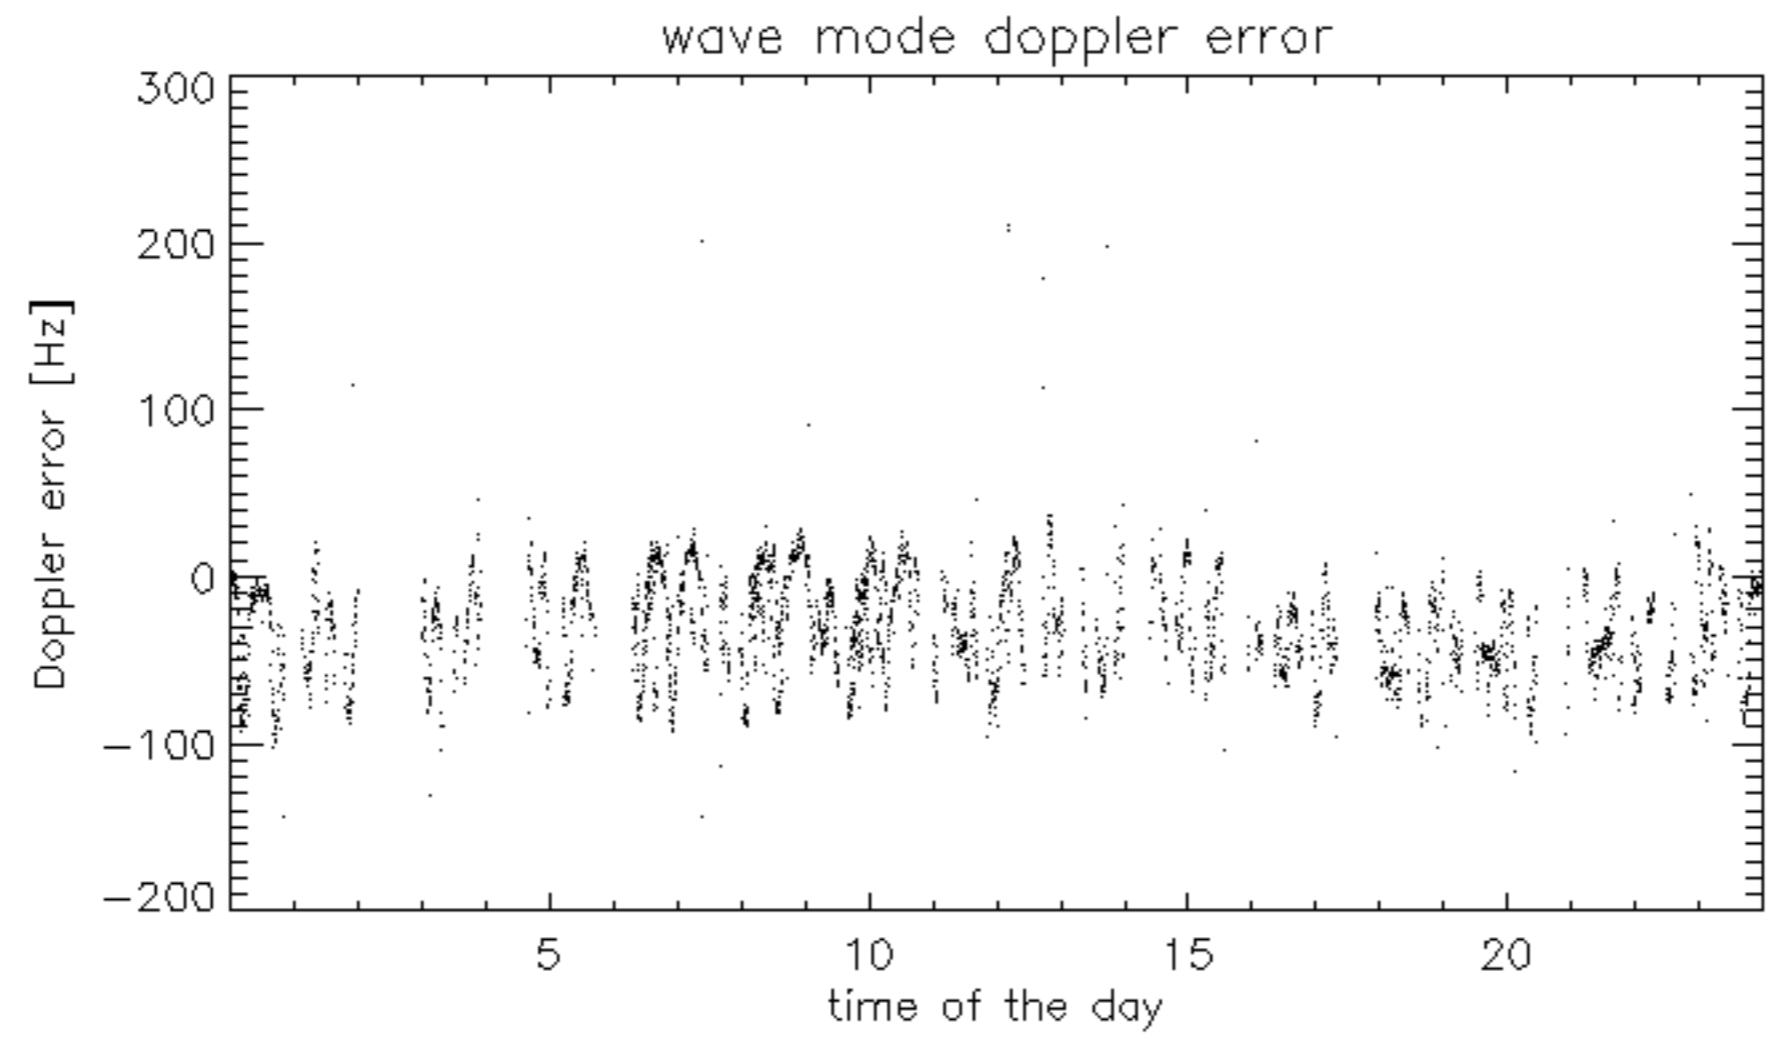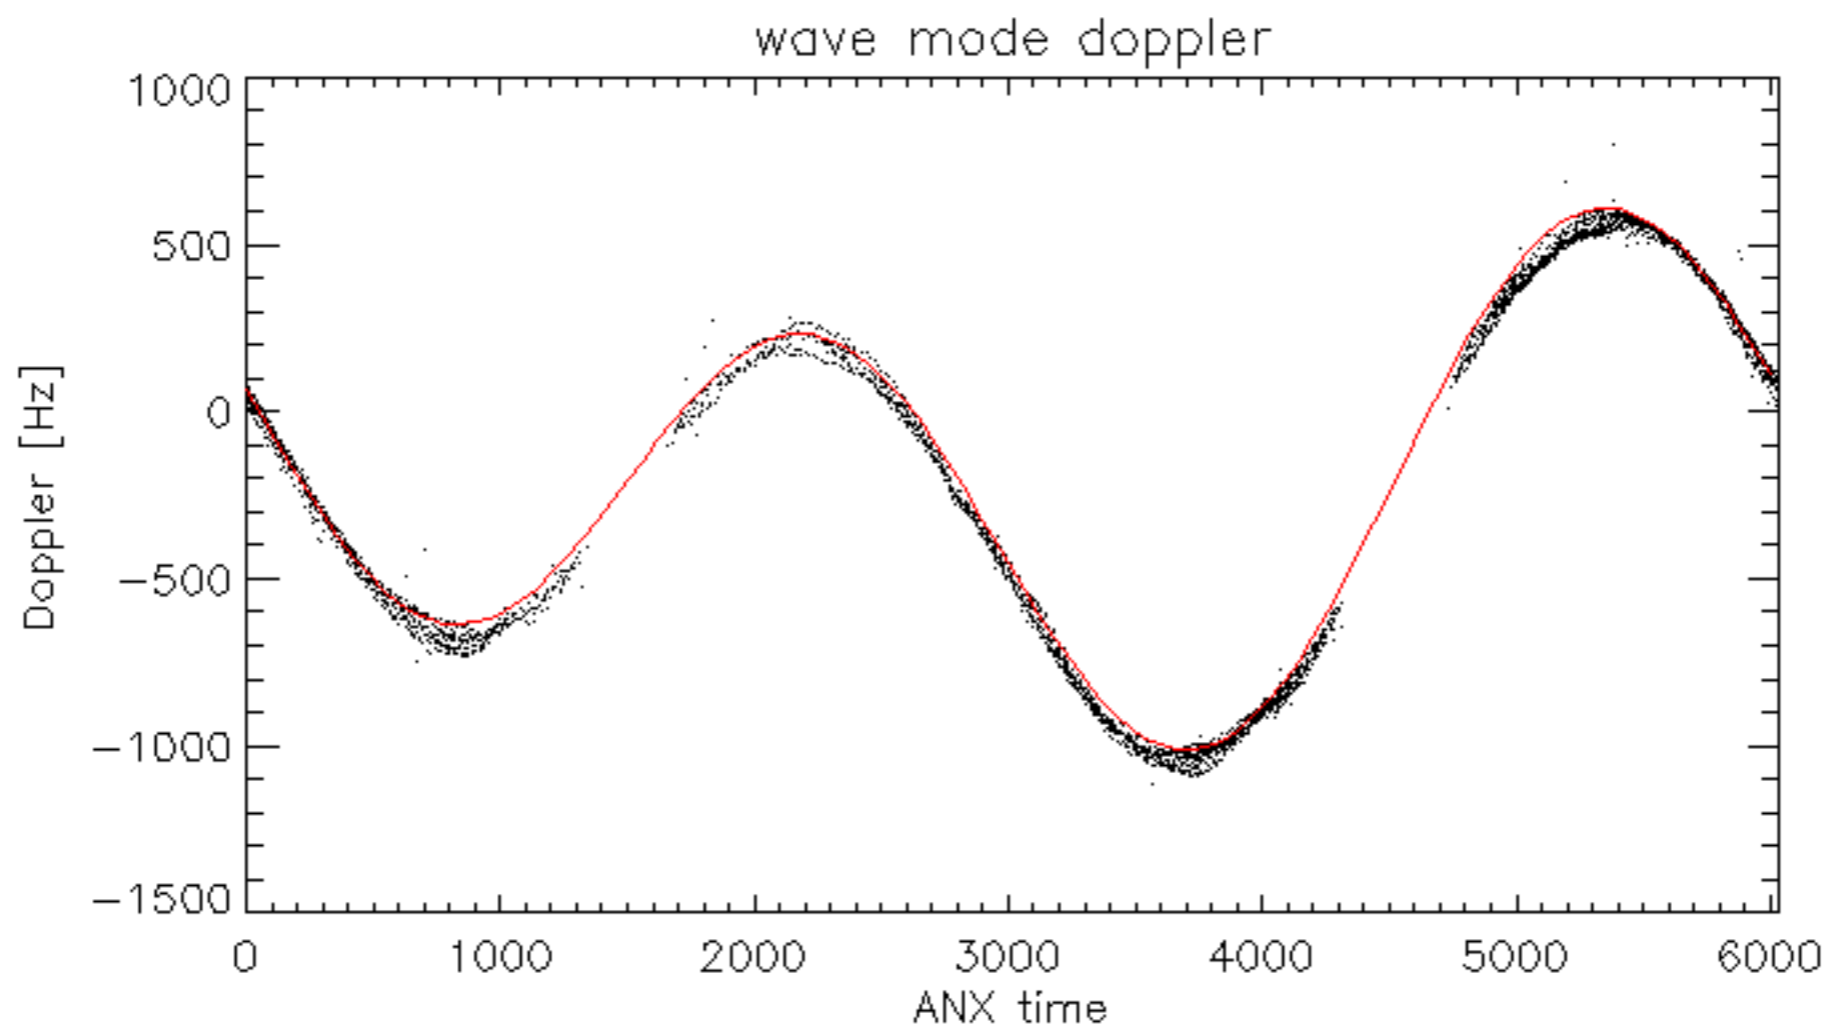

Doppler difference, estimated-predicted 'WVS' 'IS2' 'H/H' -error mean of -30.480942 Hz

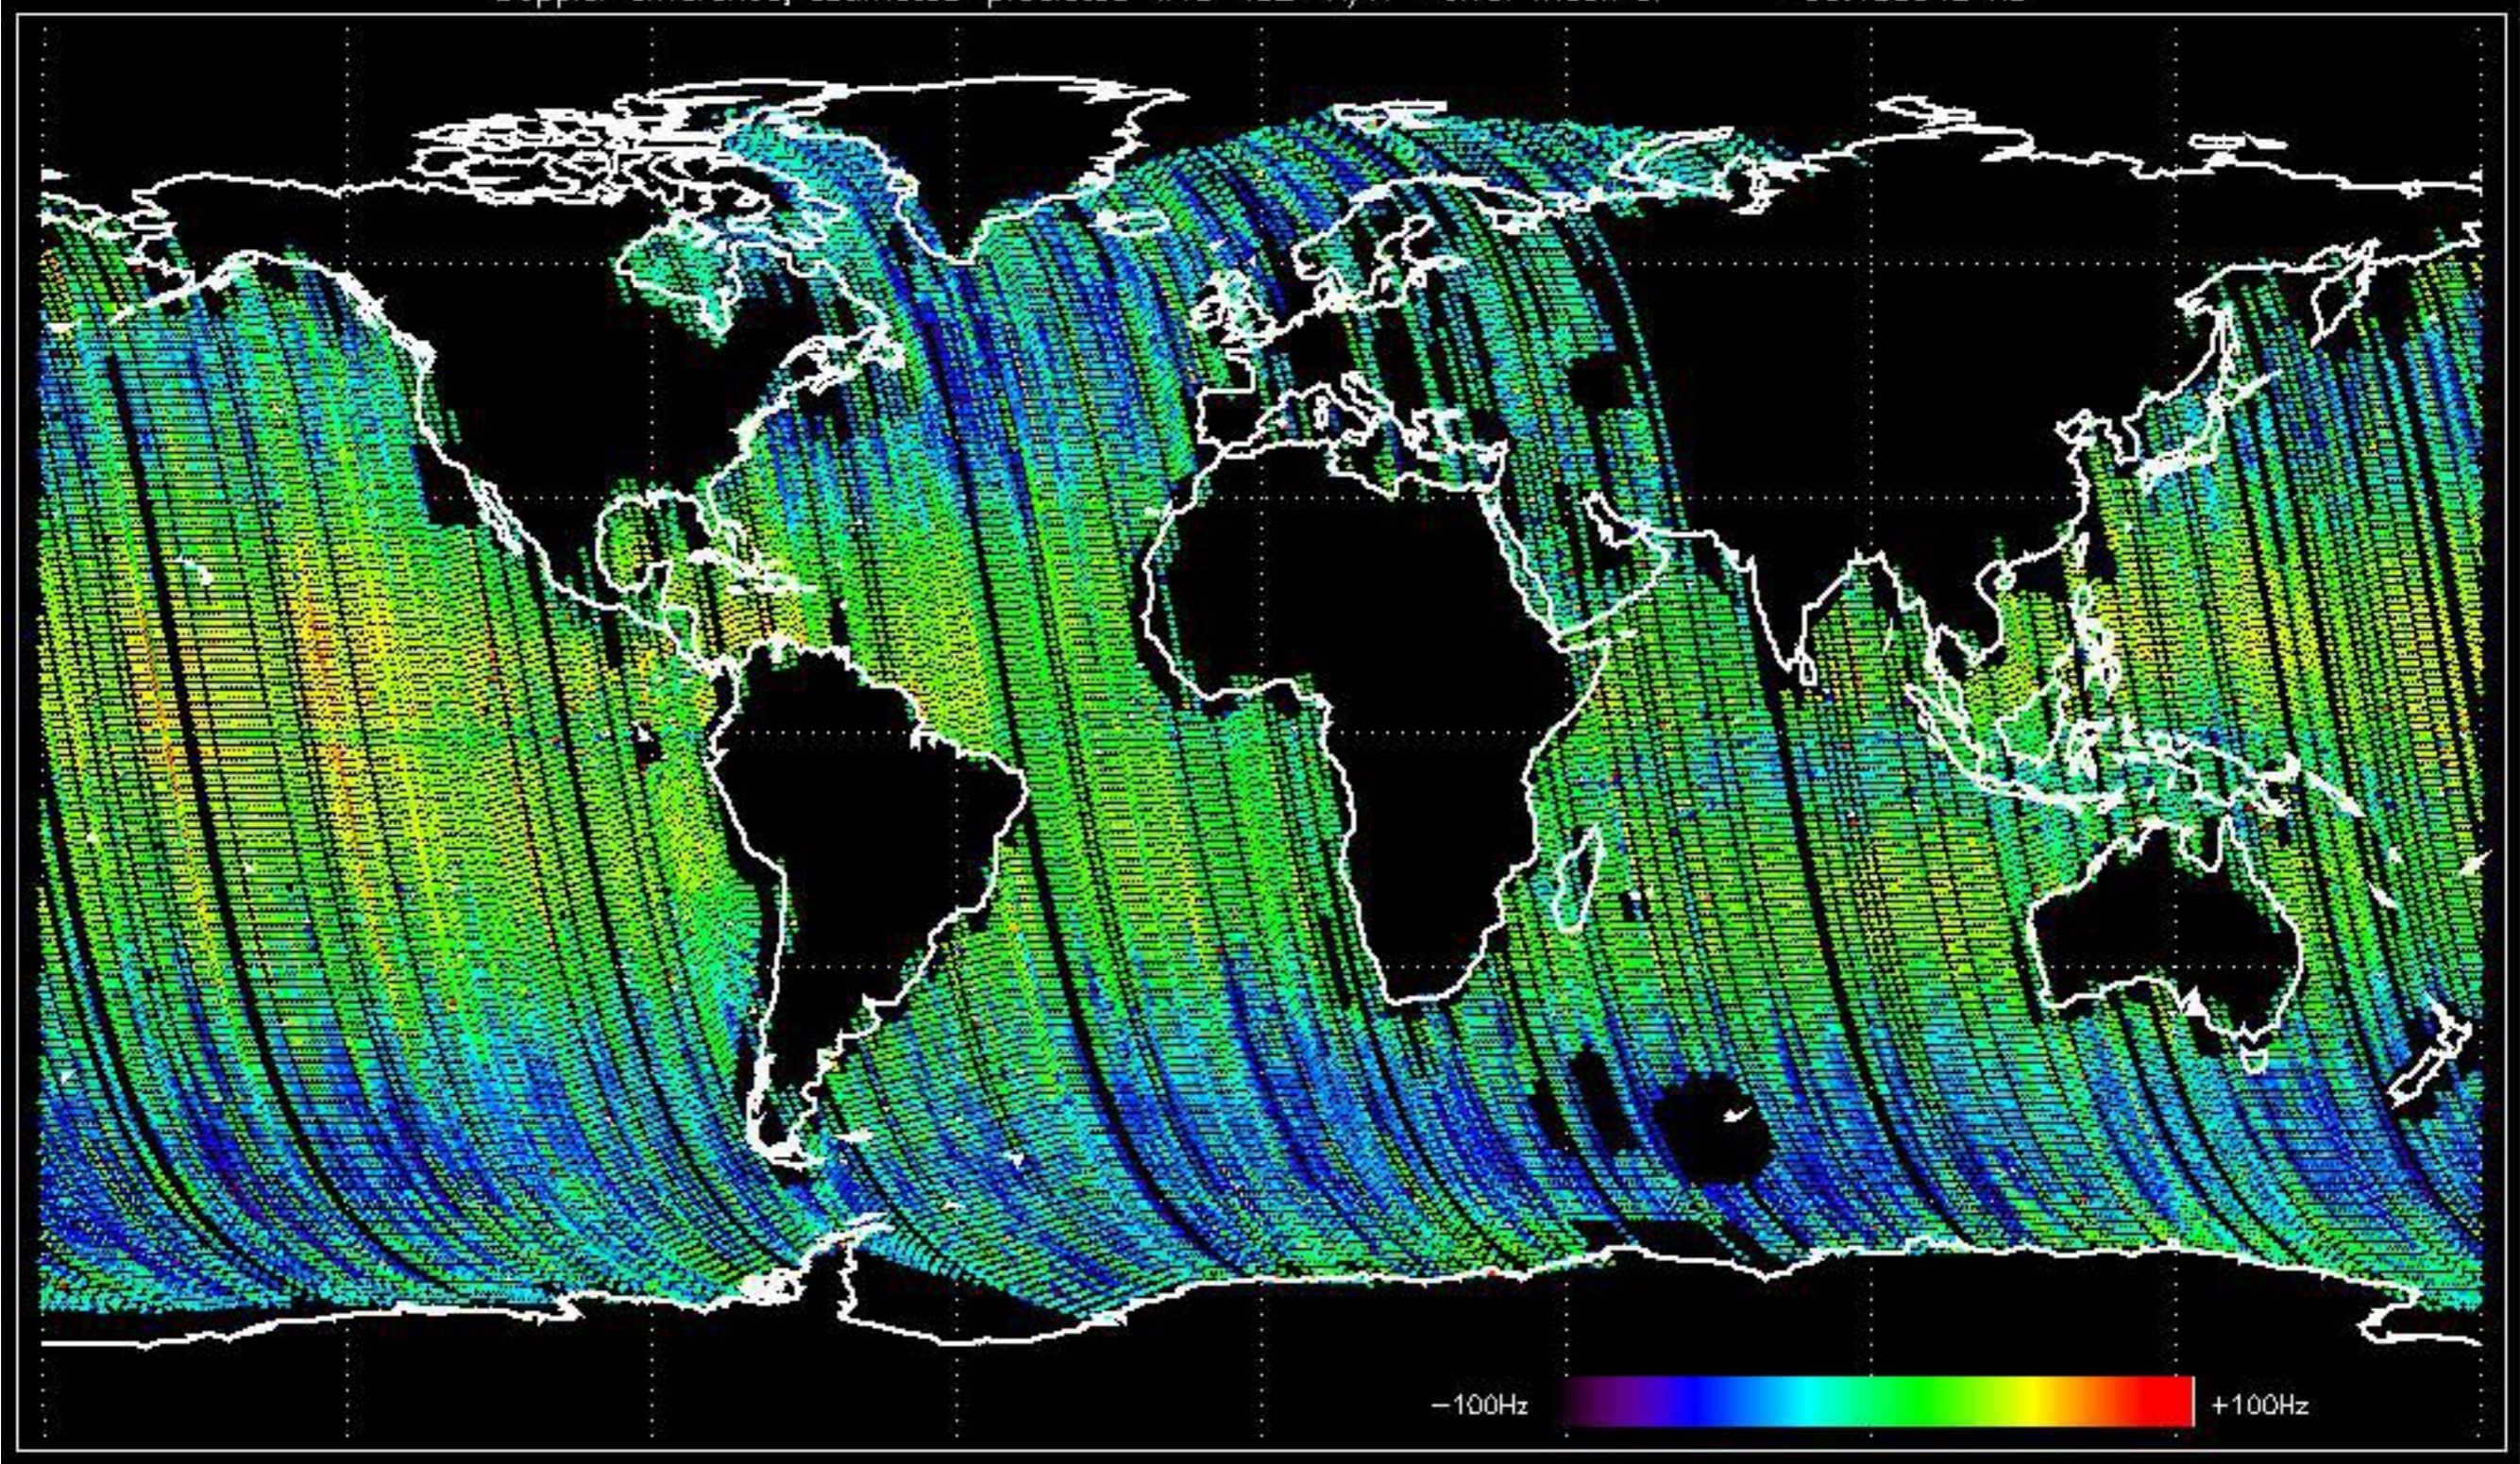





Doppler difference, estimated-predicted 'WVS' 'IS2' 'V/V' -error mean of -27.941904 Hz



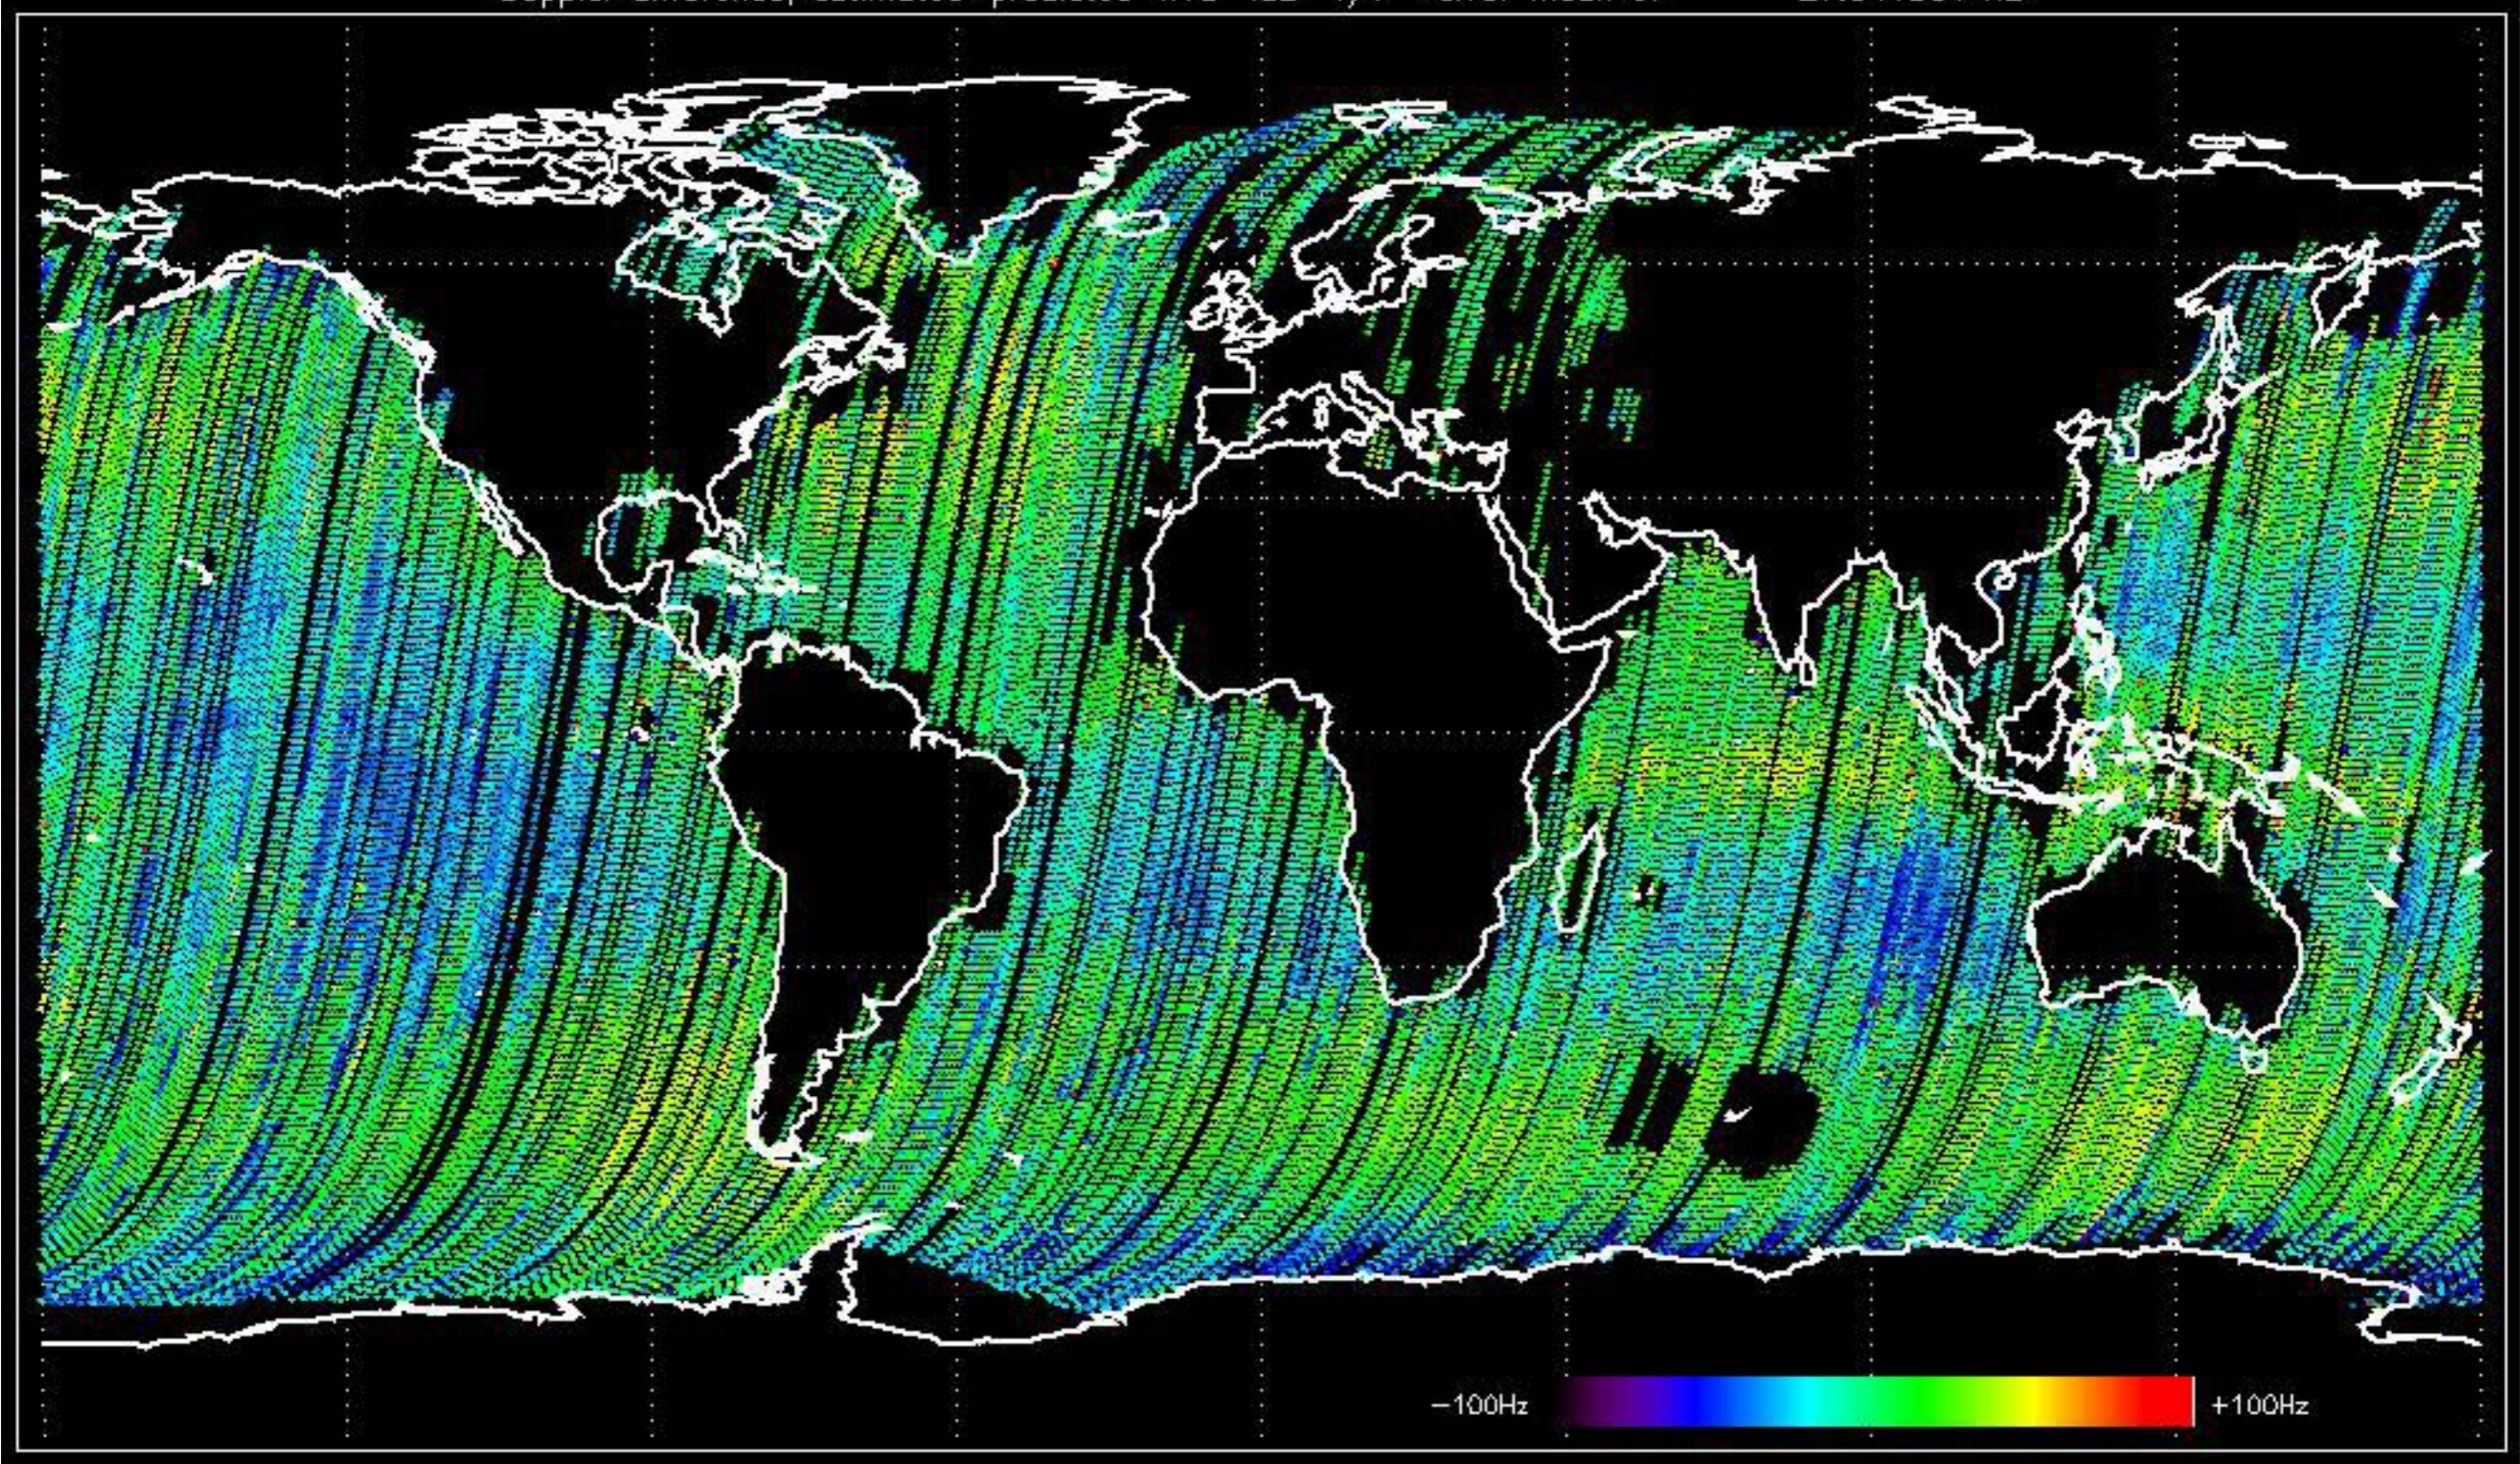


The MS mode provides an internal health check on an individual module basis.
The purpose of this mode is to identify to identify any malfunctioning modules and
to identify modules for which calibration offsets are to be applied.
No anomalies observed on available MS products:

No anomalies observed.

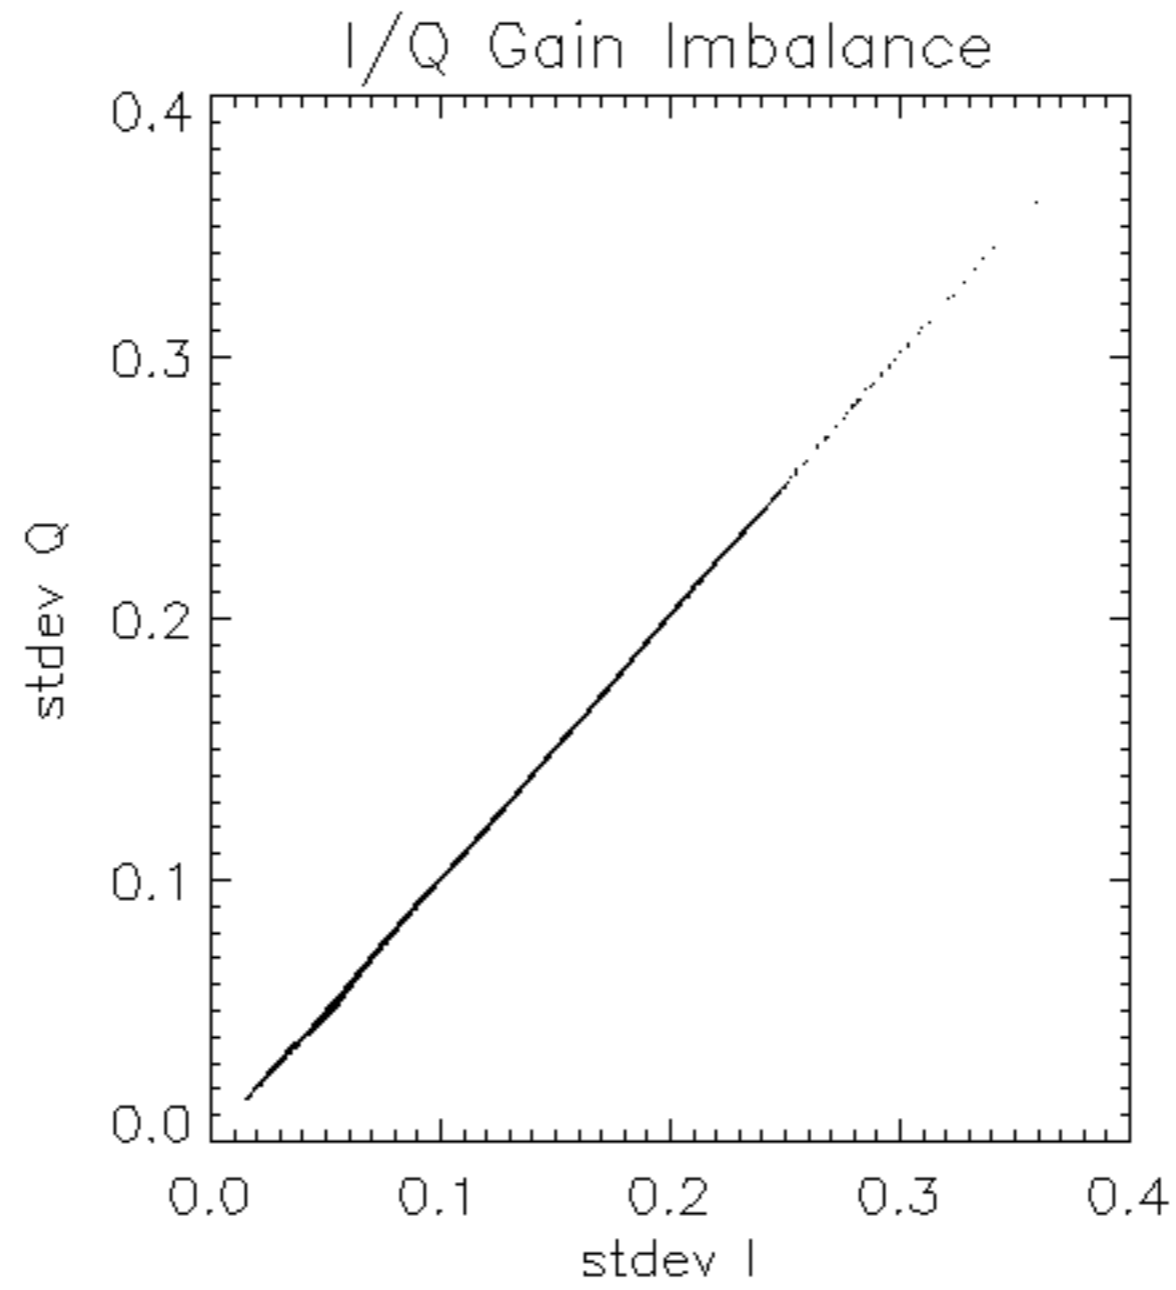

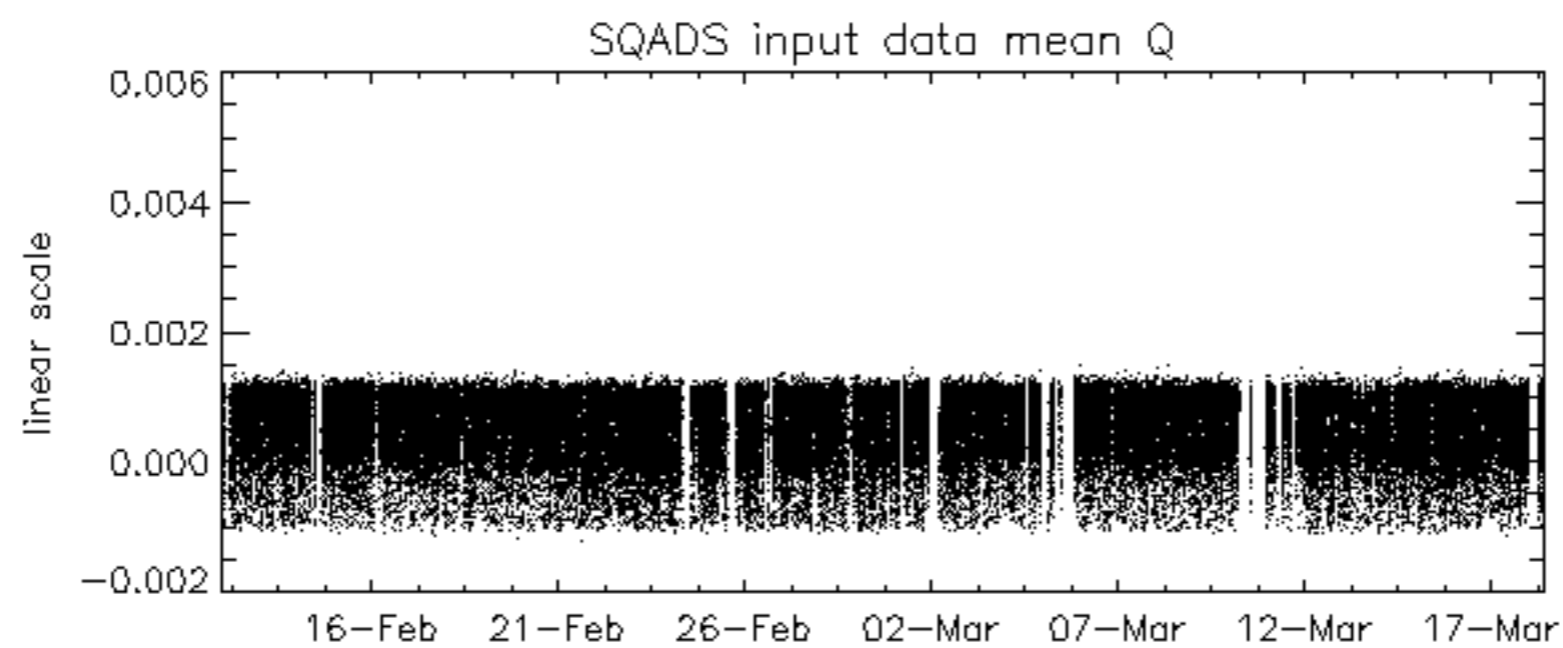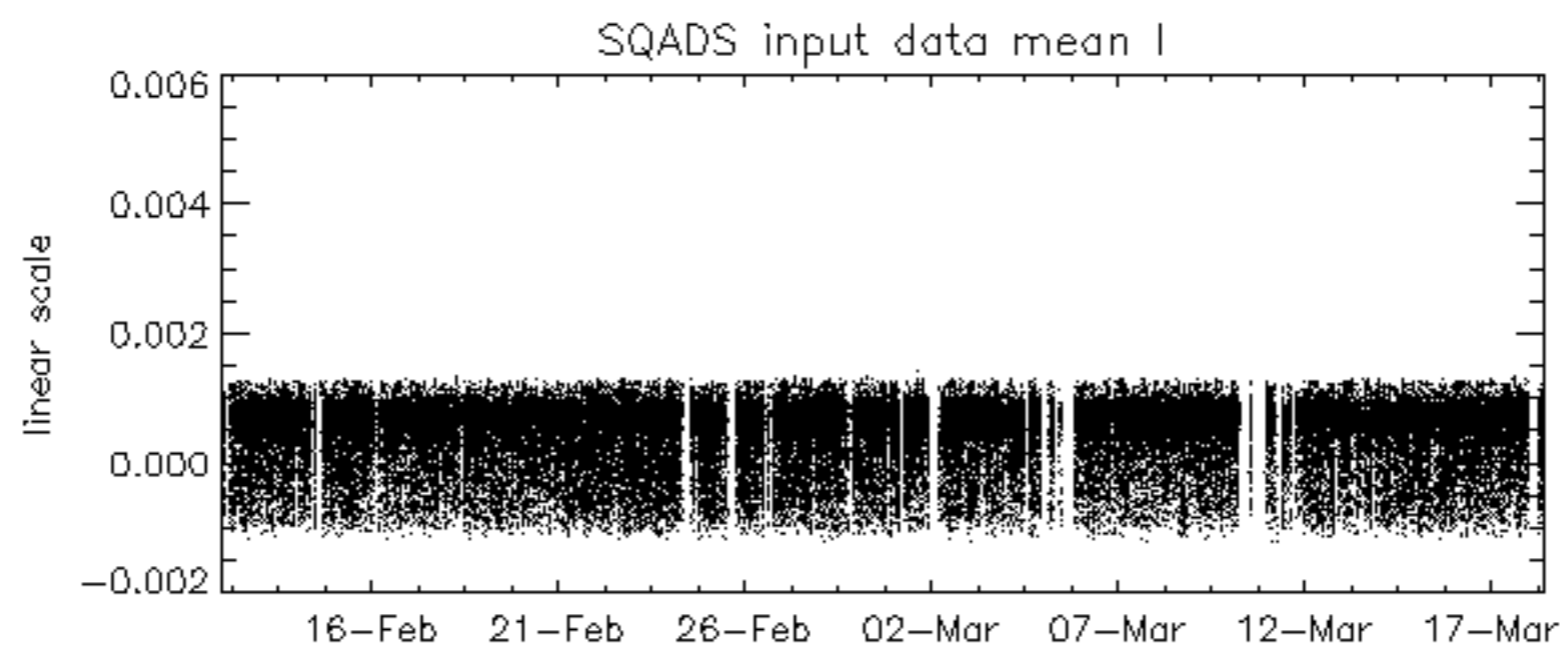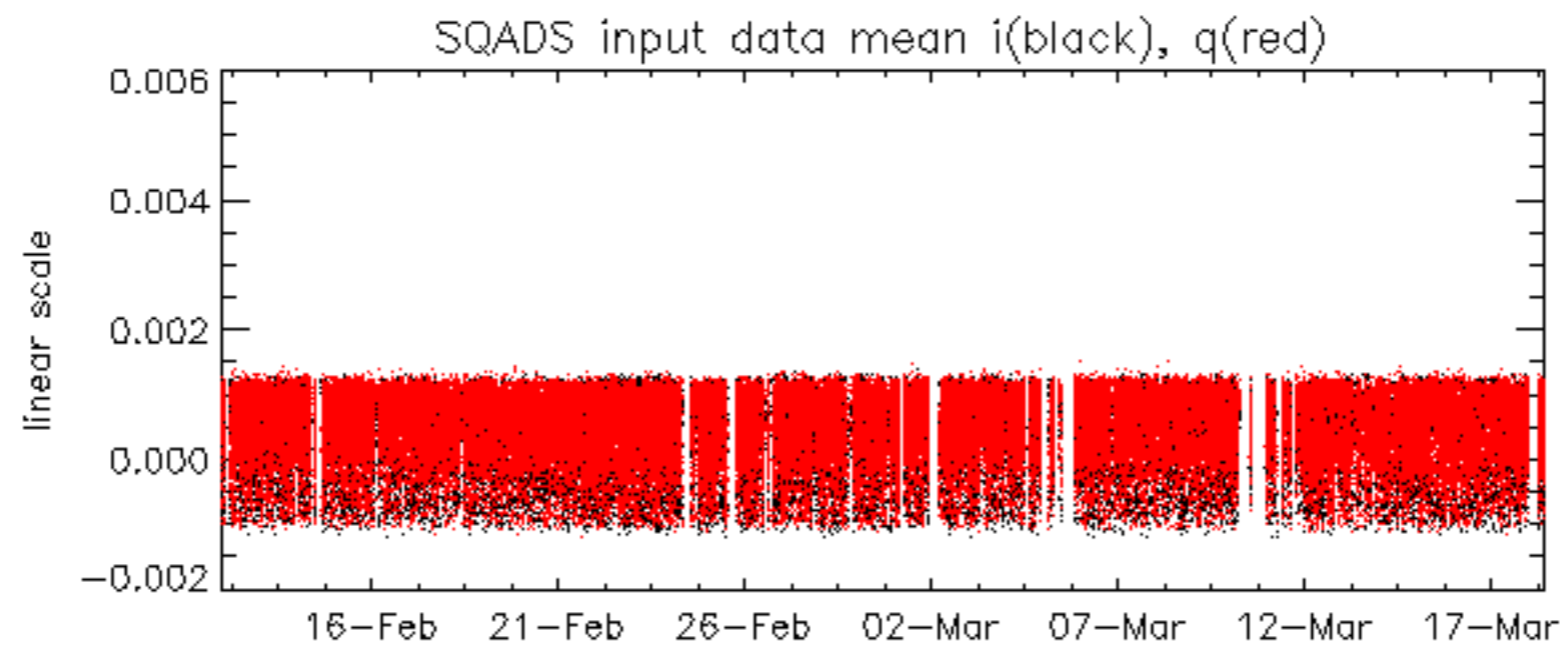

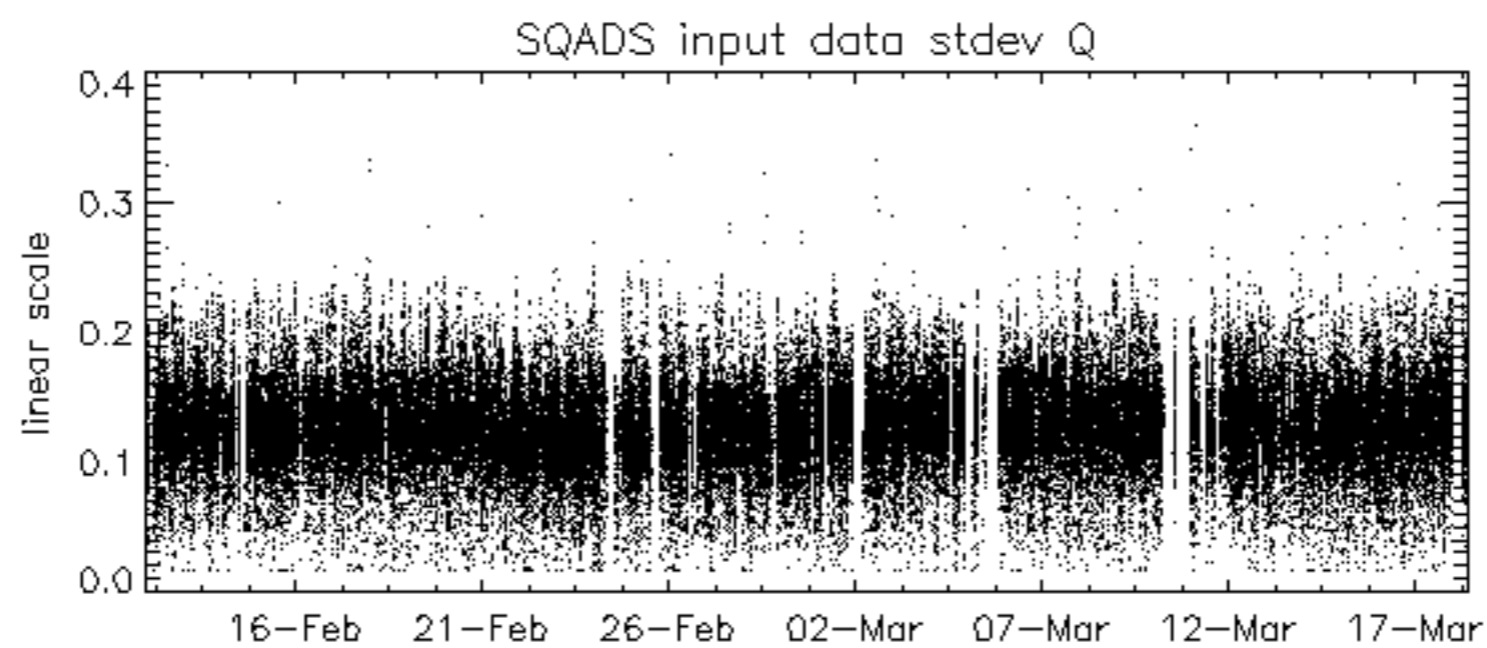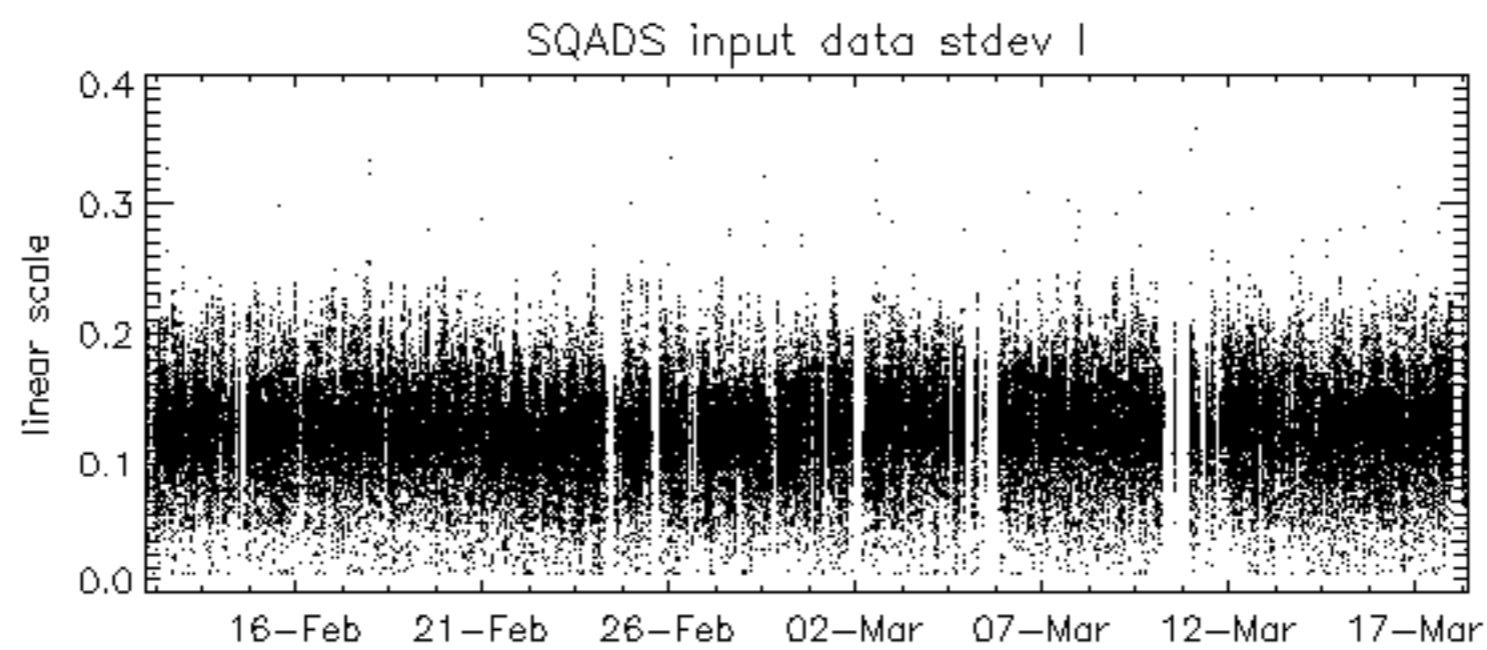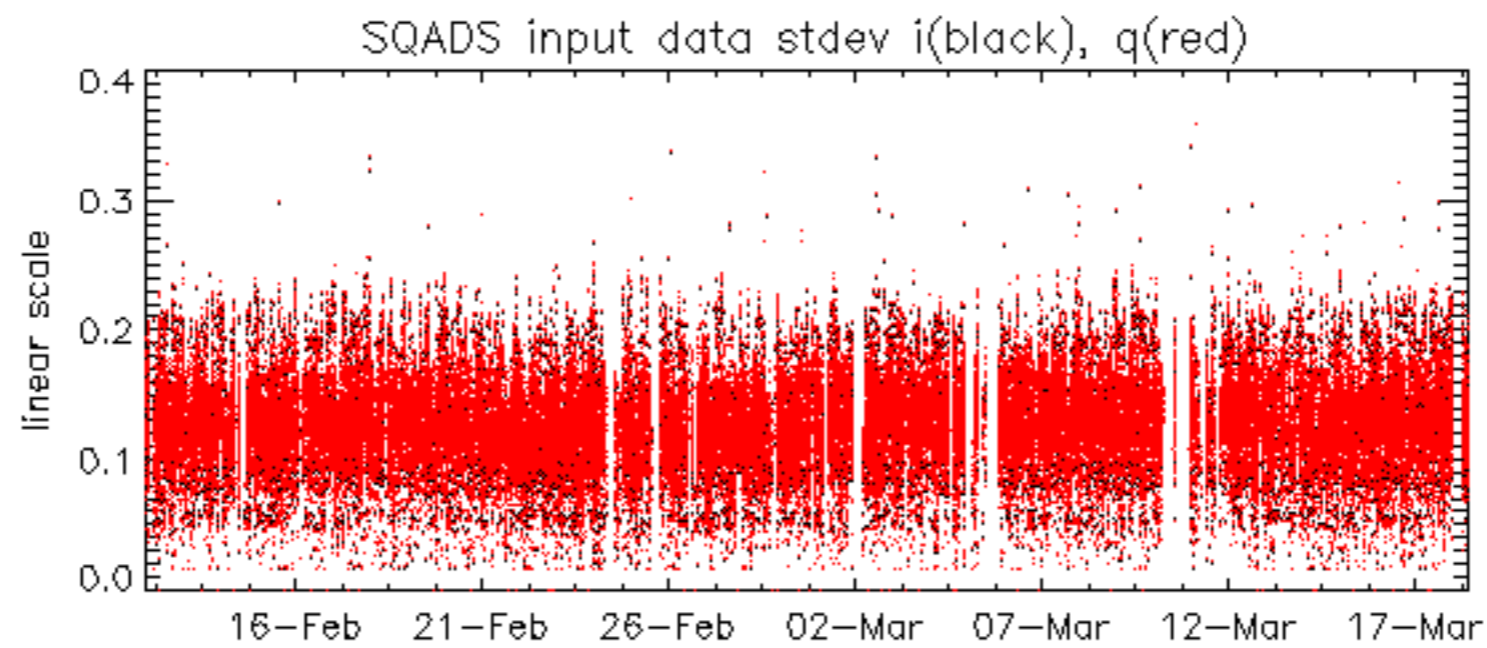

No unavailabilities during the reported period.