

PRELIMINARY REPORT OF 040413

ATTENTION: This report is automatically generated no comments are provided on data analysis

last update on Tue Apr 13 12:40:01 GMT 2004

1. [Introduction](#)
2. [Summary](#)
 - [Instrument Unavailability](#)
 - [Browse Visual Inspection](#)
 - [Module Stepping Results](#)
 - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
 - [Daily statistics \(row 3 and 24\)](#)
 - [Cyclic statistics \(row 3 and 24\)](#)
 - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
 - [raw data mean I and Q](#)
 - [raw data stdev I and Q](#)
 - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
 - [Doppler evolution versus ANX](#)

1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA_WVS_1P) products, which are the available few hours after the acquisition, on the high rate browse (BP) products and on the Module Stepping (MS) product.

2 - Summary

2.1 - Instrument Unavailability

No unavailabilities during the reported period.

2.2 - Browse Visual Inspection

No anomalies observed from browse visual inspection.

2.3 - Data Analysis

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.

3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis.
 The purpose of this mode is to identify any malfunctioning modules and
 to identify modules for which calibration offsets are to be applied.
 No anomalies observed on available MS products:

Polarisation	Start Time
V	20040412 195946
H	20040412 195826

MSM in V/V polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

MSM in H/H polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

4 - Internal calibration Results

No anomalies observed.

4.1 - Daily statistics



4.2 - Cyclic statistics



4.3 - cal pulses monitoring (all rows)



5 - RAW data statistics

No anomalies observed.

5.1 - Input mean I/Q

channel	stat	DSS-B
MEAN I	mean	0.000476408
	stdev	2.37806e-07
MEAN Q	mean	0.000483071
	stdev	2.68312e-07



5.2 - Input stdev I/Q

channel	stat	DSS-B
STDEV I	mean	0.127730
	stdev	0.00118587
STDEV Q	mean	0.127983
	stdev	0.00119956



5.3 - Gain imbalance I/Q



6 - Doppler Analysis

Preliminary report. The data is not yet controled

6.1 - Unbiased Doppler Error

Evolution of unbiased Doppler error (Real - Expected)
Ascending
Descending


6.2 - Absolute Doppler

Evolution of Absolute Doppler
Ascending
Descending


6.3 - Doppler evolution versus ANX

Evolution Doppler error versus ANX
<input type="checkbox"/>
Evolution Doppler error versus ANX
<input type="checkbox"/>


Average P1

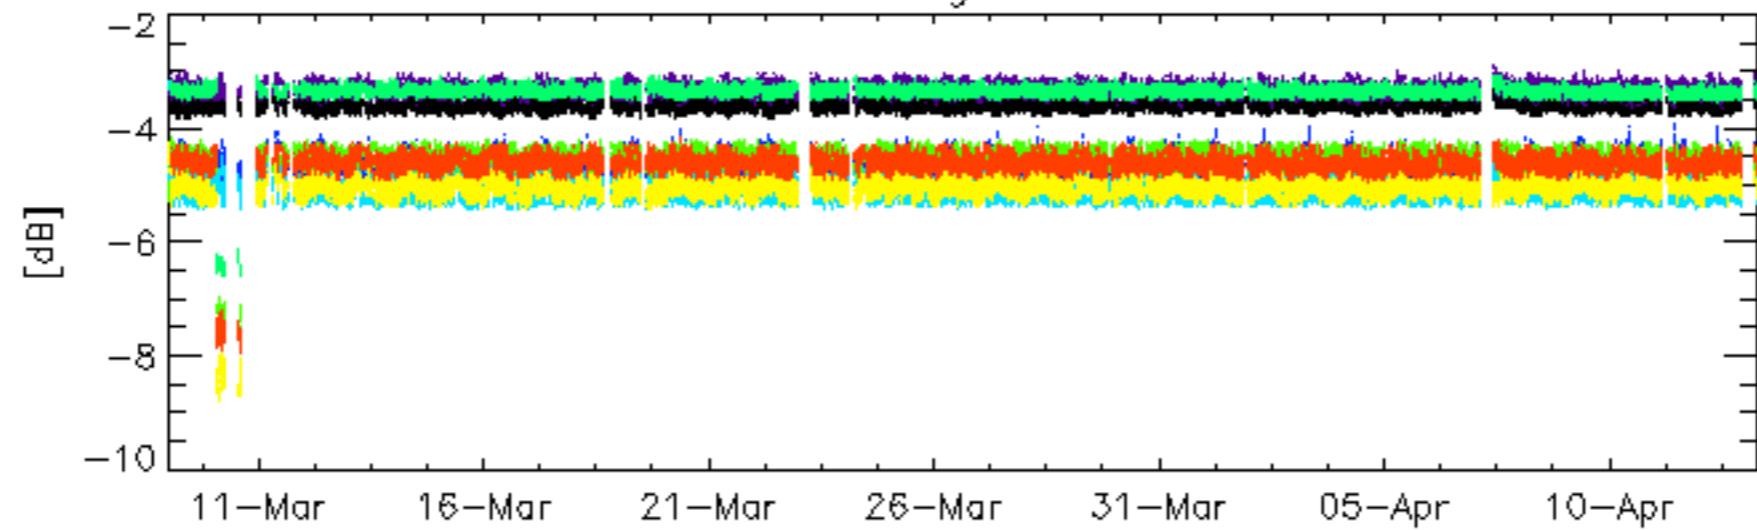

Average p2

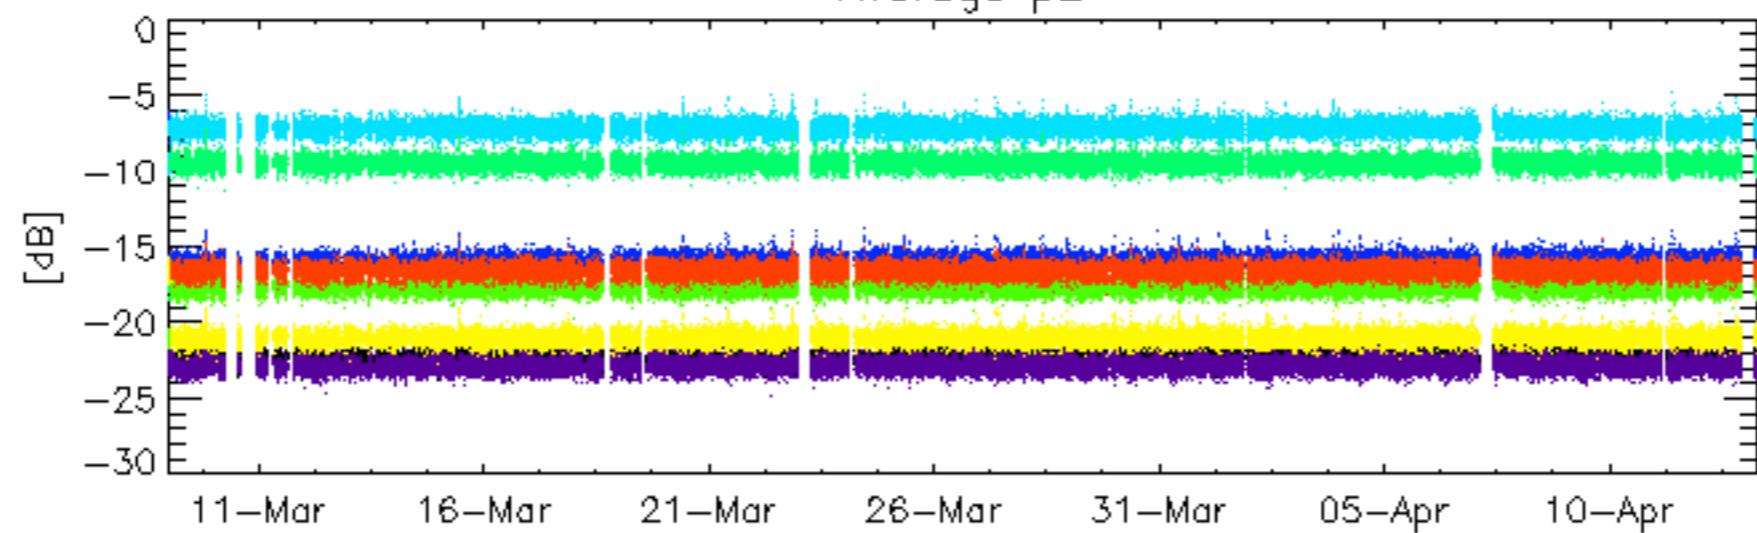


Average p3

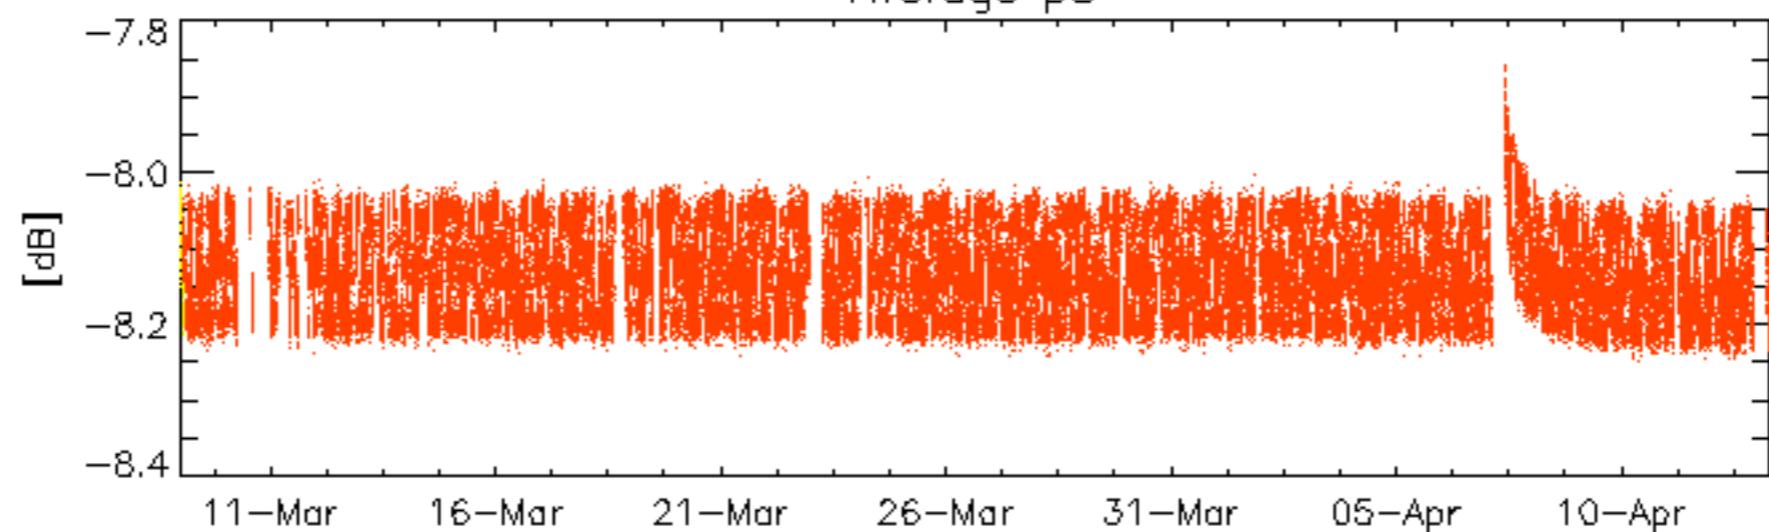


rows: $\textcolor{black}{_} 3 \textcolor{black}{_} 7 \textcolor{black}{_} 11 \textcolor{black}{_} 15 \textcolor{black}{_} 19 \textcolor{black}{_} 22 \textcolor{black}{_} 24 \textcolor{black}{_} 28$


Average P1

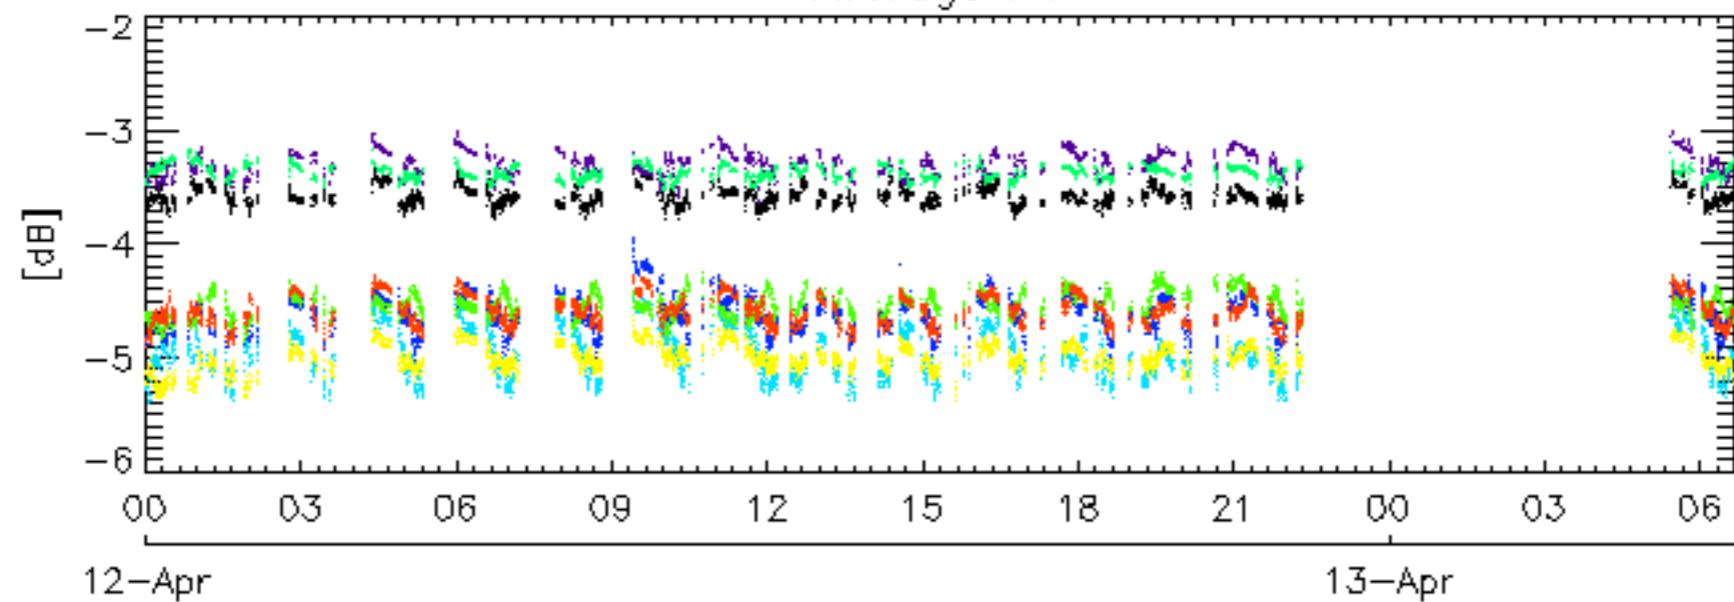

Average p2

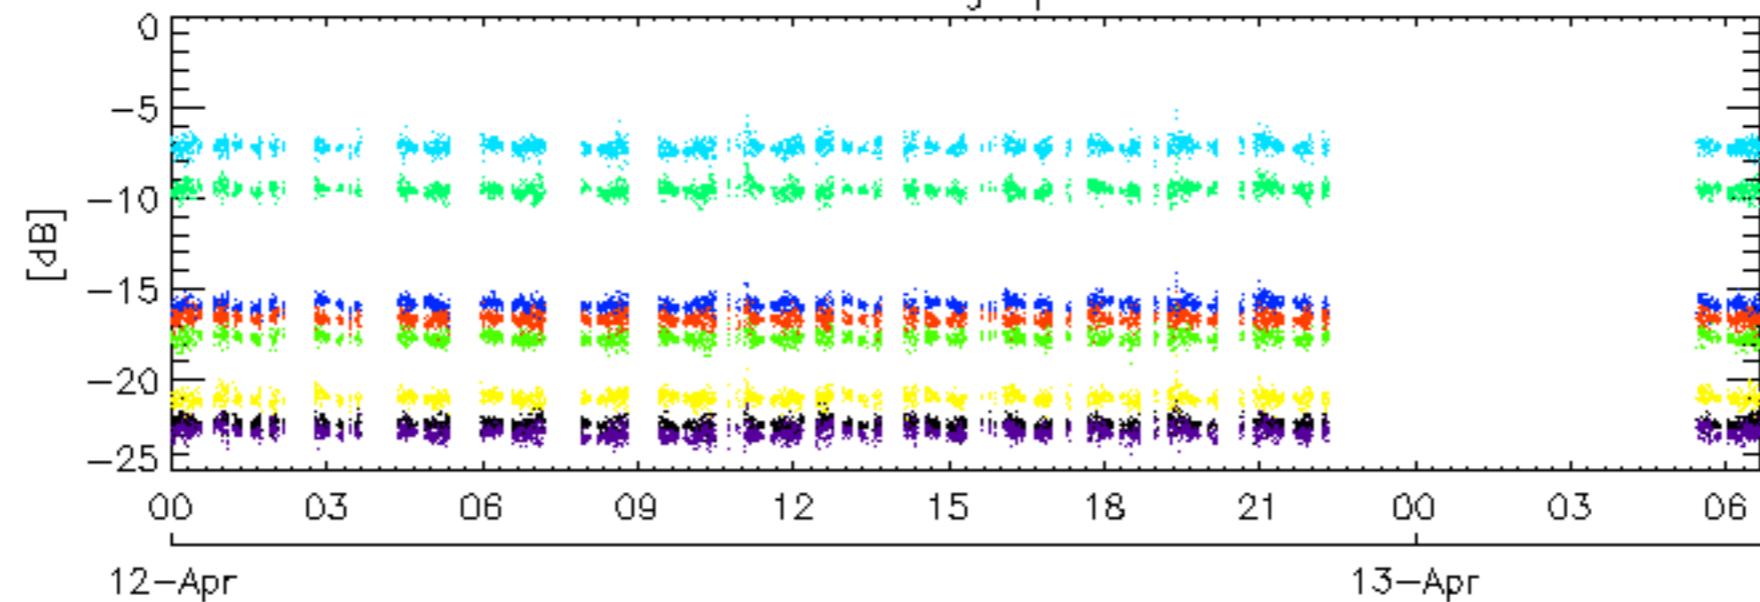

Average p3

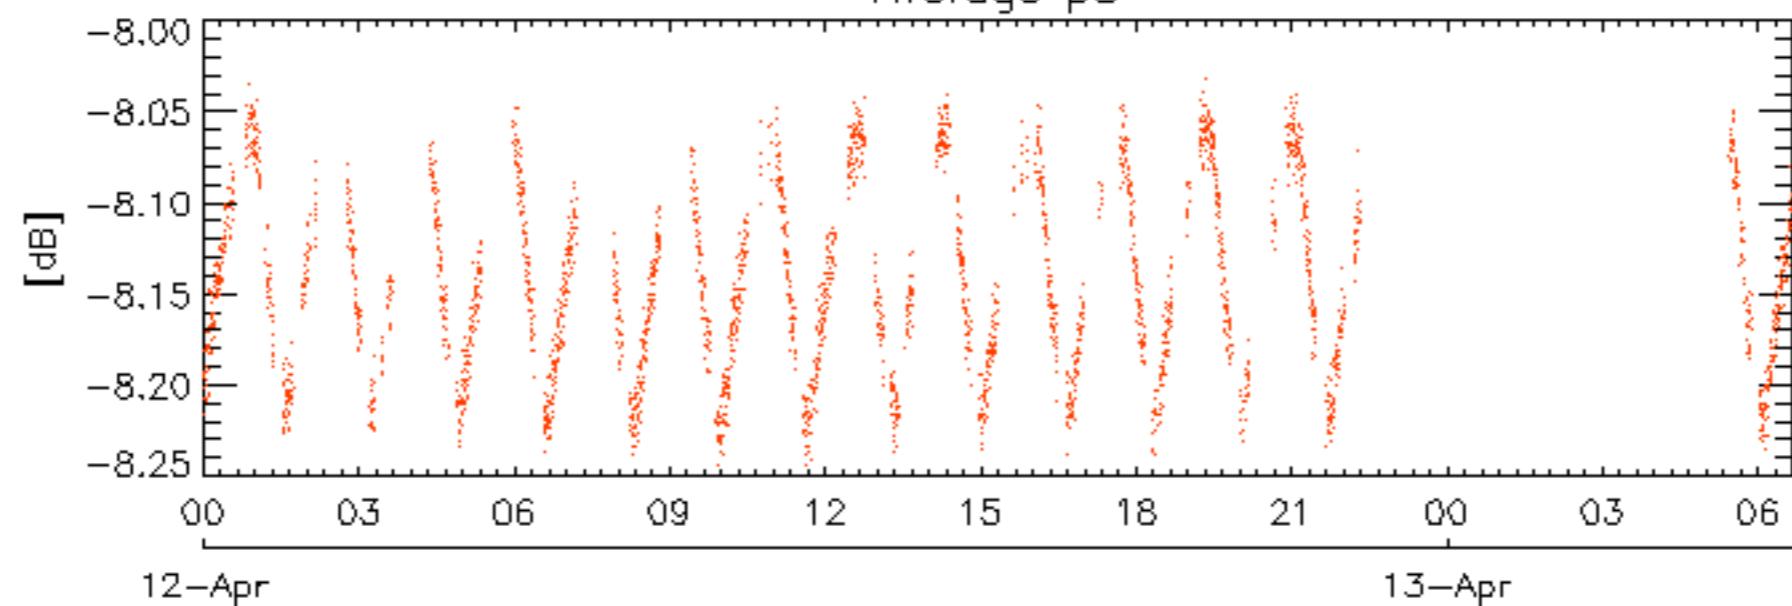


rows: 3 7 11 15 19 22 24 28

No anomalies observed from browse visual inspection.




No anomalies observed.




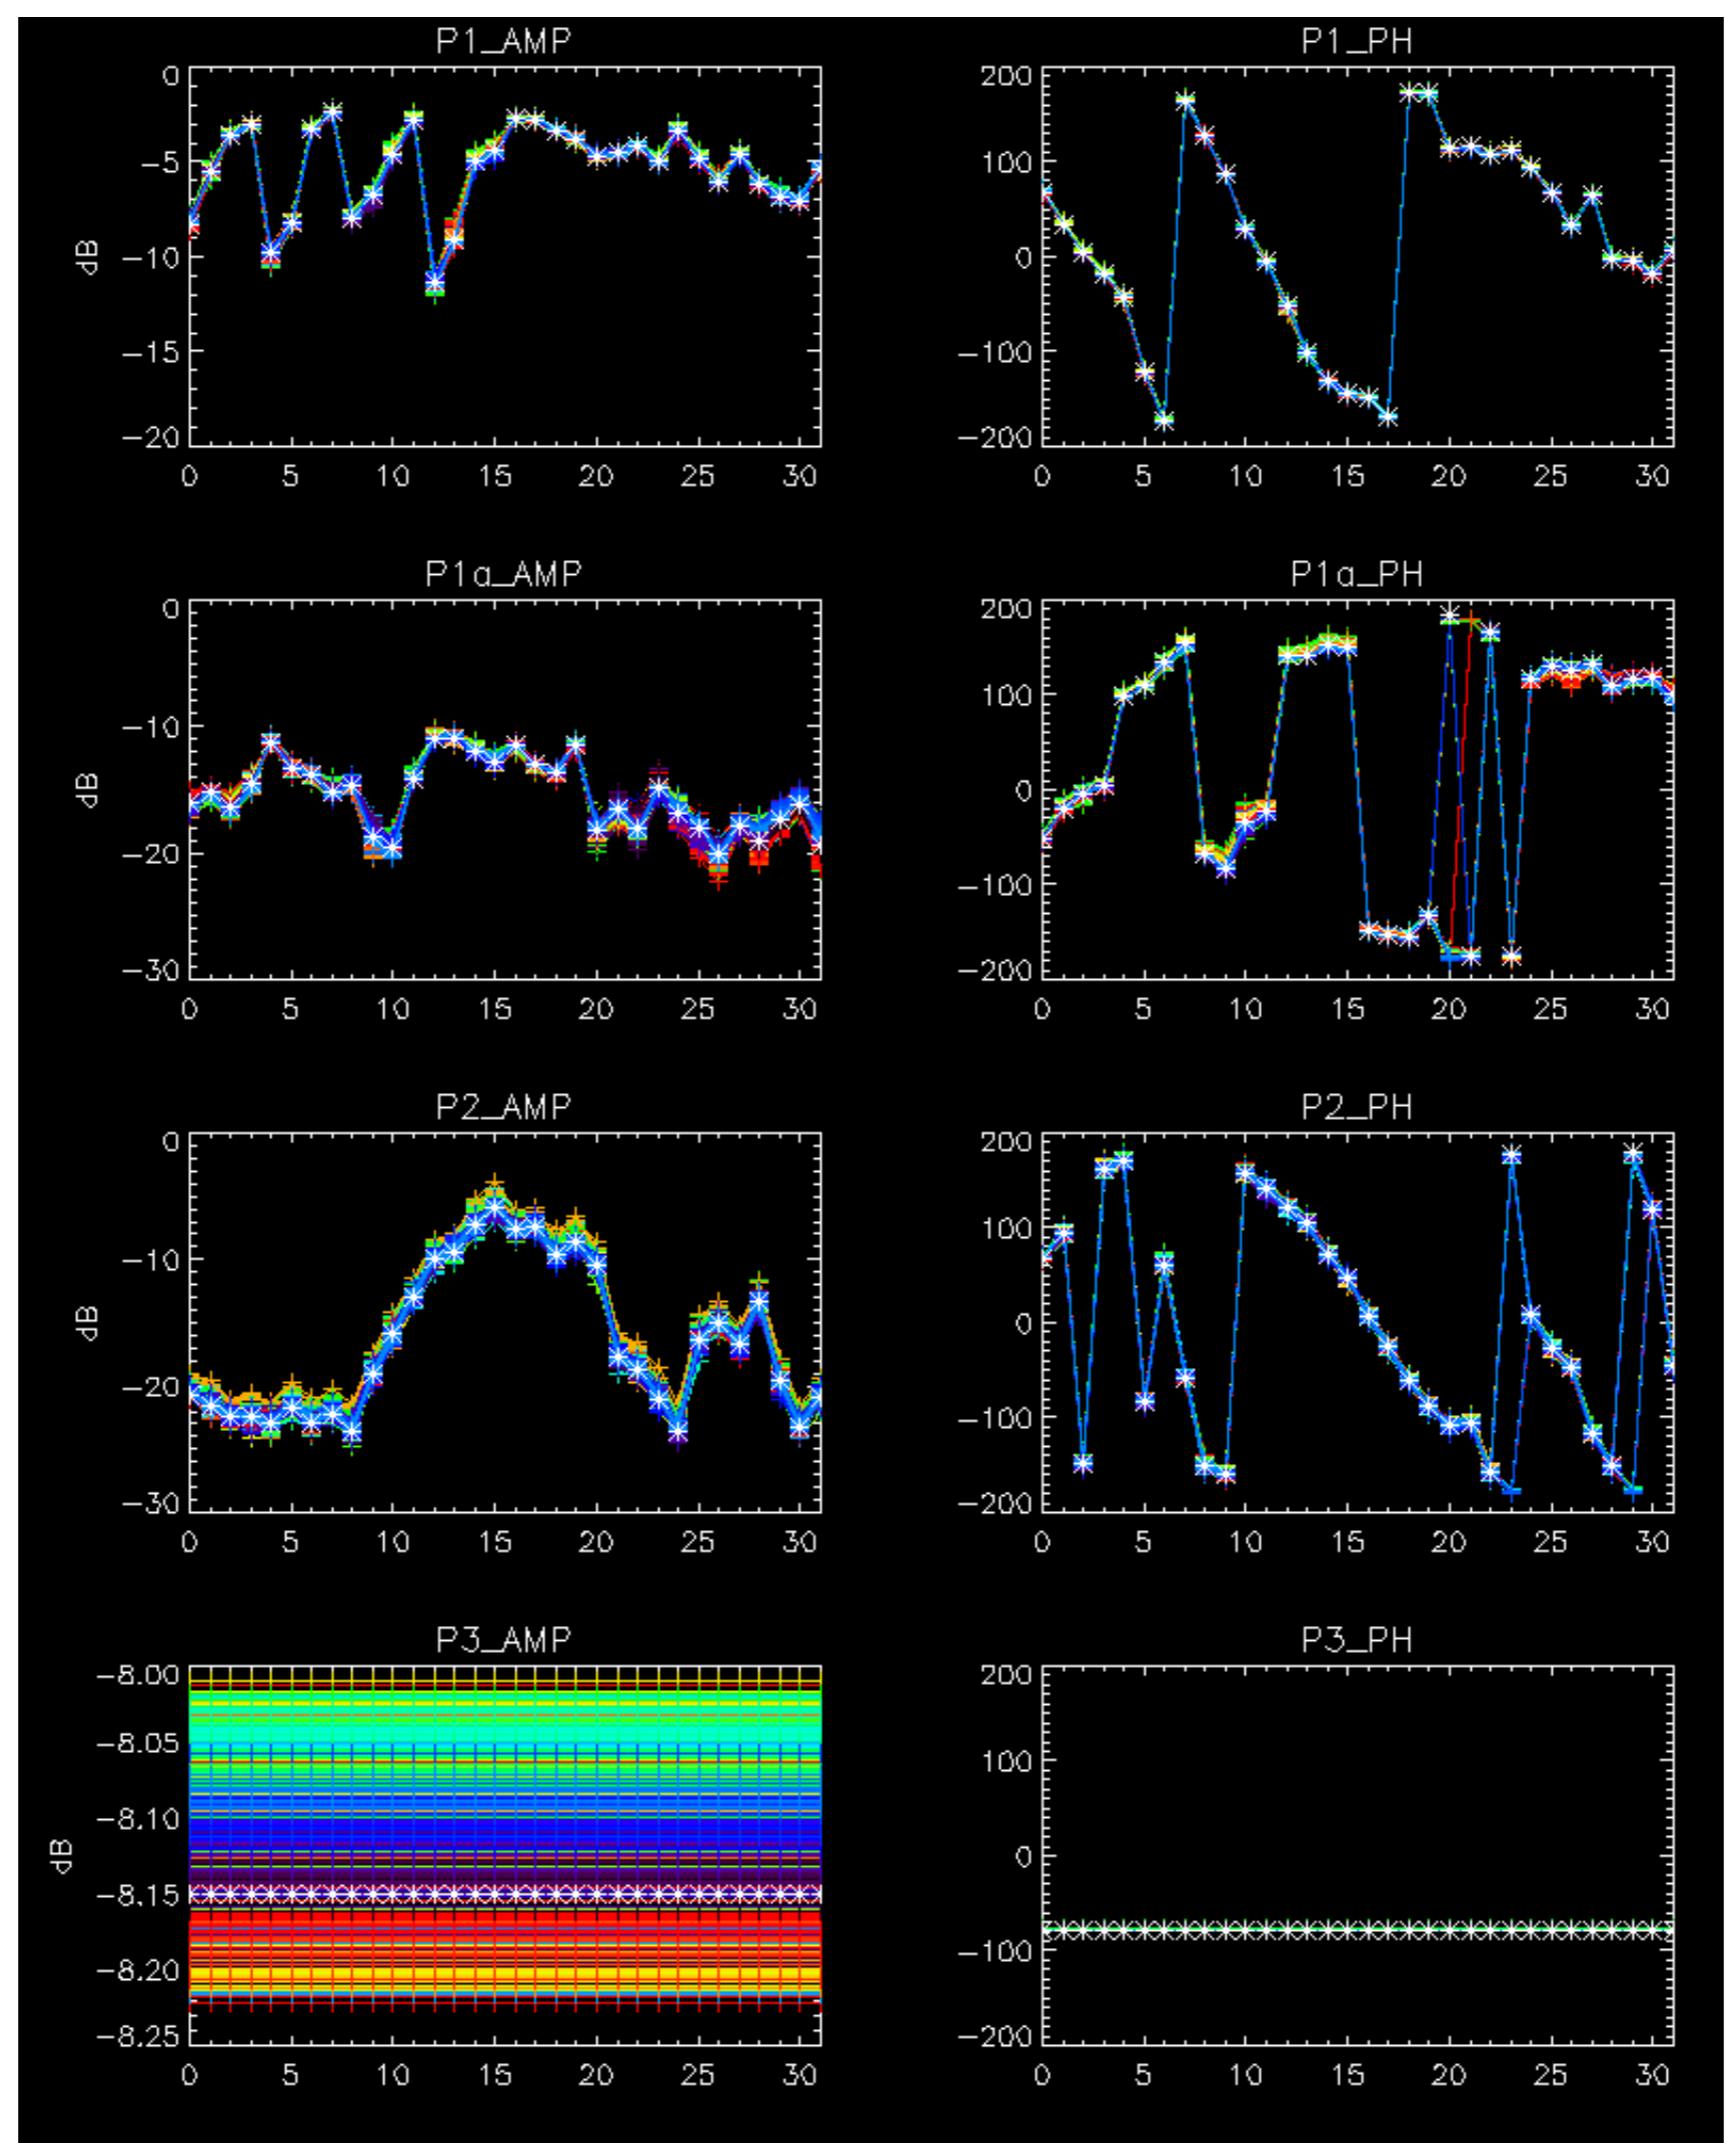



- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.




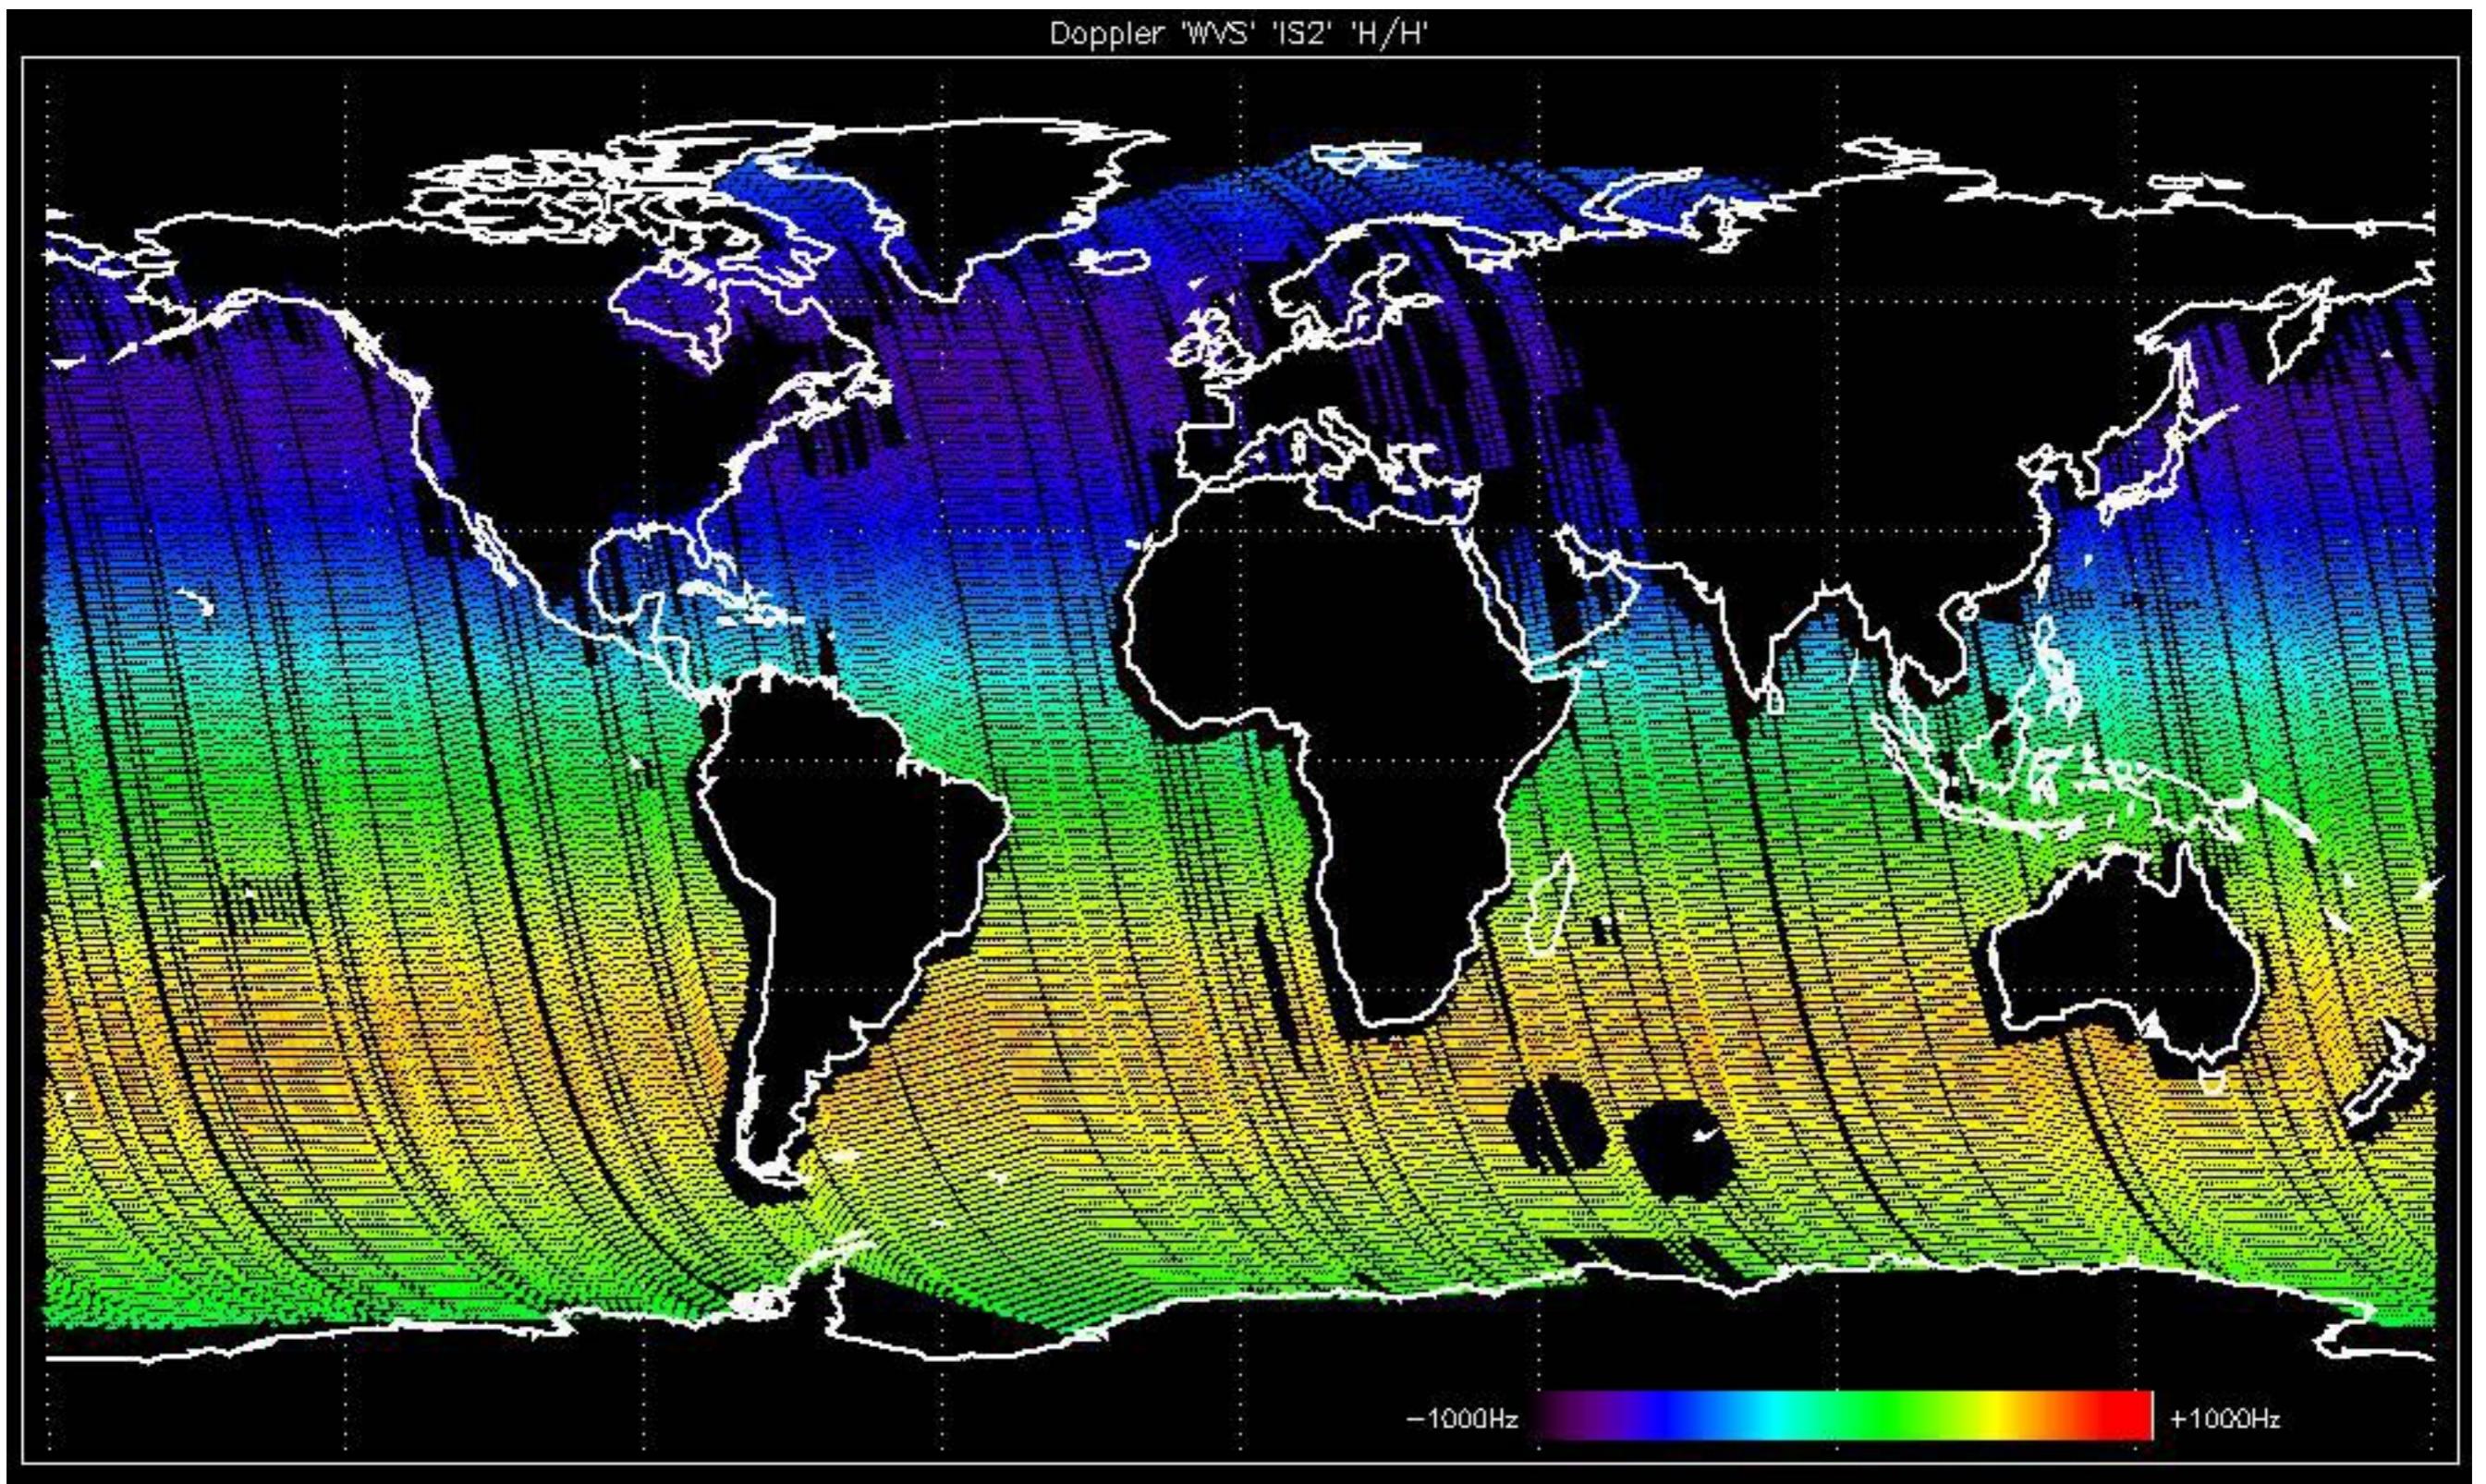


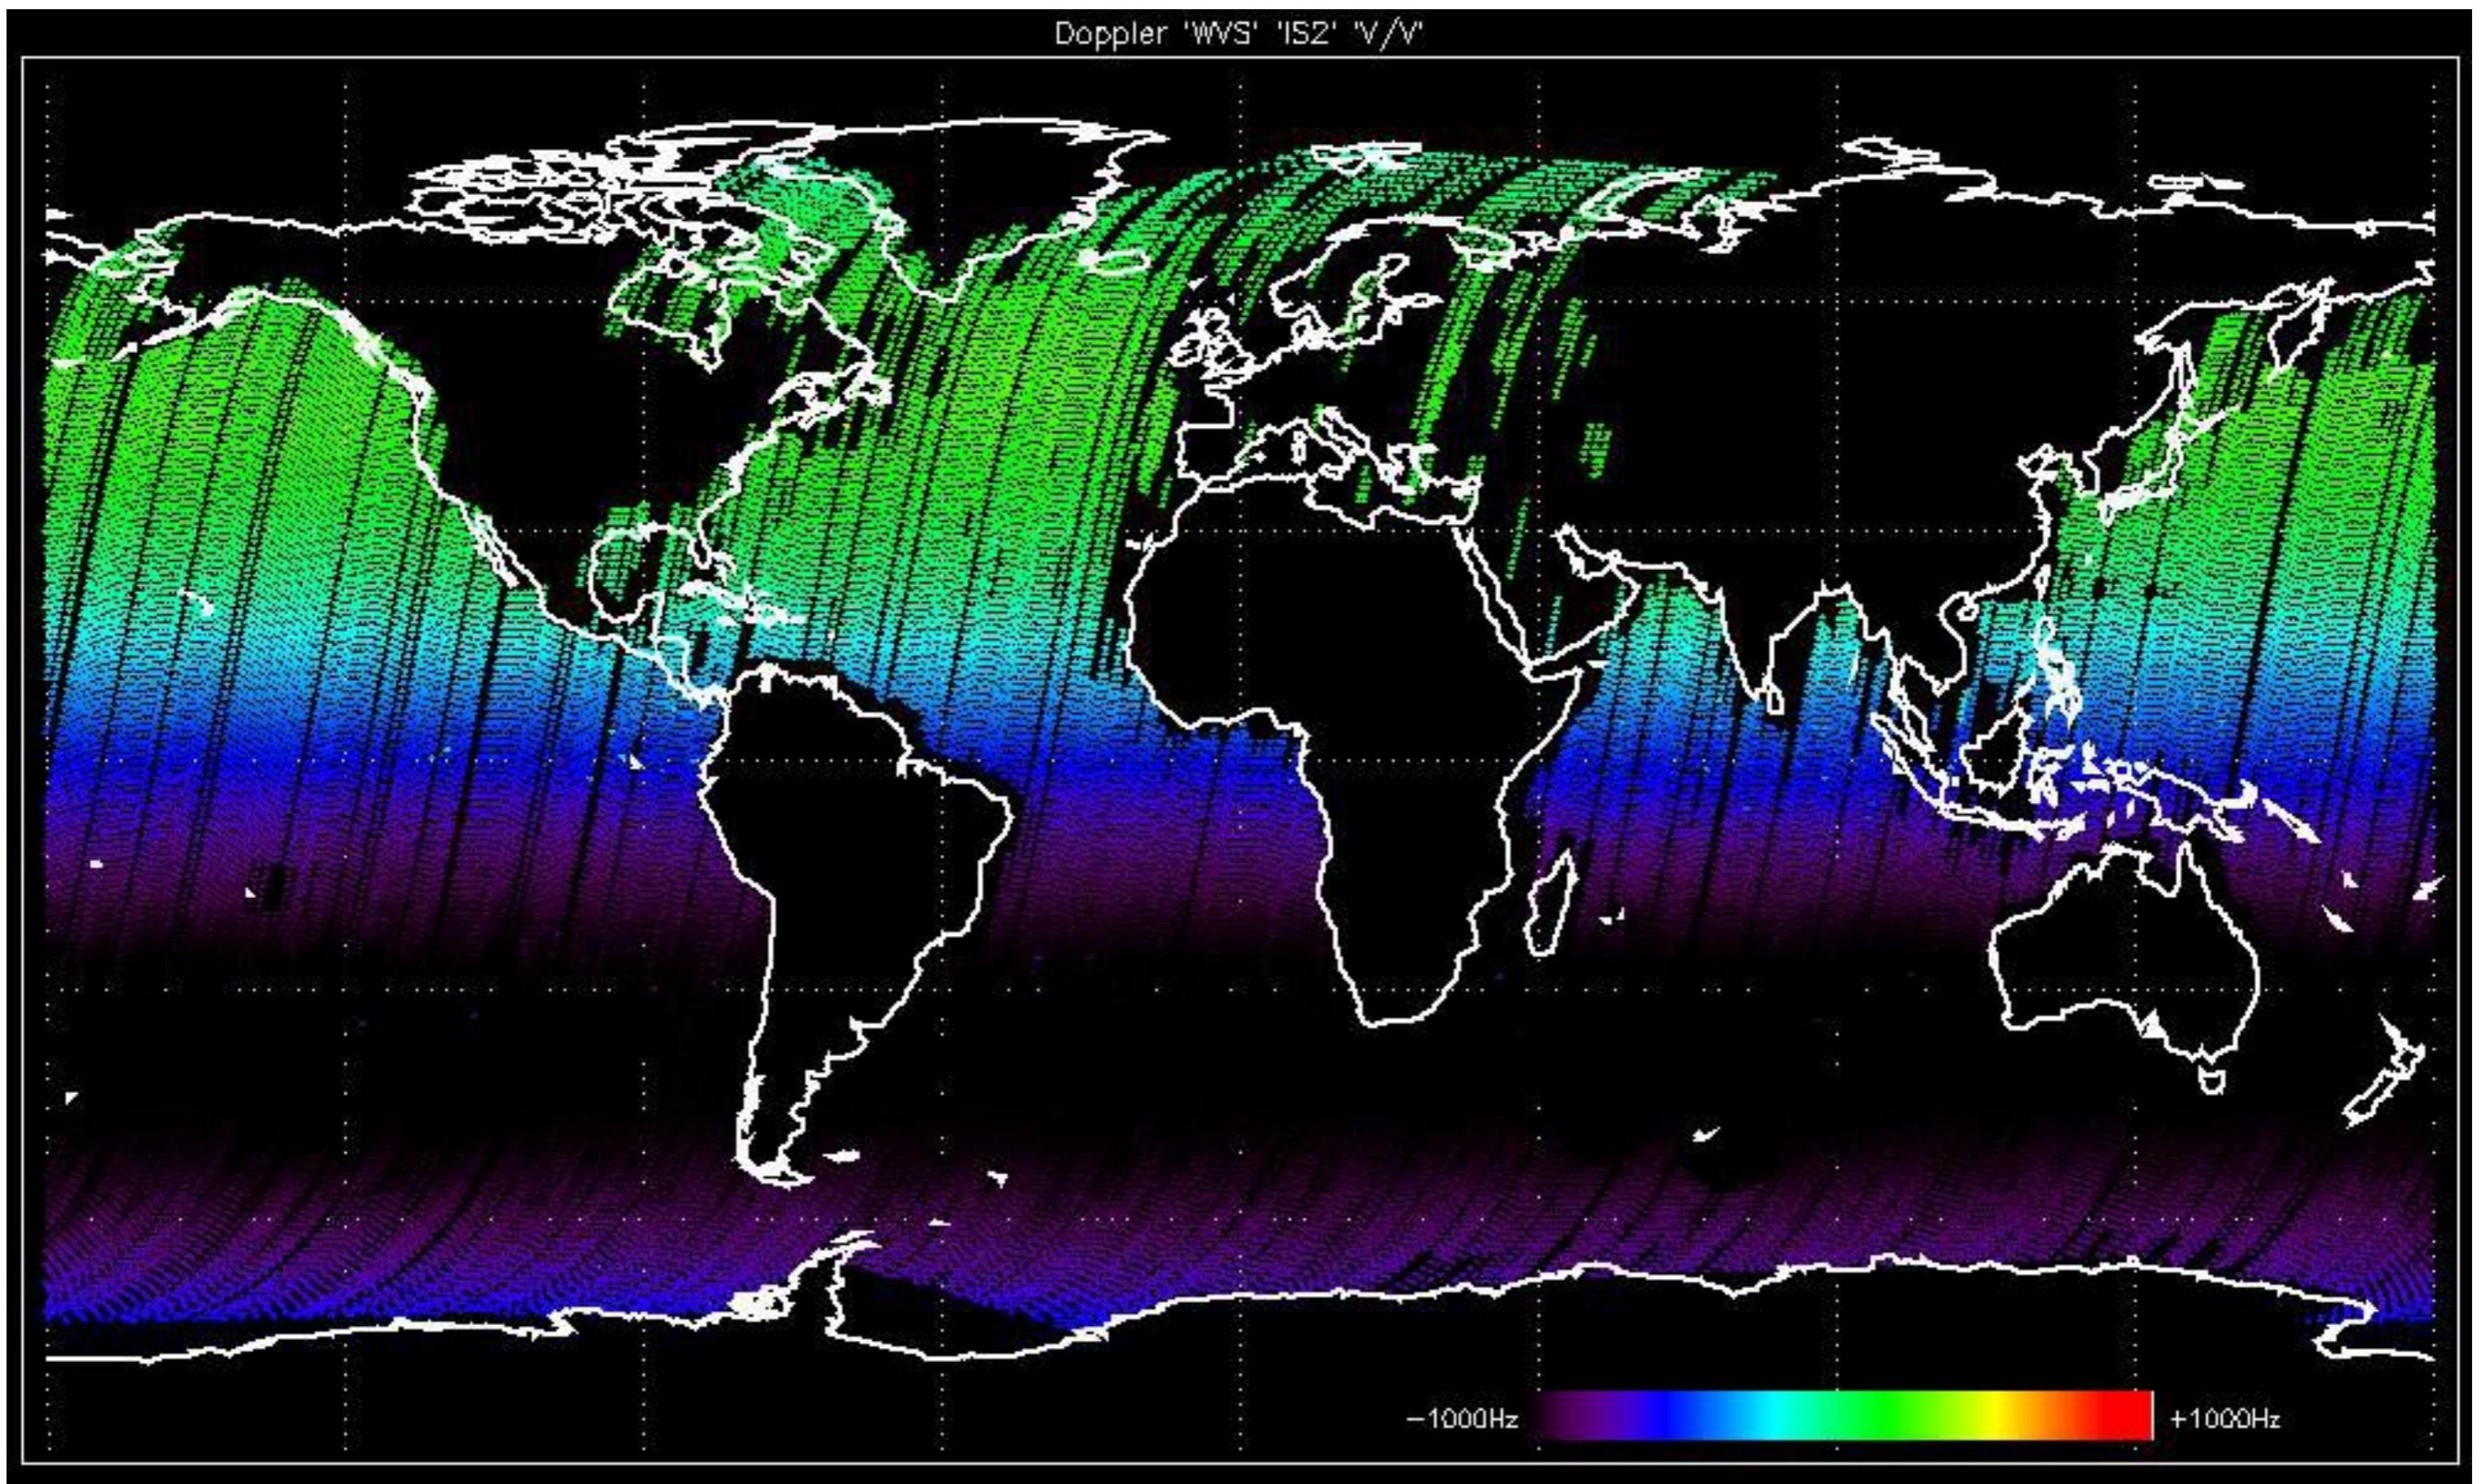

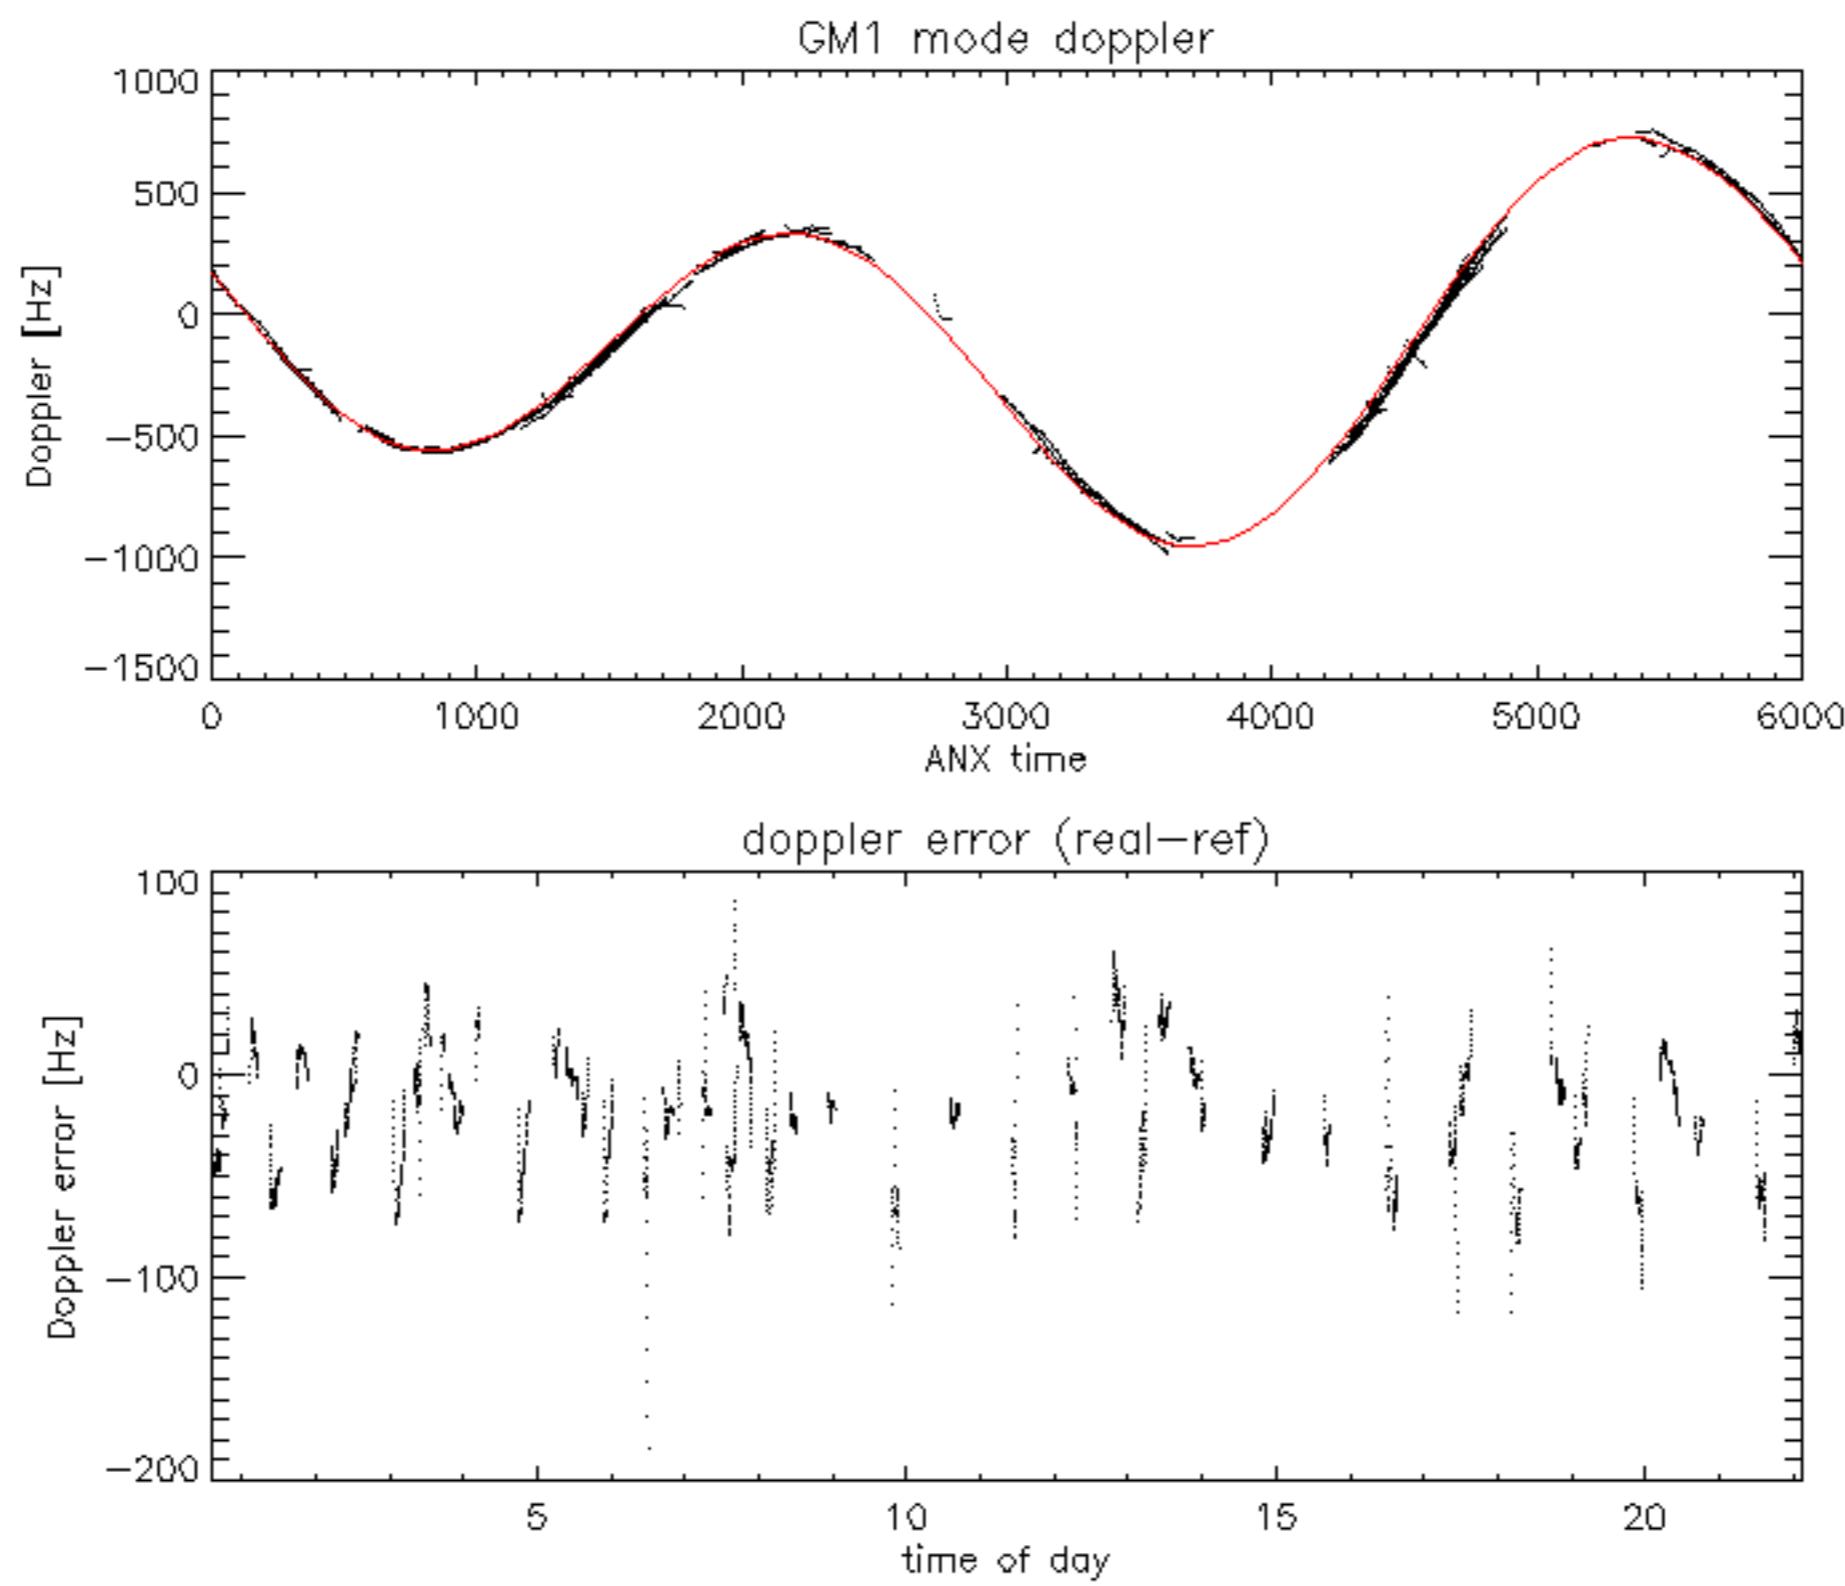

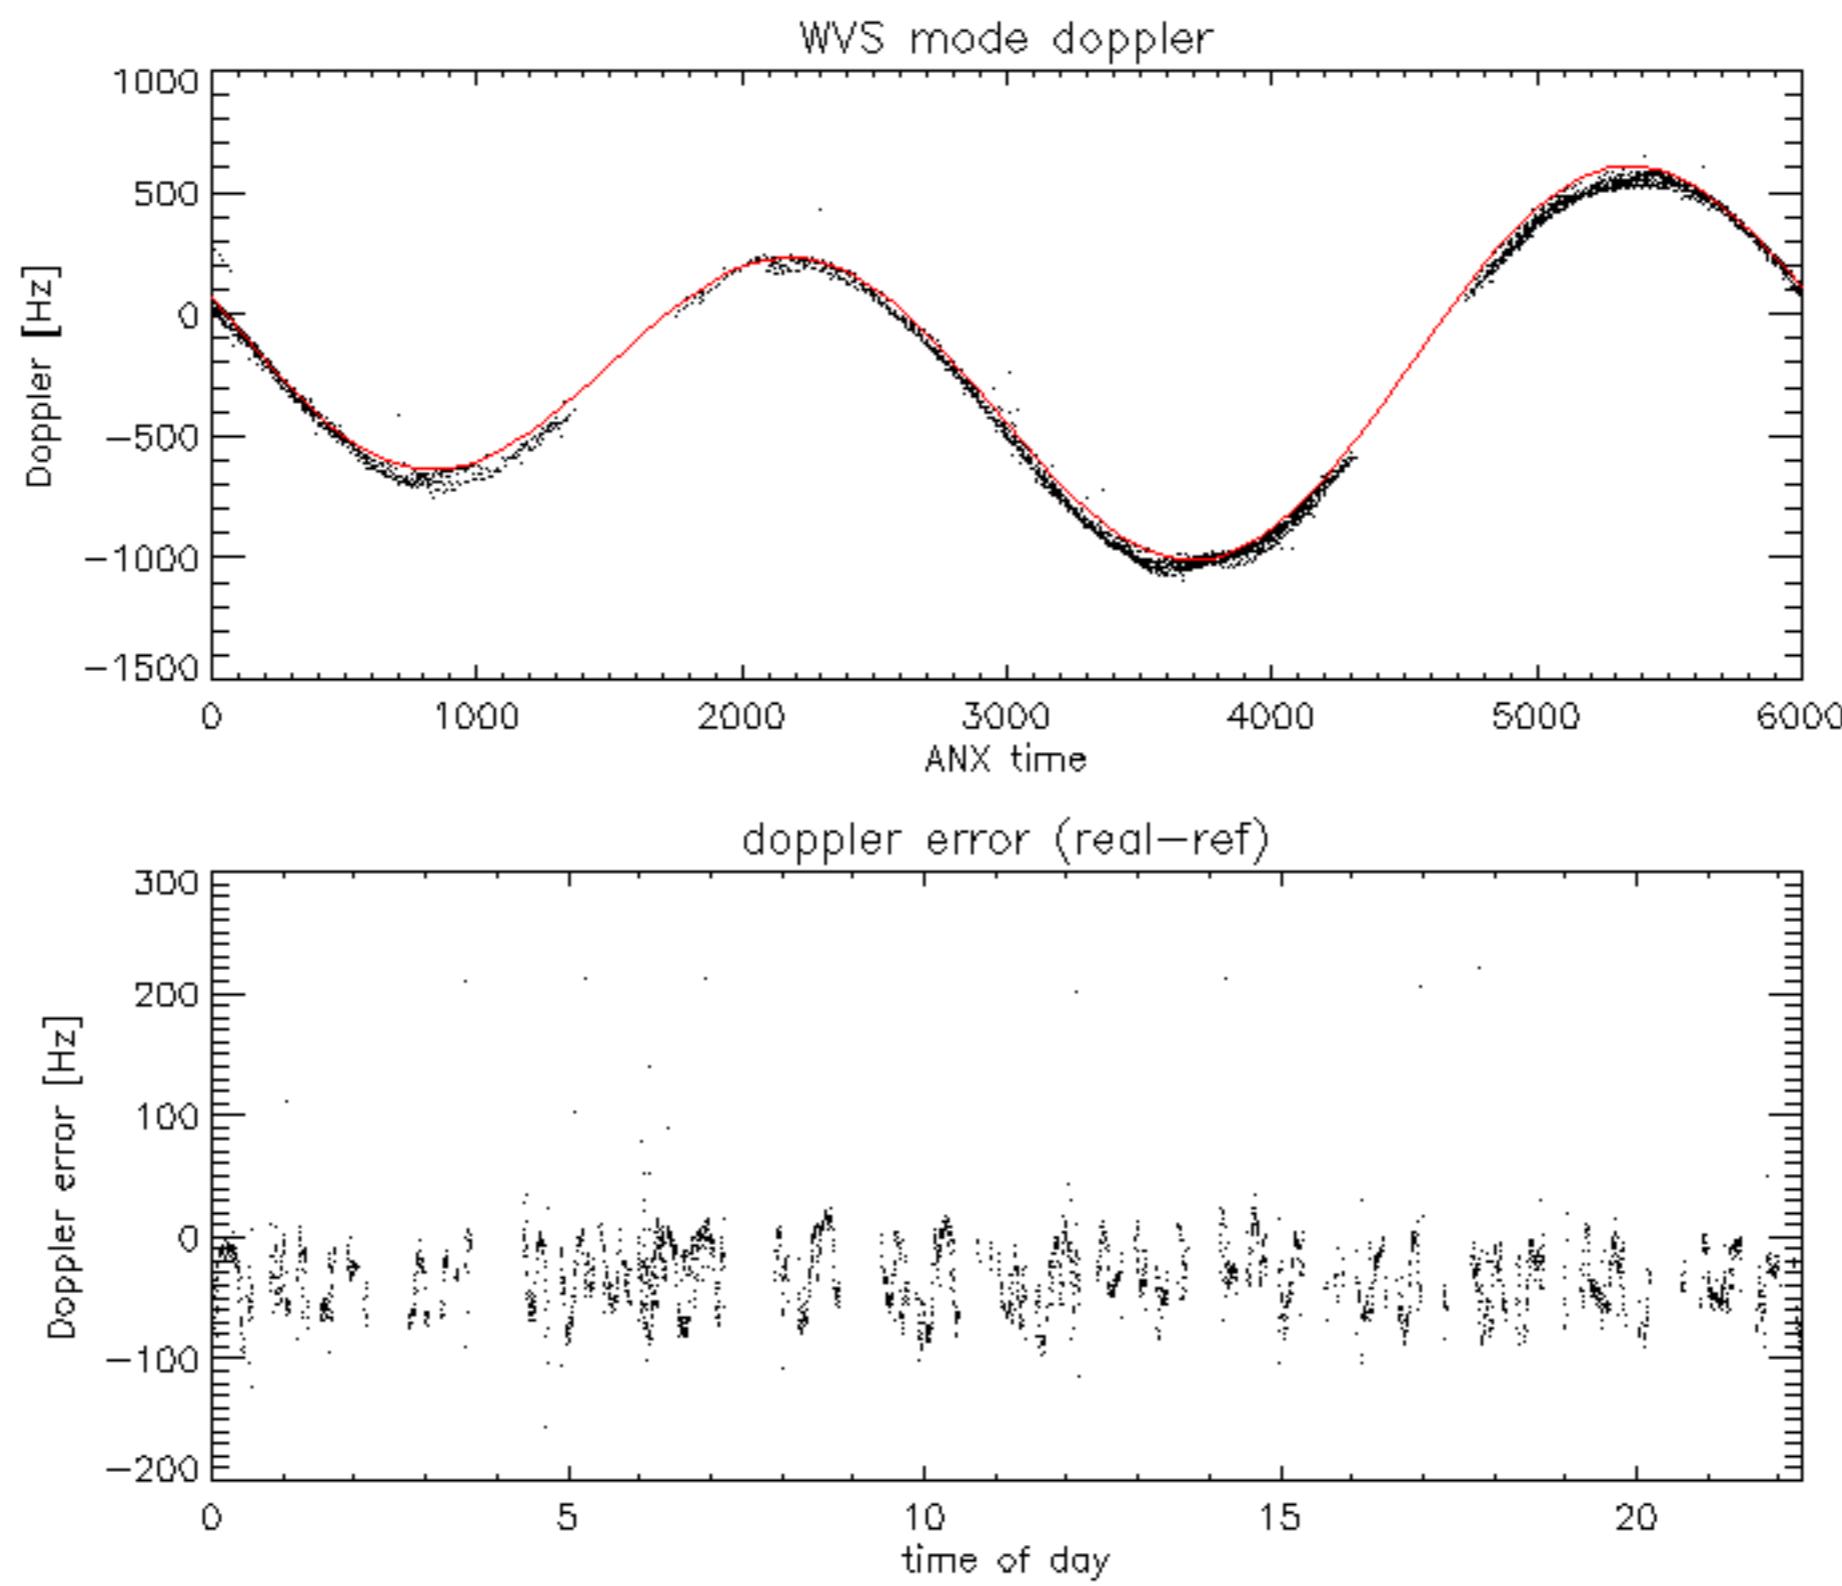

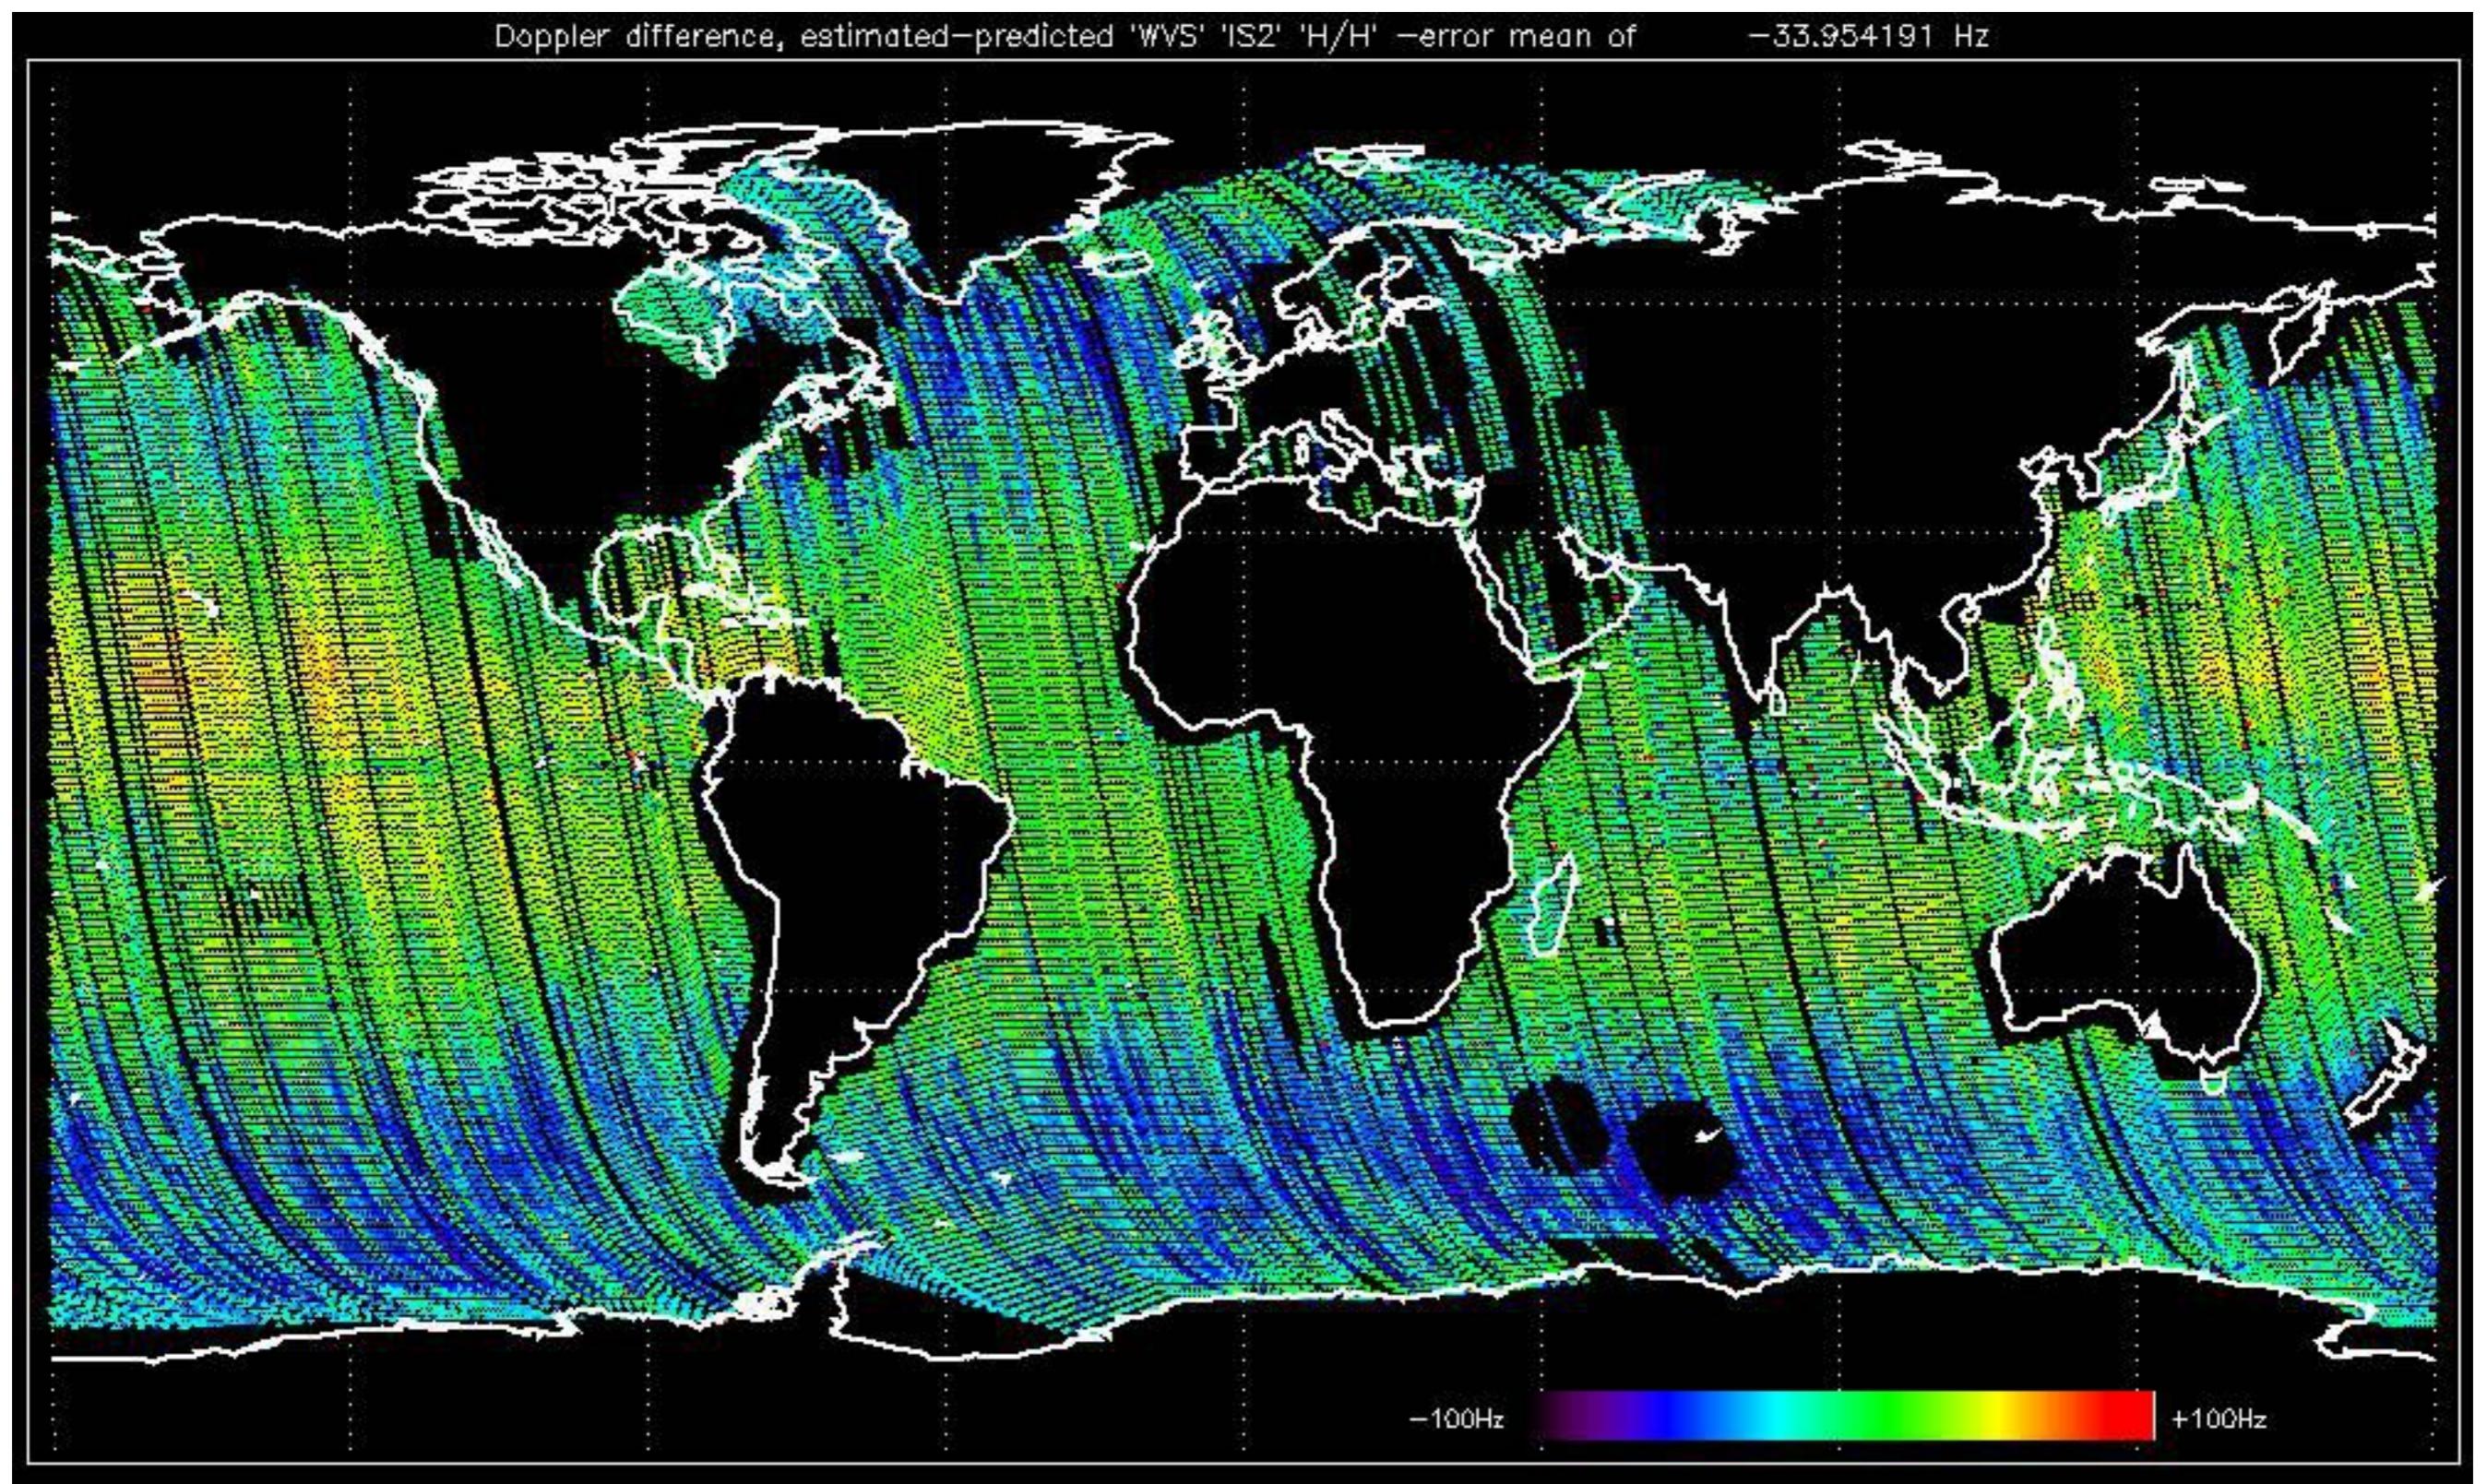

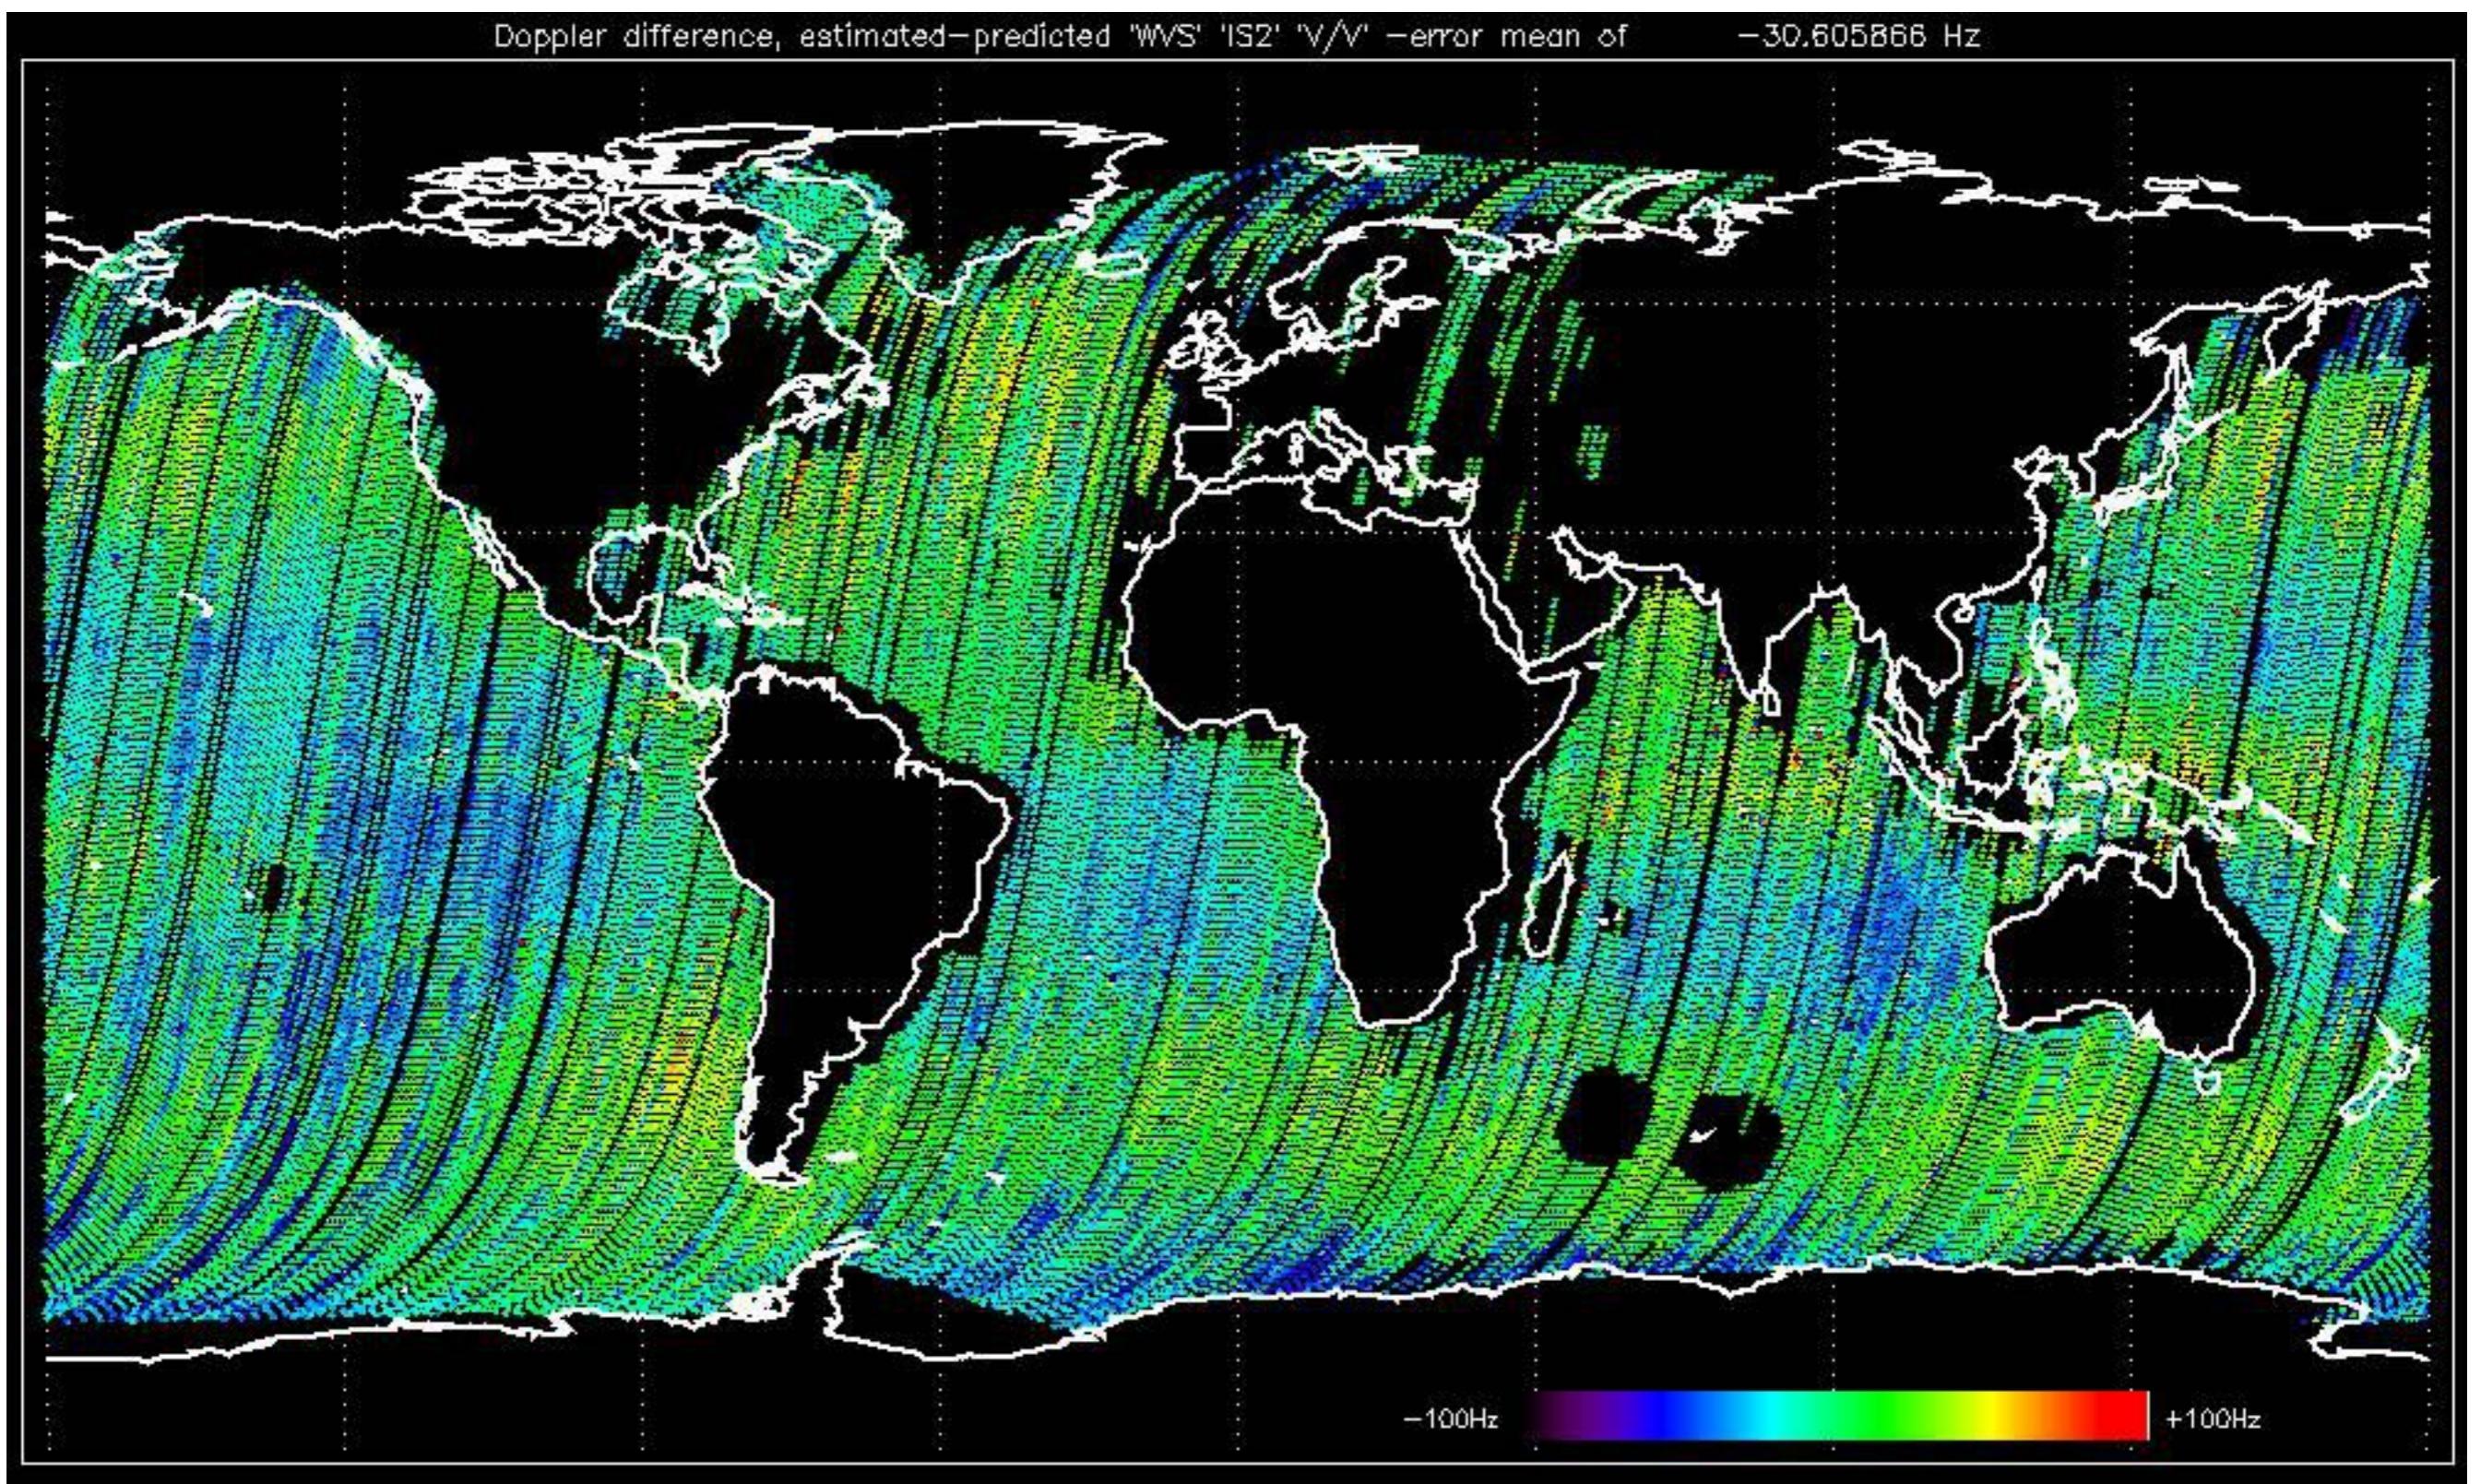

The MS mode provides an internal health check on an individual module basis.
The purpose of this mode is to identify any malfunctionning modules and
to identify modules for which calibration offsets are to be applied.
No anomalies observed on available MS products:


No anomalies observed.









Reference: 2003-06-12 14:08:52 H RxPhase

Test : 2004-04-12 19:58:26 H

RxPhase									
Reference: 2003-06-12 14:10:32 V									
Test : 2004-04-12 19:59:46 V									
A1	A3	B1	B3	C1	C3	D1	D3	E1	E3
1	2	3	4	5	6	7	8	9	10
11	12	13	14	15	16	17	18	19	20
21	22	23	24	25	26	27	28	29	30
31	32								
A2	A4	B2	B4	C2	C4	D2	D4	E2	E4
26	27	28	29	30	31	32			

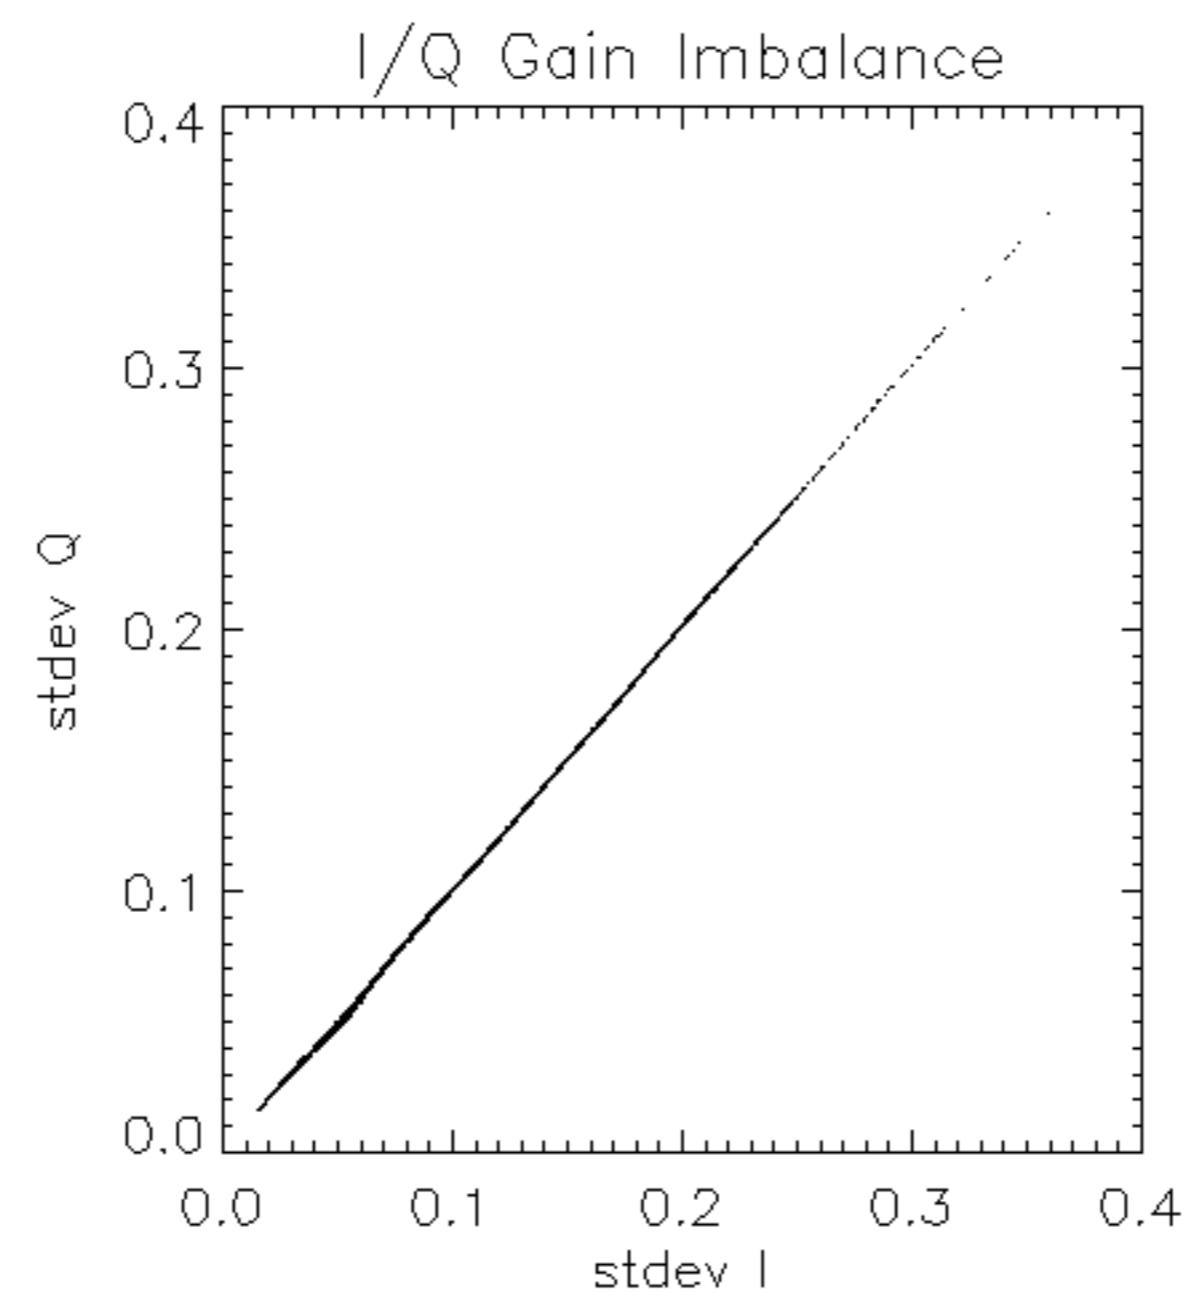

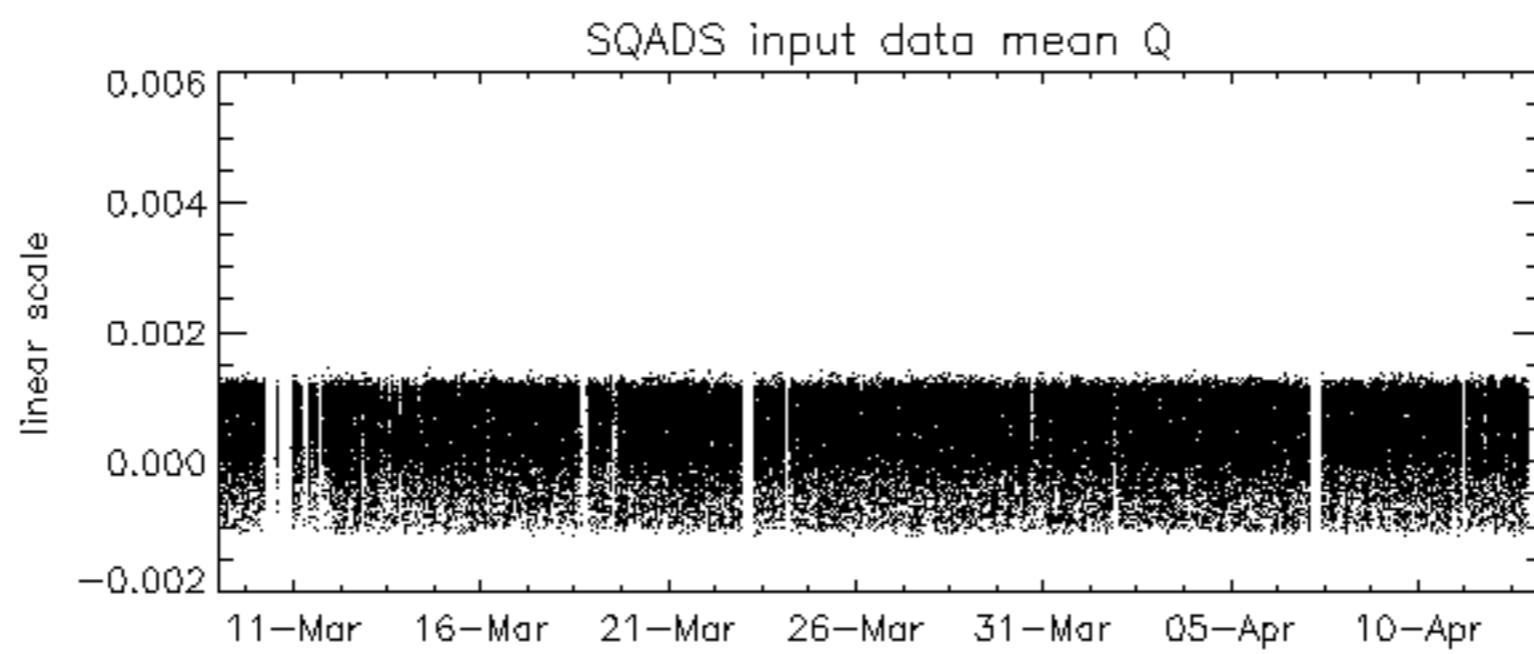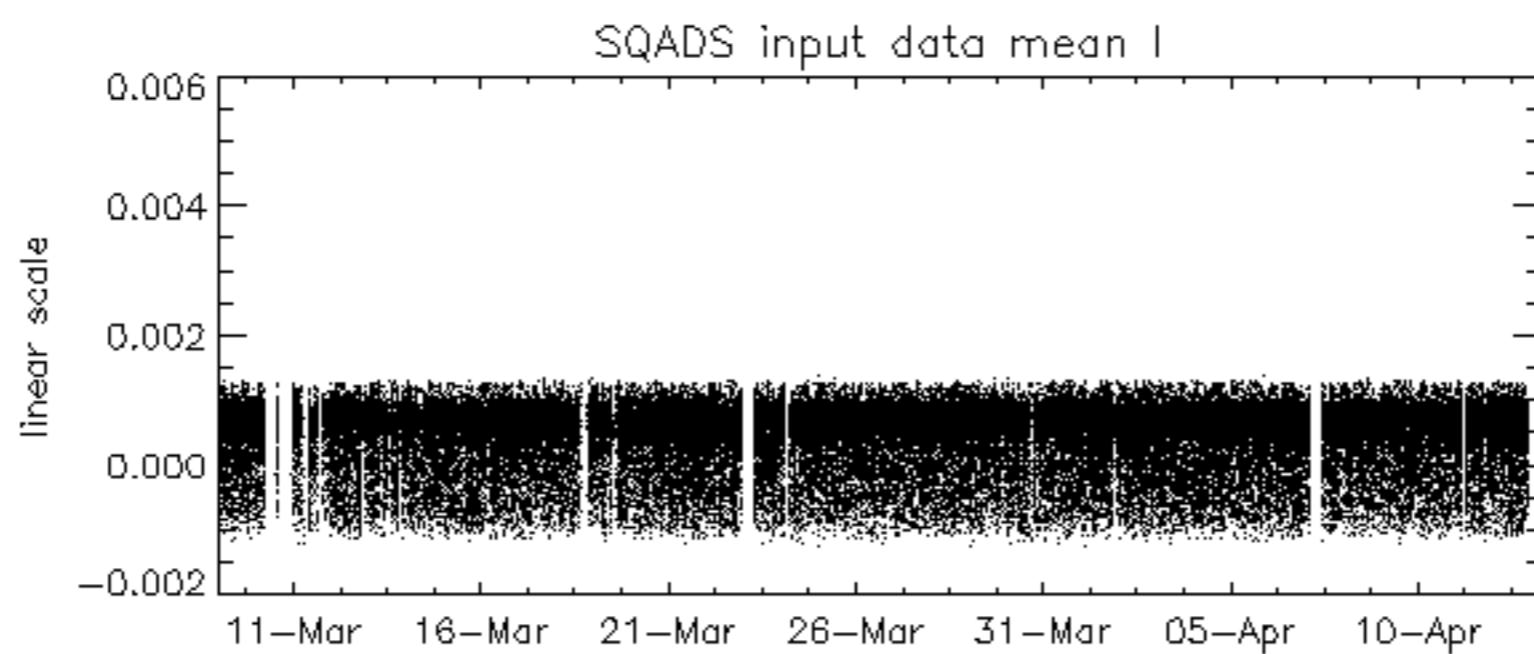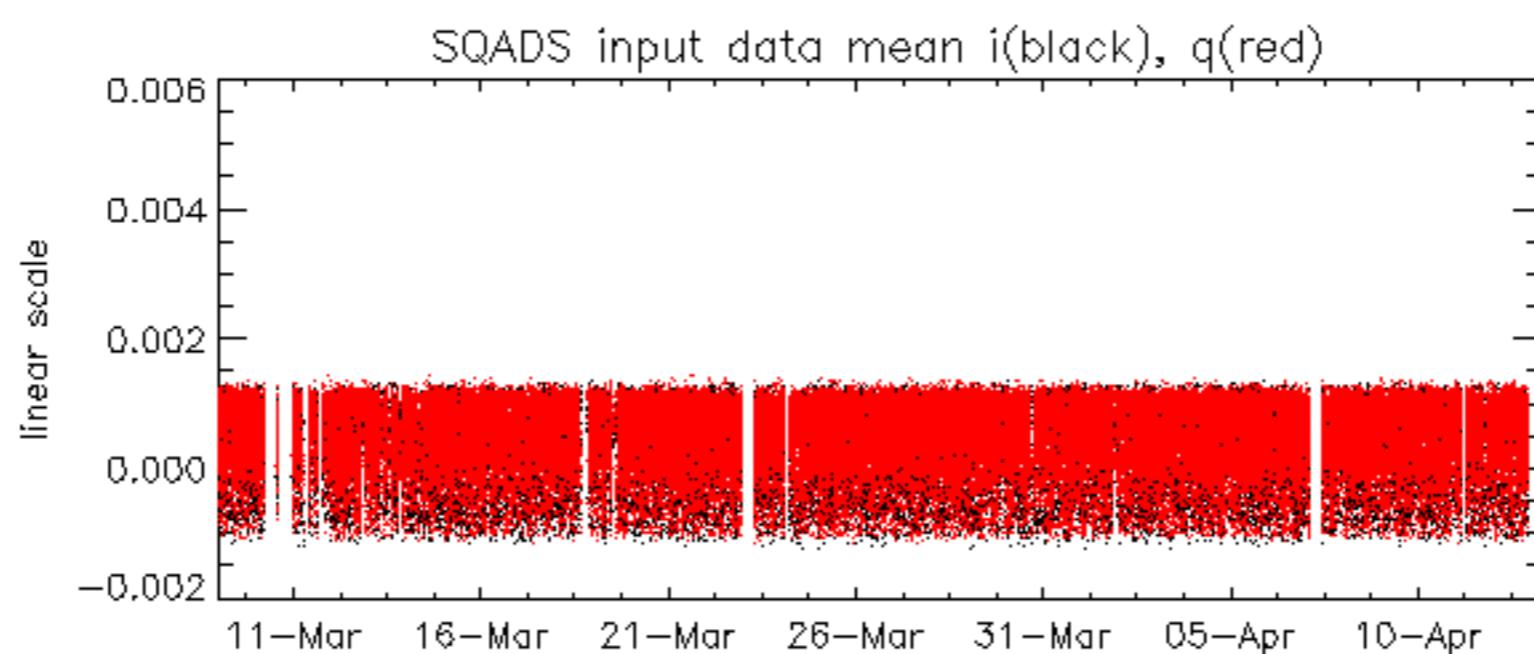

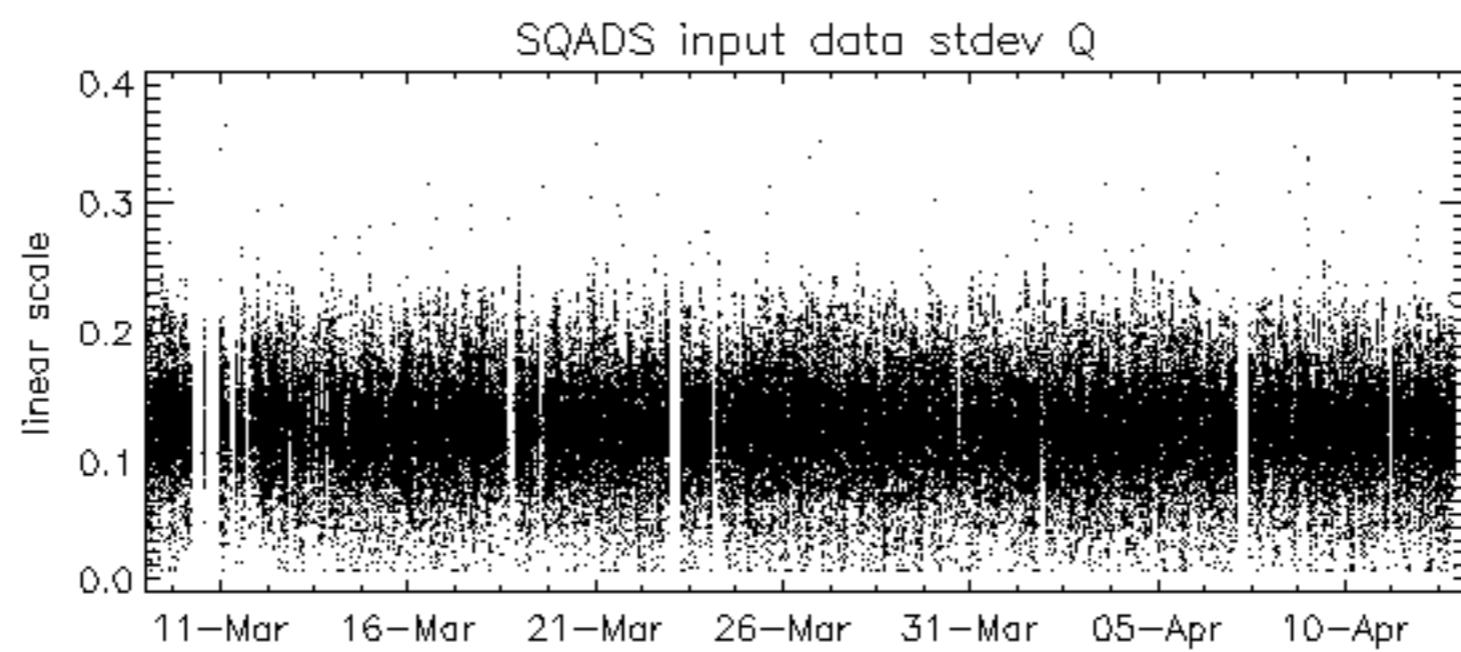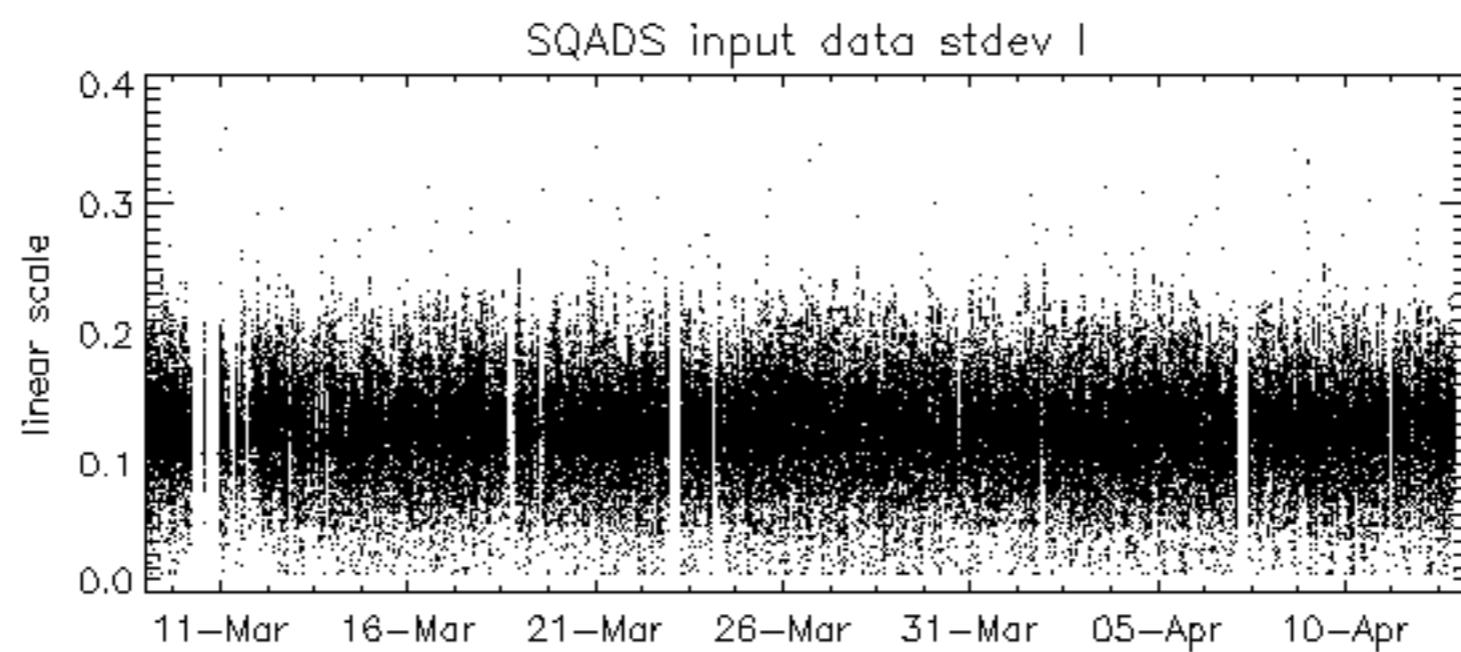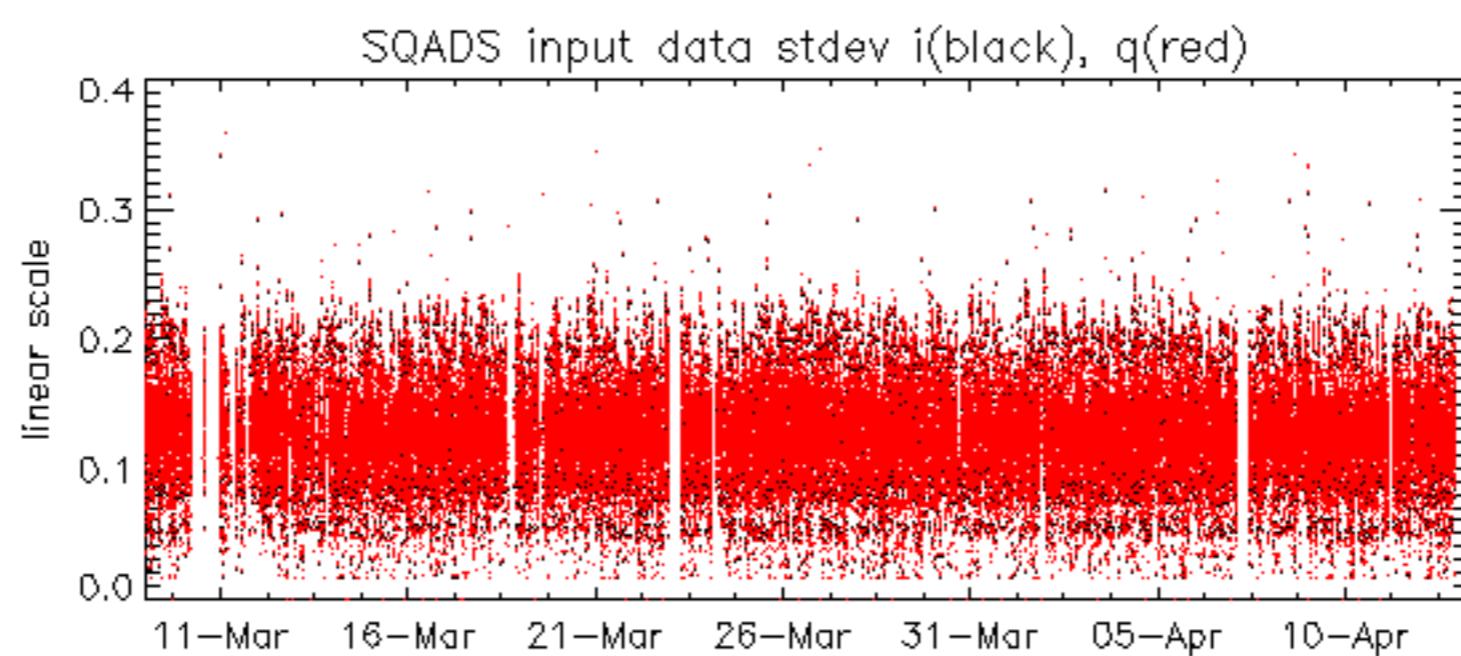

Reference:	2001-02-09 13:50:42 H	TxGain
Test	: 2004-04-12 19:58:26 H	
A1	A3	B1
B3	C1	C3
D1	D3	E1
E3		
		1
		2
		3
		4
		5
		6
		7
		8
		9
		10
		11
		12
		13
		14
		15
		16
		17
		18
		19
		20
		21
		22
		23
		24
		25
		26
		27
		28
		29
		30
		31
		32

Reference: 2003-06-12 14:08:52 H

TxGain

Test : 2004-04-12 19:58:26 H

Reference: 2003-06-12 14:10:32 V

Test : 2004-04-12 19:59:46 V

Reference: 2003-06-12 14:08:52 H TxPhase
Test : 2004-04-12 19:58:26 H

A1 A3 B1 B3 C1 C3 D1 D3 E1 E3

A2 A4 B2 B4 C2 C4 D2 D4 E2 E4

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32

No unavailabilities during the reported period.

