

# REPORT OF 040415

last update on Thu Apr 15 13:32:20 GMT 2004

1. [Introduction](#)
2. [Summary](#)
  - [Instrument Unavailability](#)
  - [Browse Visual Inspection](#)
  - [Module Stepping Results](#)
  - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
  - [Daily statistics](#)
  - [Cyclic statistics](#)
  - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
  - [raw data mean I and Q](#)
  - [raw data stdev I and Q](#)
  - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
  - [Unbiased Doppler Error](#)
  - [Absolute Doppler](#)
  - [Doppler evolution versus ANX](#)

## 1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA\_WVS\_1P) products, which are the available few hours after the acquisition, on the high rate browse (BP) products and on the Module Stepping (MS) product.

## 2 - Summary

### 2.1 - Instrument Unavailability

ASAR instrument unavailable due to OCM (planned Manoeuvre). 14-APR-2004 02:45:00 / 13:40:00.

### 2.2 - Browse Visual Inspection

No anomalies observed on available browse products.

### 2.3 - Data Analysis

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.

### 3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis. The purpose of this mode is to identify any malfunctioning modules and to identify modules for which calibration offsets are to be applied. The MS products analysis shows a failure in TX module 30 tile B2, since 12-APR-2004:

- ASA\_MS\_\_0PNPDK20040414\_185512\_000000152026\_00027\_11103\_0072.N1
- ASA\_MS\_\_0PNPDK20040414\_185632\_000000152026\_00027\_11103\_0073.N1

Polarisation	Start Time
V	20040414 185632
H	20040414 185512

#### MSM in V/V polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
☒	☒
☒	☒
☒	☒
☒	☒

#### MSM in H/H polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
☒	☒
☒	☒
☒	☒
☒	☒

### 4 - Internal calibration Results

No anomalies observed.

## 4.1 - Daily statistics



## 4.2 - Cyclic statistics



### P1 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P1	-3.581939	0.005470	0.031669
7	P1	-3.301788	0.010310	0.009234
11	P1	-4.635944	0.020820	-0.002185
15	P1	-4.991364	0.037133	0.008985
19	P1	-3.341041	0.006766	-0.024466
22	P1	-4.520180	0.014991	0.014945
24	P1	-5.043364	0.015271	0.035989
28	P1	-4.584866	0.013723	-0.050092

### P2 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P2	-22.394152	0.079201	-0.005577
7	P2	-22.878304	0.123040	0.022143
11	P2	-15.941834	0.154026	0.106496
15	P2	-7.163270	0.089426	0.052662
19	P2	-9.508341	0.169619	0.043589
22	P2	-17.662128	0.099690	0.063073
24	P2	-21.008127	0.112152	0.015874
28	P2	-16.602480	0.081212	-0.009250

### P3 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P3	-8.128109	0.003044	-0.008597
7	P3	-8.128108	0.003044	-0.008616
11	P3	-8.128107	0.003043	-0.008650

15	P3	-8.128100	0.003043	-0.008687
19	P3	-8.128095	0.003043	-0.008724
22	P3	-8.128089	0.003043	-0.008766
24	P3	-8.128078	0.003045	-0.008847
28	P3	-8.128083	0.003039	-0.008422

#### 4.3 - cal pulses monitoring (all rows)



### 5 - RAW data statistics

No anomalies observed.

#### 5.1 - Input mean I/Q

channel	stat	DSS-B
MEAN I	mean	0.000476876
	stdev	2.37549e-07
MEAN Q	mean	0.000482791
	stdev	2.68983e-07



#### 5.2 - Input stdev I/Q

channel	stat	DSS-B
STDEV I	mean	0.127693
	stdev	0.00118695
STDEV Q	mean	0.127946
	stdev	0.00120062



#### 5.3 - Gain imbalance I/Q



## 6 - Doppler Analysis

No anomalies observed in Doppler evolution.  
Analysis performed over the last 35 days.

### 6.1 - Unbiased Doppler Error

<b>Evolution of unbiased Doppler error (Real - Expected)</b>
--

Ascending
-----------

Descending
------------

### 6.2 - Absolute Doppler

<b>Evolution of Absolute Doppler</b>
--------------------------------------

Ascending
-----------

Descending
------------




### 6.3 - Doppler evolution versus ANX

<b>Evolution Doppler error versus ANX</b>
---




<b>Evolution Doppler error versus ANX</b>
---



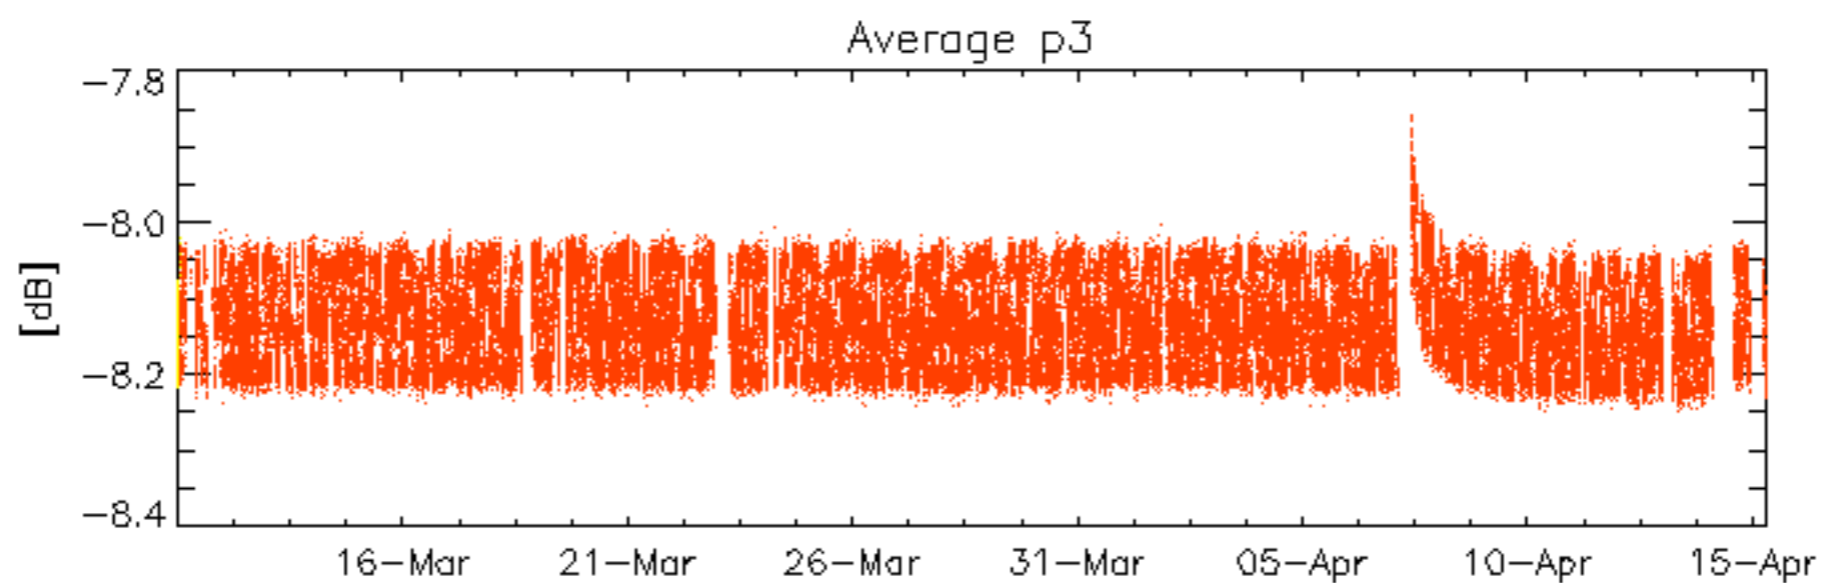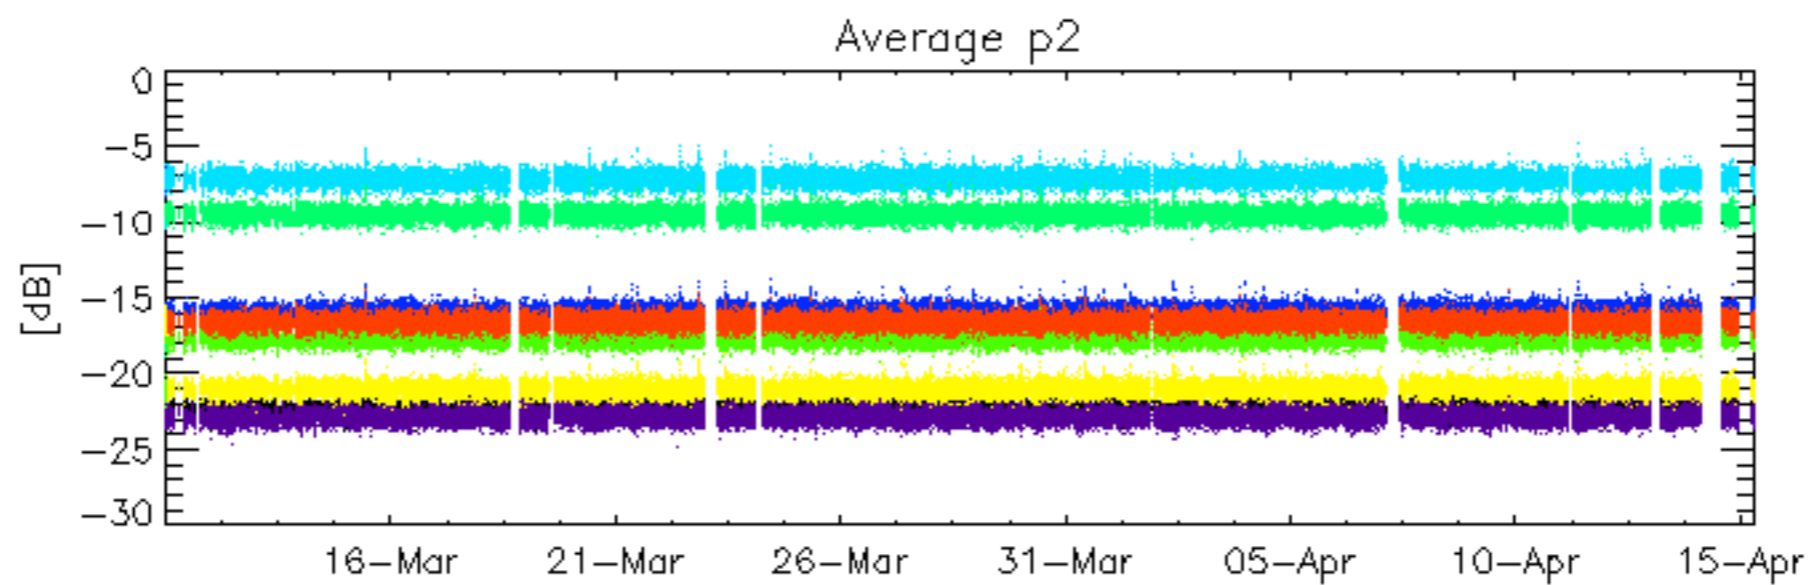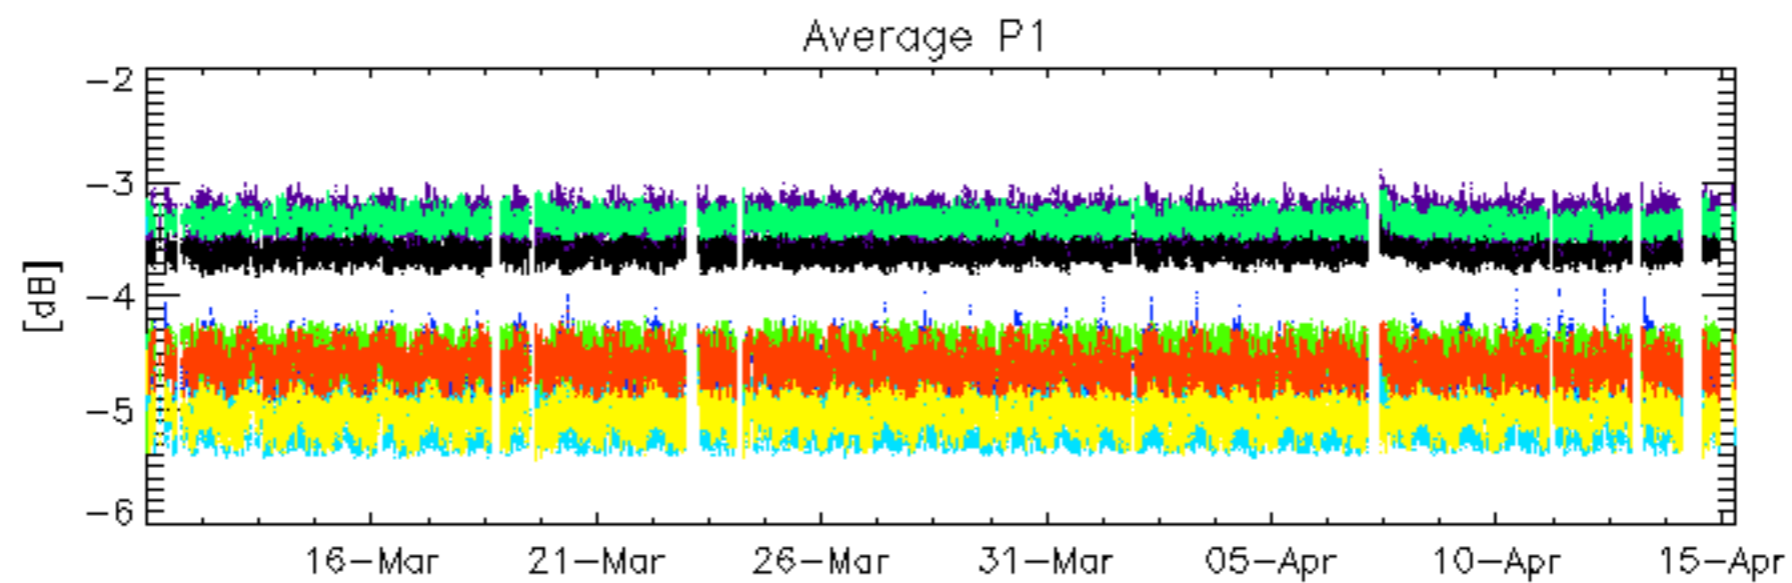


rows: \_ 3 \_ 7 \_ 11 \_ 15 \_ 19 \_ 22 \_ 24 \_ 28

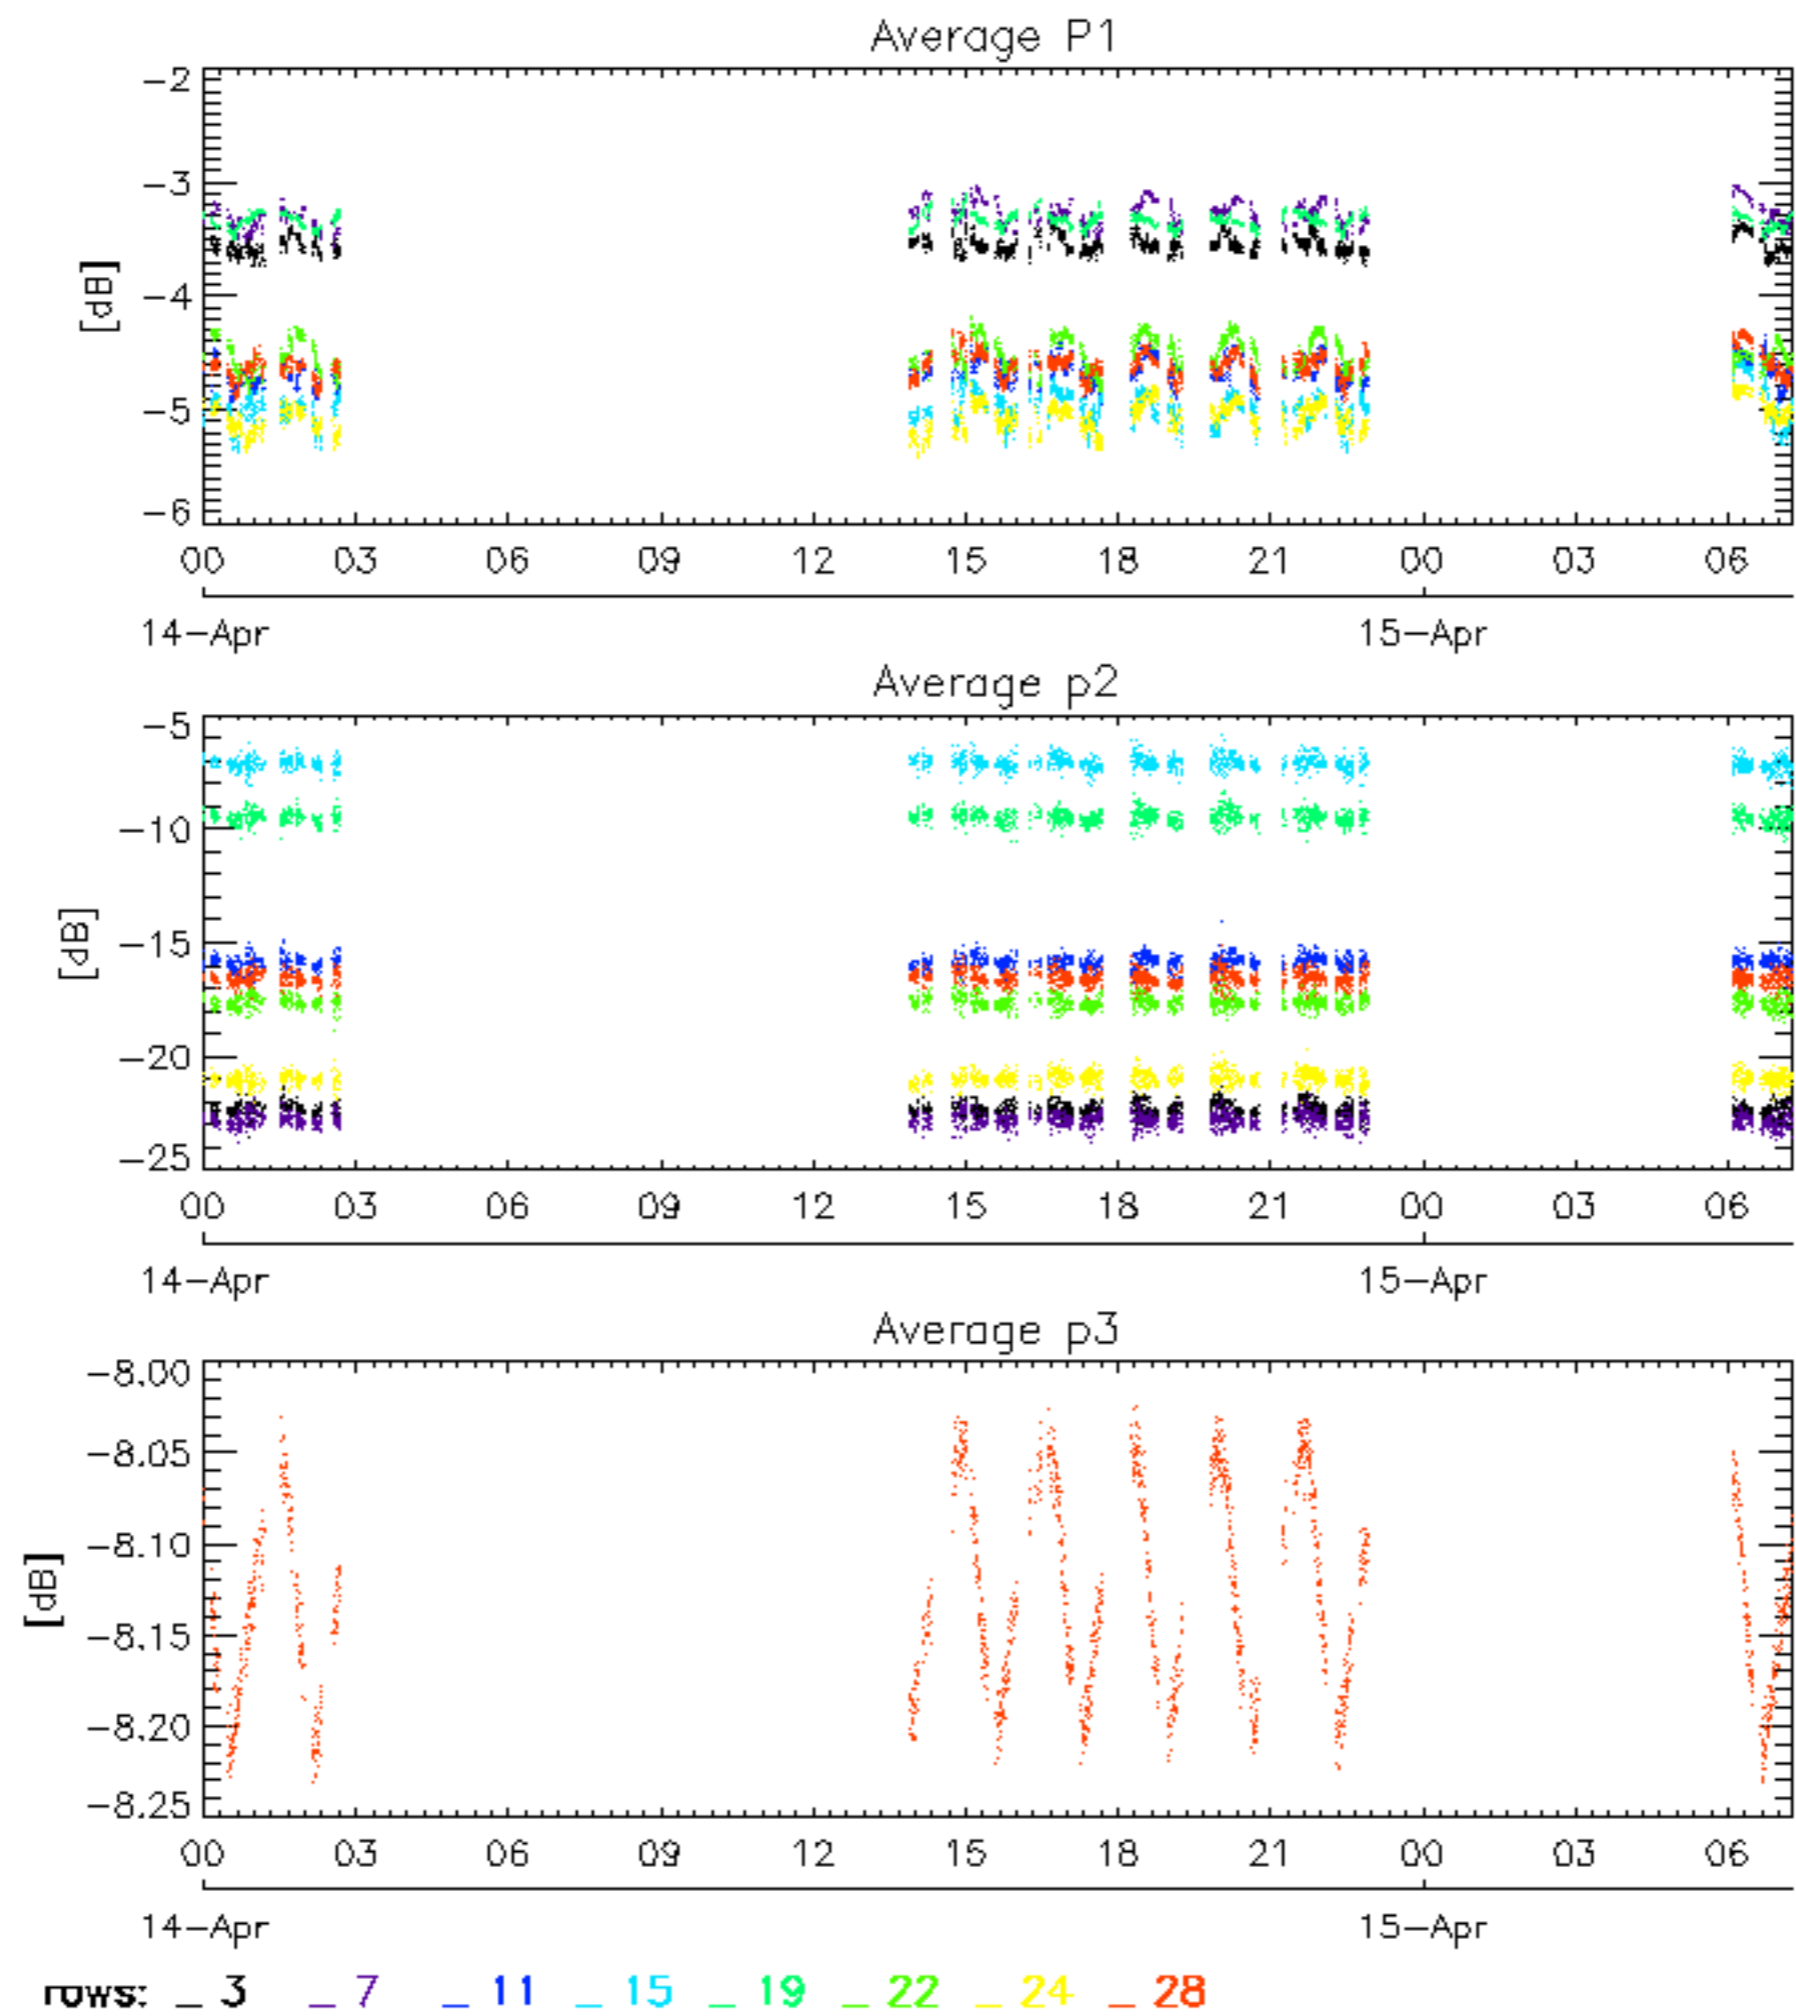

No anomalies observed on available browse products.




No anomalies observed.

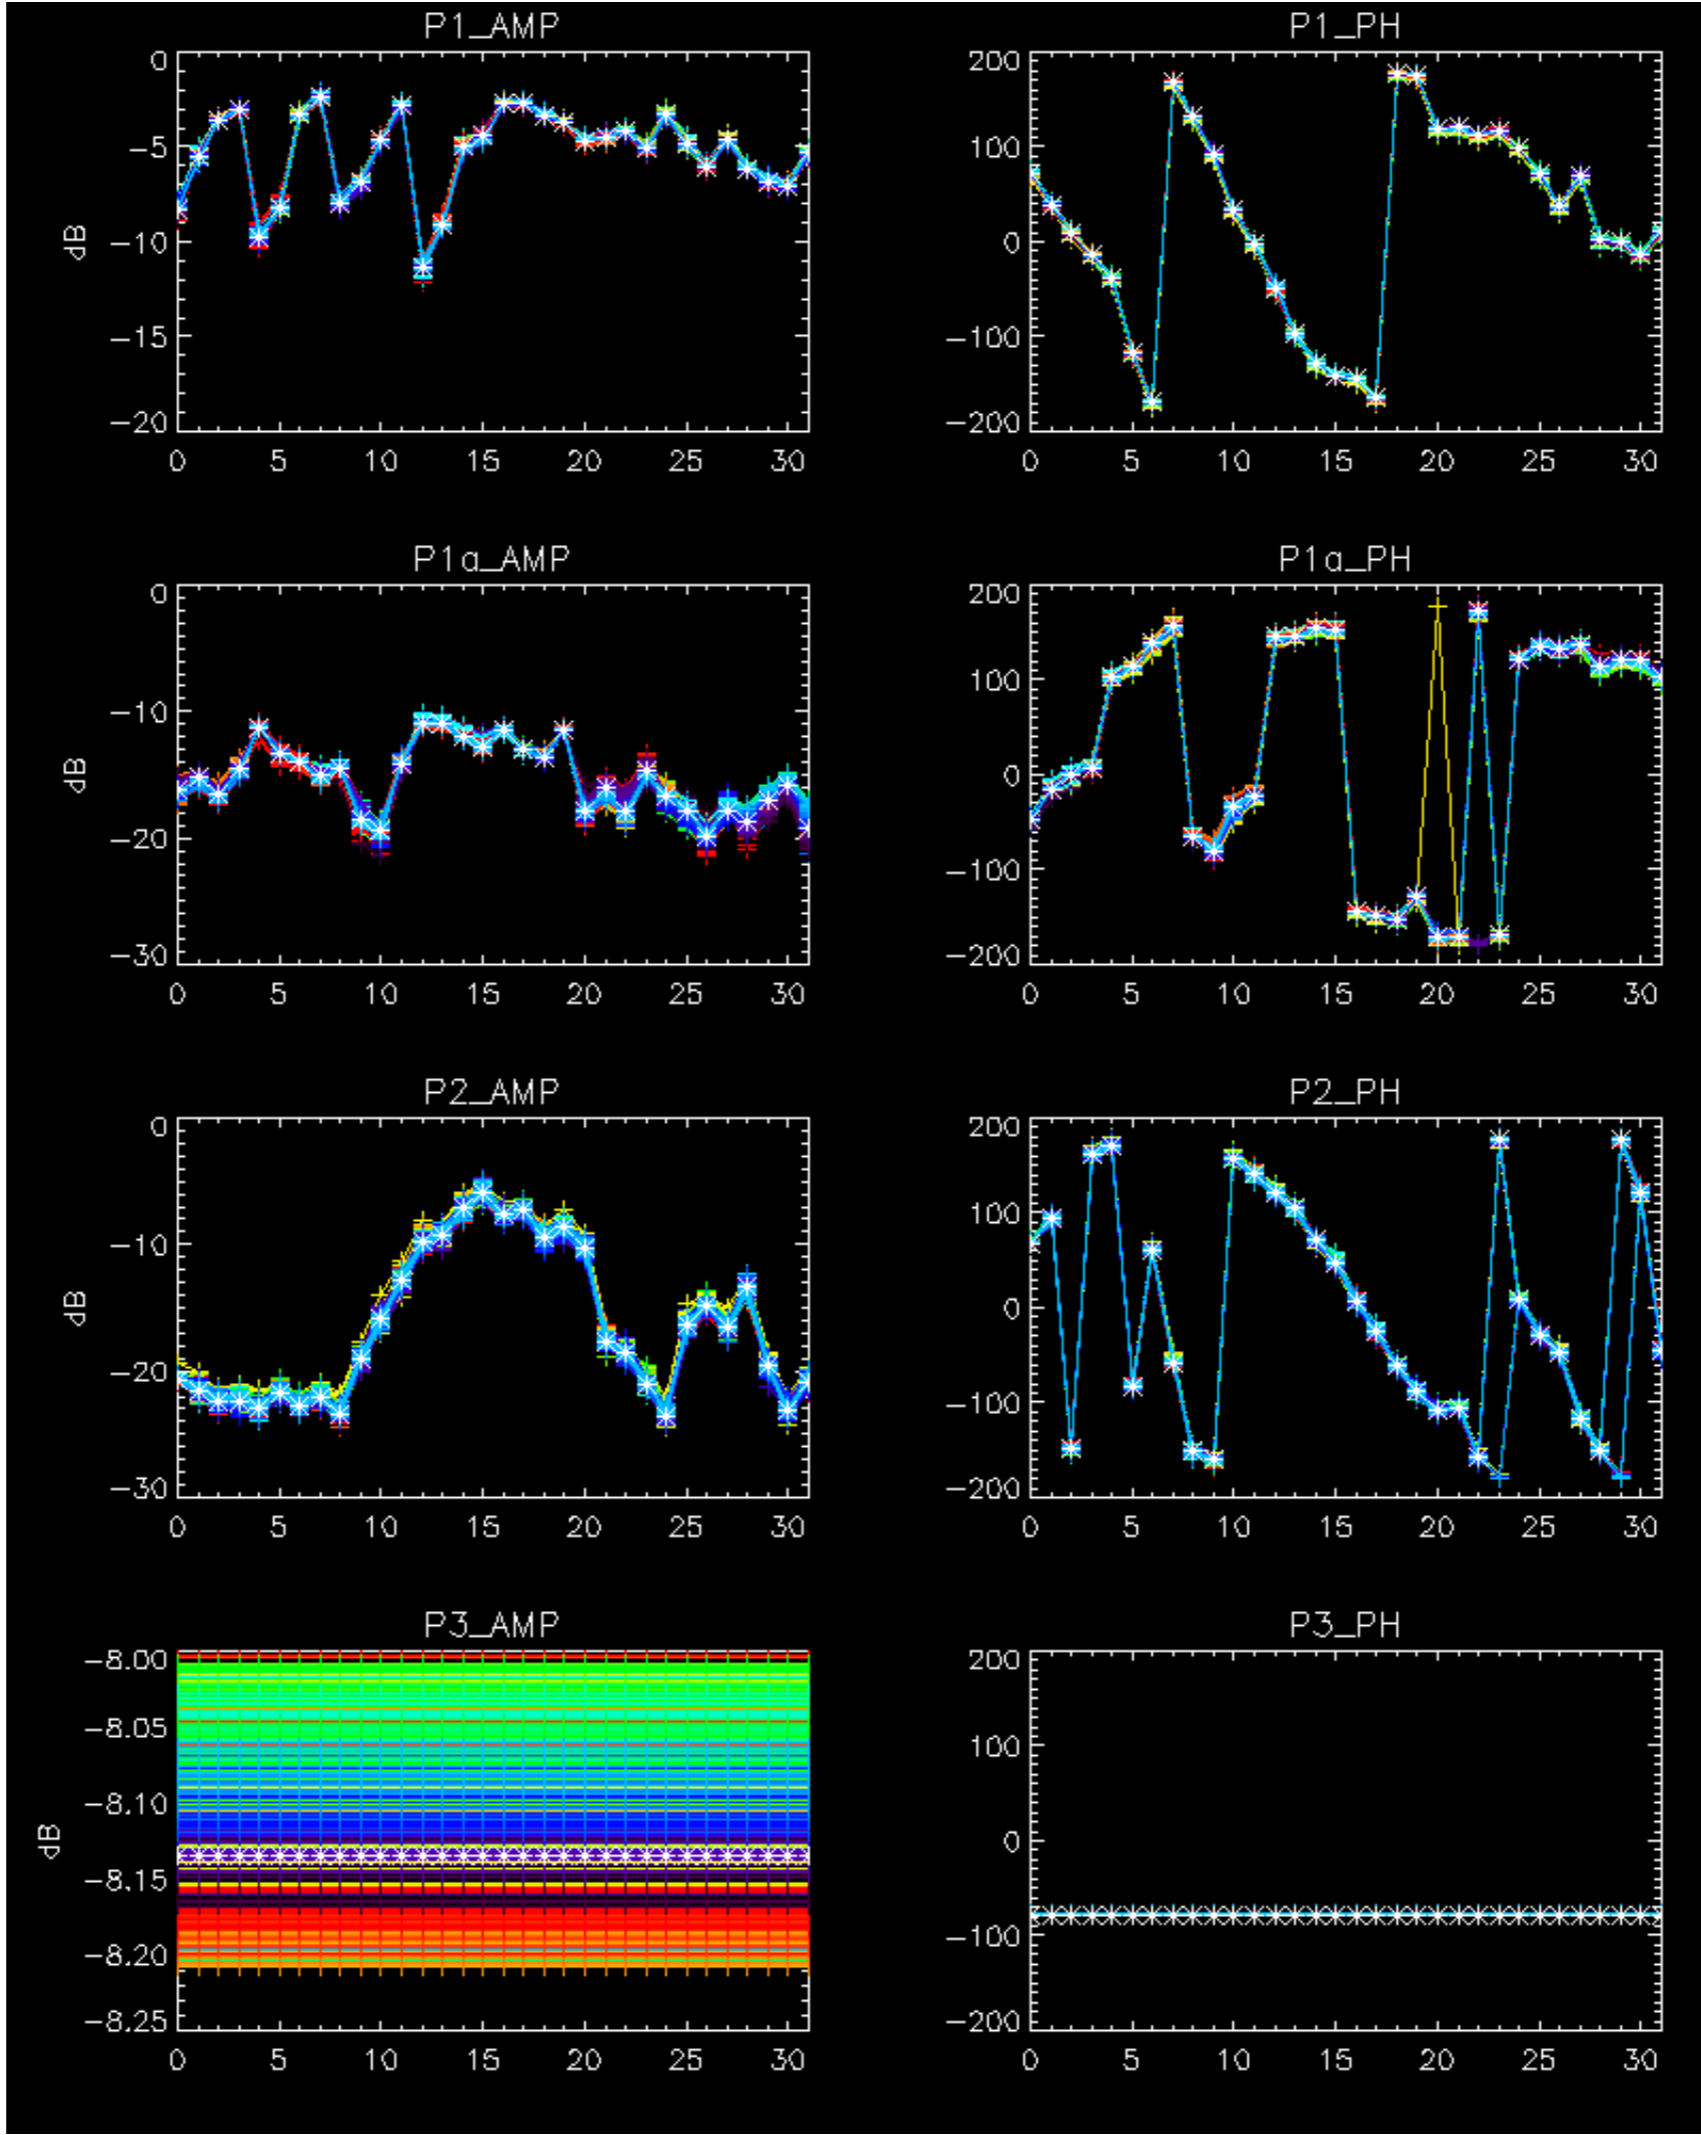


- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.



No anomalies observed in Doppler evolution.  
Analysis performed over the last 35 days.



Doppler 'WVS' 'IS2' 'H/H'

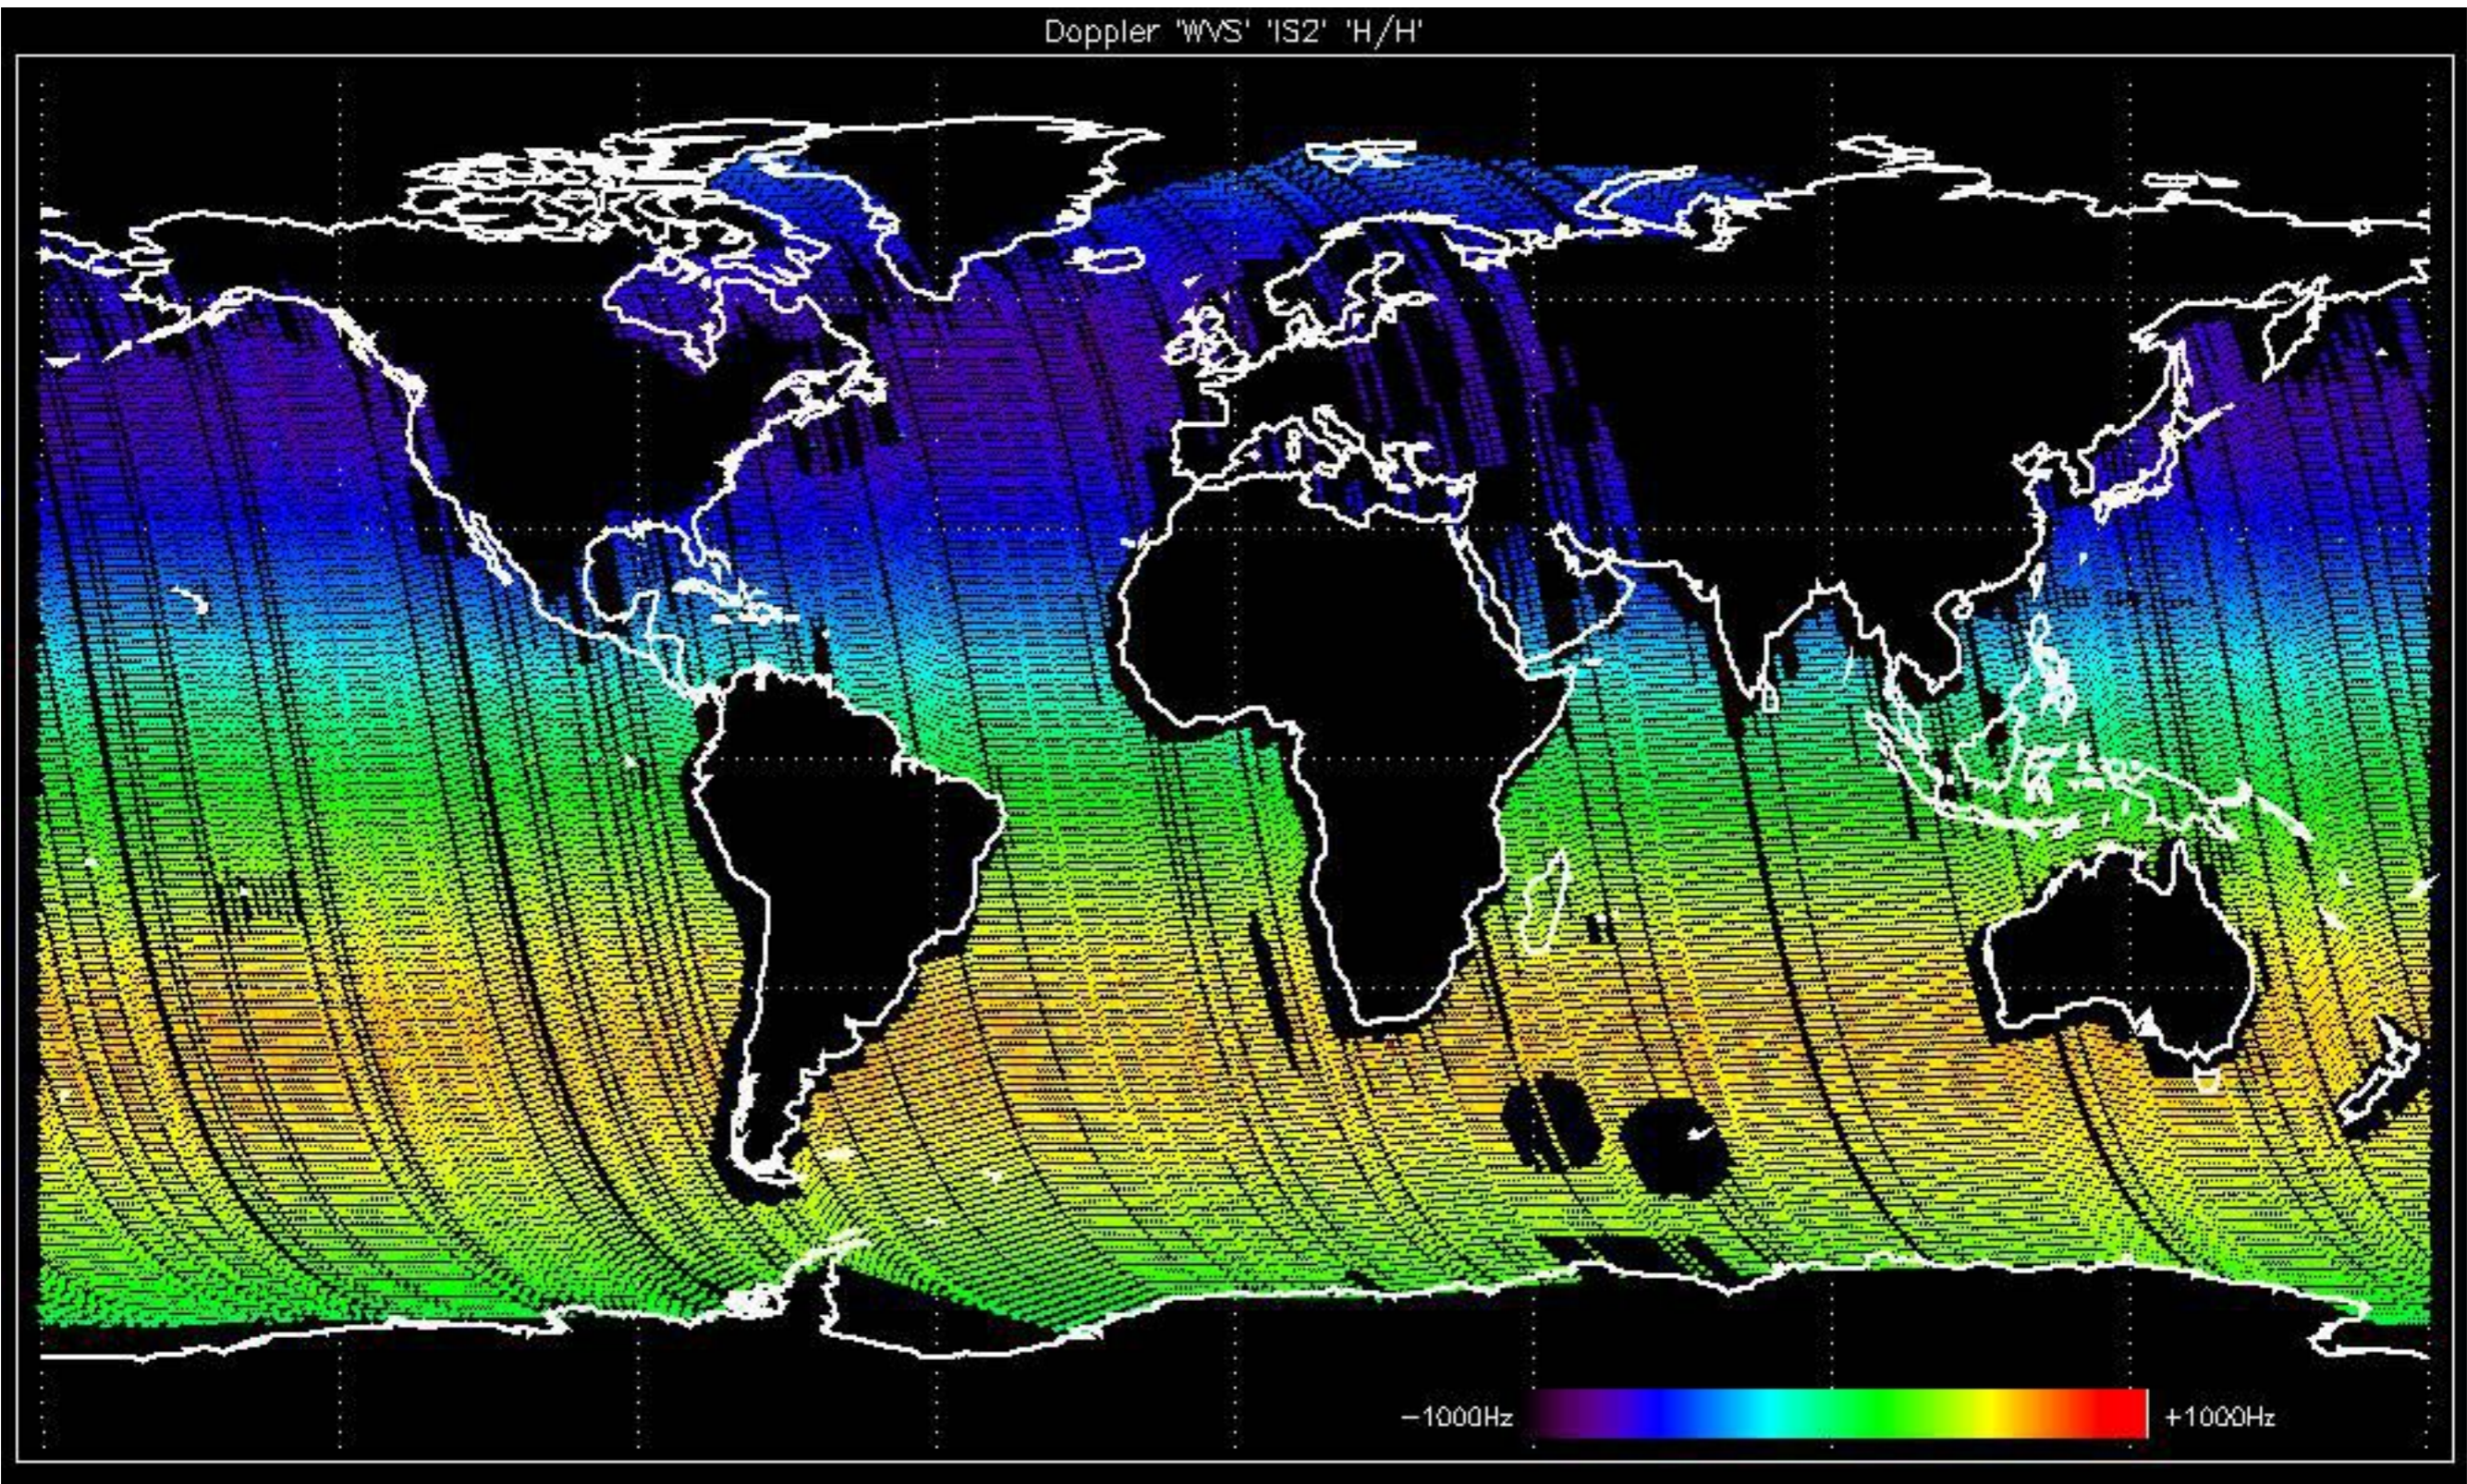

Doppler 'WVS' 'IS2' 'V/V'

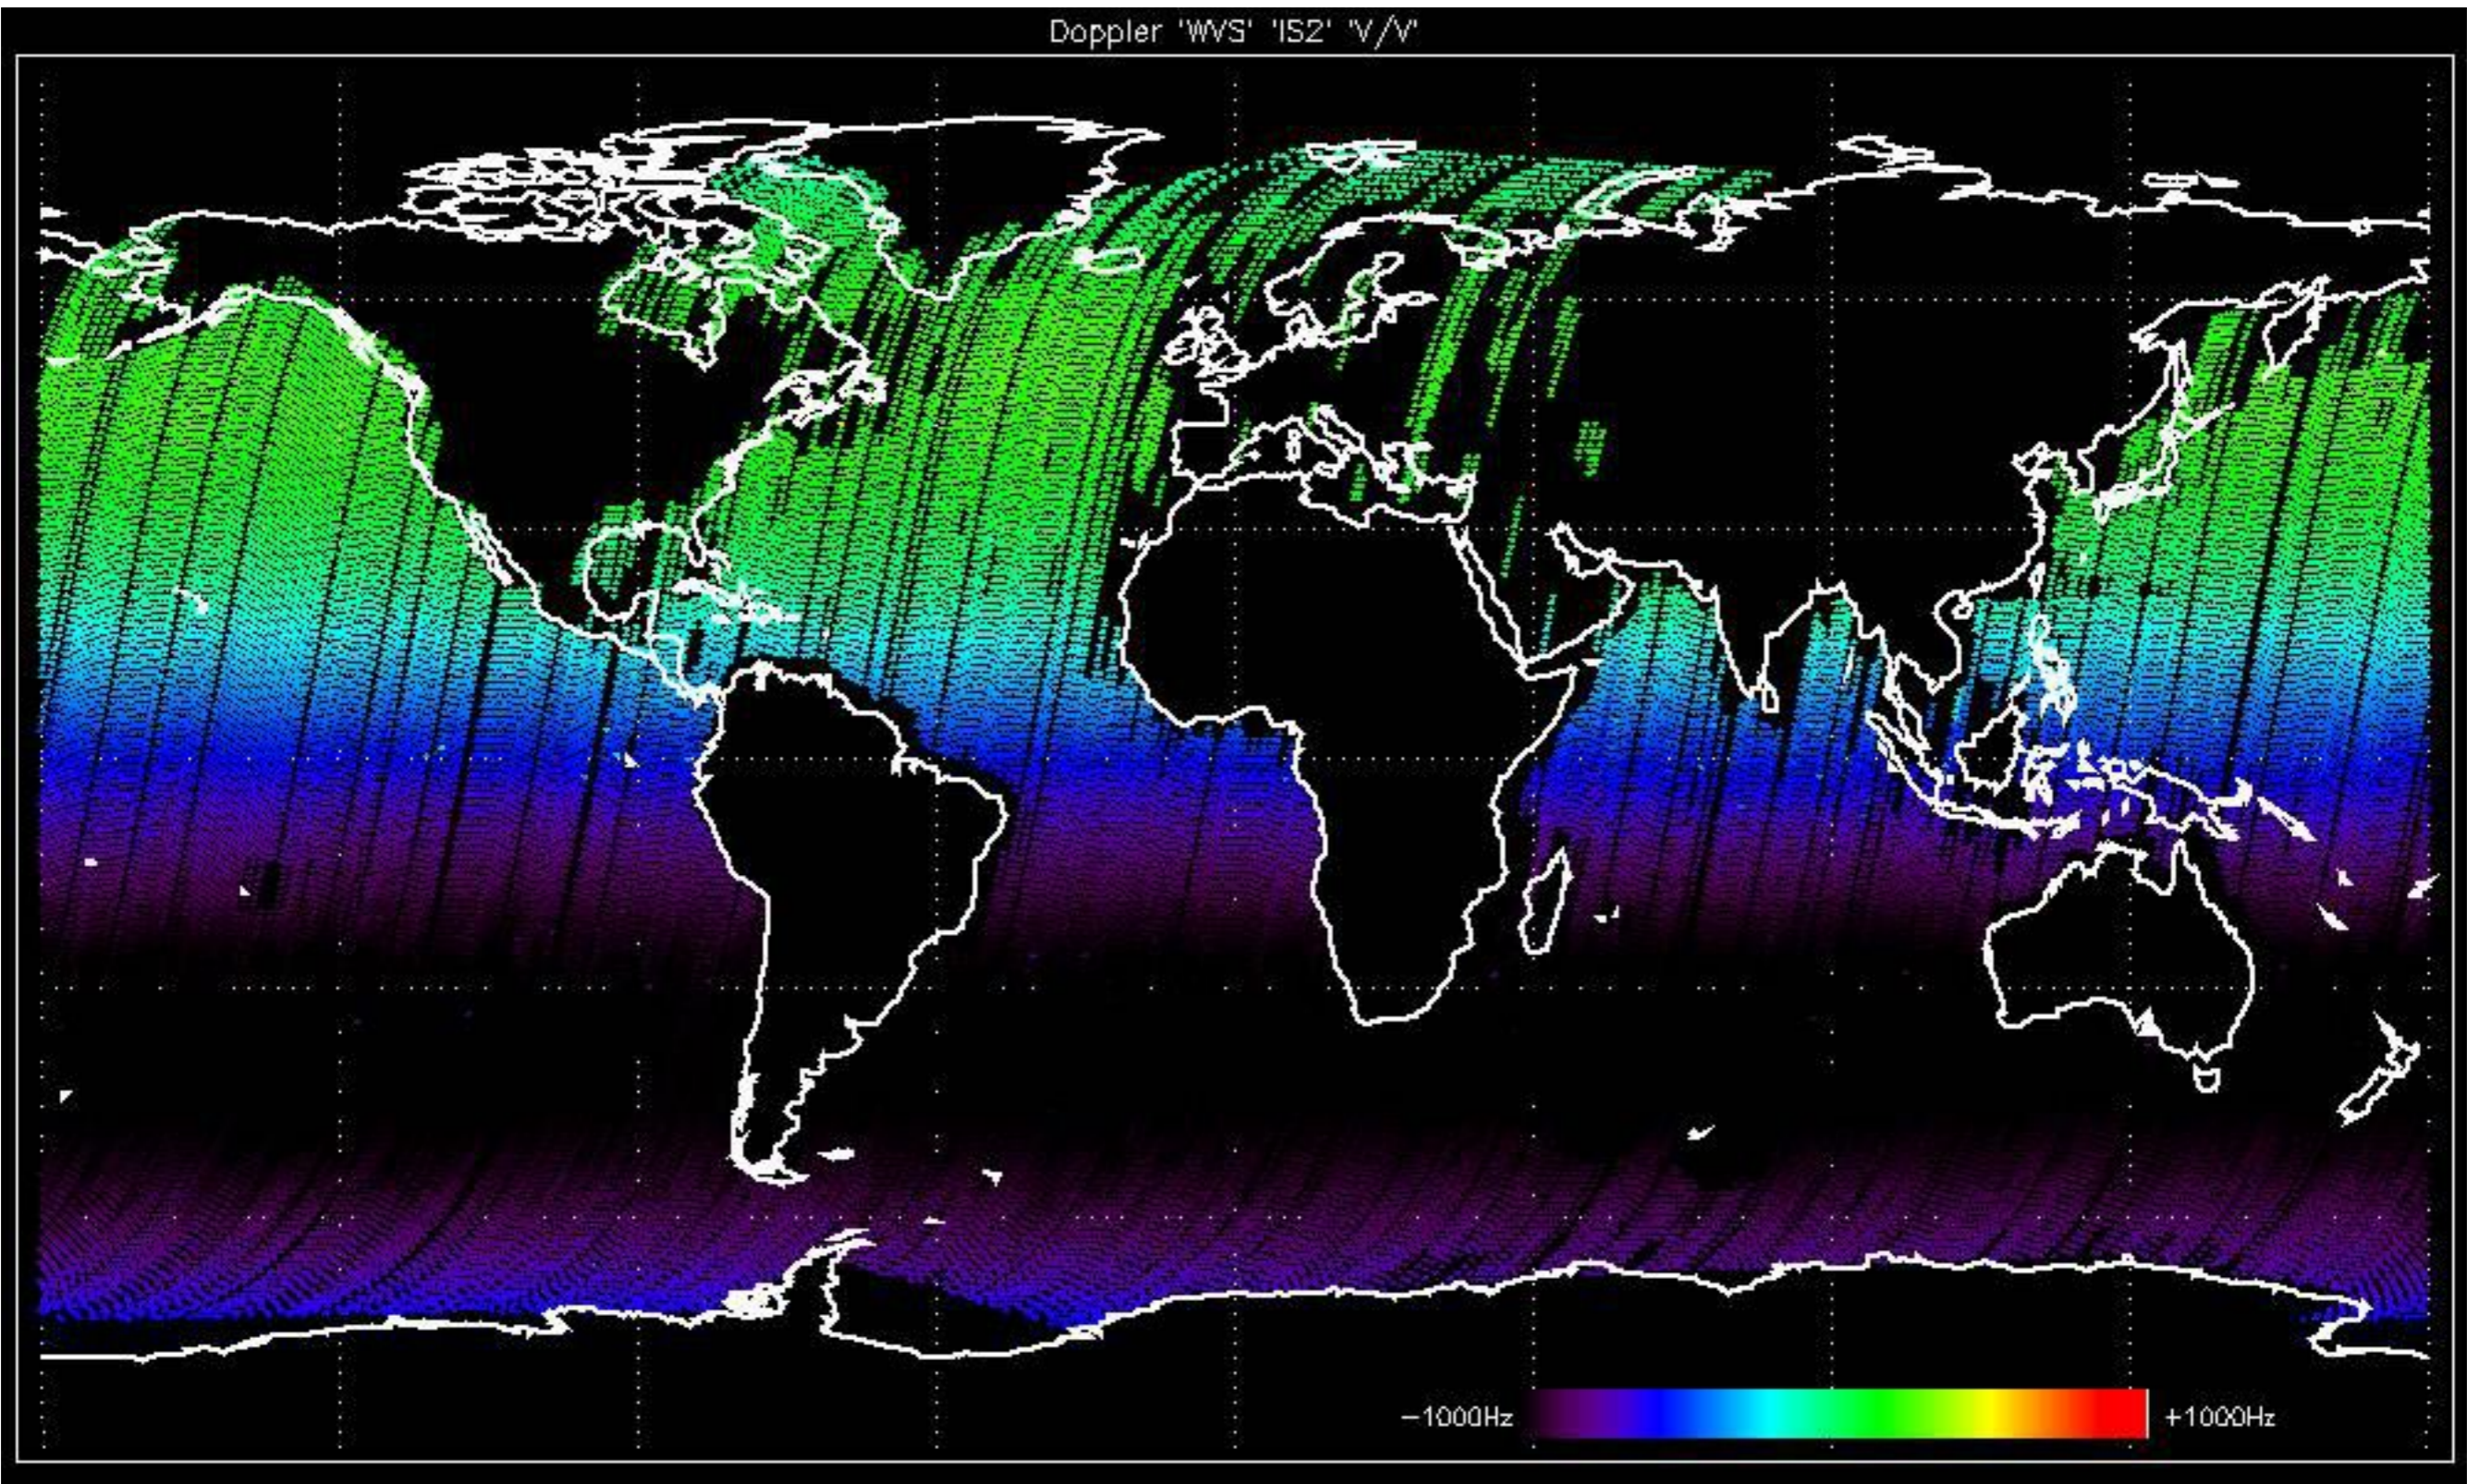


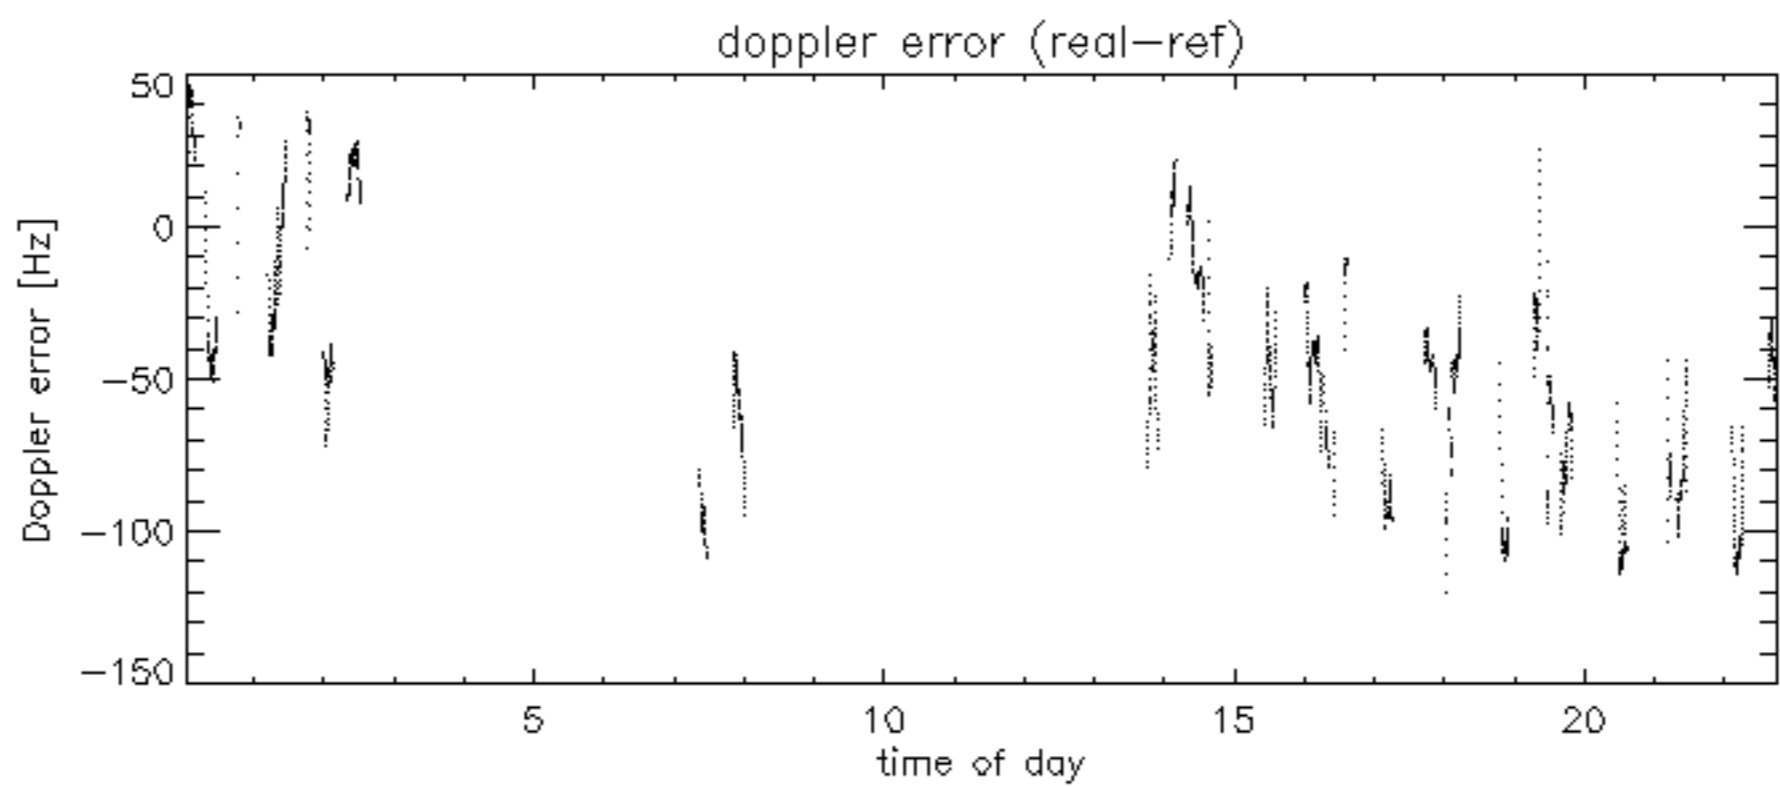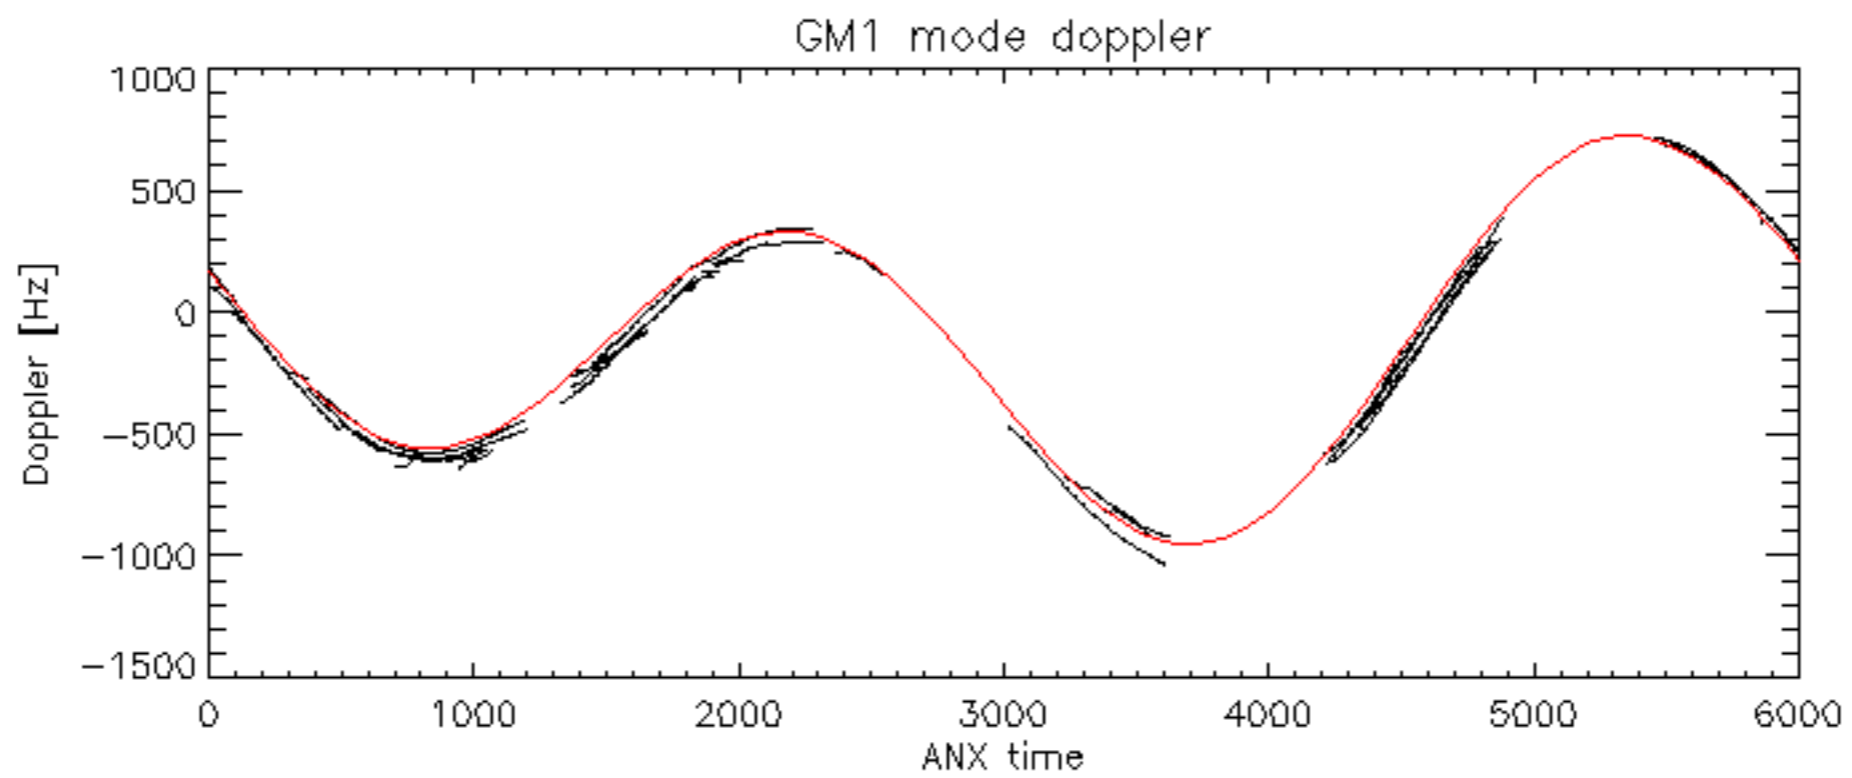

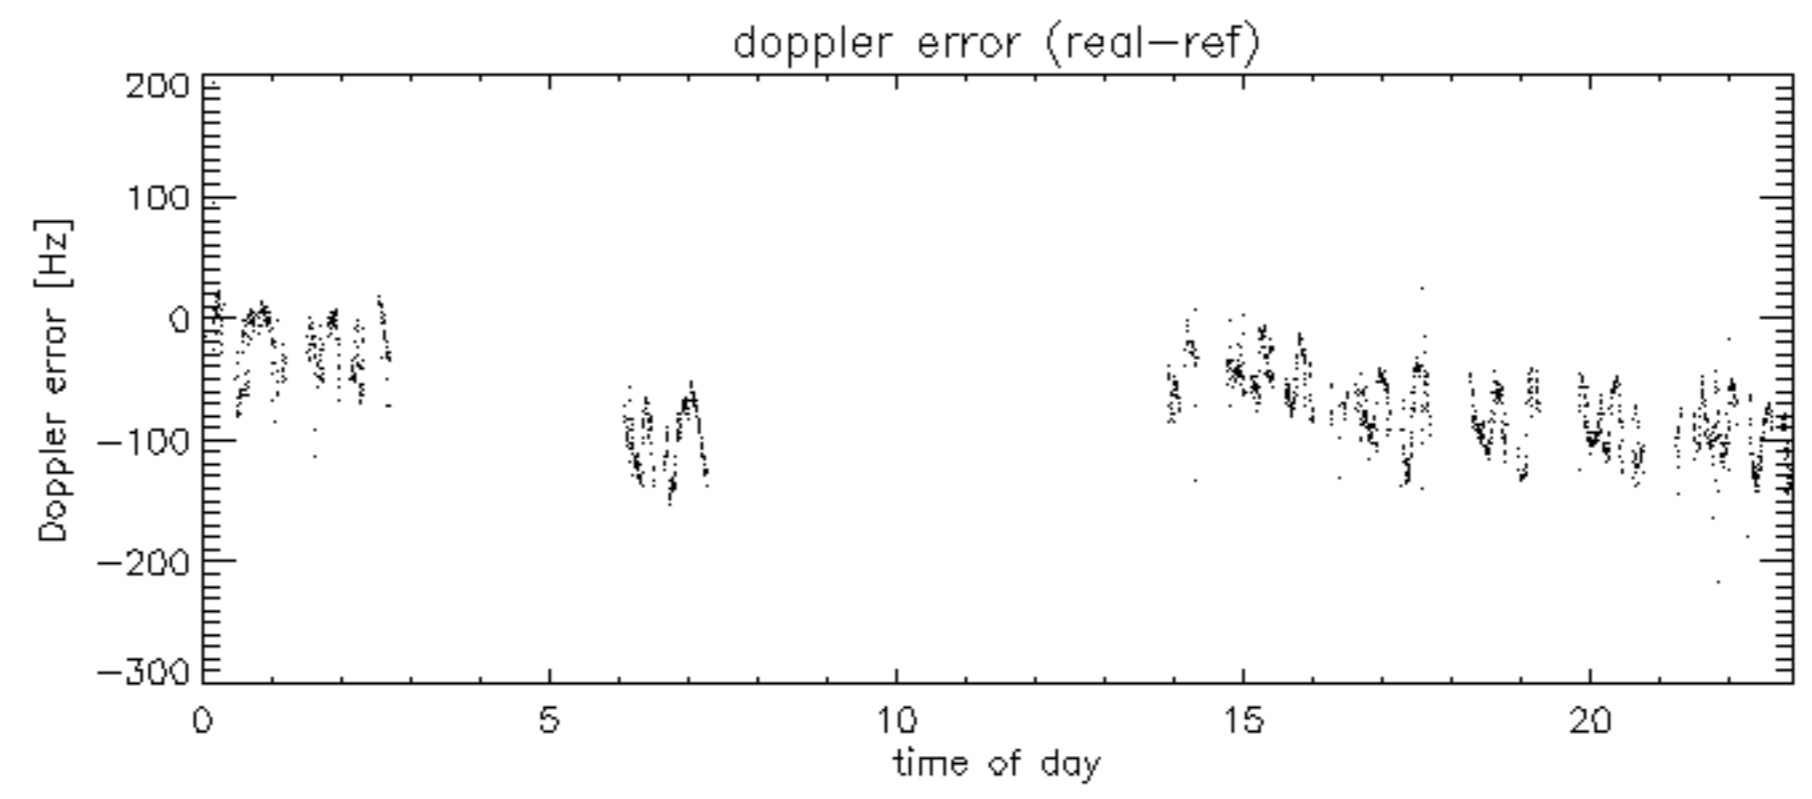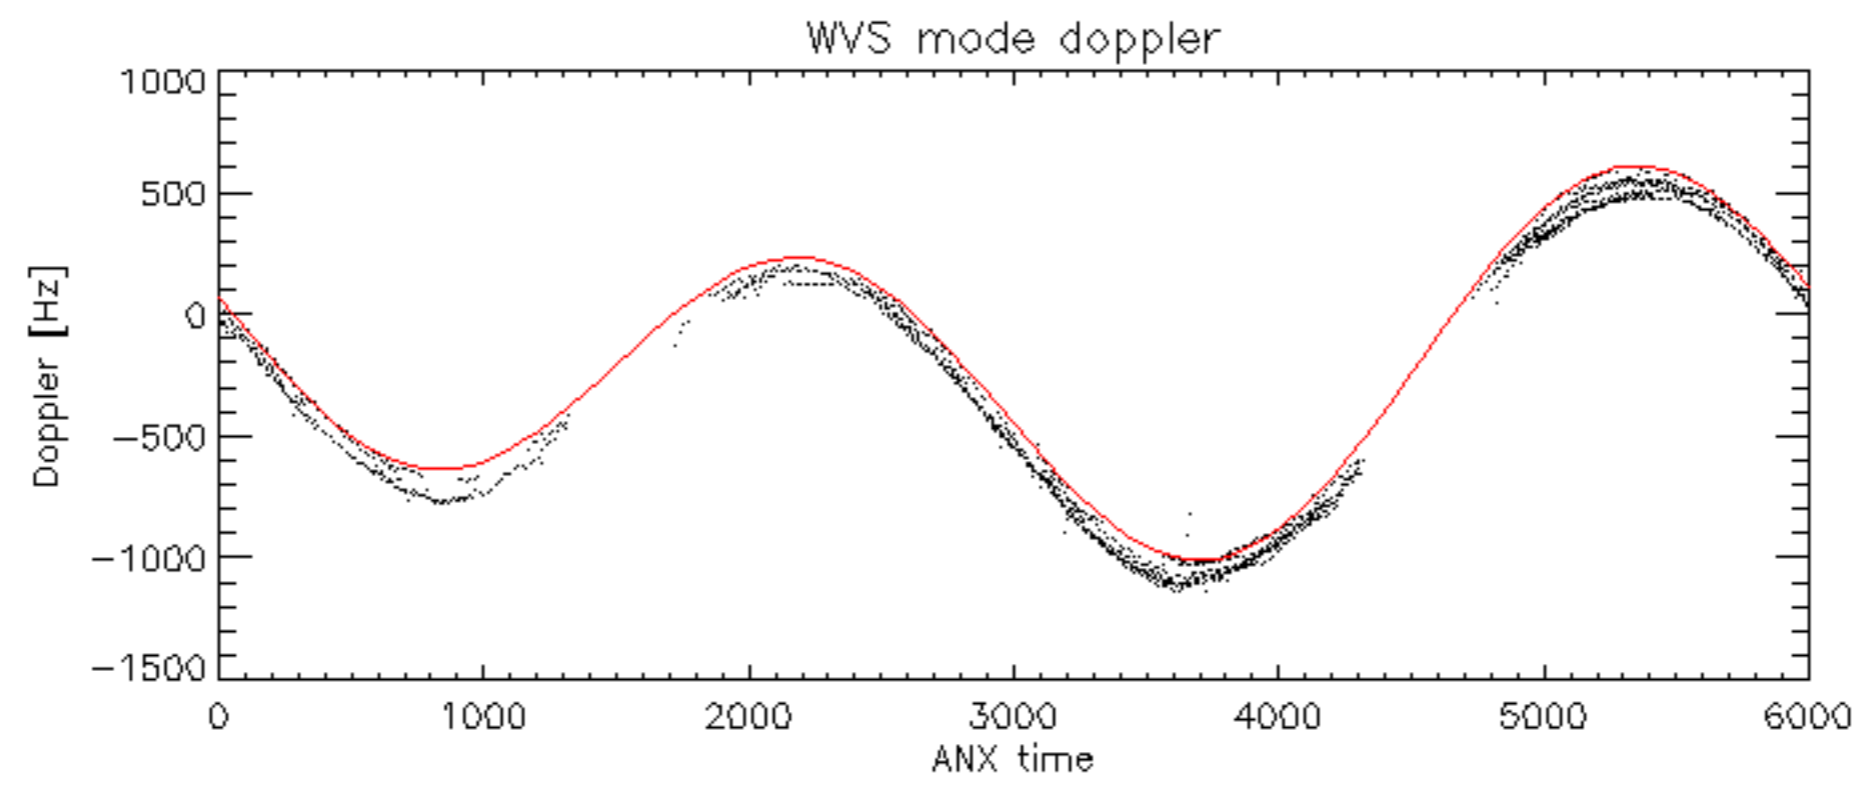




Doppler difference, estimated-predicted 'WVS' 'IS2' 'H/H' -error mean of -34.858418 Hz

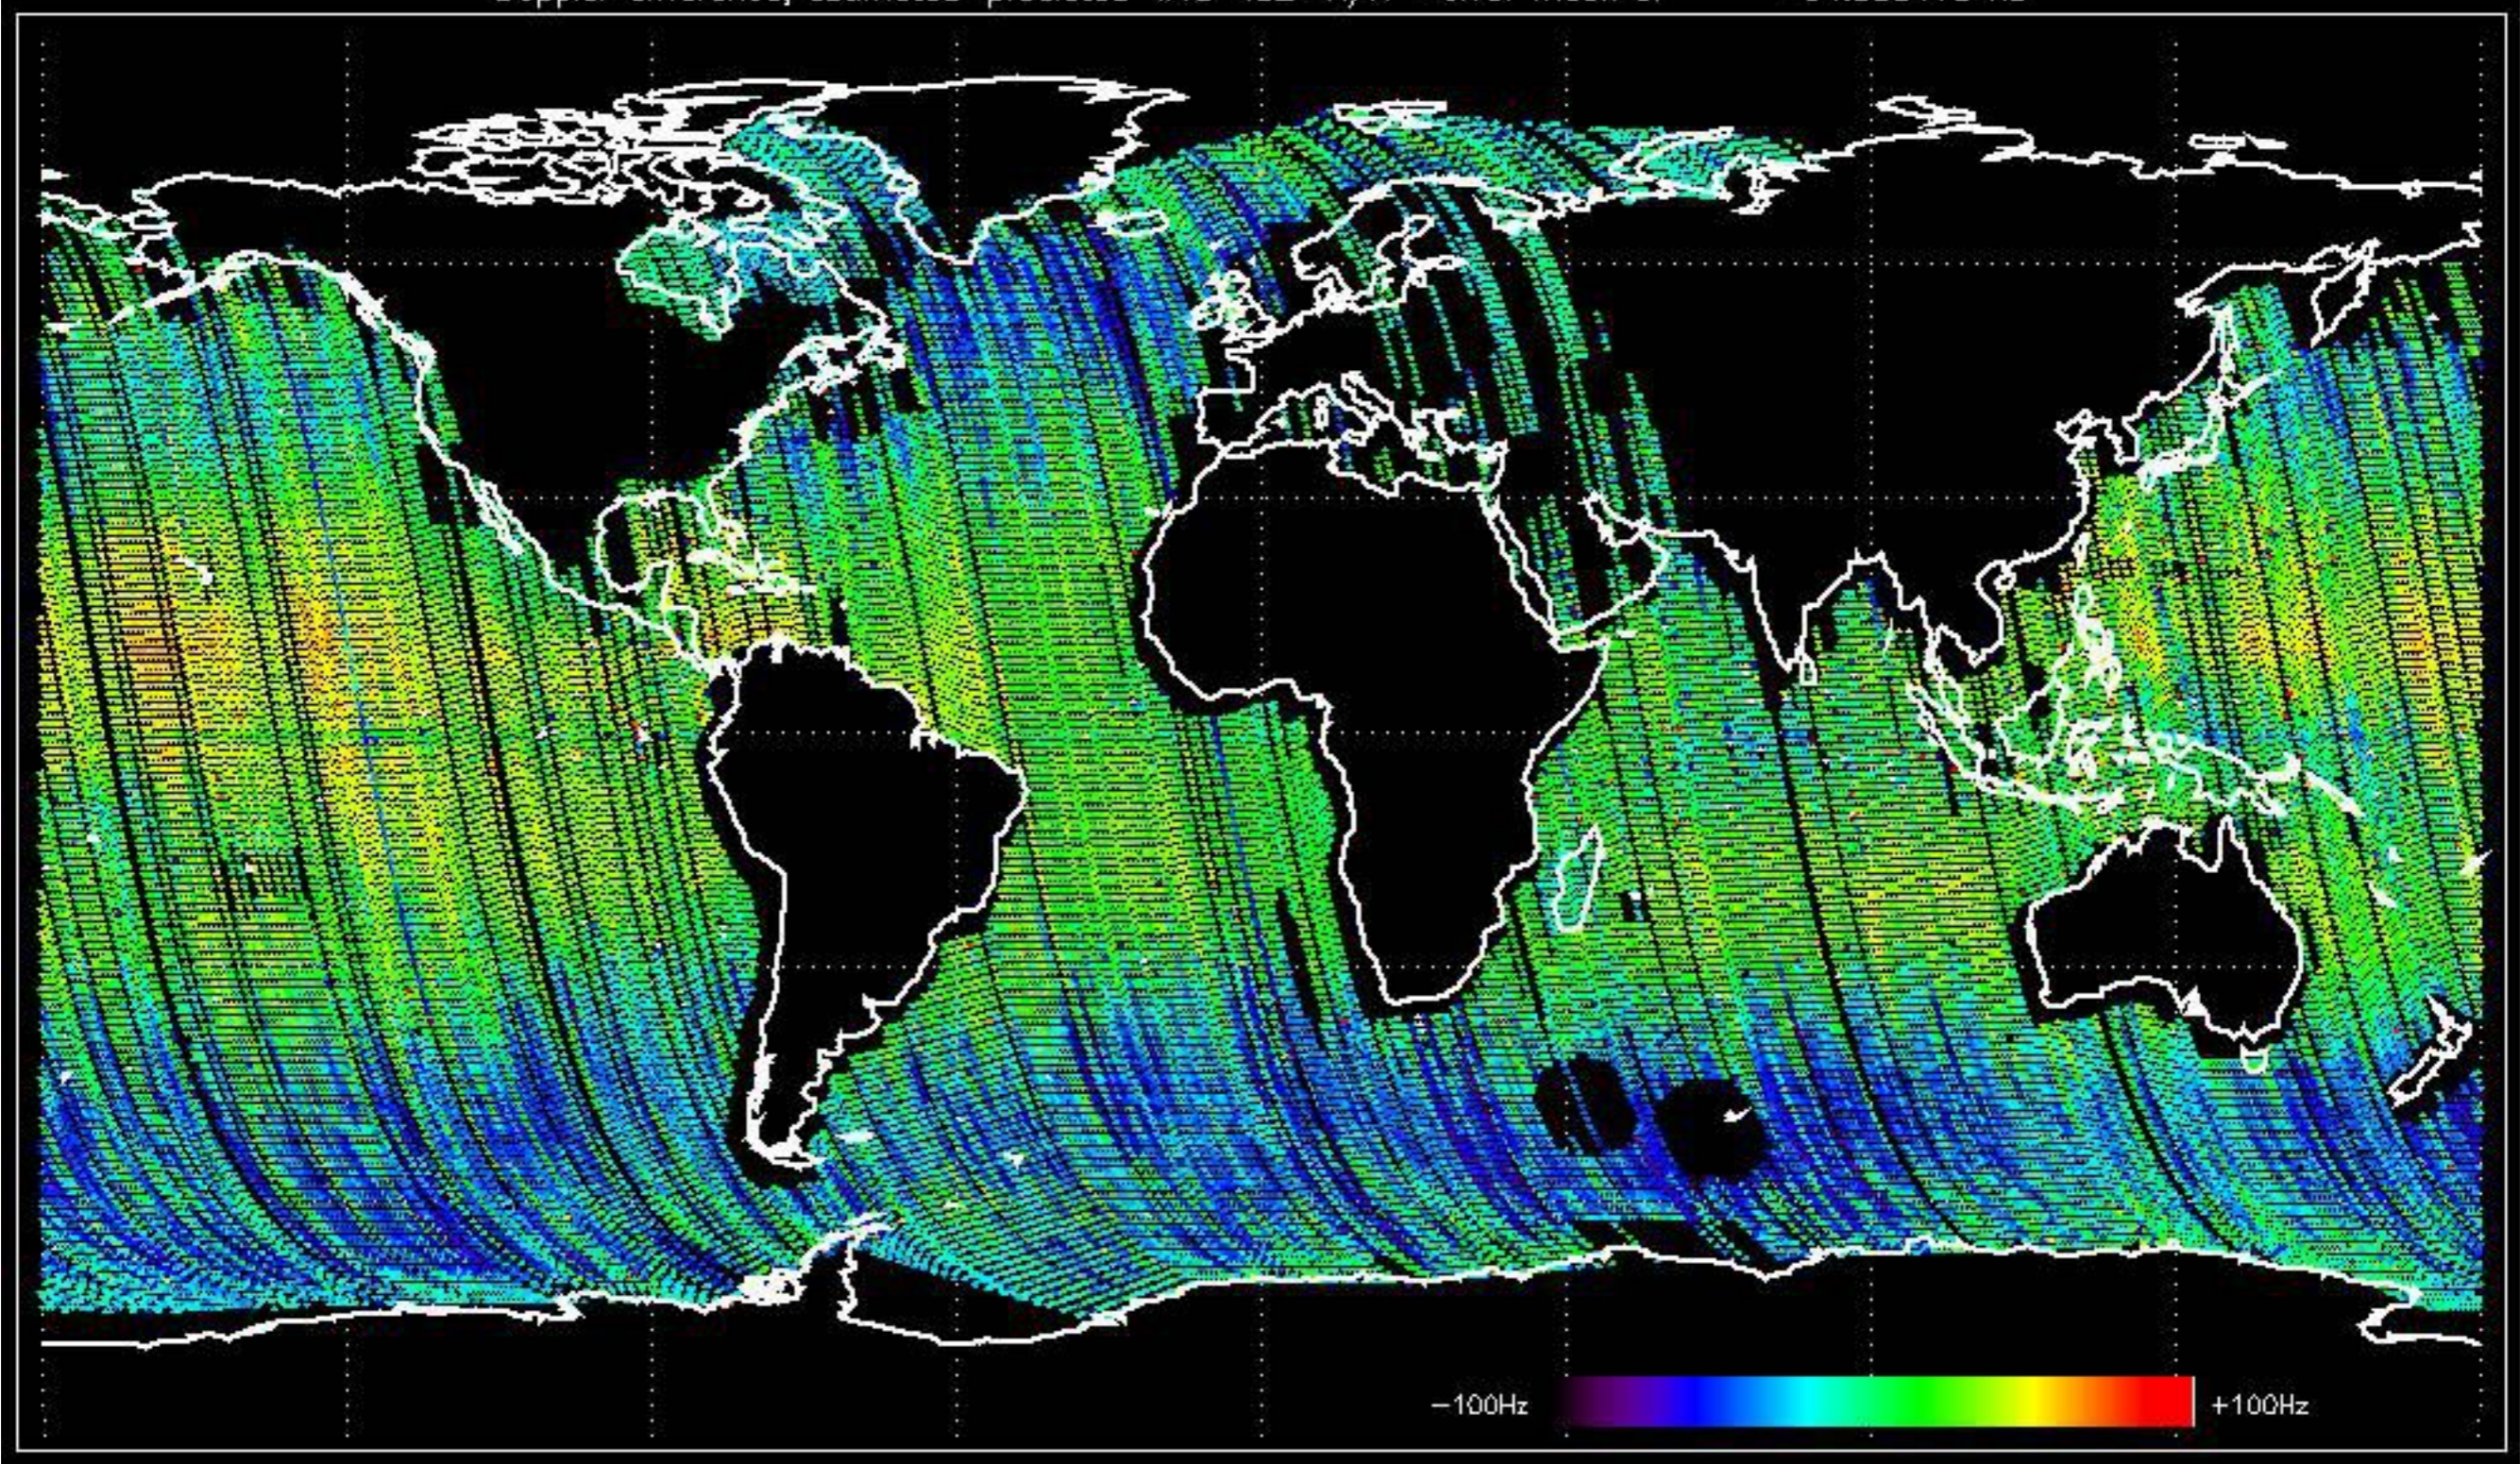

Doppler difference, estimated-predicted 'WVS' 'IS2' 'V/V' -error mean of -31.686720 Hz

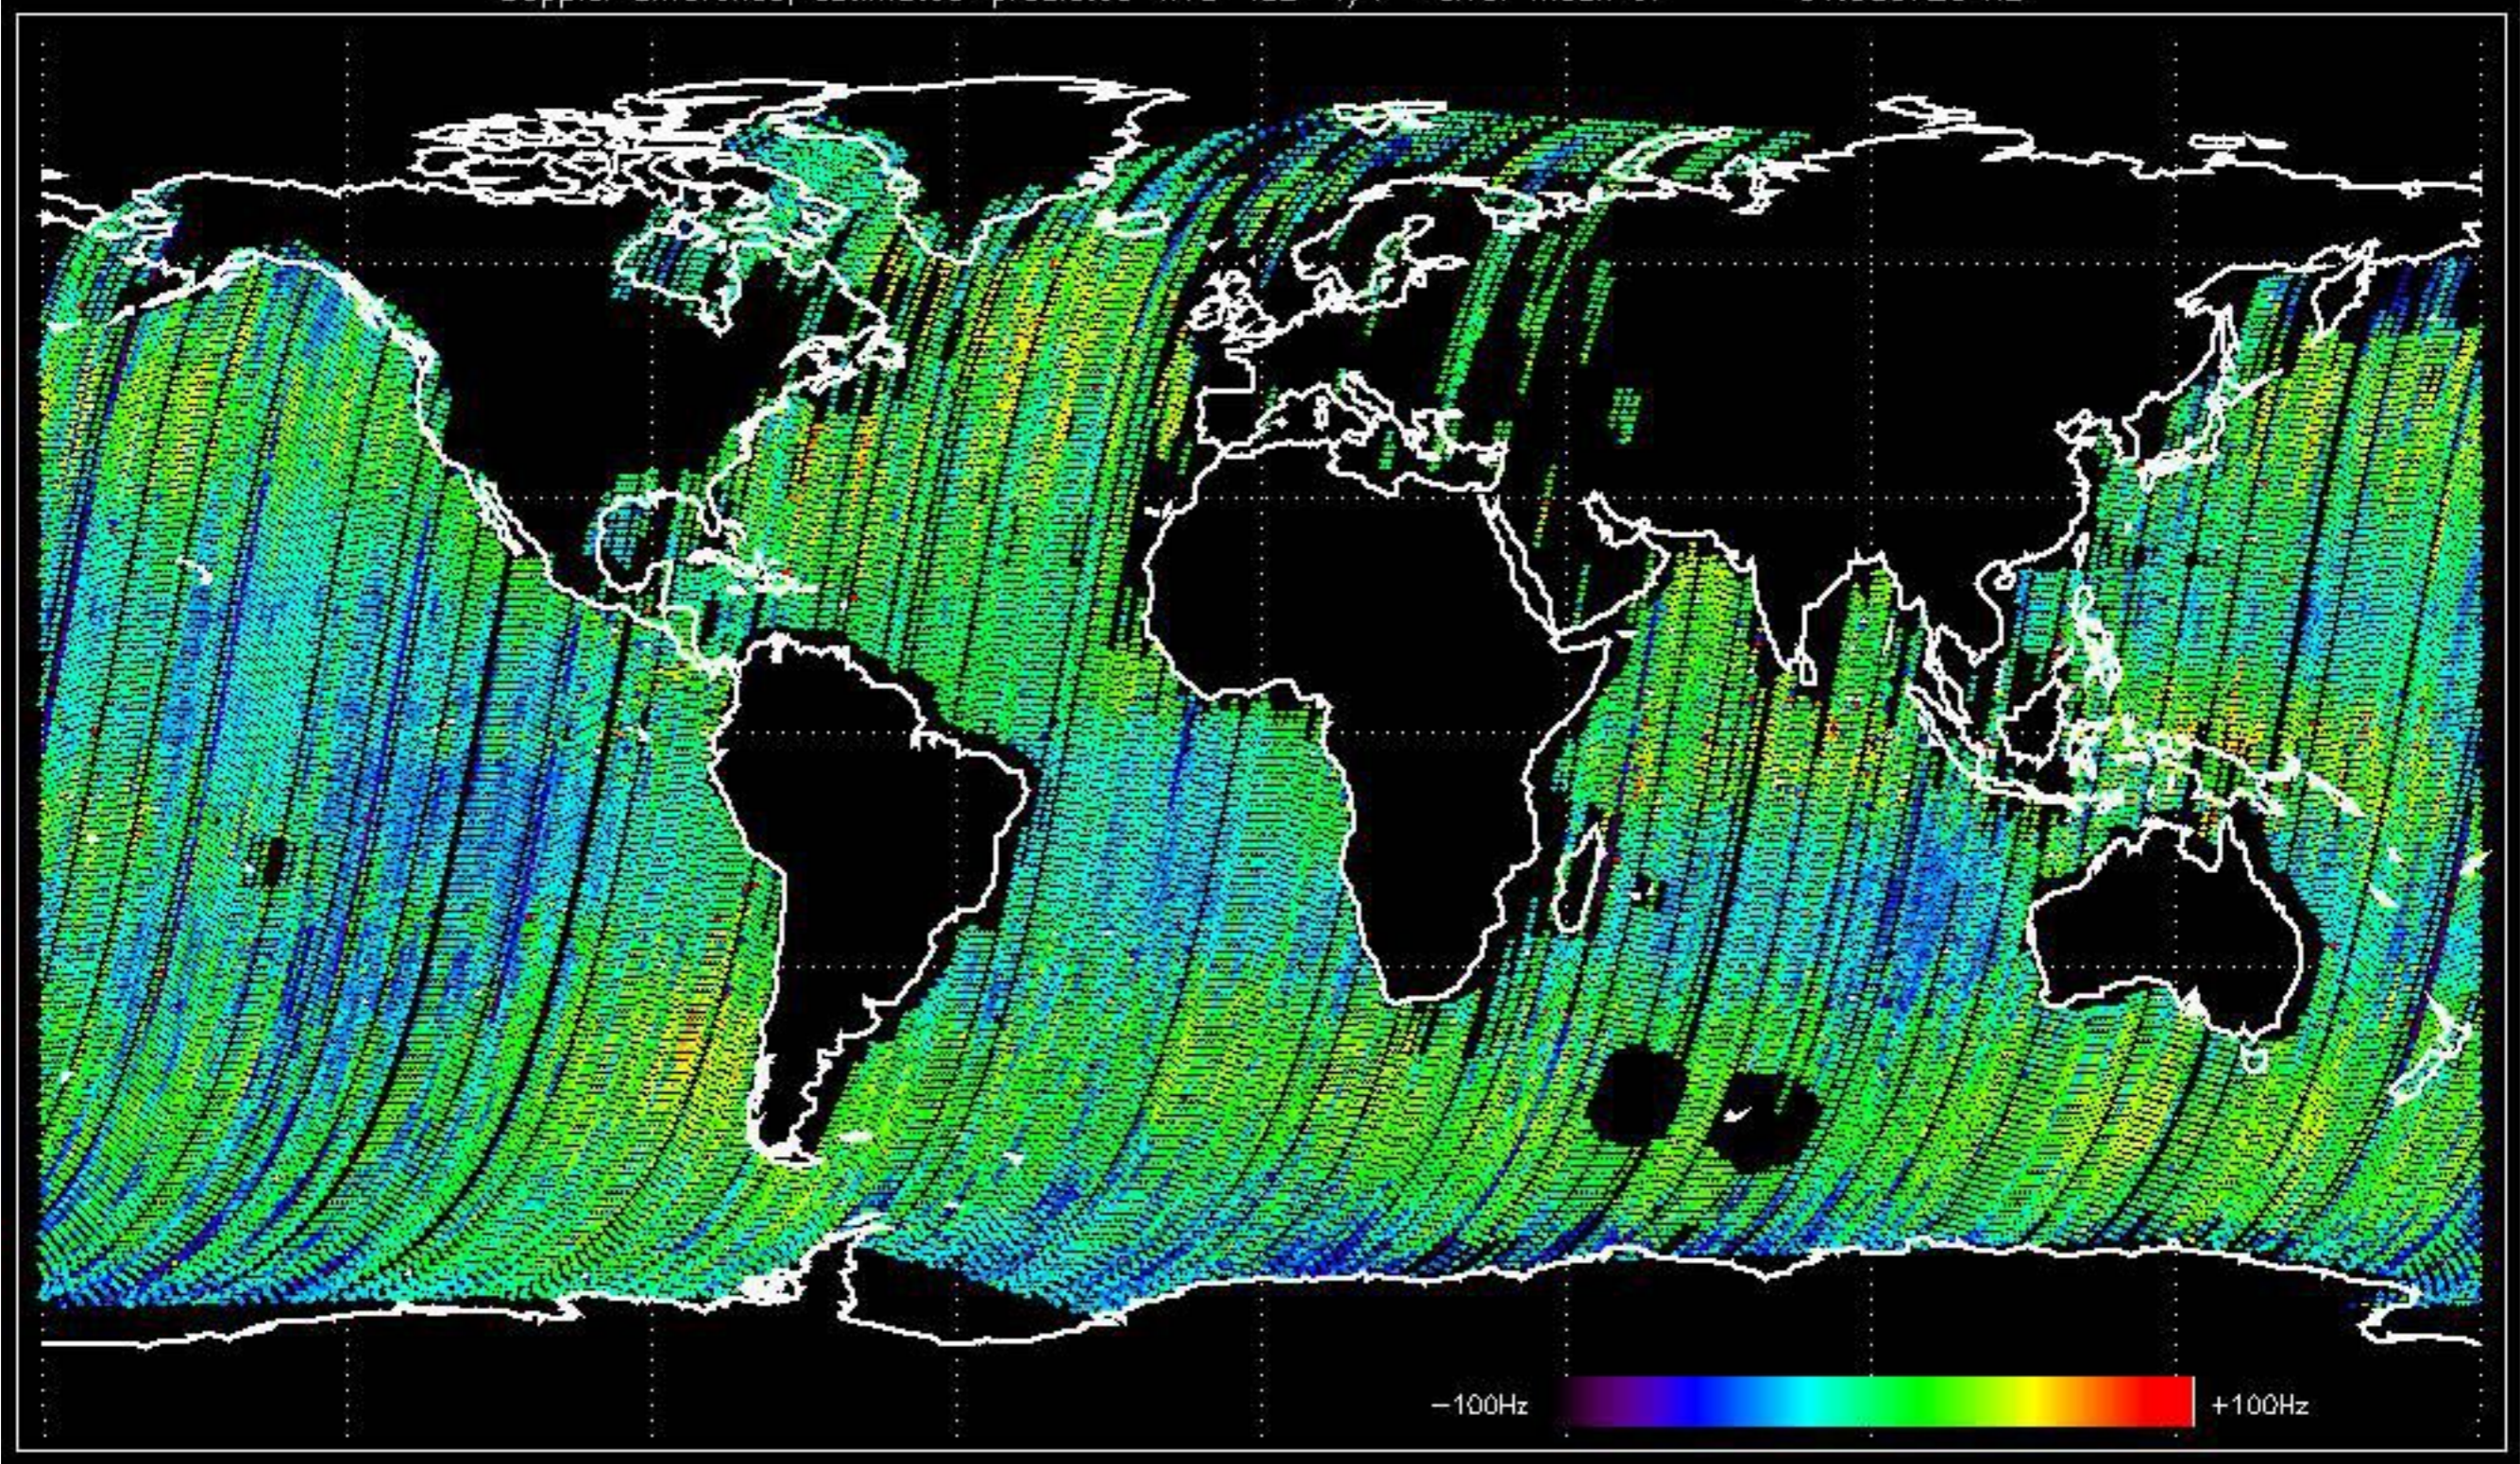

-100Hz +100Hz

The MS mode provides an internal health check on an individual module basis.  
The purpose of this mode is to identify any malfunctioning modules and  
to identify modules for which calibration offsets are to be applied.  
The MS products analysis shows a failure in TX module 30 tile B2, since 12-APR-2004:

- ASA\_MS\_\_0PNPDK20040414\_185512\_000000152026\_00027\_11103\_0072.N1
- ASA\_MS\_\_0PNPDK20040414\_185632\_000000152026\_00027\_11103\_0073.N1

No anomalies observed.


























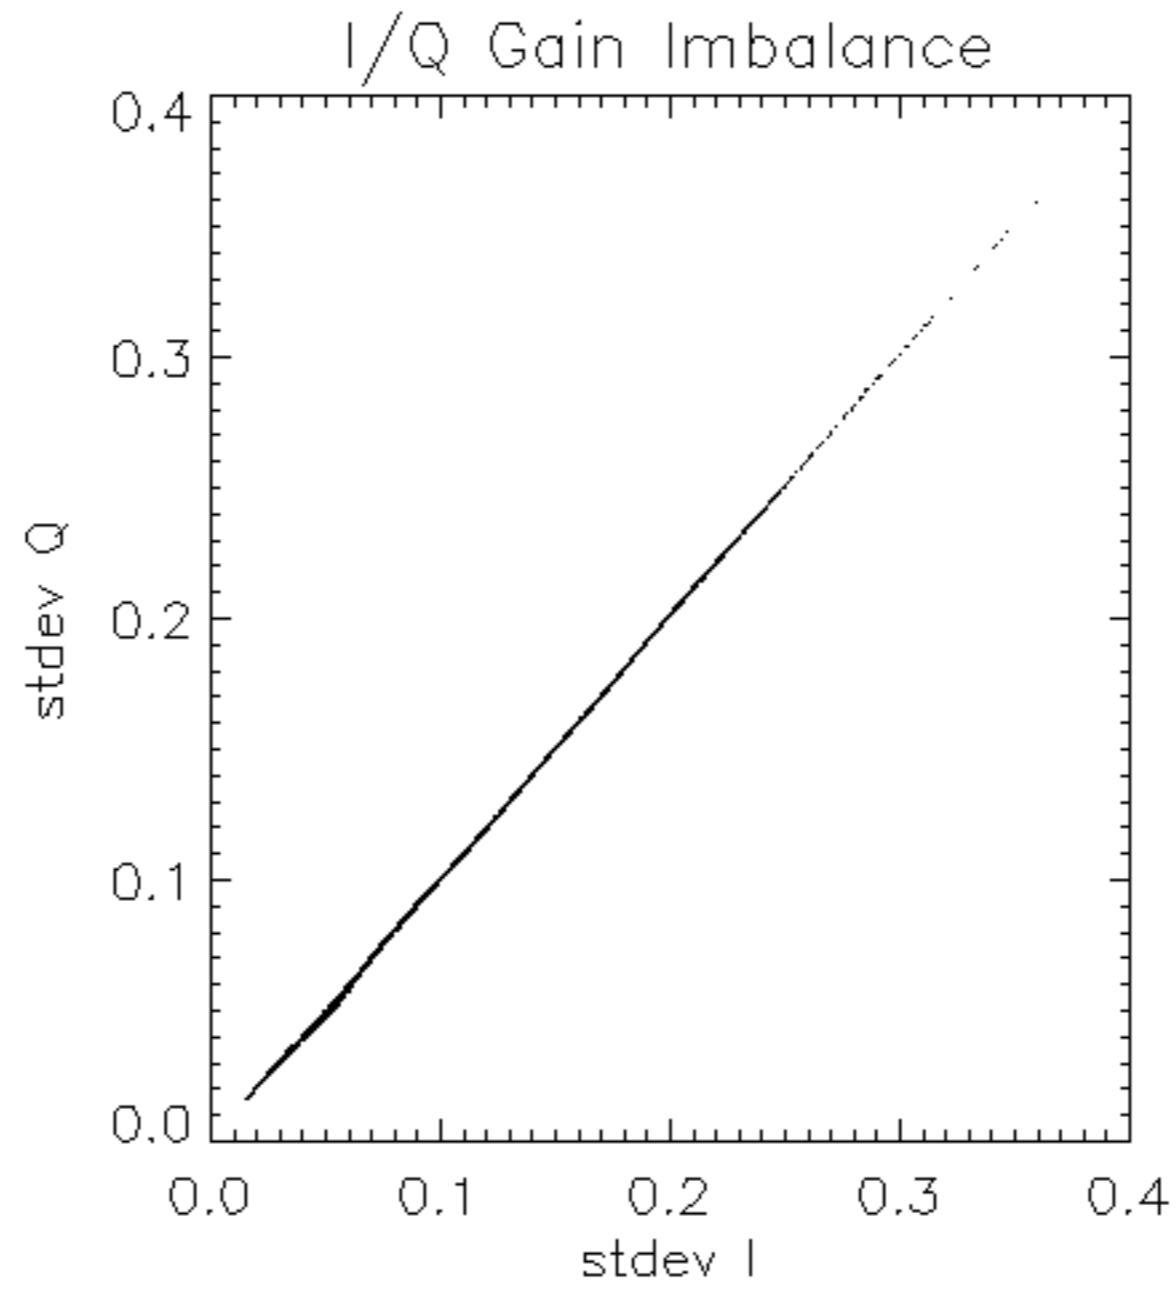

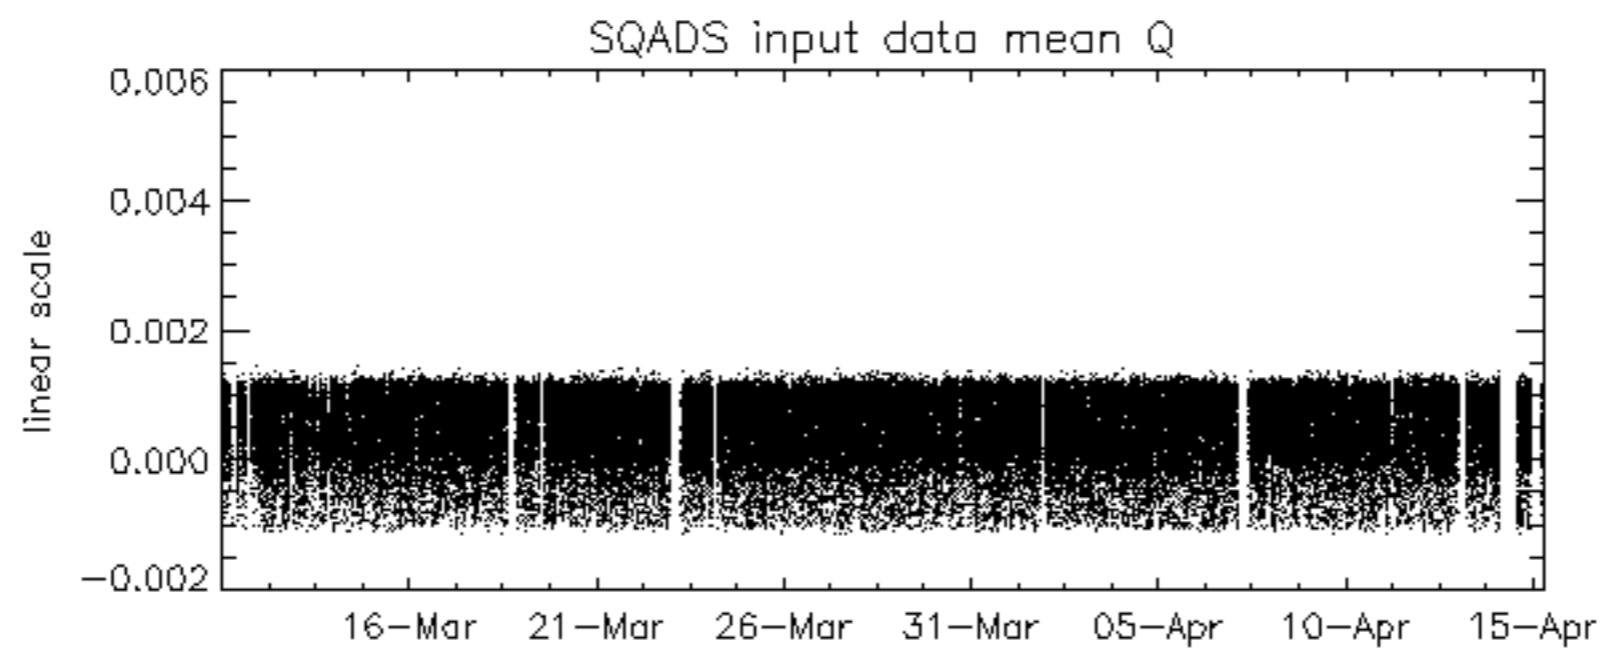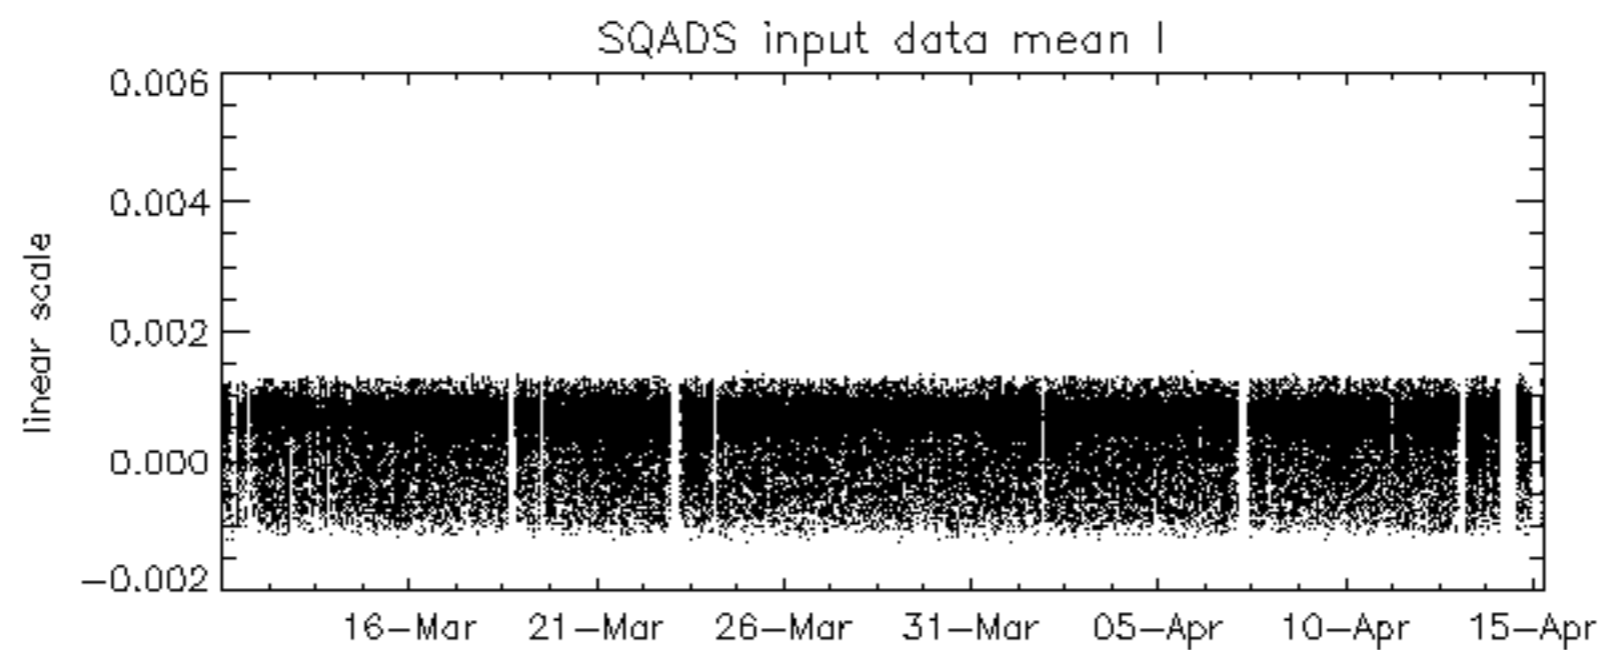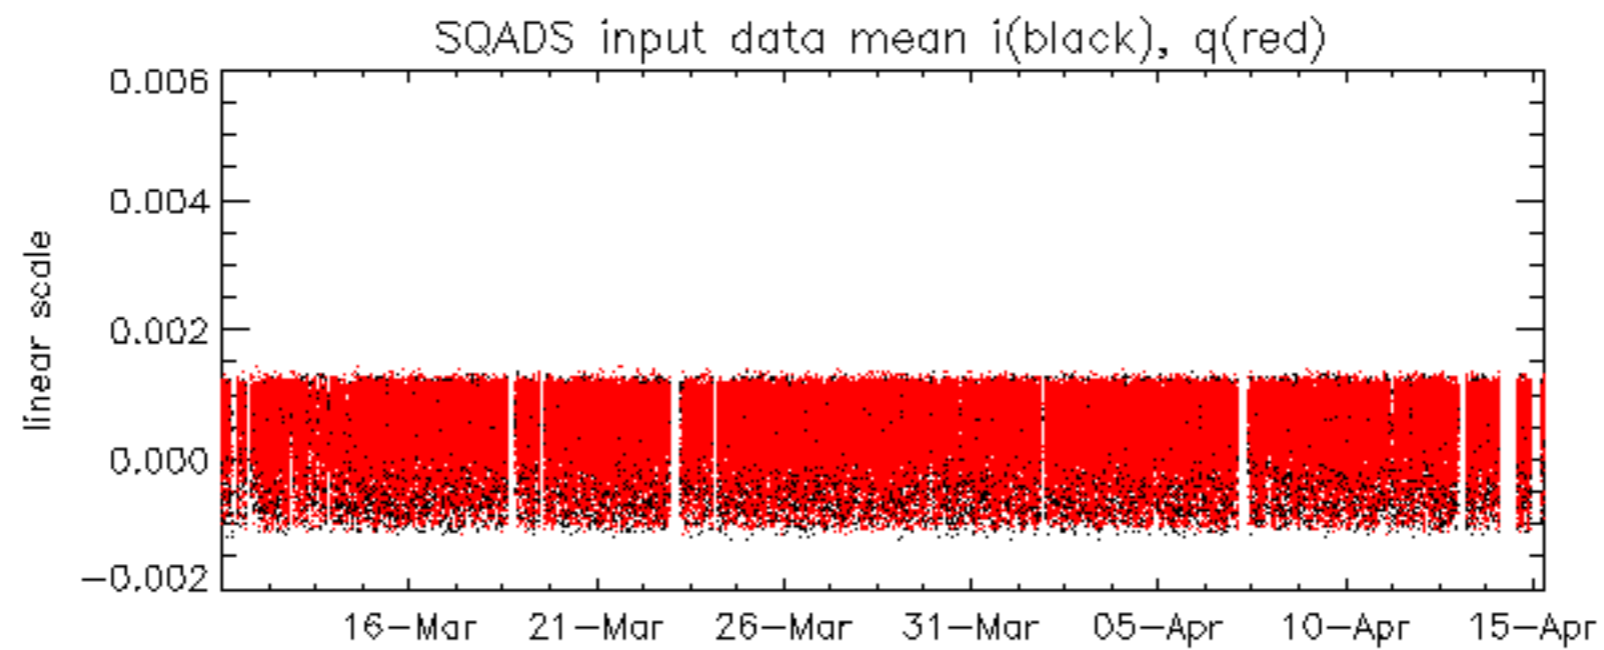

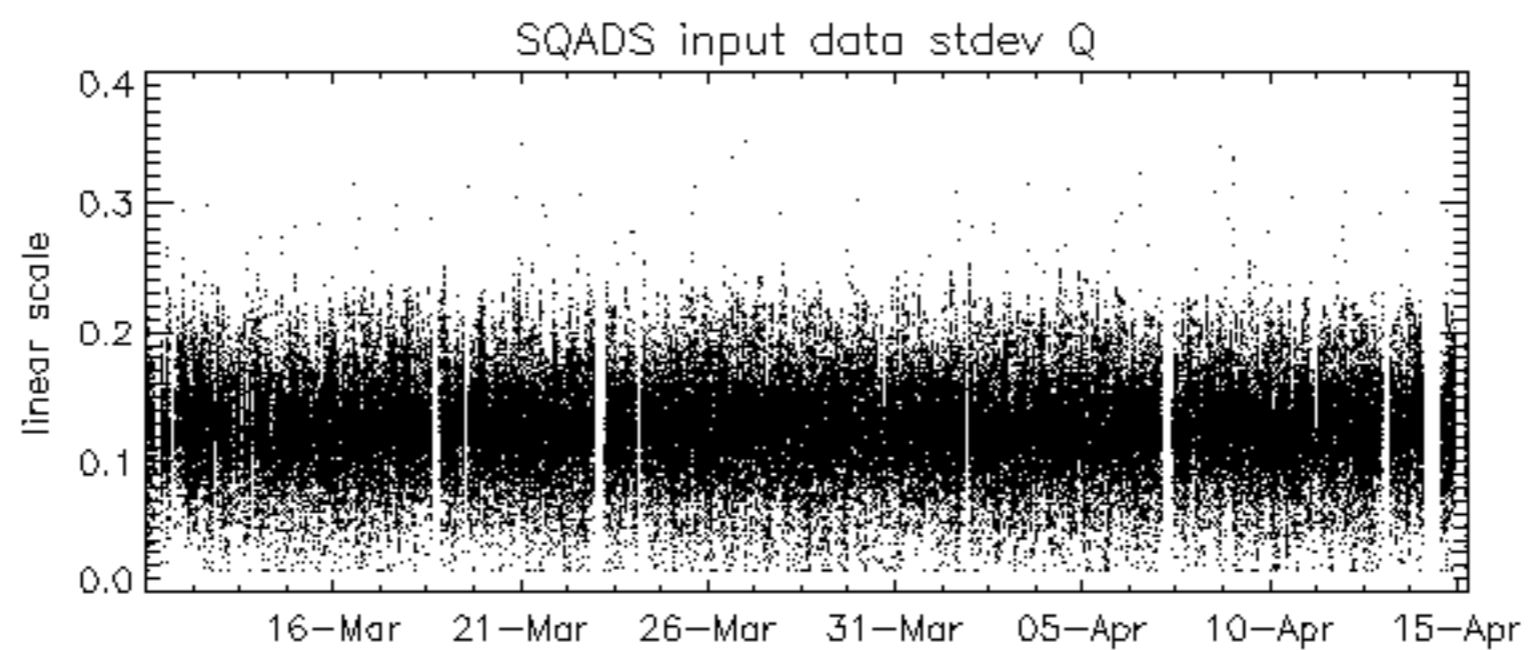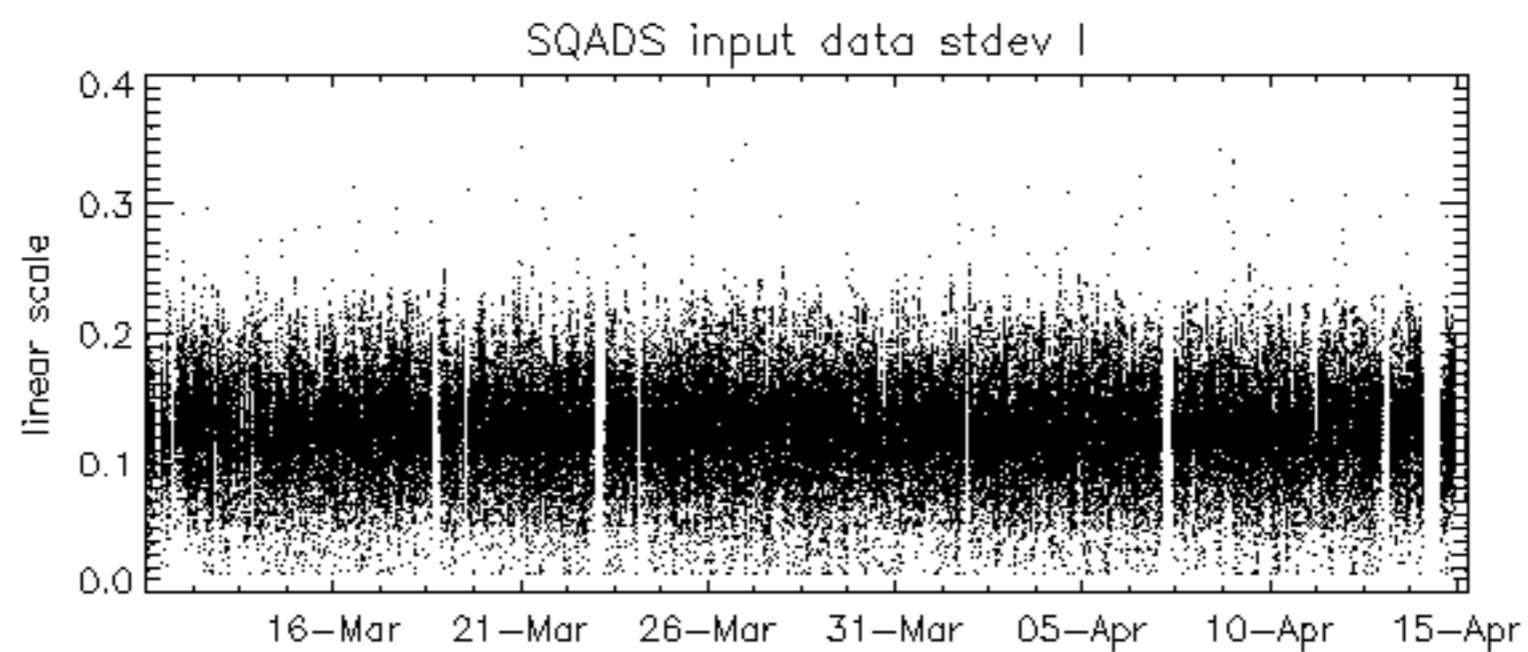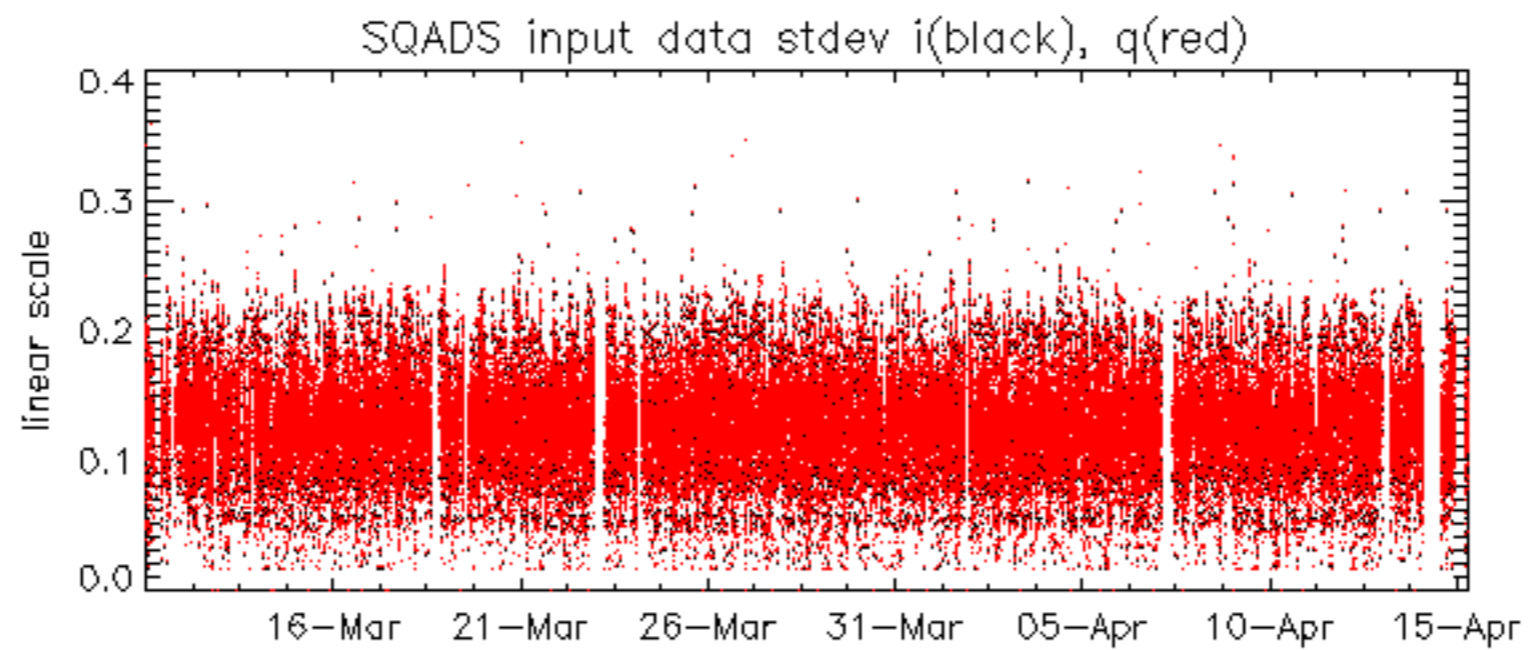



















ASAR instrument unavailable due to OCM (planned Manoeuvre). 14-APR-2004 02:45:00 / 13:40:00.

