

REPORT OF 040422

last update on Thu Apr 22 12:57:37 GMT 2004

1. [Introduction](#)
2. [Summary](#)
 - [Instrument Unavailability](#)
 - [Browse Visual Inspection](#)
 - [Module Stepping Results](#)
 - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
 - [Daily statistics](#)
 - [Cyclic statistics](#)
 - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
 - [raw data mean I and Q](#)
 - [raw data stdev I and Q](#)
 - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
 - [Unbiased Doppler Error](#)
 - [Absolute Doppler](#)
 - [Doppler evolution versus ANX](#)

1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA_WVS_1P) products, which are the available few hours after the acquisition, on the high rate browse (BP) products and on the Module Stepping (MS) product.

2 - Summary

2.1 - Instrument Unavailability

No unavailabilities during the reported period.

2.2 - Browse Visual Inspection

No anomalies observed on available browse products

2.3 - Data Analysis

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.

3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis. The purpose of this mode is to identify any malfunctioning modules and to identify modules for which calibration offsets are to be applied.

No anomalies observed on available MS products:

Polarisation	Start Time
V	20040421 201701
H	20040421 201541

MSM in V/V polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
⊗	⊗
⊗	⊗
⊗	⊗
⊗	⊗

MSM in H/H polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
⊗	⊗
⊗	⊗
⊗	⊗
⊗	⊗

4 - Internal calibration Results

No anomalies observed.

4.1 - Daily statistics

⊗

4.2 - Cyclic statistics



P1 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P1	-3.578404	0.005368	0.017497
7	P1	-3.299850	0.010650	0.005532
11	P1	-4.633368	0.021533	0.013808
15	P1	-4.984330	0.038348	0.019735
19	P1	-3.346817	0.006777	-0.037580
22	P1	-4.516878	0.014785	0.013095
24	P1	-5.031340	0.015099	0.054988
28	P1	-4.589489	0.013618	-0.033931

P2 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P2	-22.396303	0.079922	-0.015524
7	P2	-22.874012	0.121828	-0.032483
11	P2	-15.911105	0.152832	0.115148
15	P2	-7.159904	0.089109	0.022442
19	P2	-9.513062	0.164593	0.035430
22	P2	-17.657074	0.100051	0.054093
24	P2	-20.995445	0.113449	0.024067
28	P2	-16.604136	0.081555	-0.011554

P3 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P3	-8.130056	0.003075	-0.015037
7	P3	-8.130055	0.003075	-0.015069
11	P3	-8.130042	0.003076	-0.015150
15	P3	-8.130040	0.003077	-0.015185
19	P3	-8.130042	0.003077	-0.015182
22	P3	-8.130056	0.003076	-0.015092
24	P3	-8.130070	0.003076	-0.015010

4.3 - cal pulses monitoring (all rows)



5 - RAW data statistics

No anomalies observed.

5.1 - Input mean I/Q

channel	stat	DSS-B
MEAN I	mean	0.000479303
	stdev	2.37549e-07
MEAN Q	mean	0.000483202
	stdev	2.71451e-07



5.2 - Input stdev I/Q

channel	stat	DSS-B
STDEV I	mean	0.127639
	stdev	0.00118583
STDEV Q	mean	0.127893
	stdev	0.00119930



5.3 - Gain imbalance I/Q



6 - Doppler Analysis

6.1 - Unbiased Doppler Error

Evolution of unbiased Doppler error (Real - Expected)
--

Ascending

Descending

6.2 - Absolute Doppler

Evolution of Absolute Doppler

Ascending

Descending




6.3 - Doppler evolution versus ANX

Evolution Doppler error versus ANX




Evolution Doppler error versus ANX



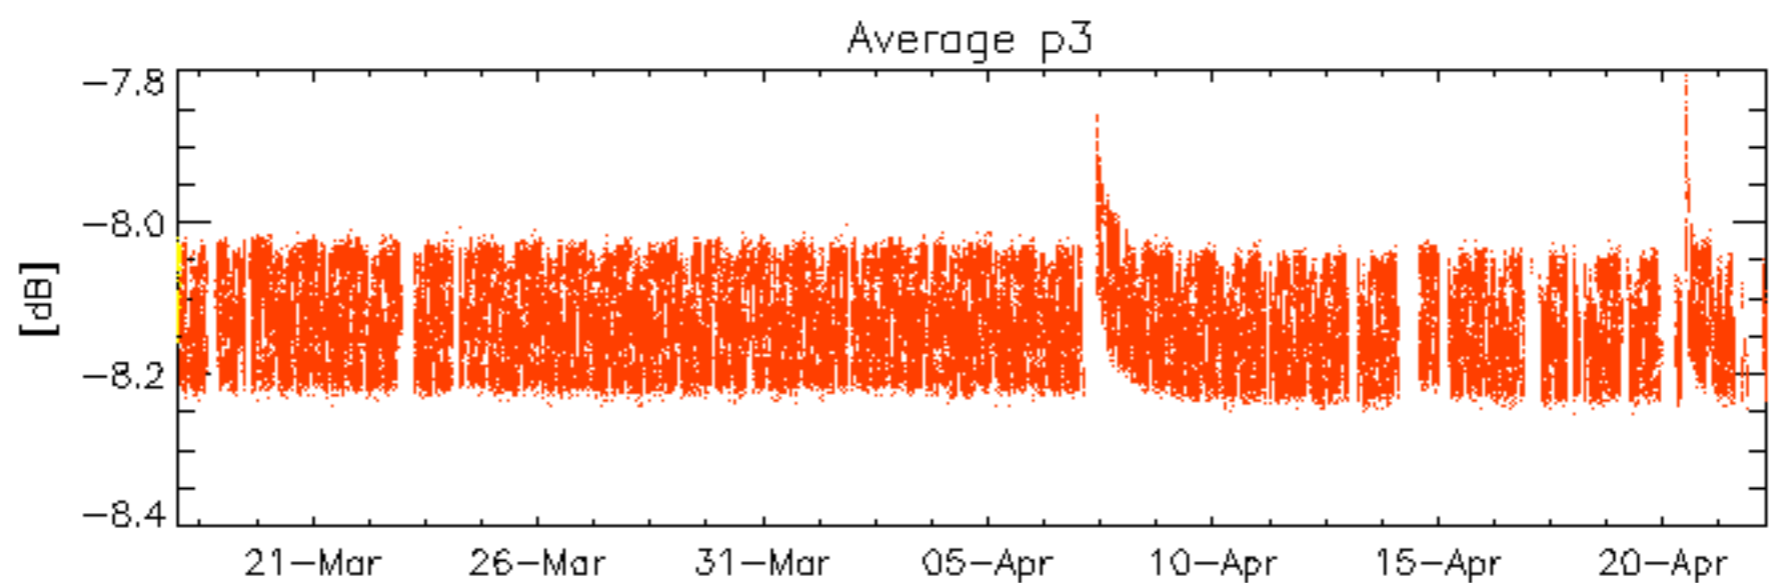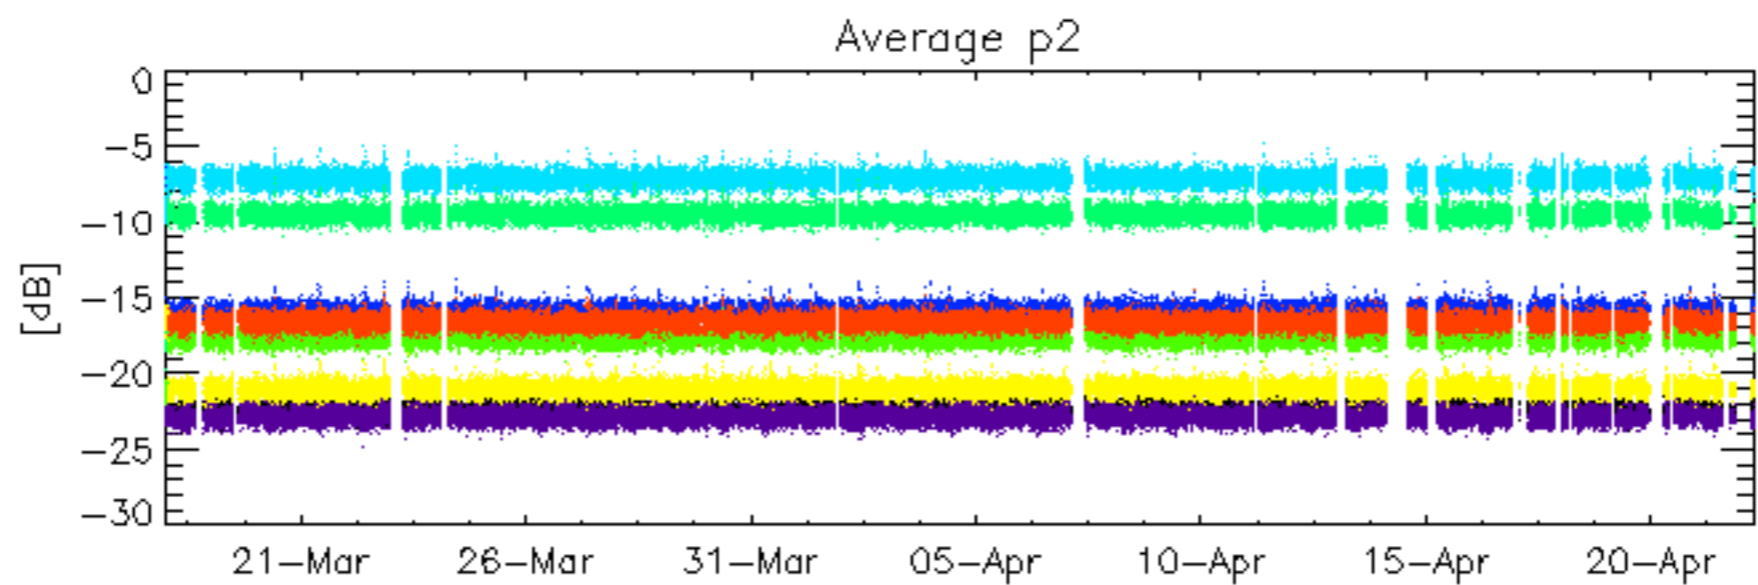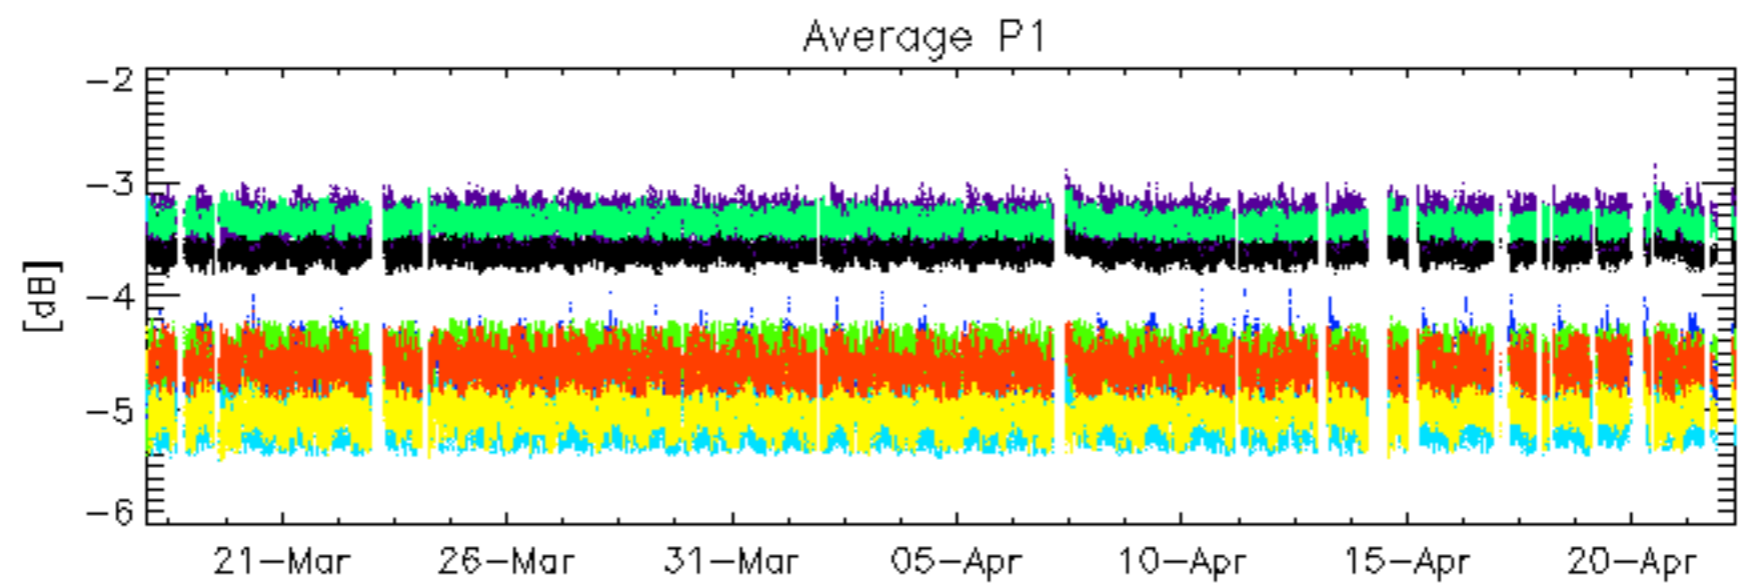


rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 28

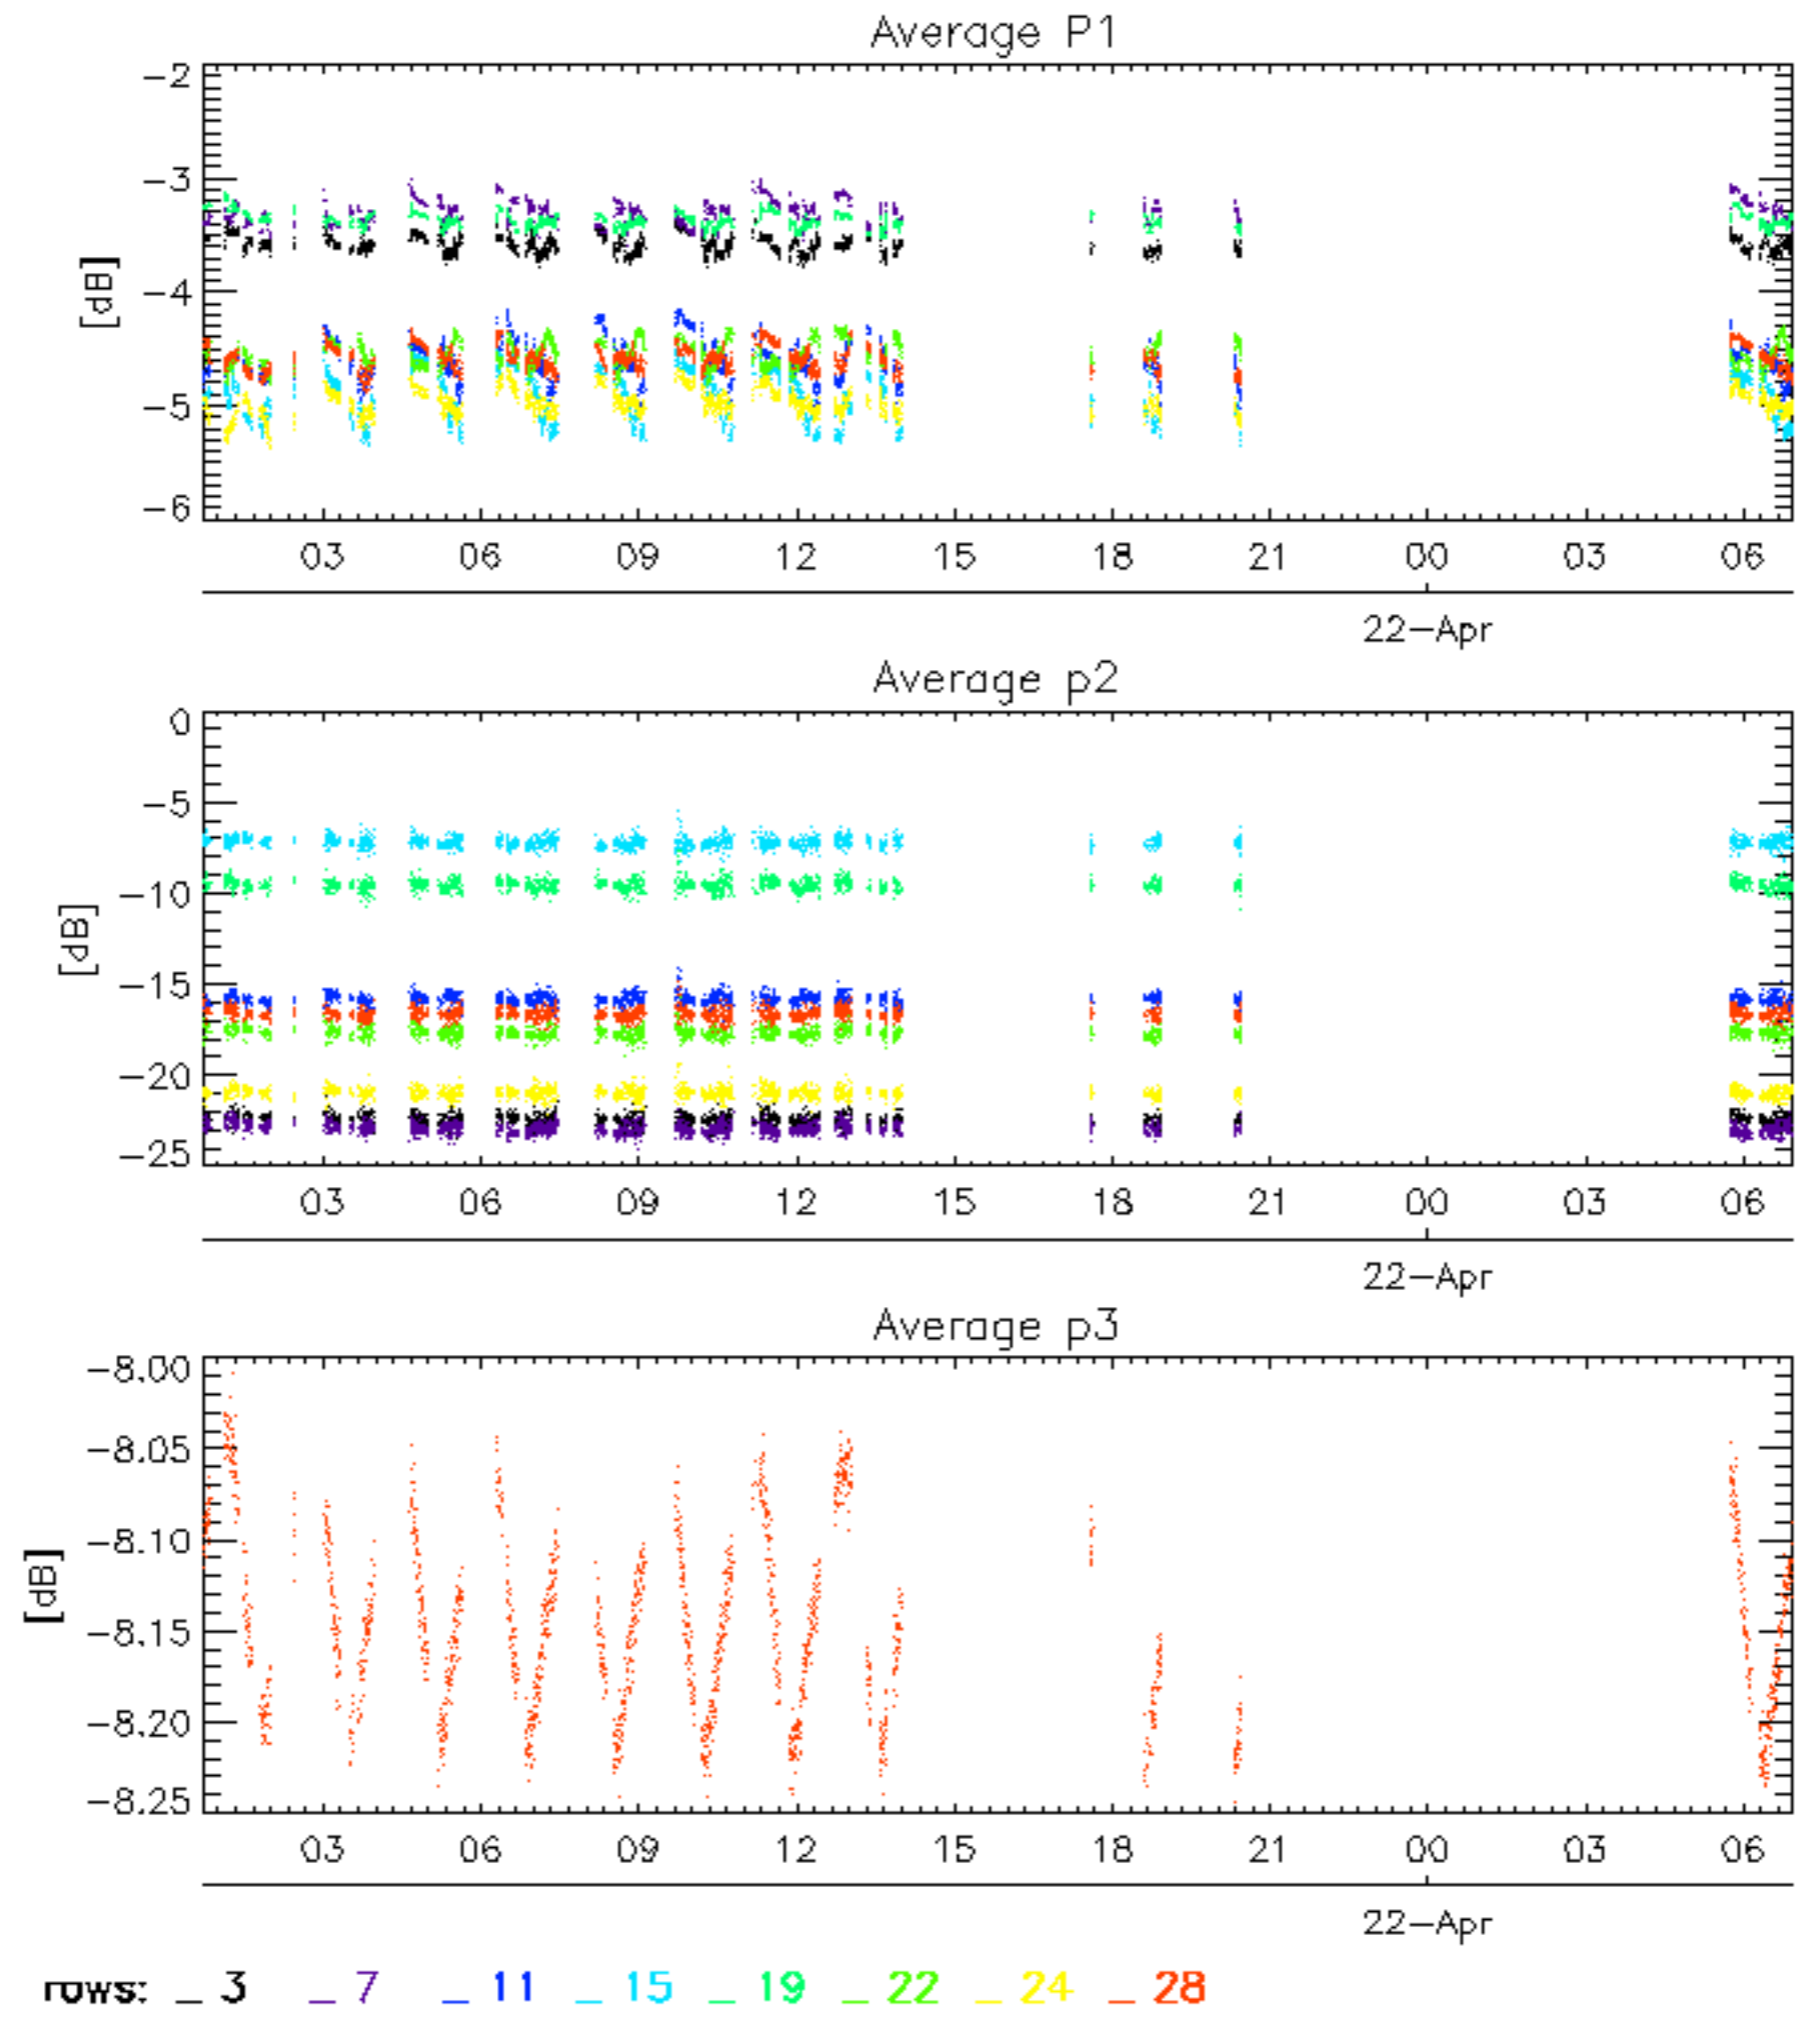


No anomalies observed on available browse products

No anomalies observed.

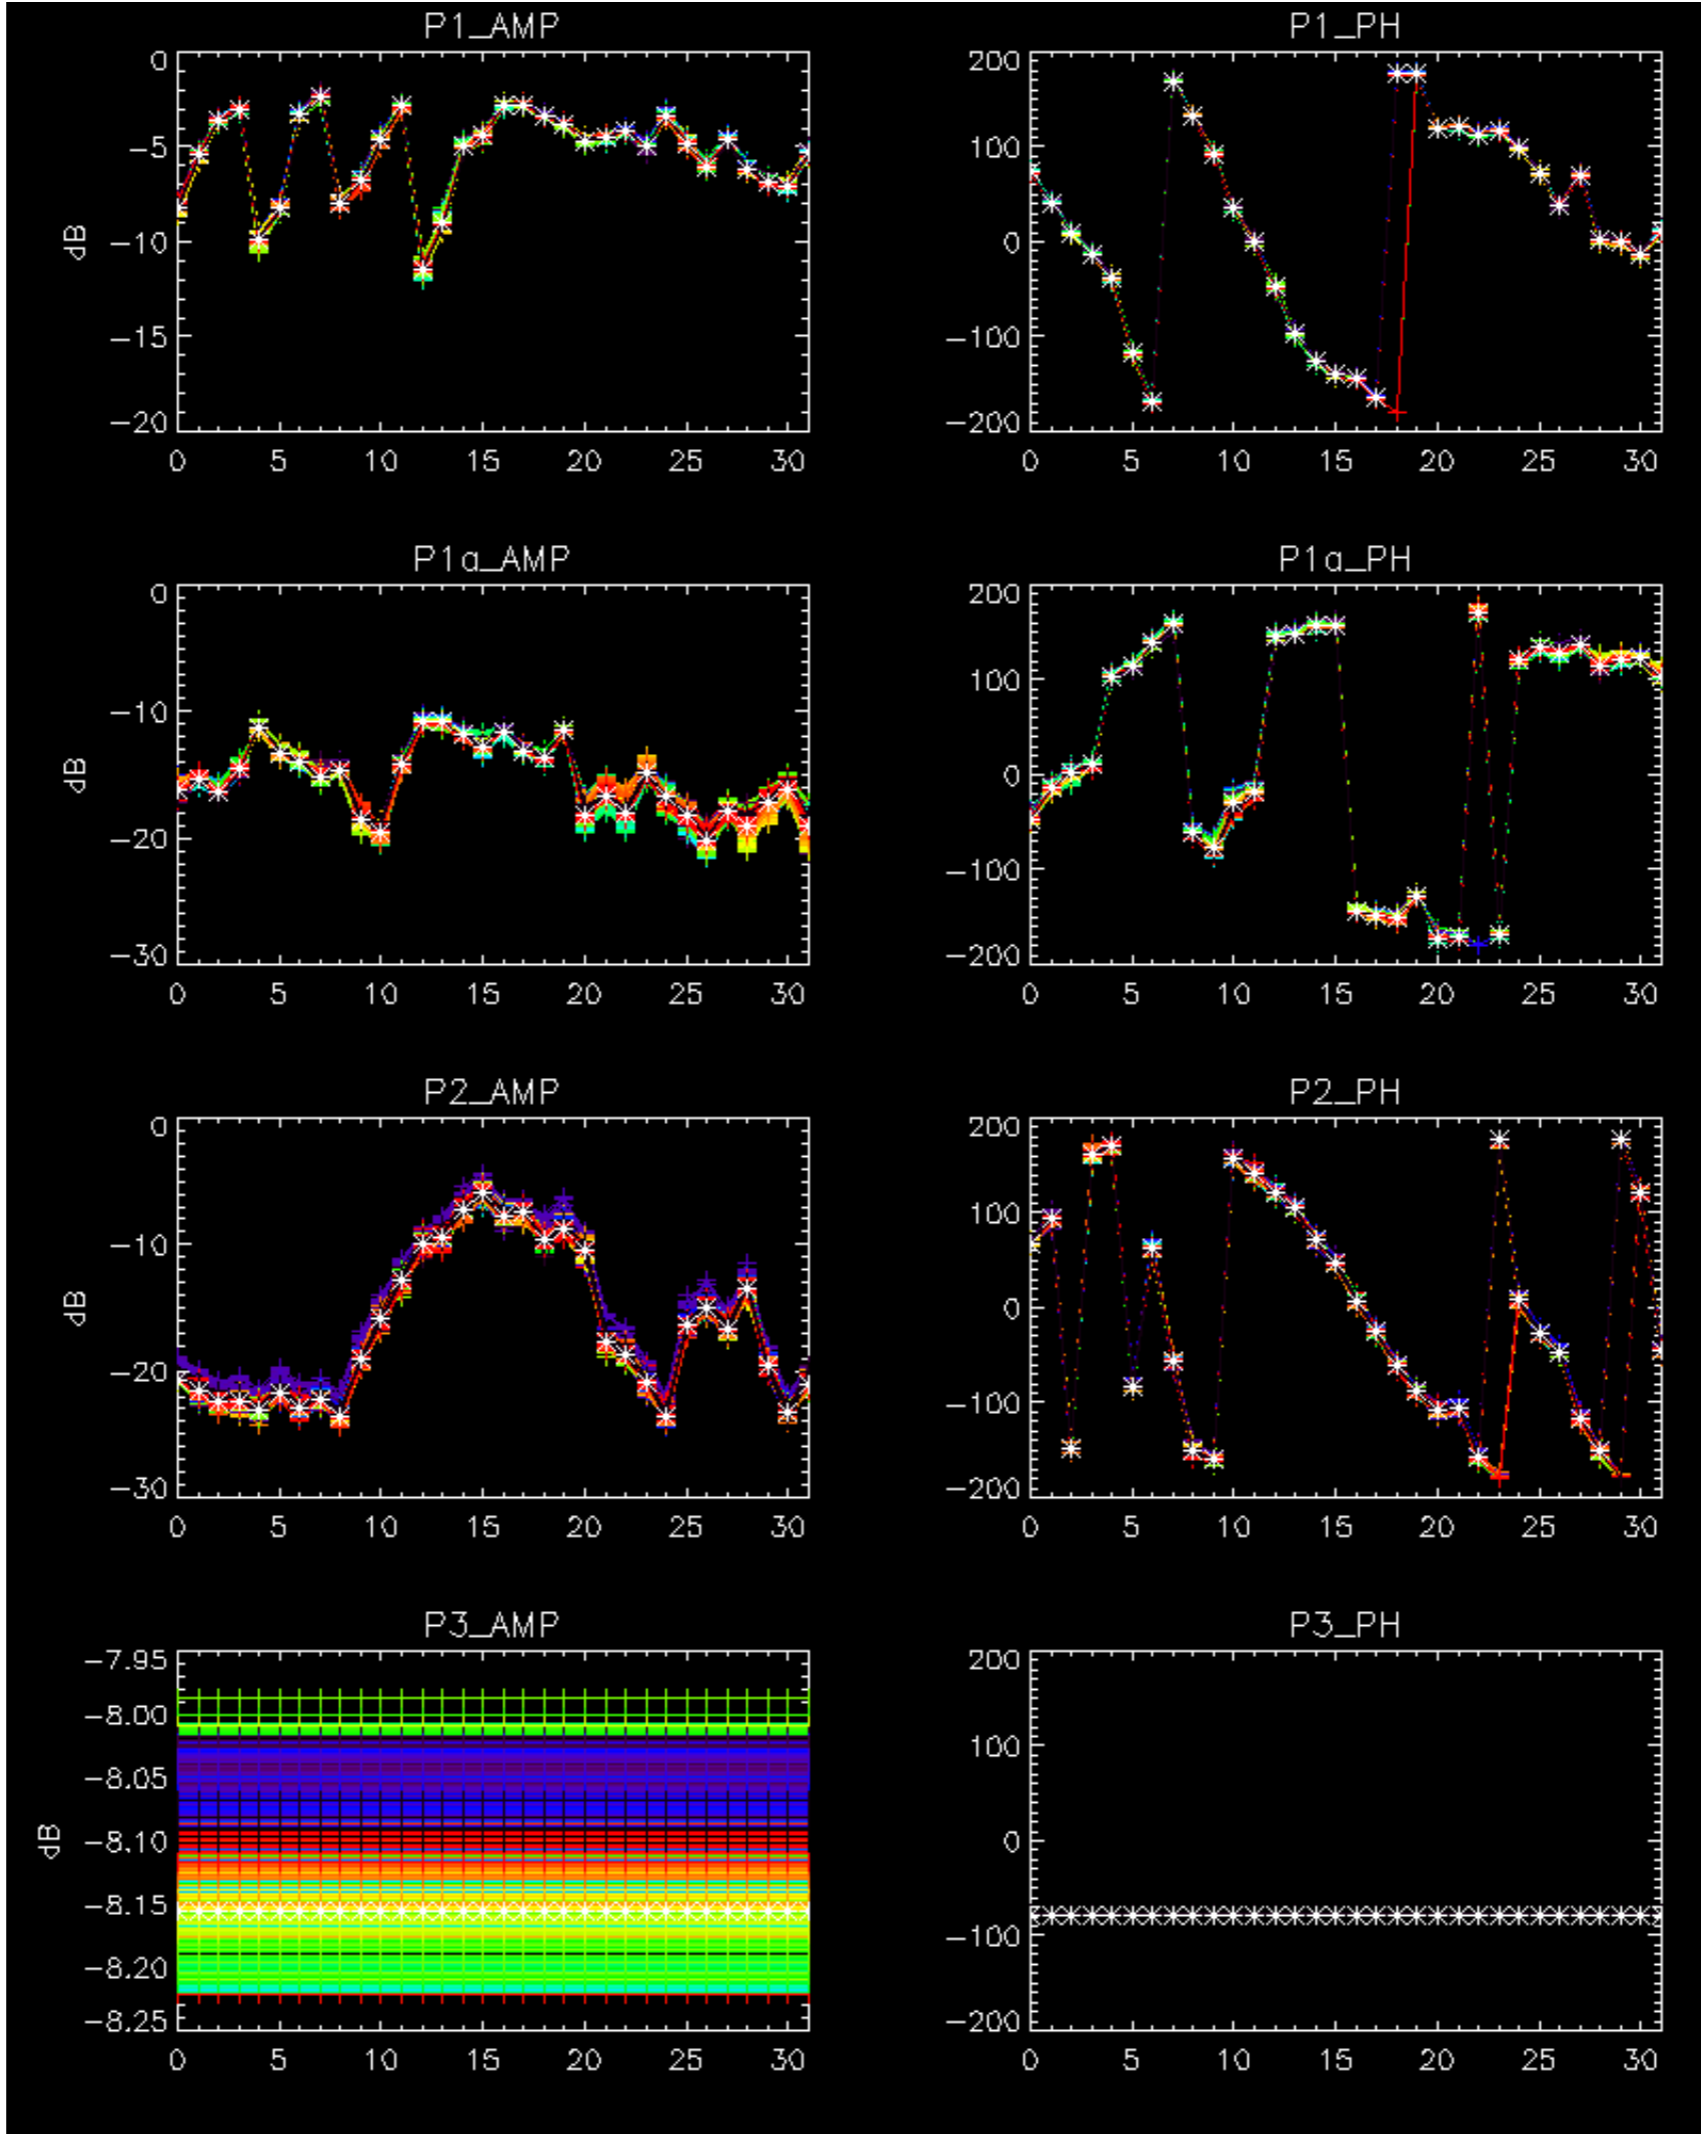

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.


Doppler 'WVS' 'IS2' 'H/H'


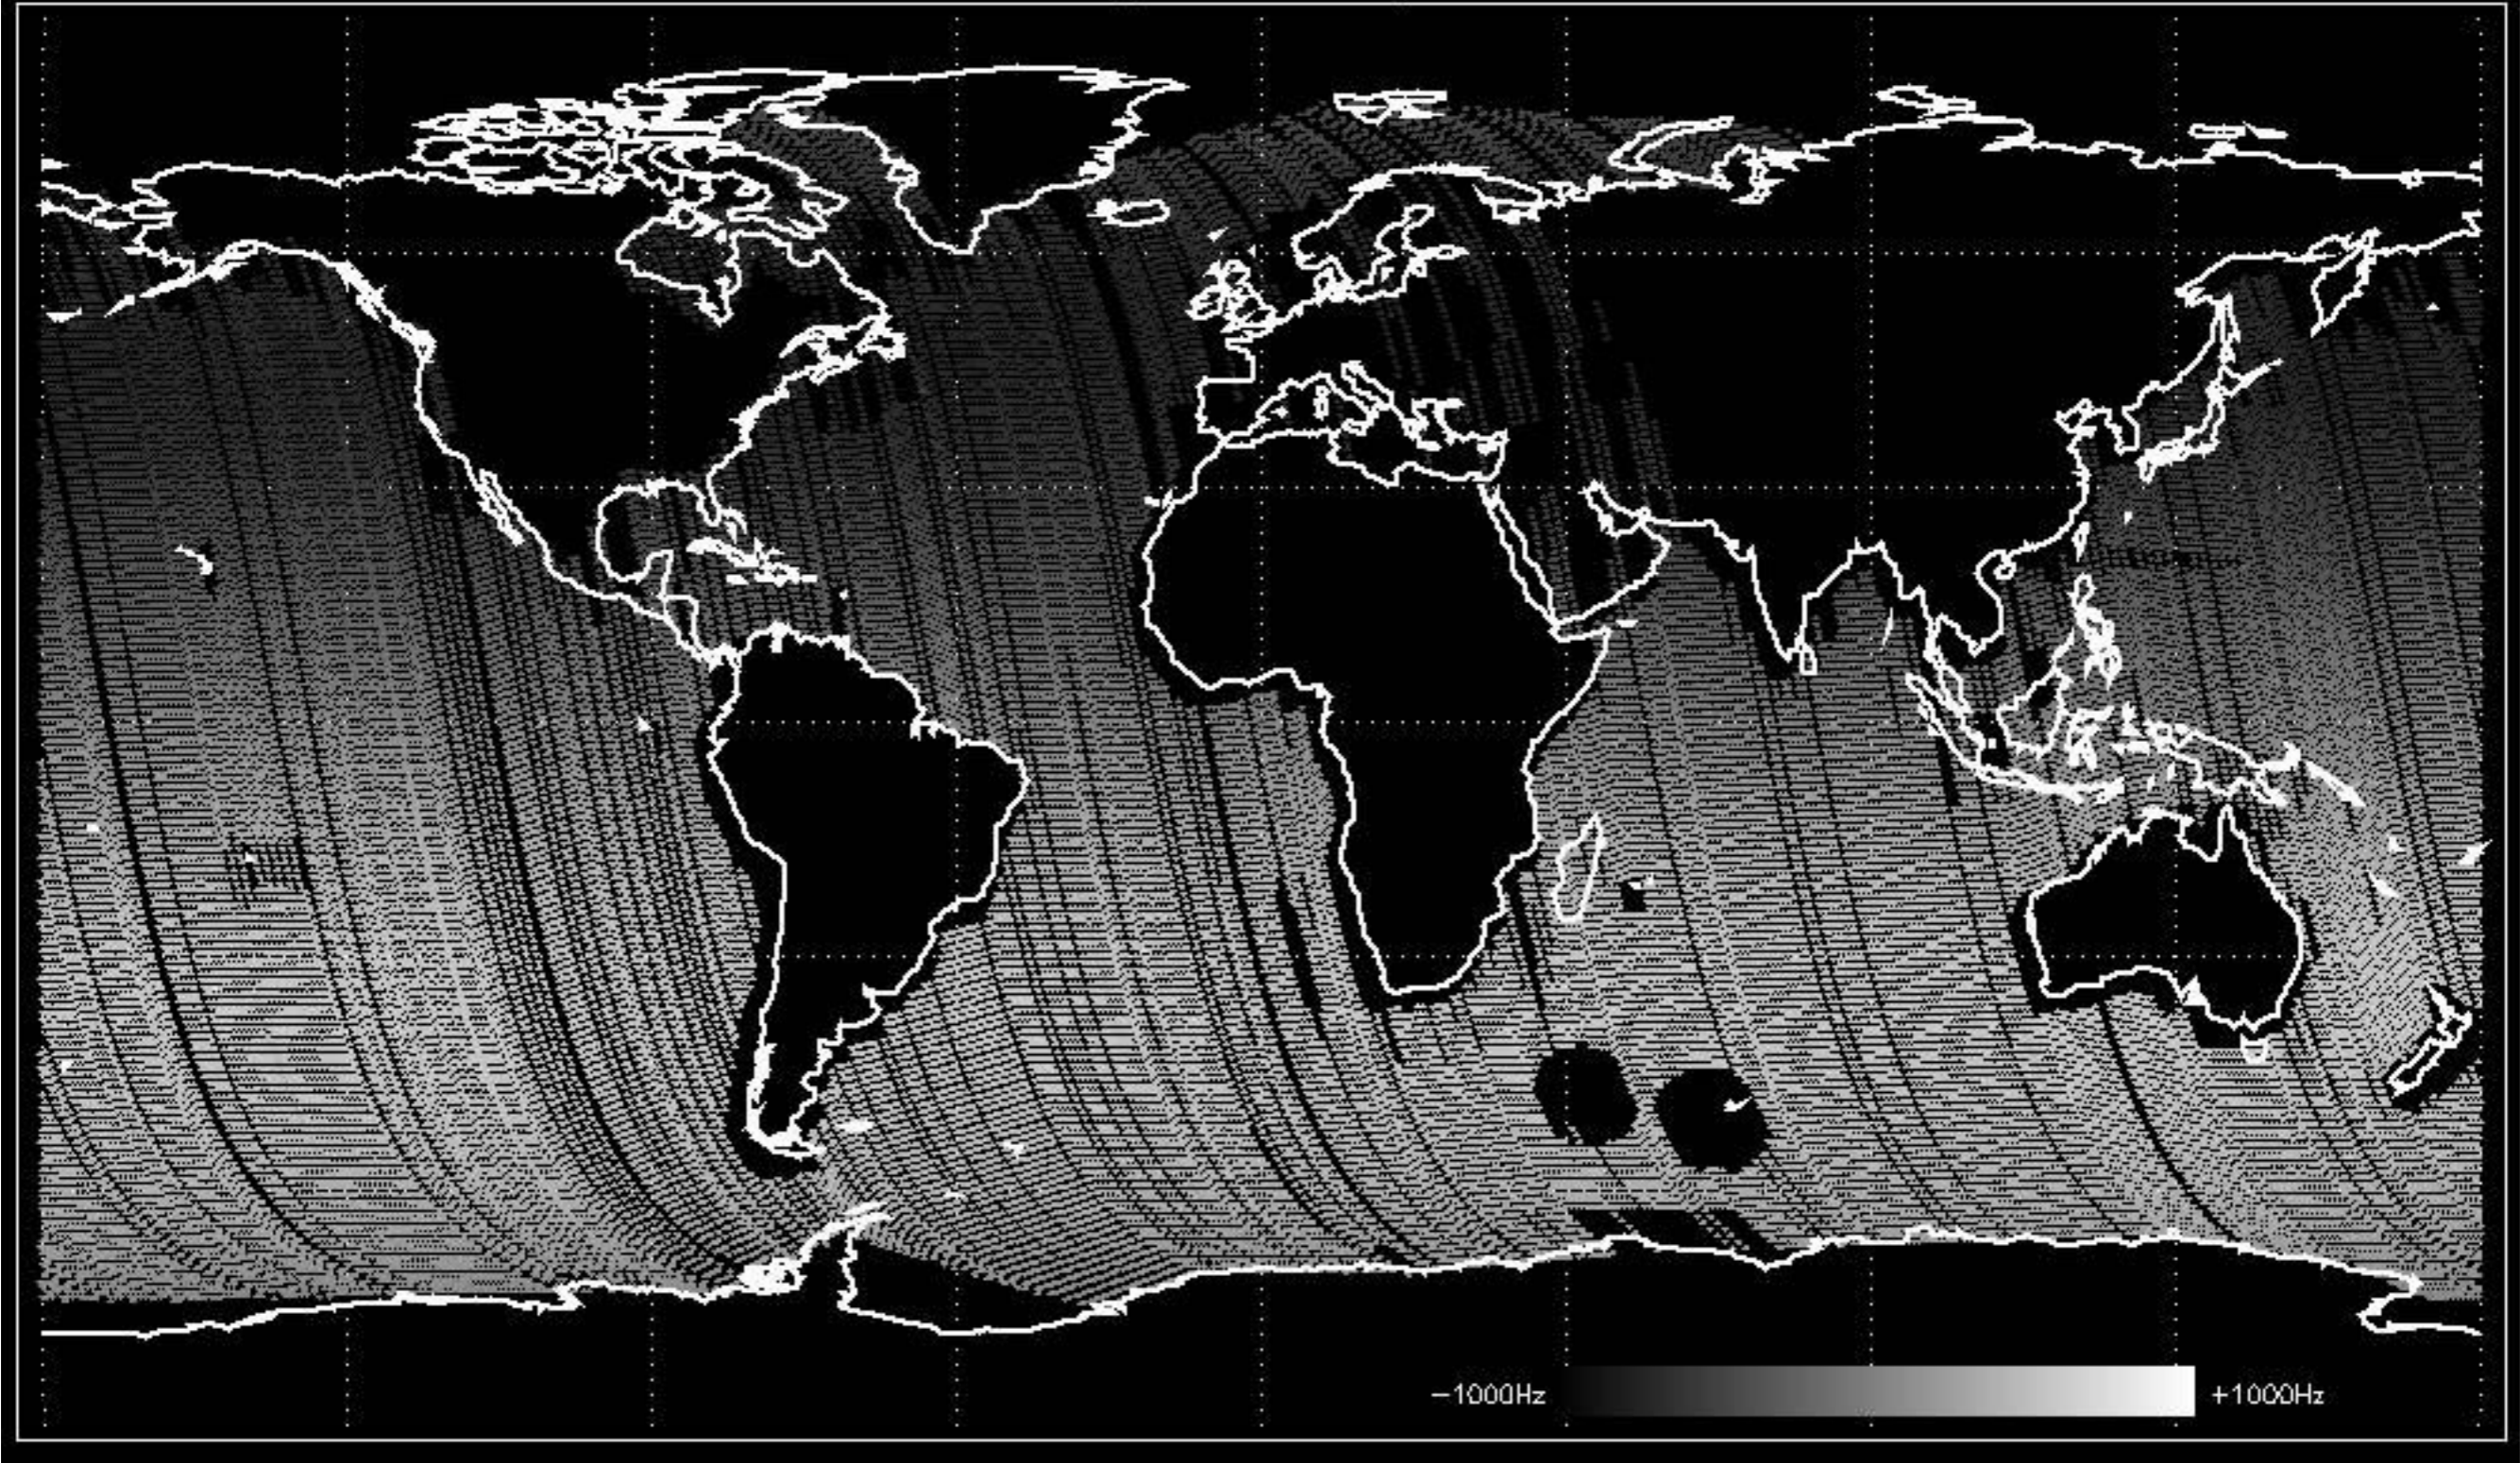




-1000Hz

+1000Hz


Doppler 'WVS' 'ISZ' 'V/V'

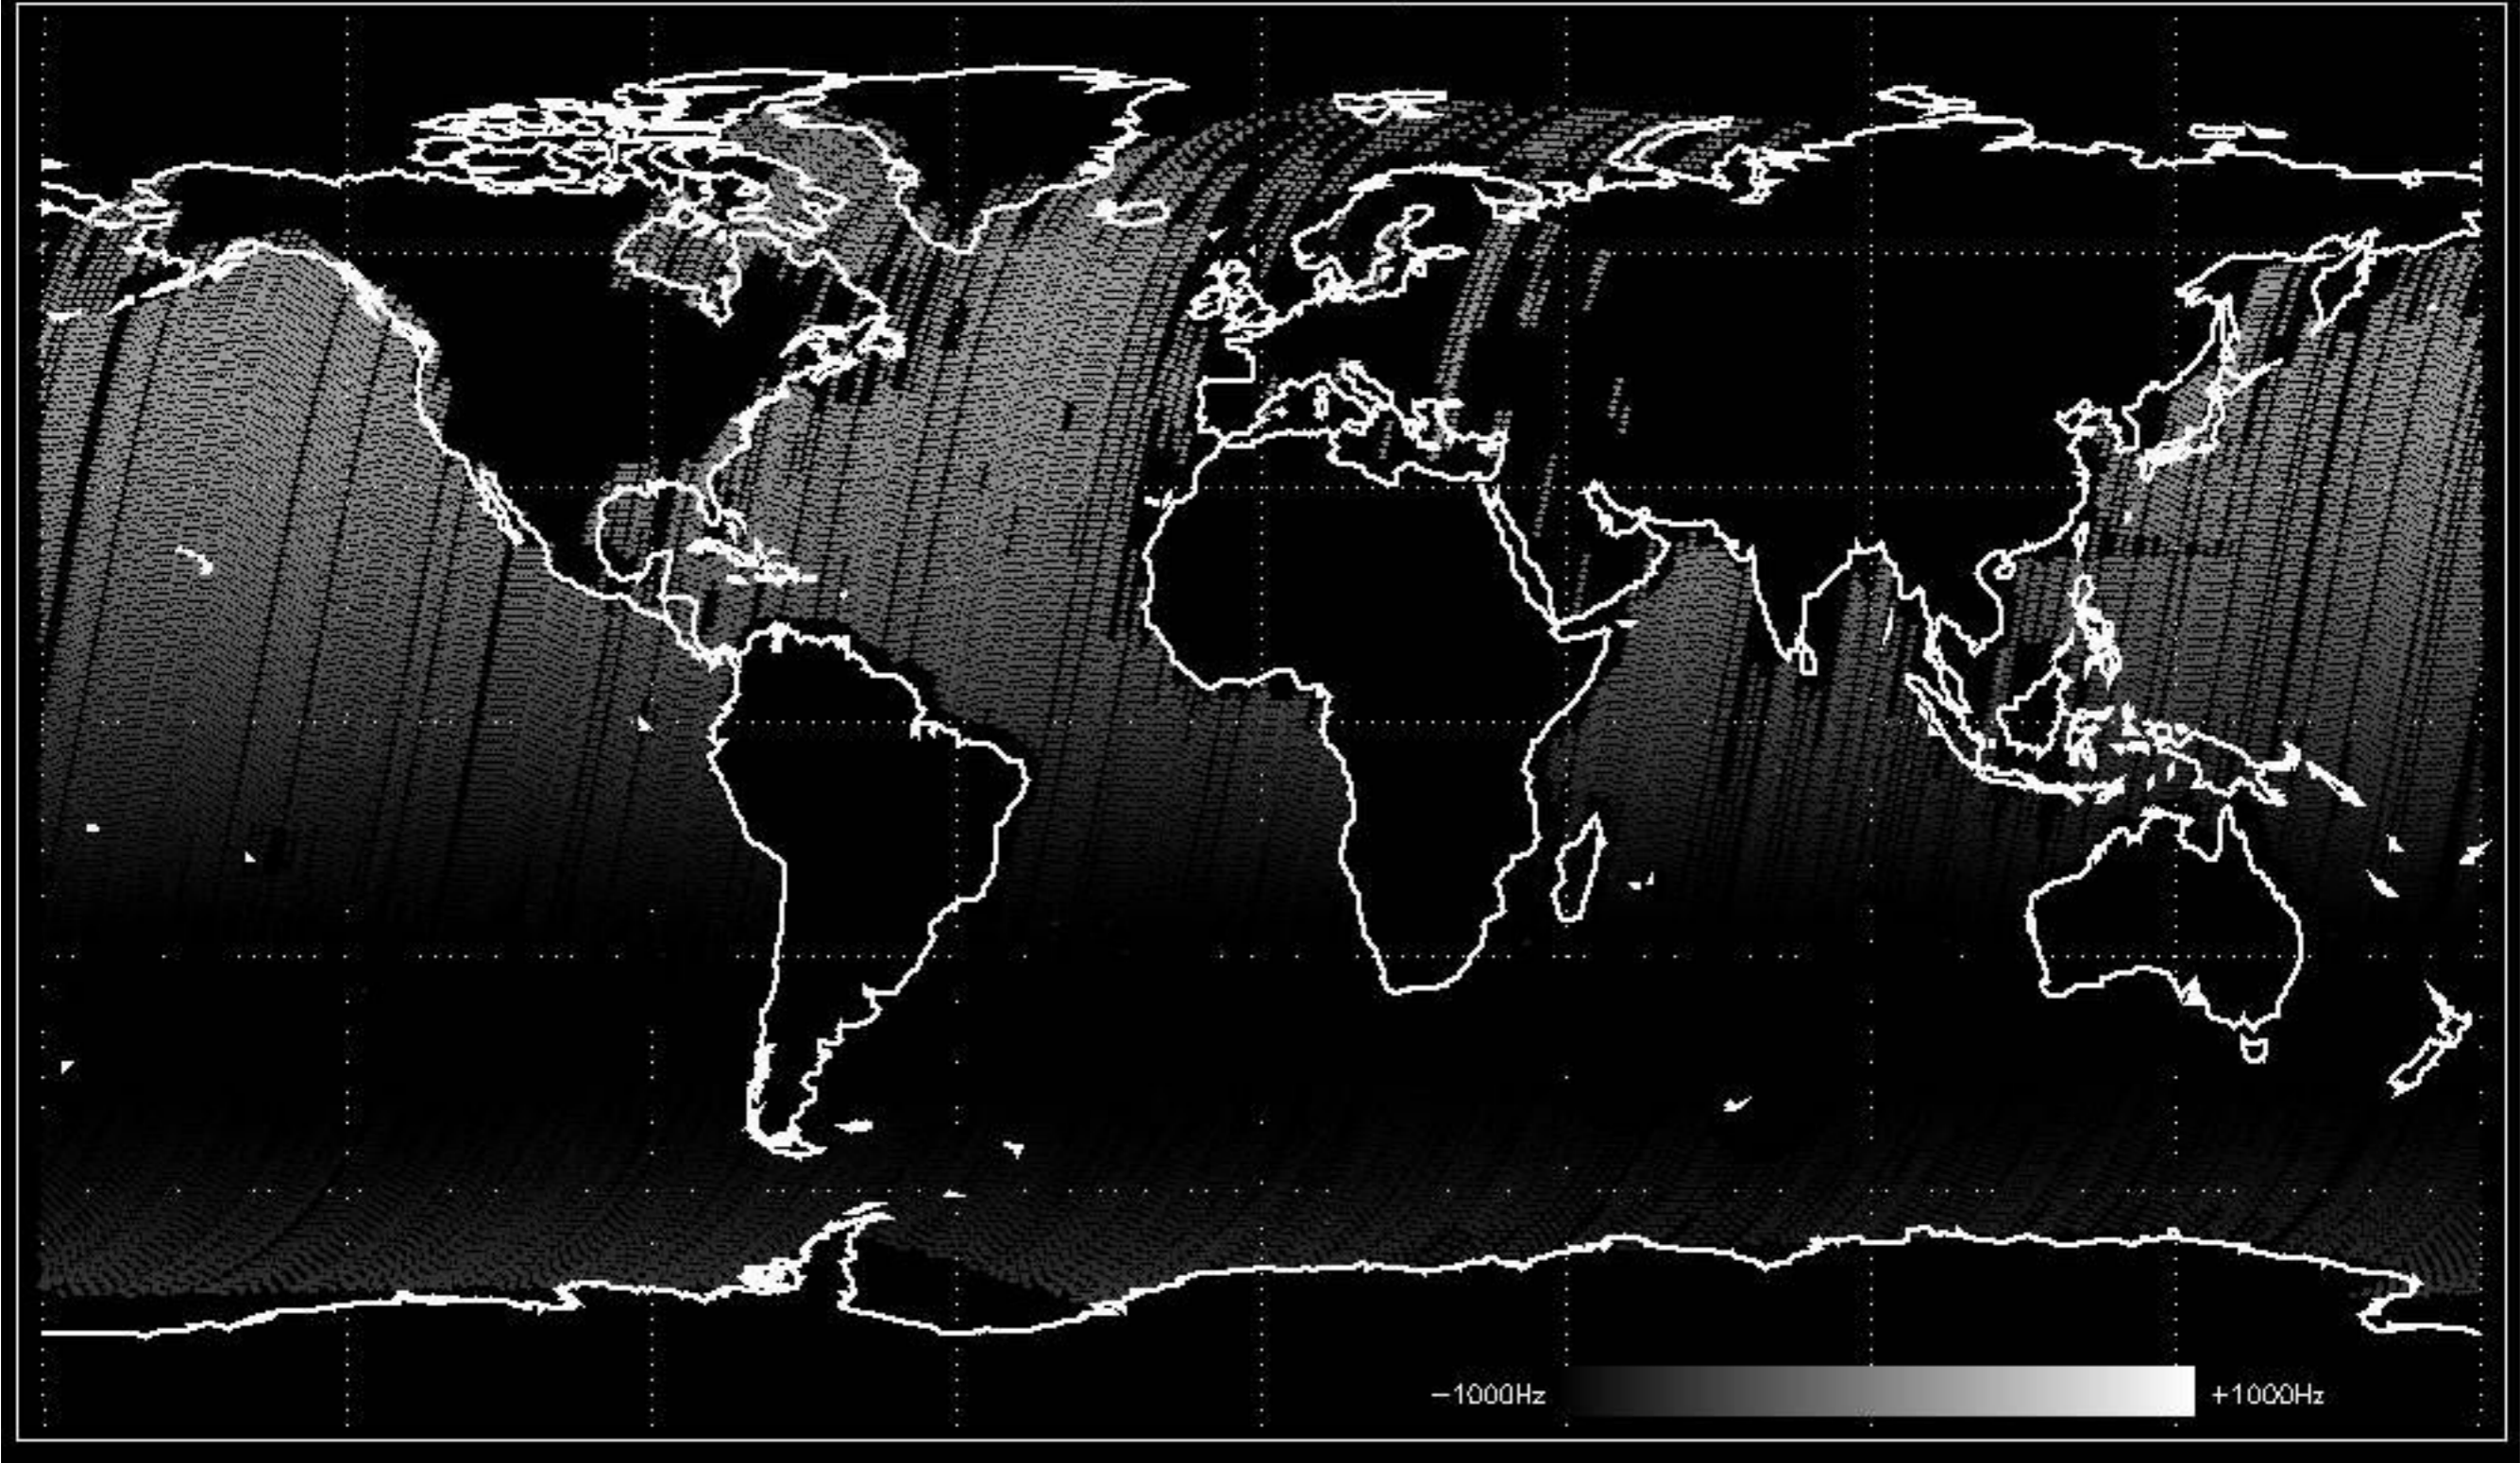

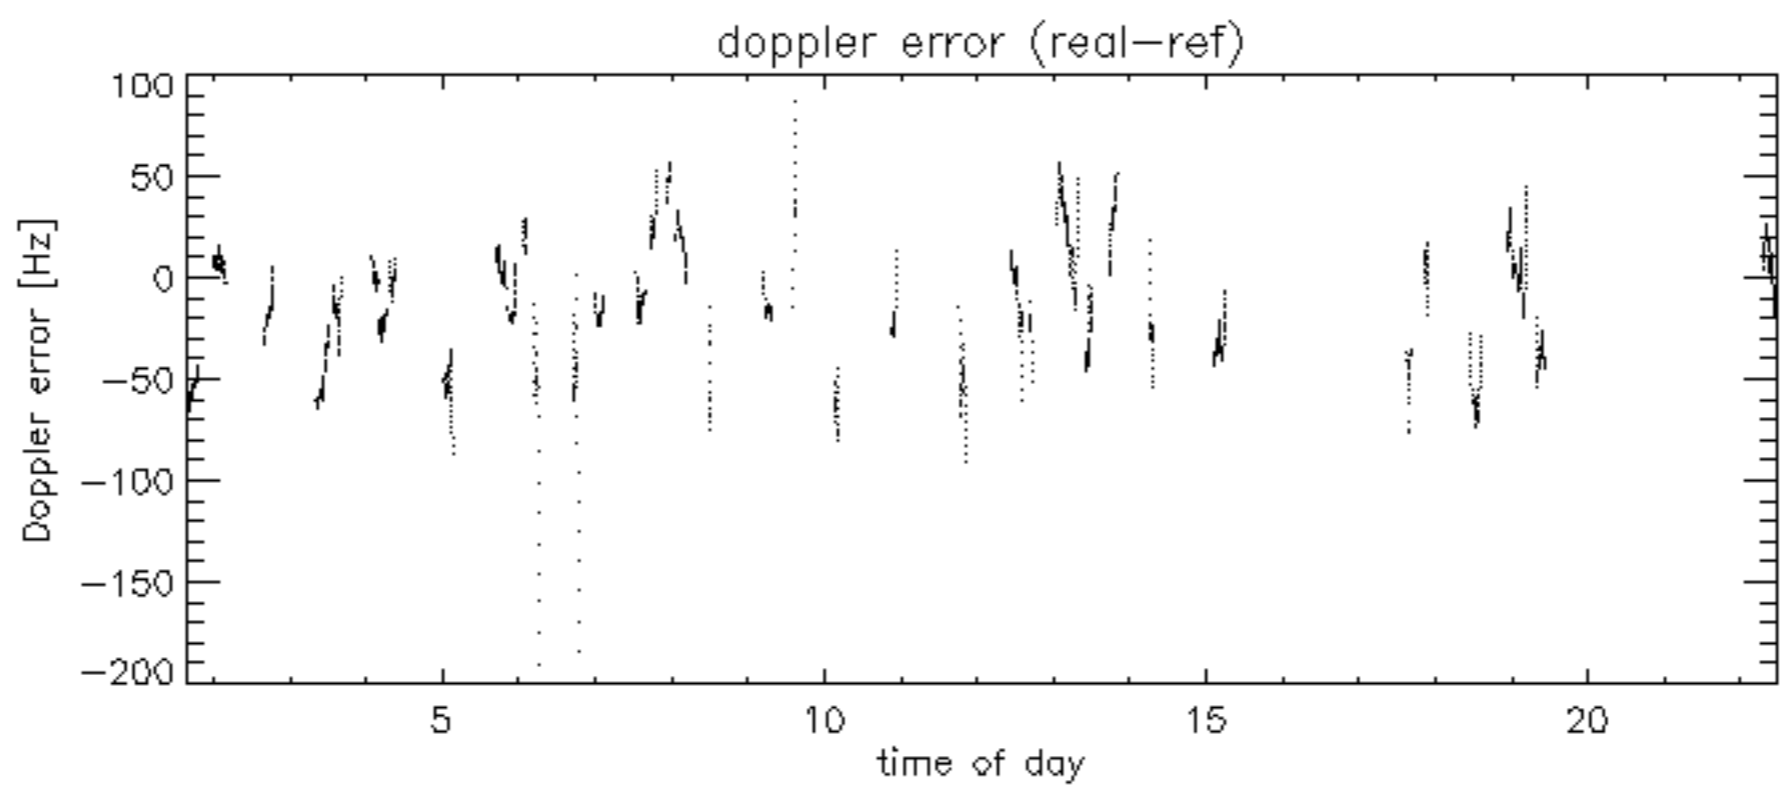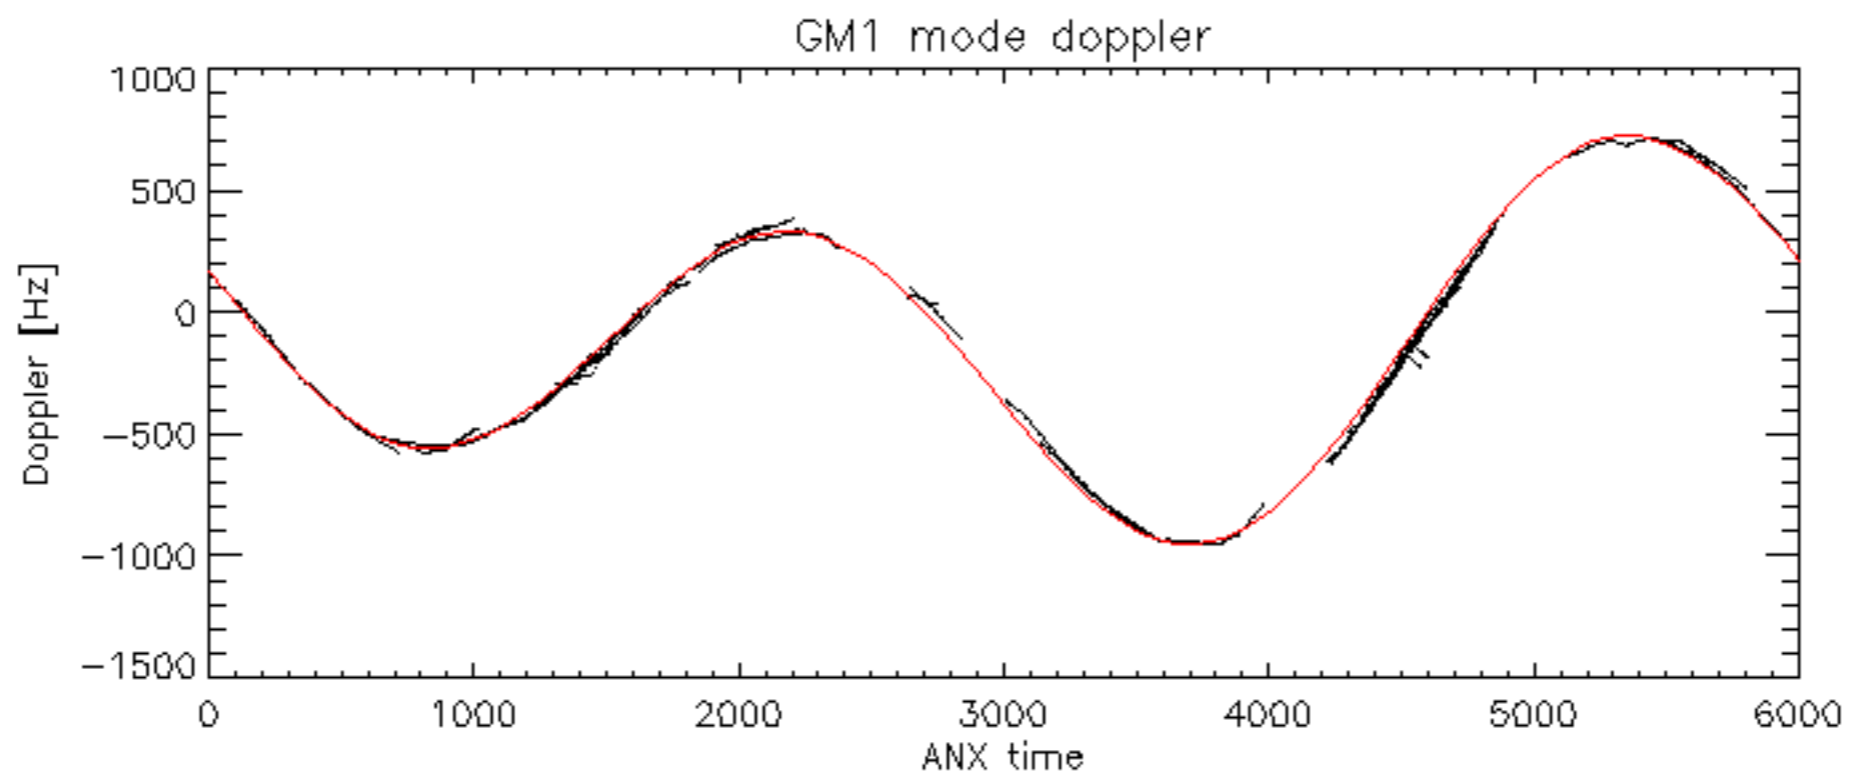


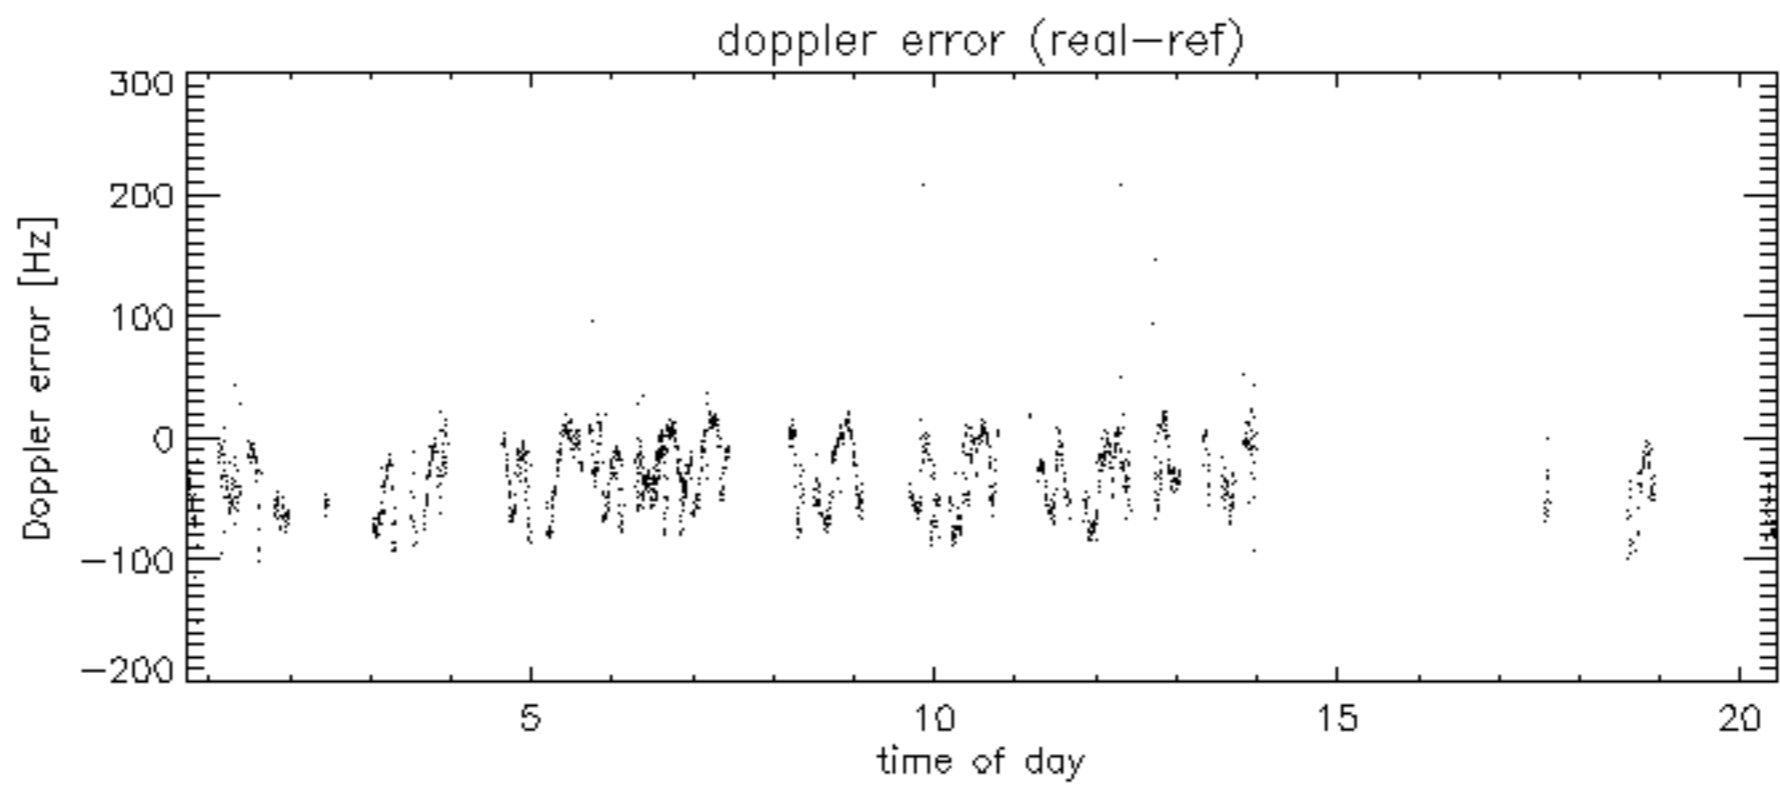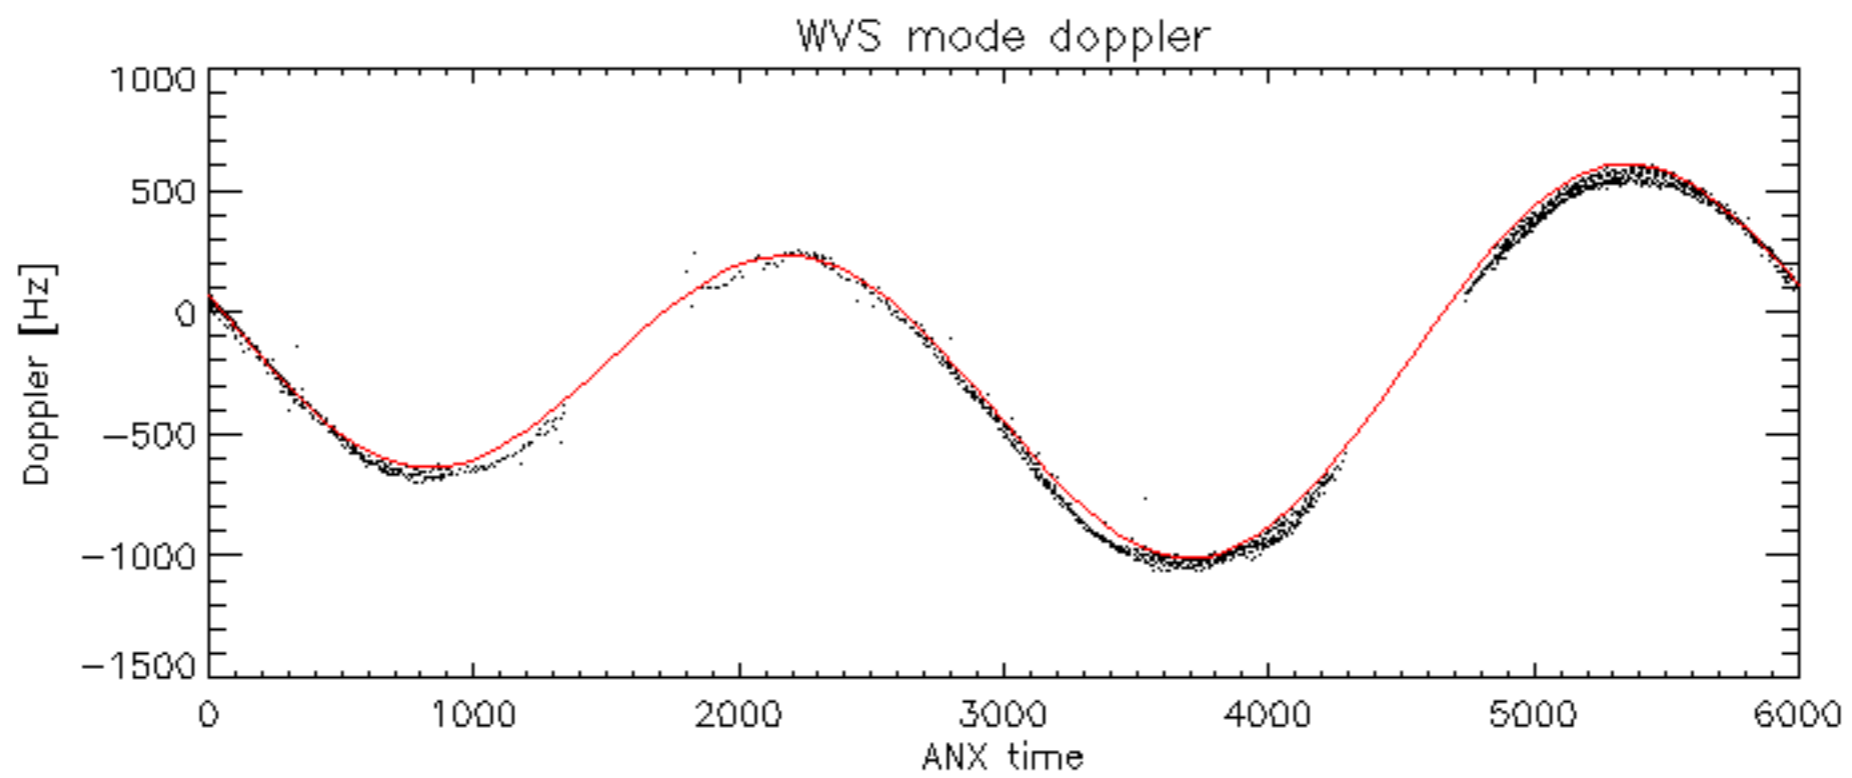

Doppler difference, estimated-predicted 'WVS' 'IS2' 'H/H' -error mean of -36.309746 Hz

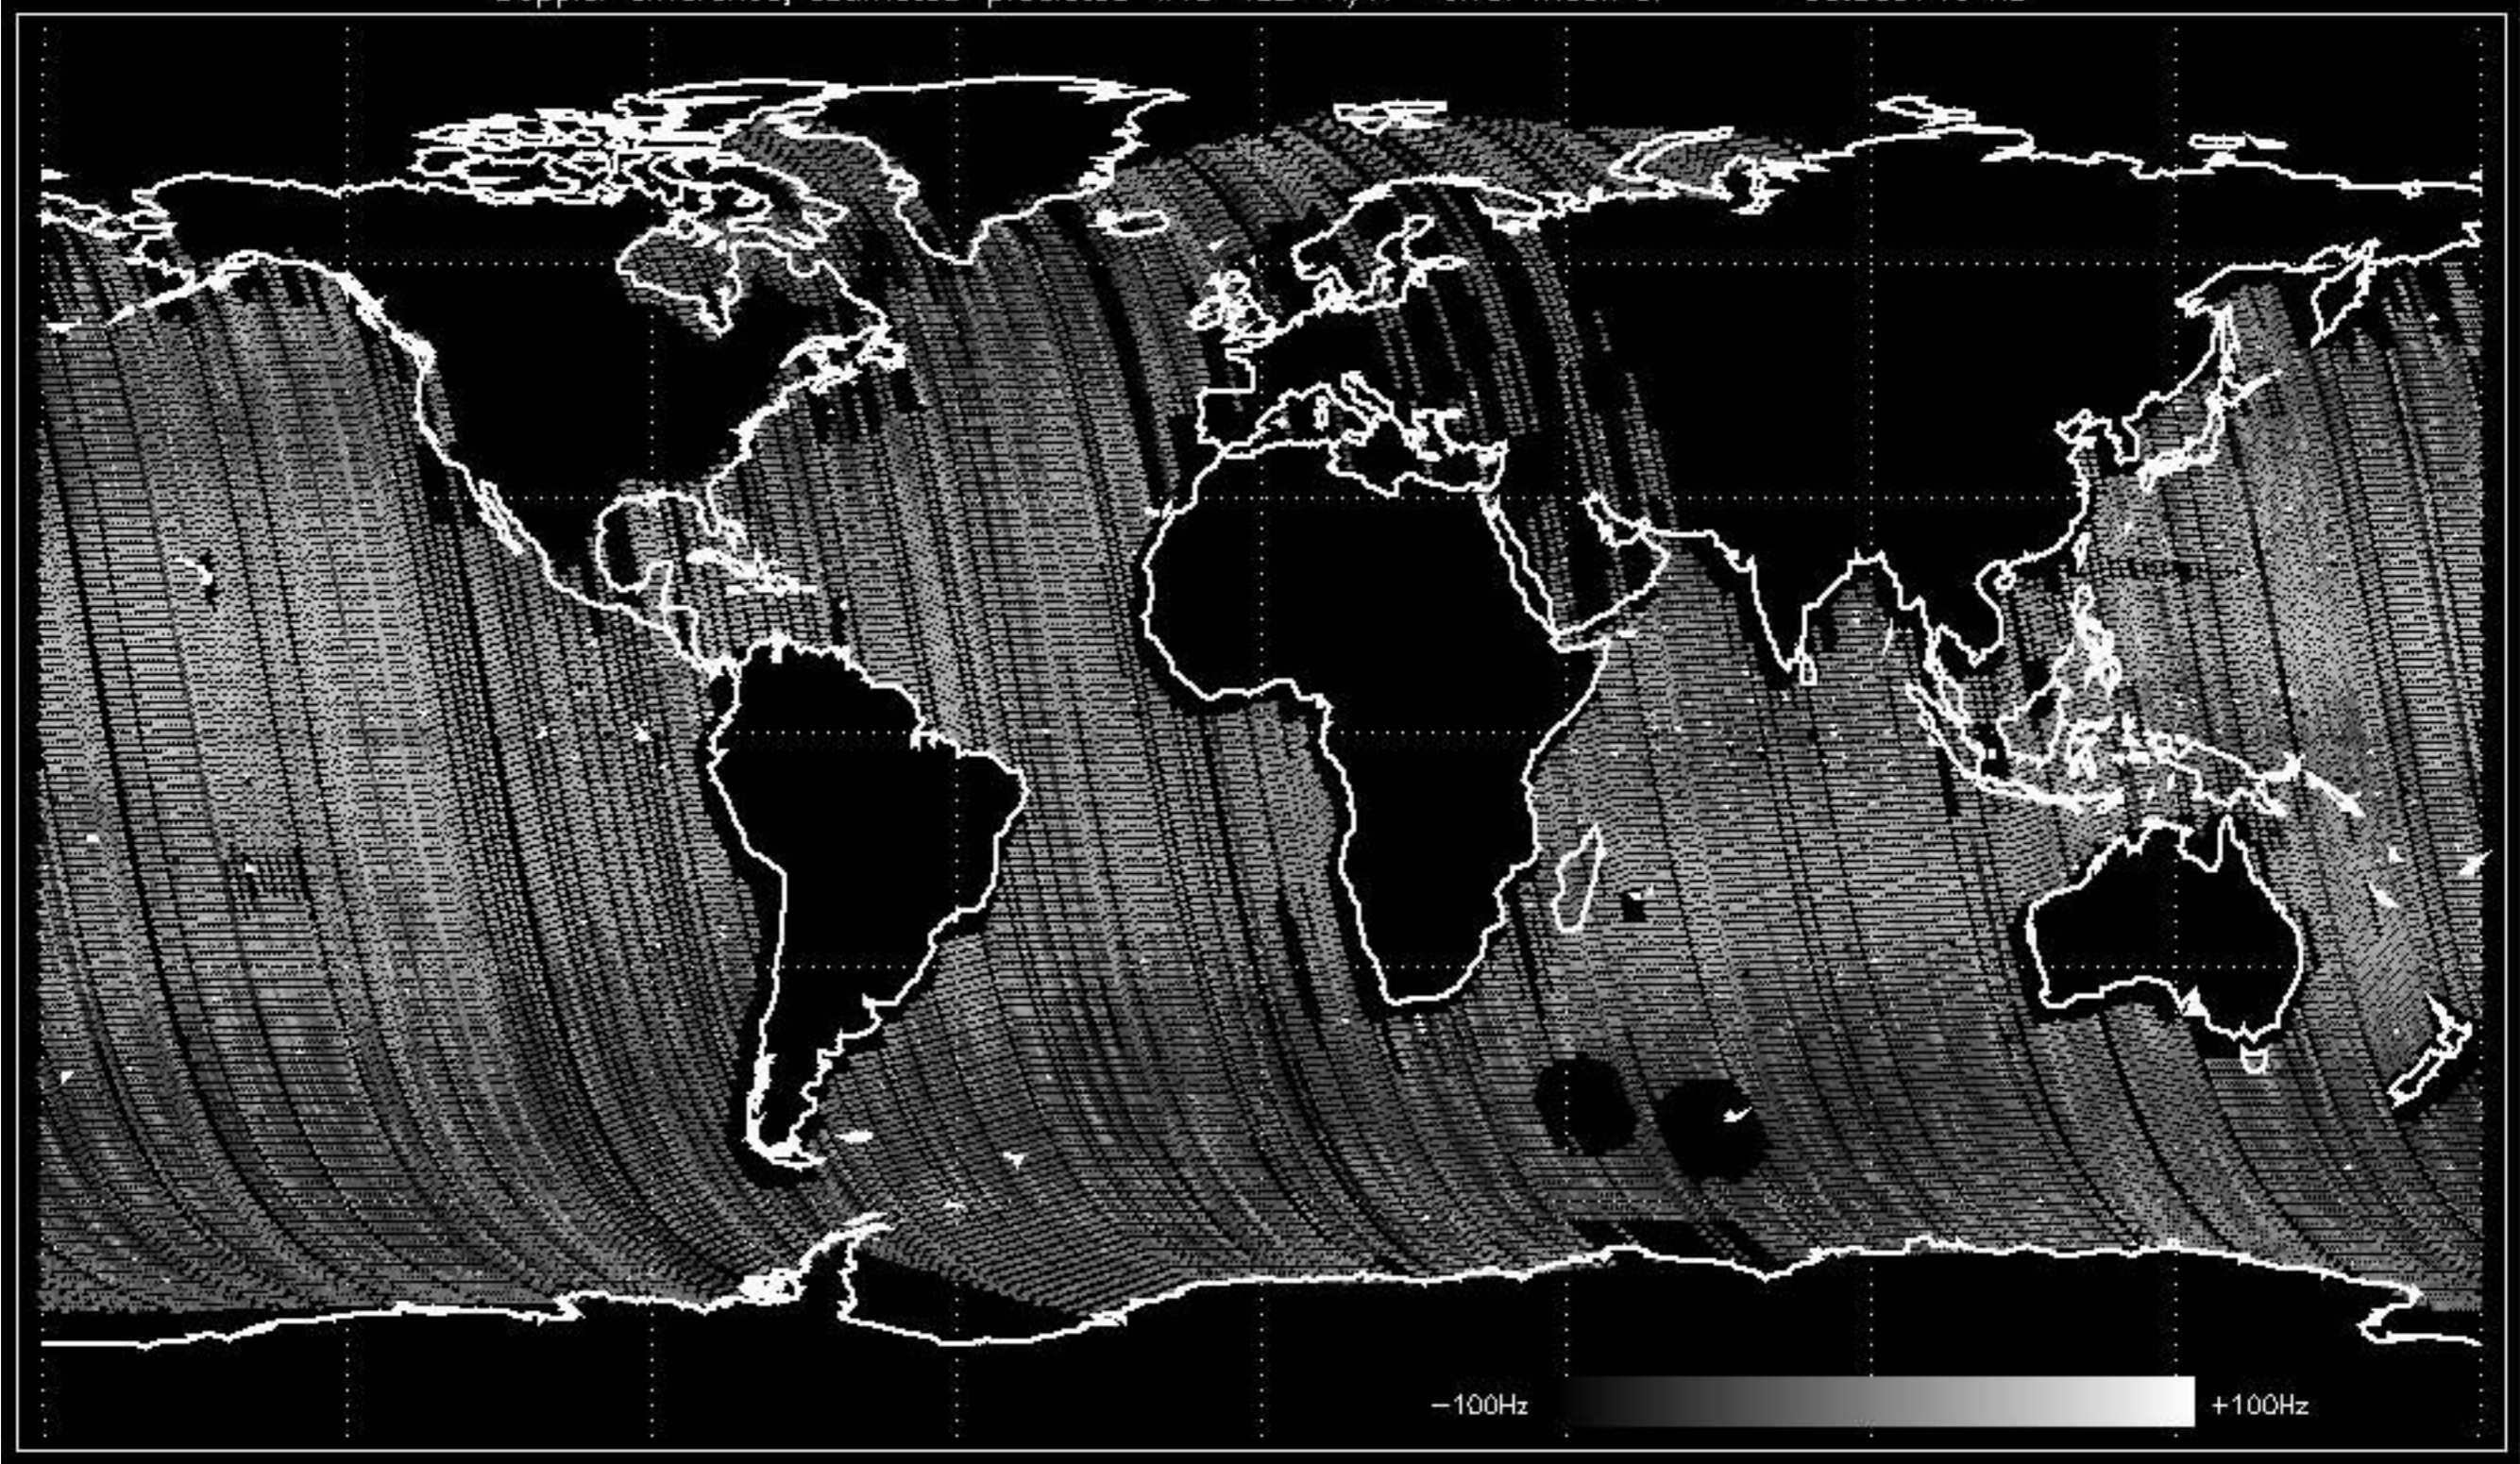





Doppler difference, estimated-predicted 'WVS' 'IS2' 'V/V' -error mean of -33.615684 Hz



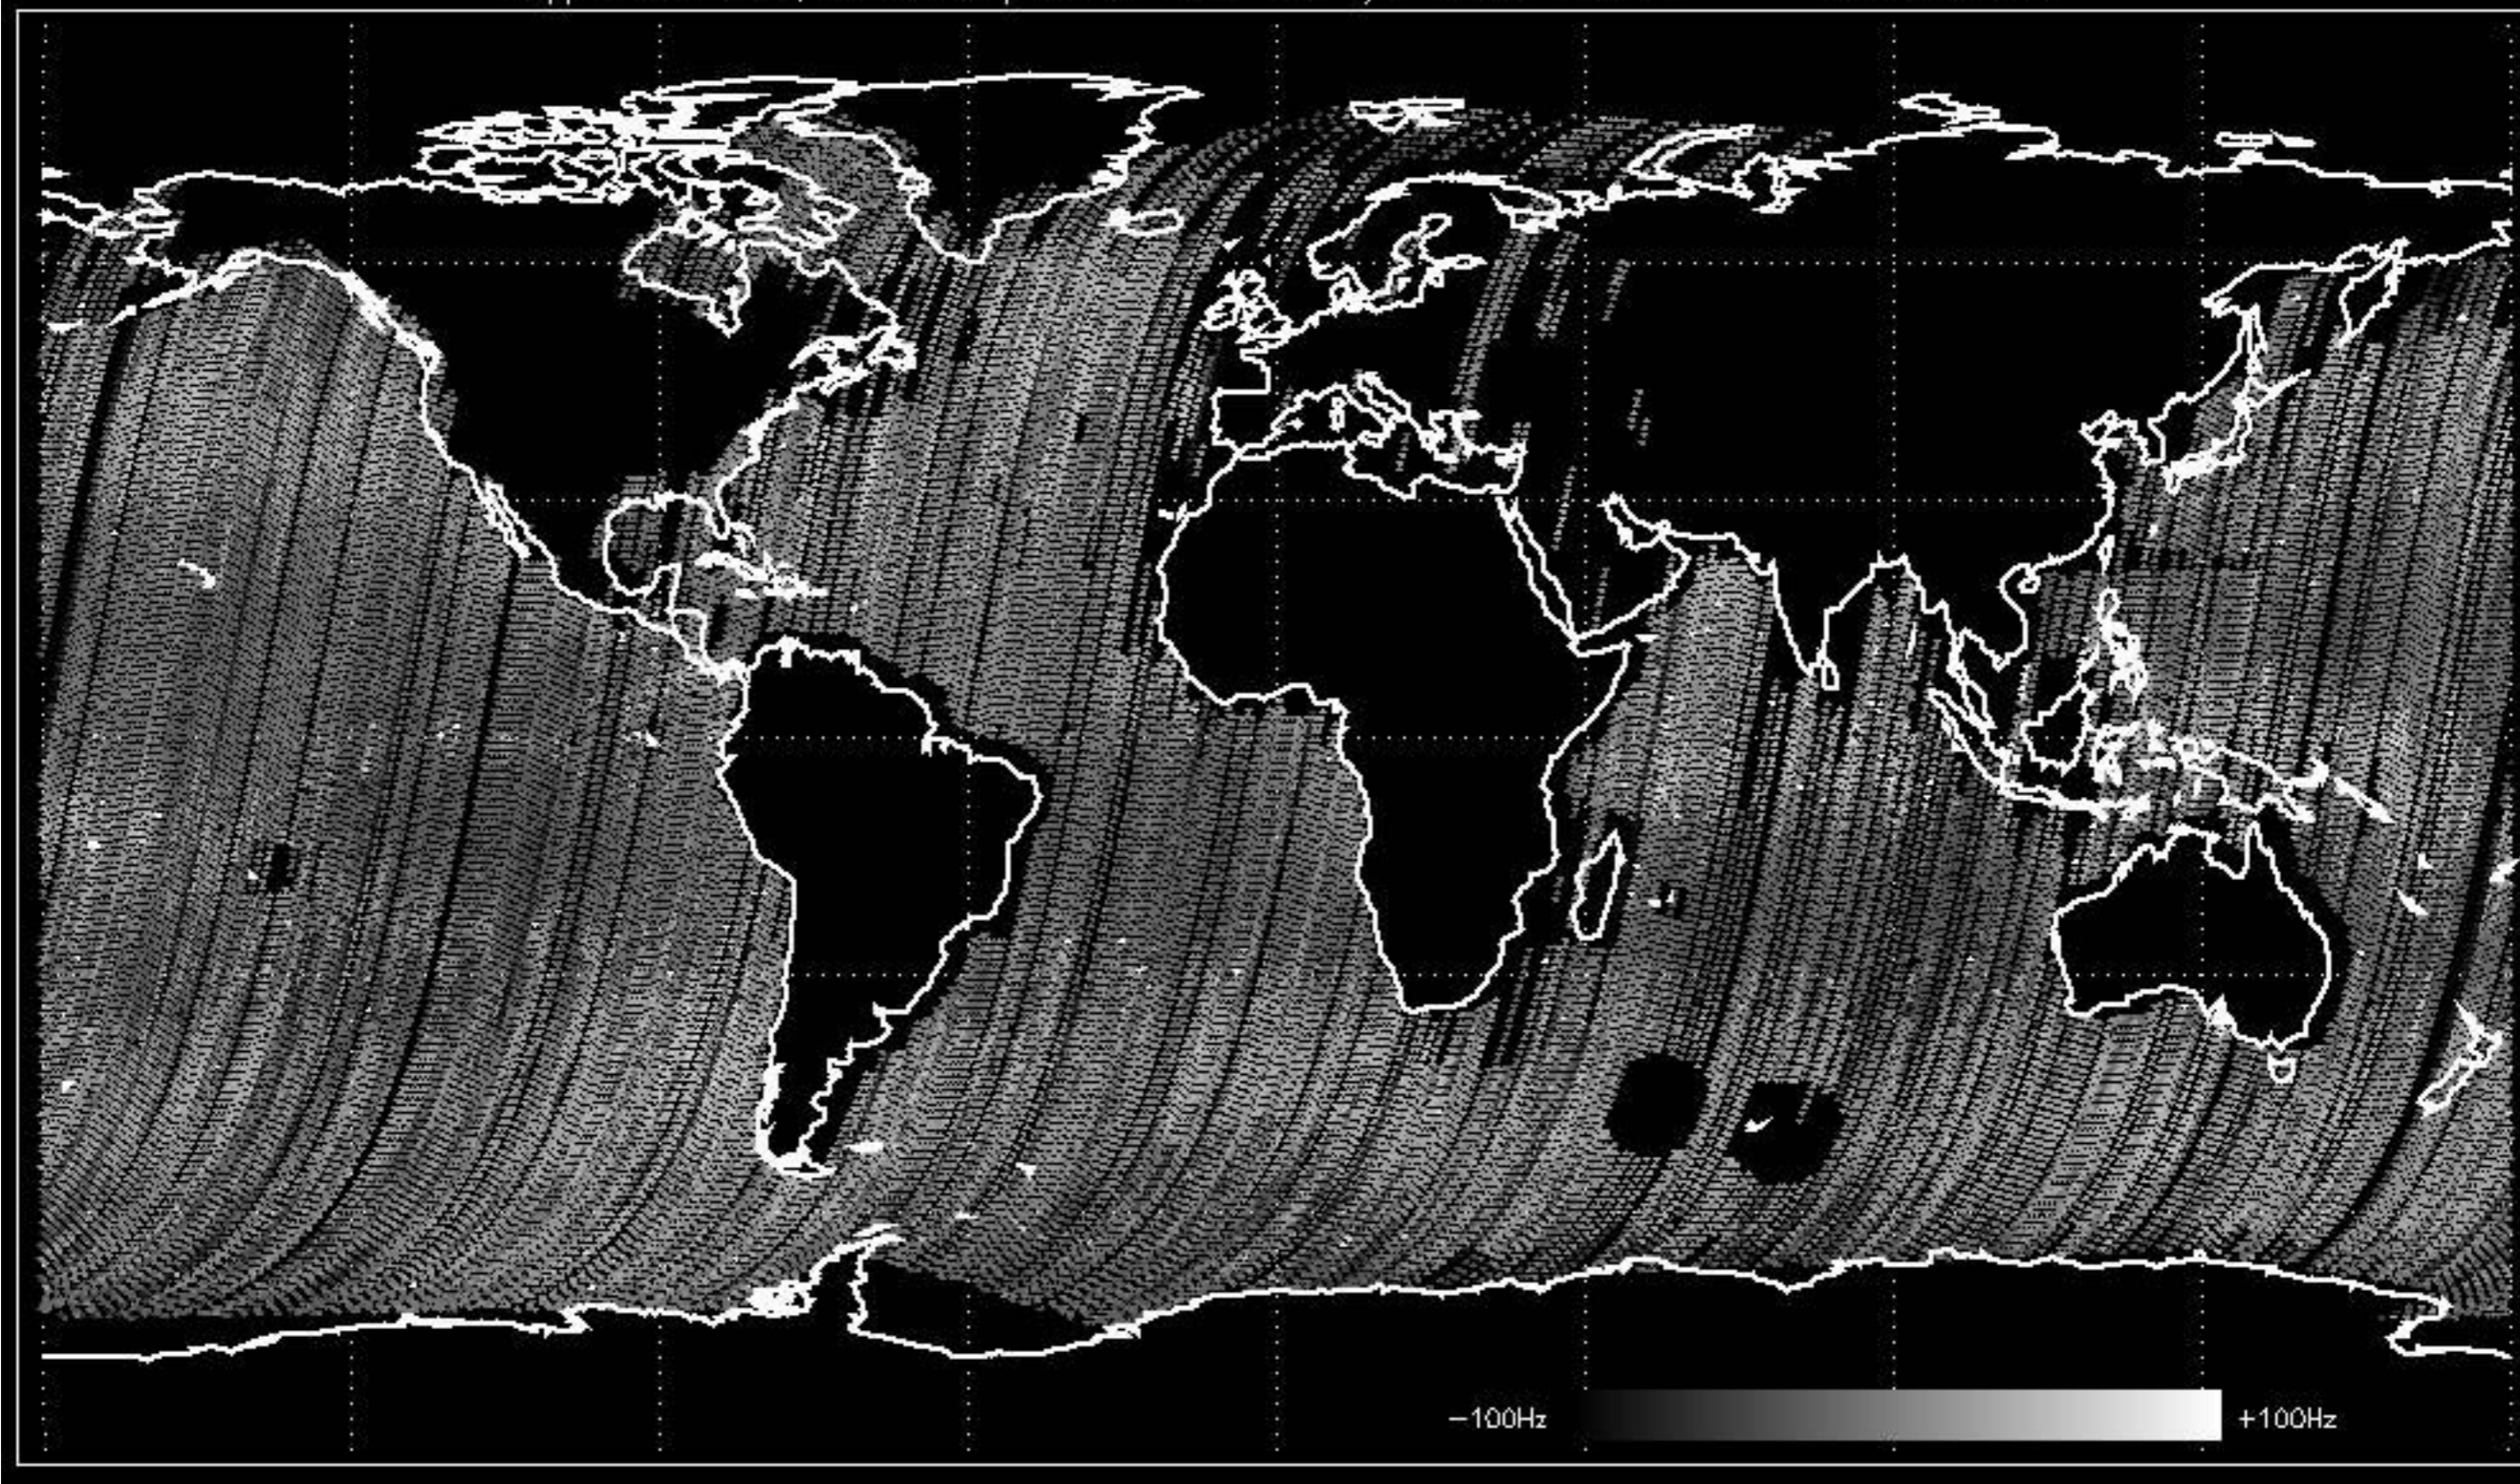


The MS mode provides an internal health check on an individual module basis.
The purpose of this mode is to identify to identify any malfunctioning modules and
to identify modules for which calibration offsets are to be applied.
No anomalies observed on available MS products:

No anomalies observed.

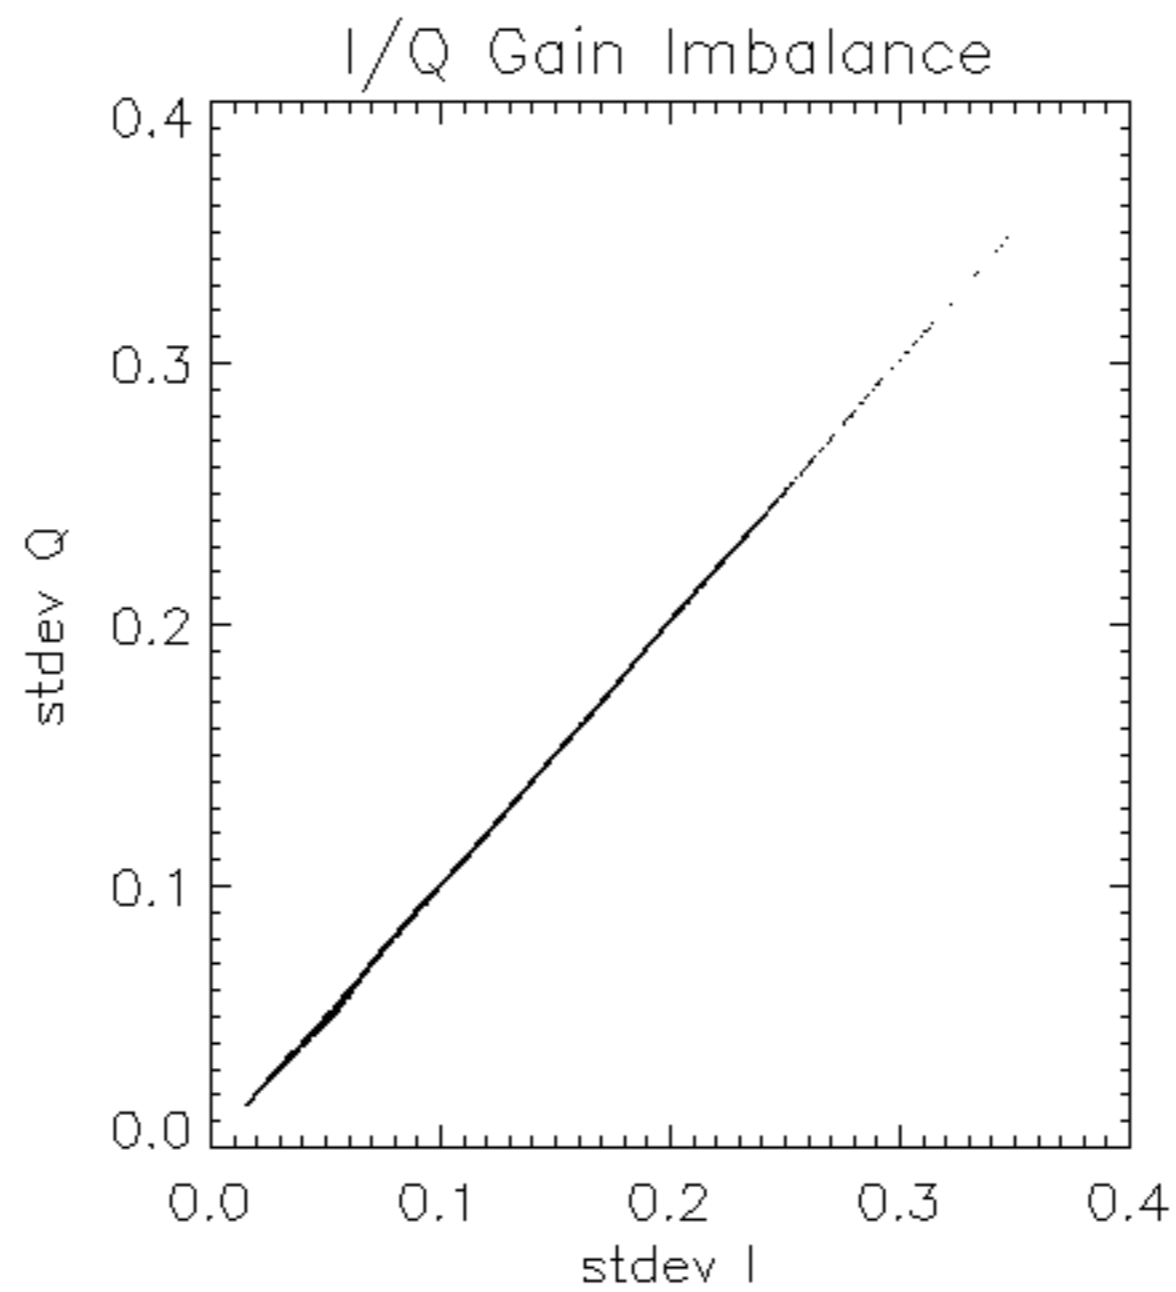

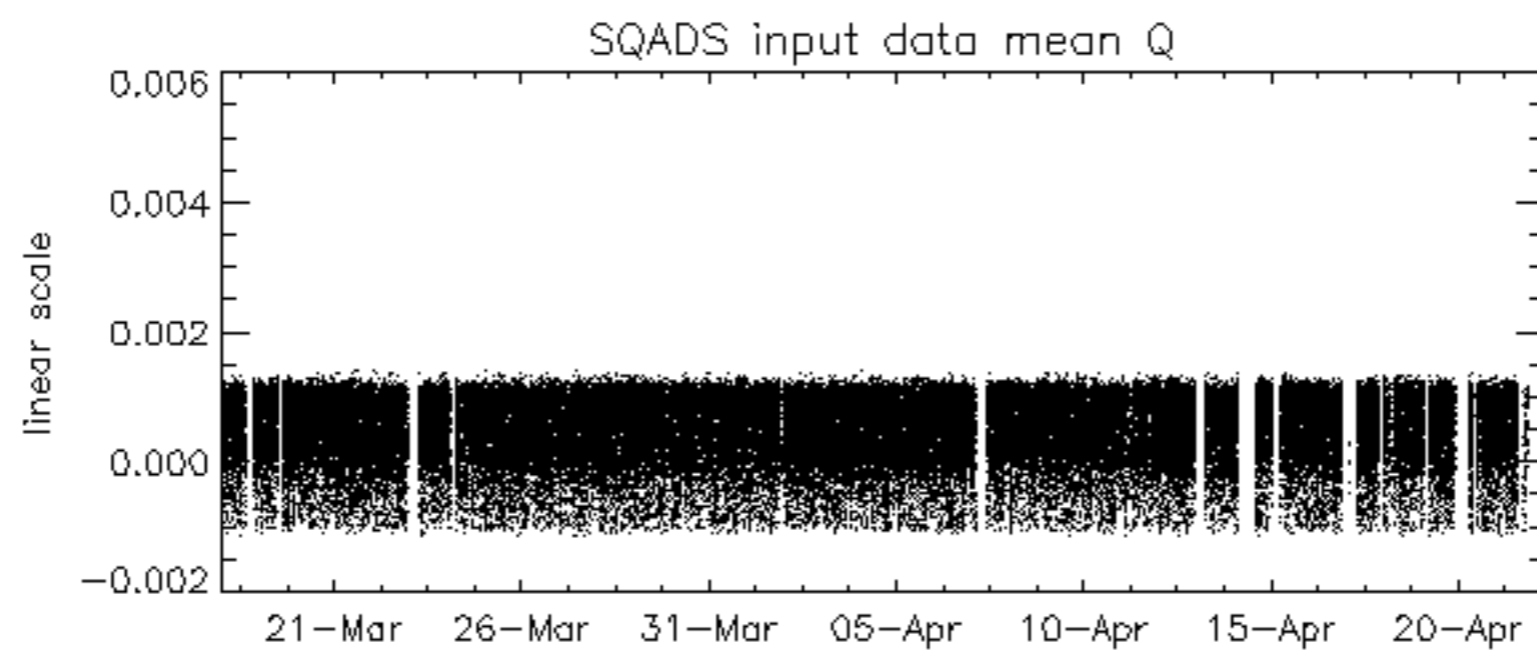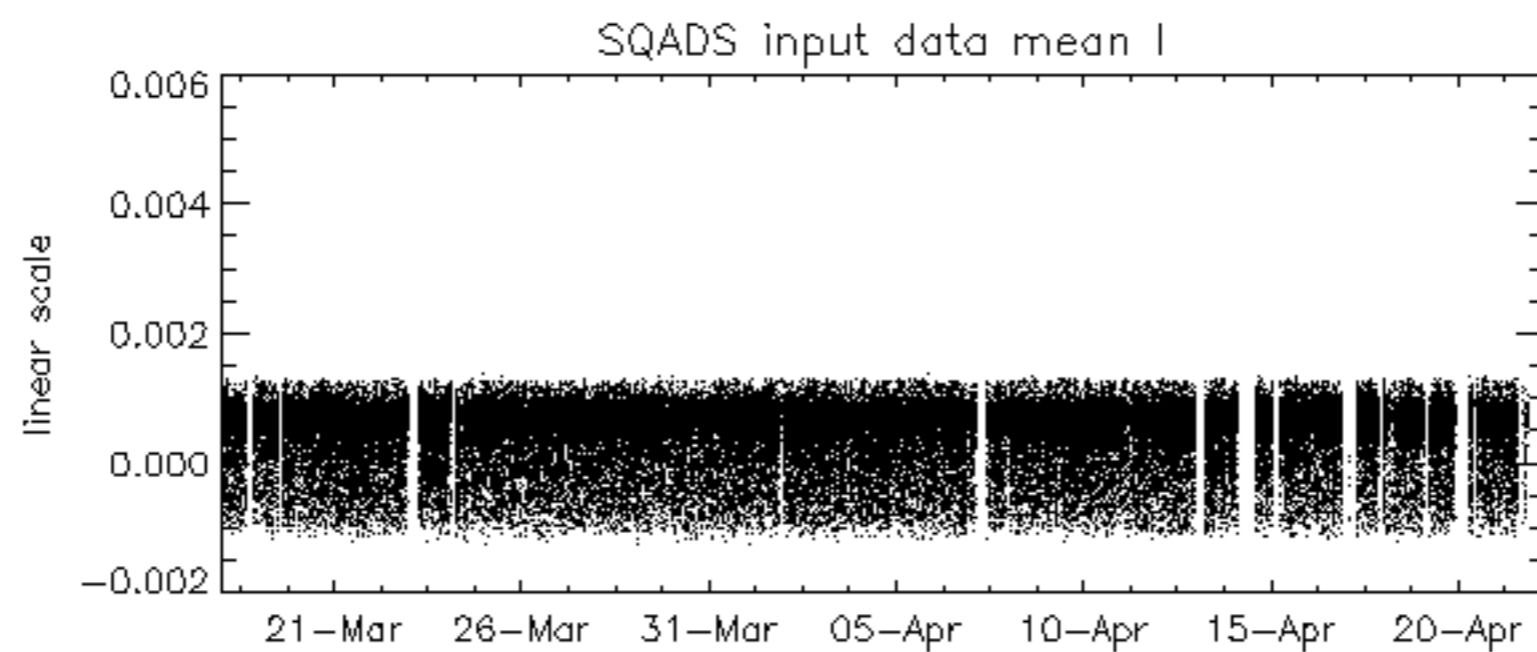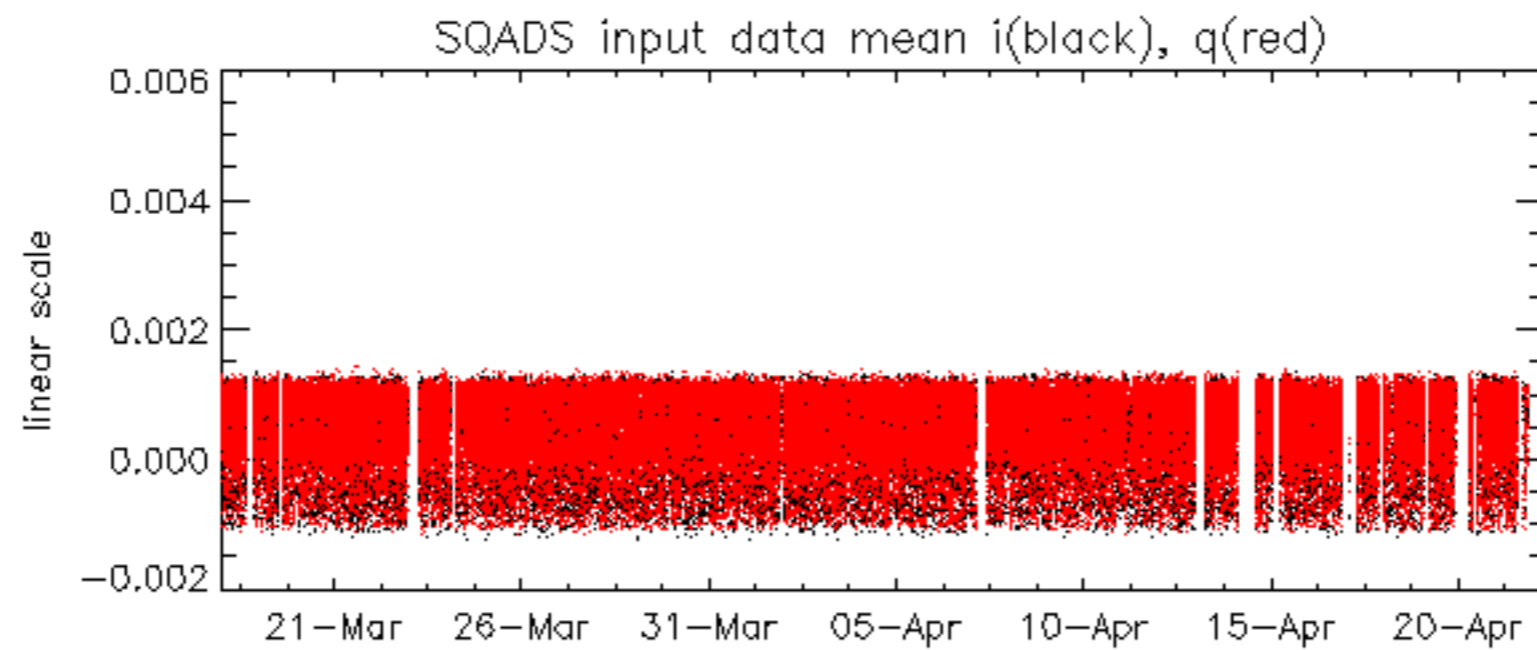

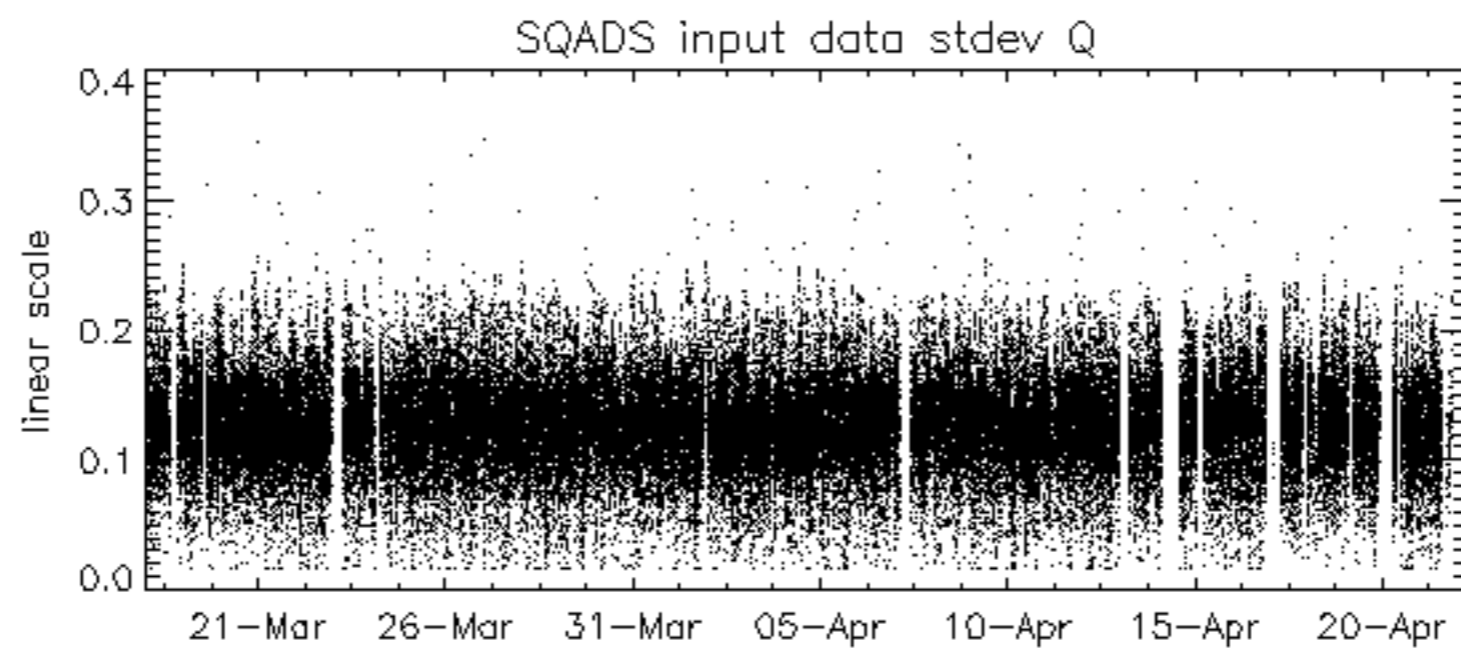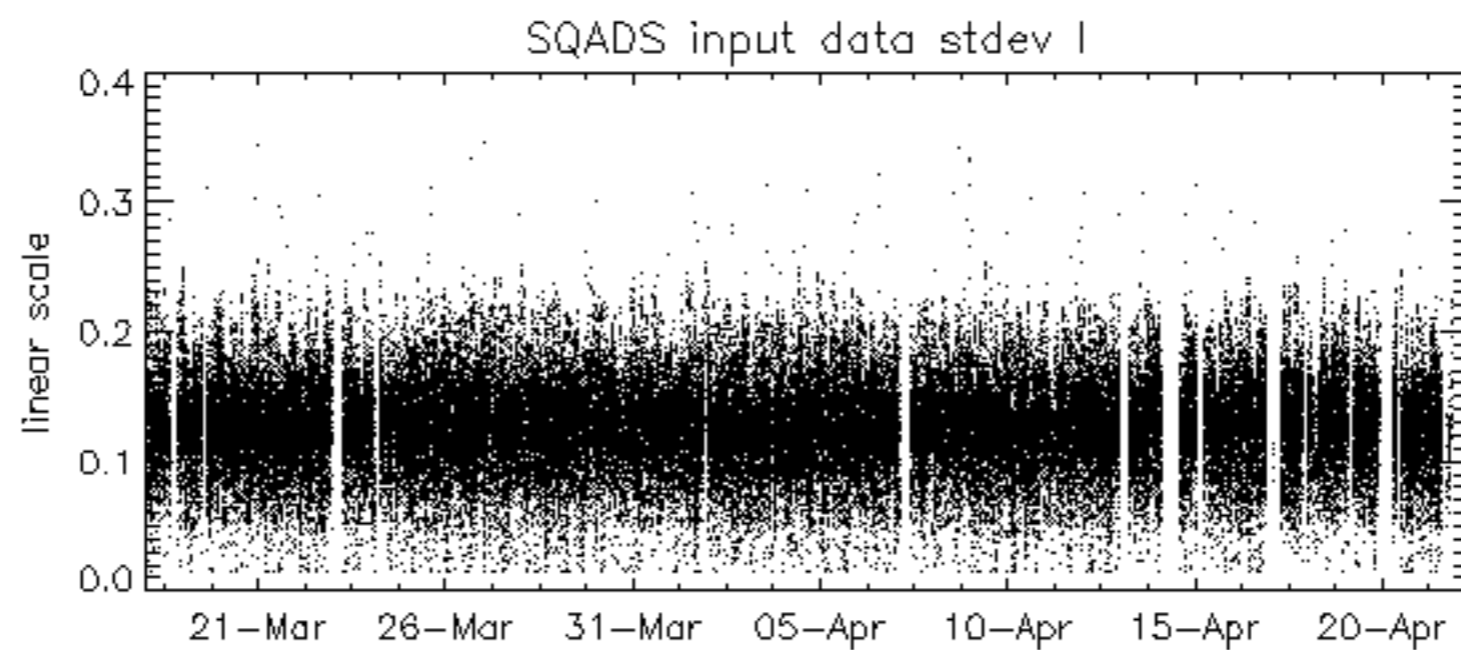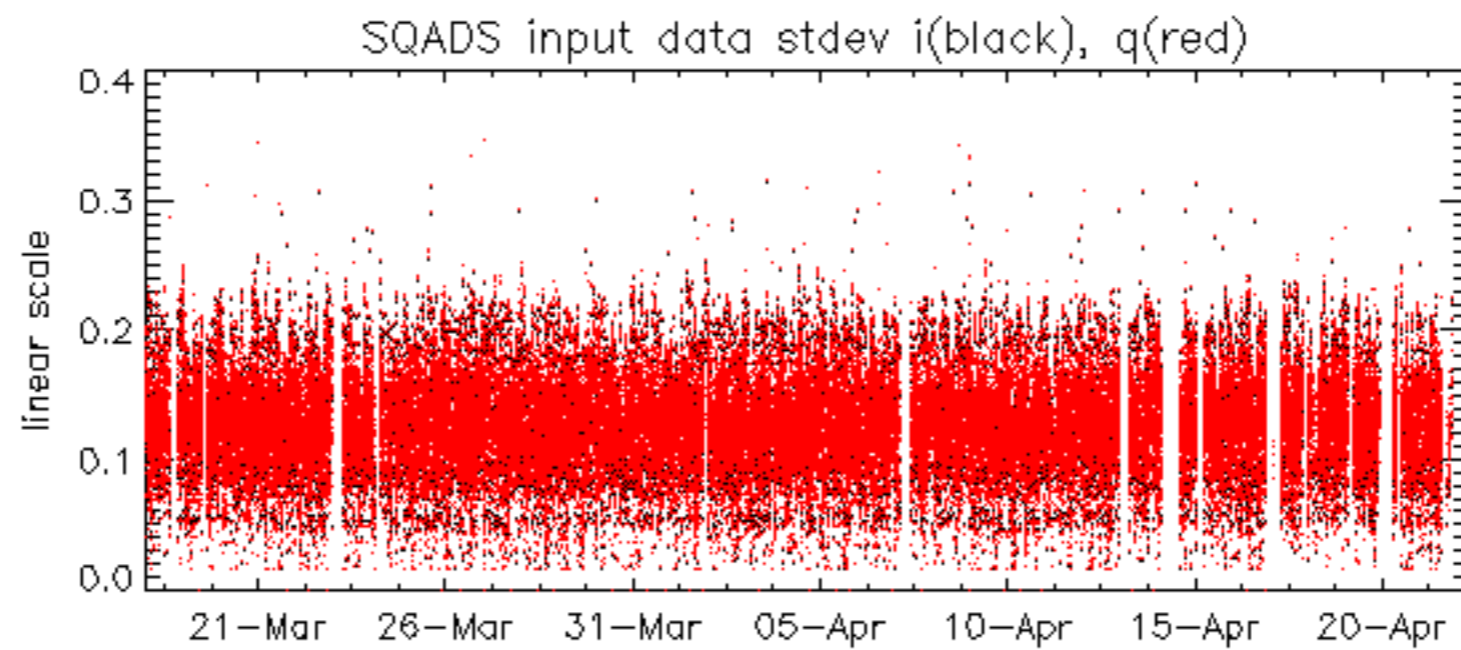

No unavailabilities during the reported period.