

PRELIMINARY REPORT OF 040731

ATTENTION: This report is automatically generated no comments are provided on data analysis

last update on Sat Jul 31 13:04:05 GMT 2004

1. [Introduction](#)
2. [Summary](#)
 - [Instrument Unavailability](#)
 - [Browse Visual Inspection](#)
 - [Module Stepping Results](#)
 - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
 - [Daily statistics](#)
 - [Cyclic statistics](#)
 - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
 - [raw data mean I and Q](#)
 - [raw data stdev I and Q](#)
 - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
 - [Unbiased Doppler Error for WVS](#)
 - [Absolute Doppler for WVS](#)
 - [Doppler evolution versus ANX for WVS](#)
 - [Unbiased Doppler Error for GM1](#)
 - [Absolute Doppler for GM1](#)
 - [Doppler evolution versus ANX for GM1](#)

1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA_WVS_1P), global monitoring products (ASA_GM1_1P), which are the available few hours after the acquisition, on the browse (BP) products and on the Module Stepping (MS) product.

2 - Summary

2.1 - Instrument Unavailability

No unavailabilities during the reported period.

2.2 - Browse Visual Inspection

2.3 - Data Analysis

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.

3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis. The purpose of this mode is to identify any malfunctioning modules and to identify modules for which calibration offsets are to be applied. No anomalies observed on available MS products:

Polarisation	Start Time
V	20040730 055518
H	20040729 062655

MSM in V/V polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>

MSM in H/H polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>

4 - Internal calibration Results

No anomalies observed.

4.1 - Daily statistics

4.1.1 - Evolution for WVS

Evolution of cal pulses for WVS

4.1.2 - Evolution for GM1

Evolution of cal pulses for GM1

4.2 - Cyclic statistics

4.2.1 - Evolution for WVS

Evolution of cal pulses for WVS

P1a Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

P1 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P1	-3.477221	0.005490	0.023782
7	P1	-3.319883	0.012763	0.024435
11	P1	-4.598572	0.030493	-0.027819
15	P1	-5.722390	0.055740	-0.005249
19	P1	-3.446900	0.004317	-0.011393
22	P1	-4.560876	0.010870	-0.019884
24	P1	-4.946555	0.017012	-0.009775
30	P1	-6.887163	0.025880	-0.028092

3	P1	-16.184999	0.125098	-0.001651
7	P1	-13.966269	0.078671	0.019348
11	P1	-20.027500	0.258349	-0.167202
15	P1	-11.789339	0.041859	0.025046
19	P1	-13.843821	0.034731	-0.022279
22	P1	-16.331188	0.347118	0.004530
24	P1	-14.604057	0.280405	0.014048
30	P1	-17.671686	0.415162	0.049443

P2 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P2	-22.340376	0.079385	0.074352
7	P2	-22.726860	0.119157	0.096917
11	P2	-15.472040	0.136698	0.110494
15	P2	-7.115235	0.088833	0.068290
19	P2	-9.560842	0.147399	0.044808
22	P2	-17.427521	0.102416	0.130128
24	P2	-20.767473	0.083218	0.033789
30	P2	-19.364767	0.077531	0.103766

P3 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P3	-8.143145	0.001902	-0.001973
7	P3	-8.143150	0.001902	-0.001958
11	P3	-8.143167	0.001902	-0.001892
15	P3	-8.143174	0.001902	-0.001877
19	P3	-8.143177	0.001902	-0.001847
22	P3	-8.143173	0.001902	-0.001859
24	P3	-8.143170	0.001902	-0.001865
30	P3	-8.143132	0.001898	-0.002063

4.2.2 - Evolution for GM1

Evolution of cal pulses for GM1	
<input type="checkbox"/>	
<input type="checkbox"/>	

P1a Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

P1 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P1	-2.973809	0.114284	0.454669
7	P1	-2.924371	0.124246	-0.256435
11	P1	-3.832679	0.029076	0.013783
15	P1	-3.923285	0.712583	1.134795
19	P1	-3.410421	0.041942	-0.183168
22	P1	-5.697379	0.049821	0.144252
24	P1	-3.956520	0.067054	0.297947
30	P1	-6.159219	0.078955	-0.135901
3	P1	-10.794229	0.346226	0.640487
7	P1	-9.947990	0.284024	-0.444877
11	P1	-11.927923	0.217959	-0.332151
15	P1	-11.767992	0.264053	0.403384
19	P1	-15.273649	0.611852	-0.951776
22	P1	-22.191668	5.856527	-2.899772
24	P1	-17.483097	0.313231	-0.471384
30	P1	-20.986832	3.595886	2.111332

P2 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P2	-18.047020	0.077675	0.168885
7	P2	-22.834633	0.235718	0.100196
11	P2	-10.979854	0.196432	-0.232623
15	P2	-4.954549	0.042064	-0.014424
19	P2	-6.855034	0.053509	0.169008
22	P2	-7.542811	0.097157	0.168502
24	P2	-11.027328	0.148009	-0.062053
30	P2	-22.276028	0.127007	0.047277

P3 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

3	P3	-7.983523	0.003604	-0.011650
7	P3	-7.983590	0.003602	-0.011661
11	P3	-7.983525	0.003603	-0.011463
15	P3	-7.983449	0.003612	-0.011459
19	P3	-7.983408	0.003611	-0.011764
22	P3	-7.983532	0.003594	-0.011817
24	P3	-7.983441	0.003627	-0.011783
30	P3	-7.983549	0.003601	-0.011644

4.3 - cal pulses monitoring (all rows)

4.3.1 - Evolution for WVS



4.3.2 - Evolution for GM1



5 - RAW data statistics

No anomalies observed.

5.1 - Input mean I/Q

channel	stat	DSS-B
MEAN I	mean	0.000491128
	stdev	2.16031e-07
MEAN Q	mean	0.000530890
	stdev	2.48501e-07



5.2 - Input stdev I/Q

channel	stat	DSS-B
STDEV I	mean	0.128922
	stdev	0.00105858

STDEV Q	mean	0.129174
	stdev	0.00107025





5.3 - Gain imbalance I/Q





6 - Doppler Analysis

Preliminary report. The data is not yet controlled

6.1 - Unbiased Doppler Error for WVS

Evolution of unbiased Doppler error (Real - Expected)	
	Ascending
	Descending

6.2 - Absolute Doppler for WVS

Evolution of Absolute Doppler	
	Ascending
	Descending

6.3 - Doppler evolution versus ANX for WVS

Evolution Doppler error versus ANX	
	

6.4 - Unbiased Doppler Error for GM1

Evolution of unbiased Doppler error (Real - Expected)	
<input type="checkbox"/>	
	Ascending
<input type="checkbox"/>	
	Descending





6.5 - Absolute Doppler for GM1

Evolution of Absolute Doppler	
<input type="checkbox"/>	
	Ascending
<input type="checkbox"/>	
	Descending

6.6 - Doppler evolution versus ANX for GM1


Evolution Doppler error versus ANX	
<input type="checkbox"/>	

Cal pulses for GM1 SS3

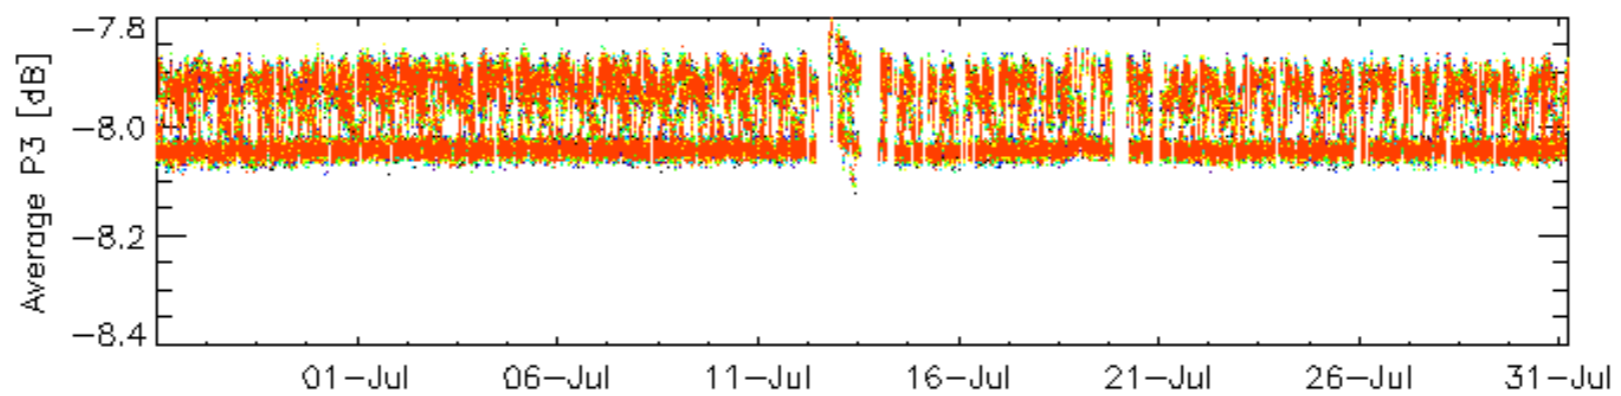
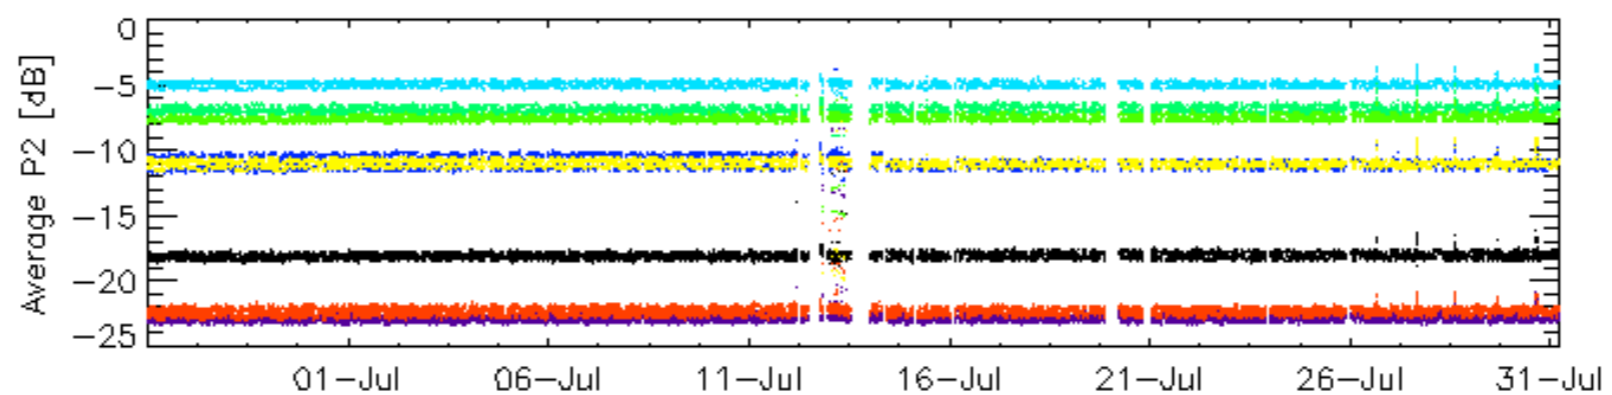
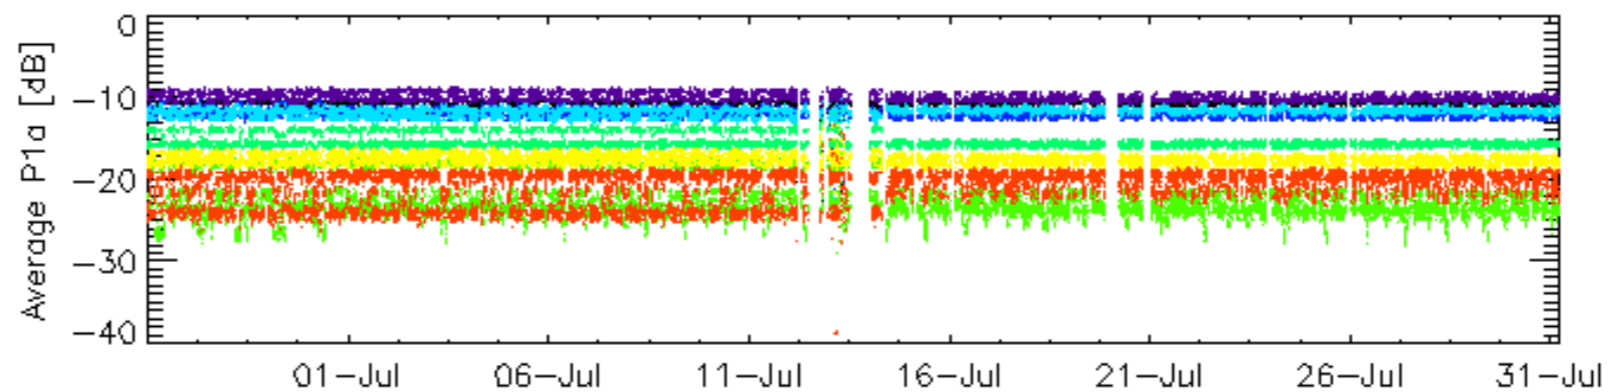
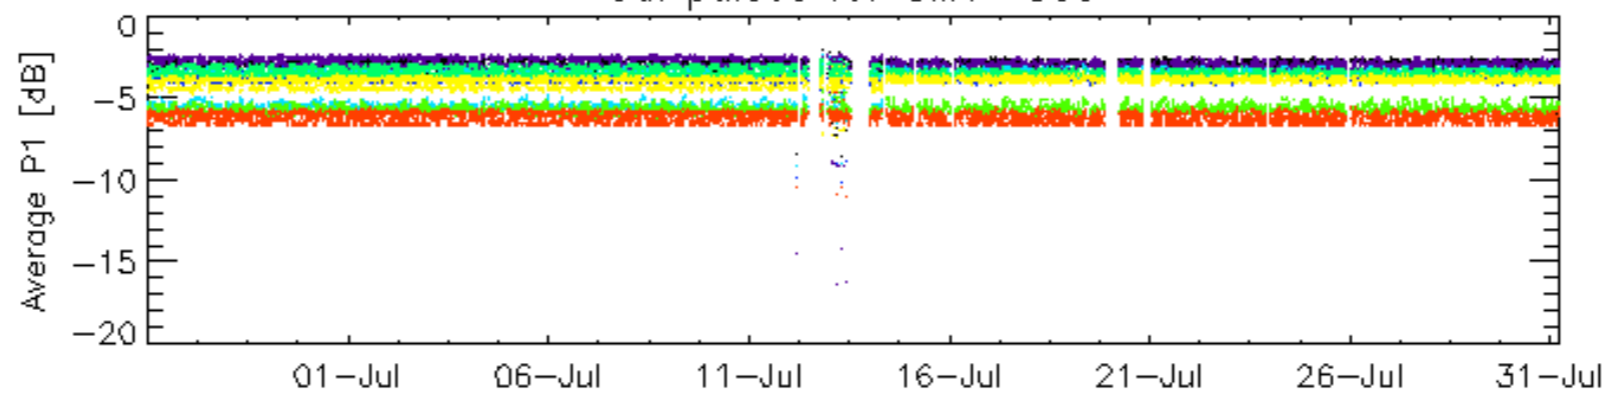


rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

Cal pulses for GM1 SS3

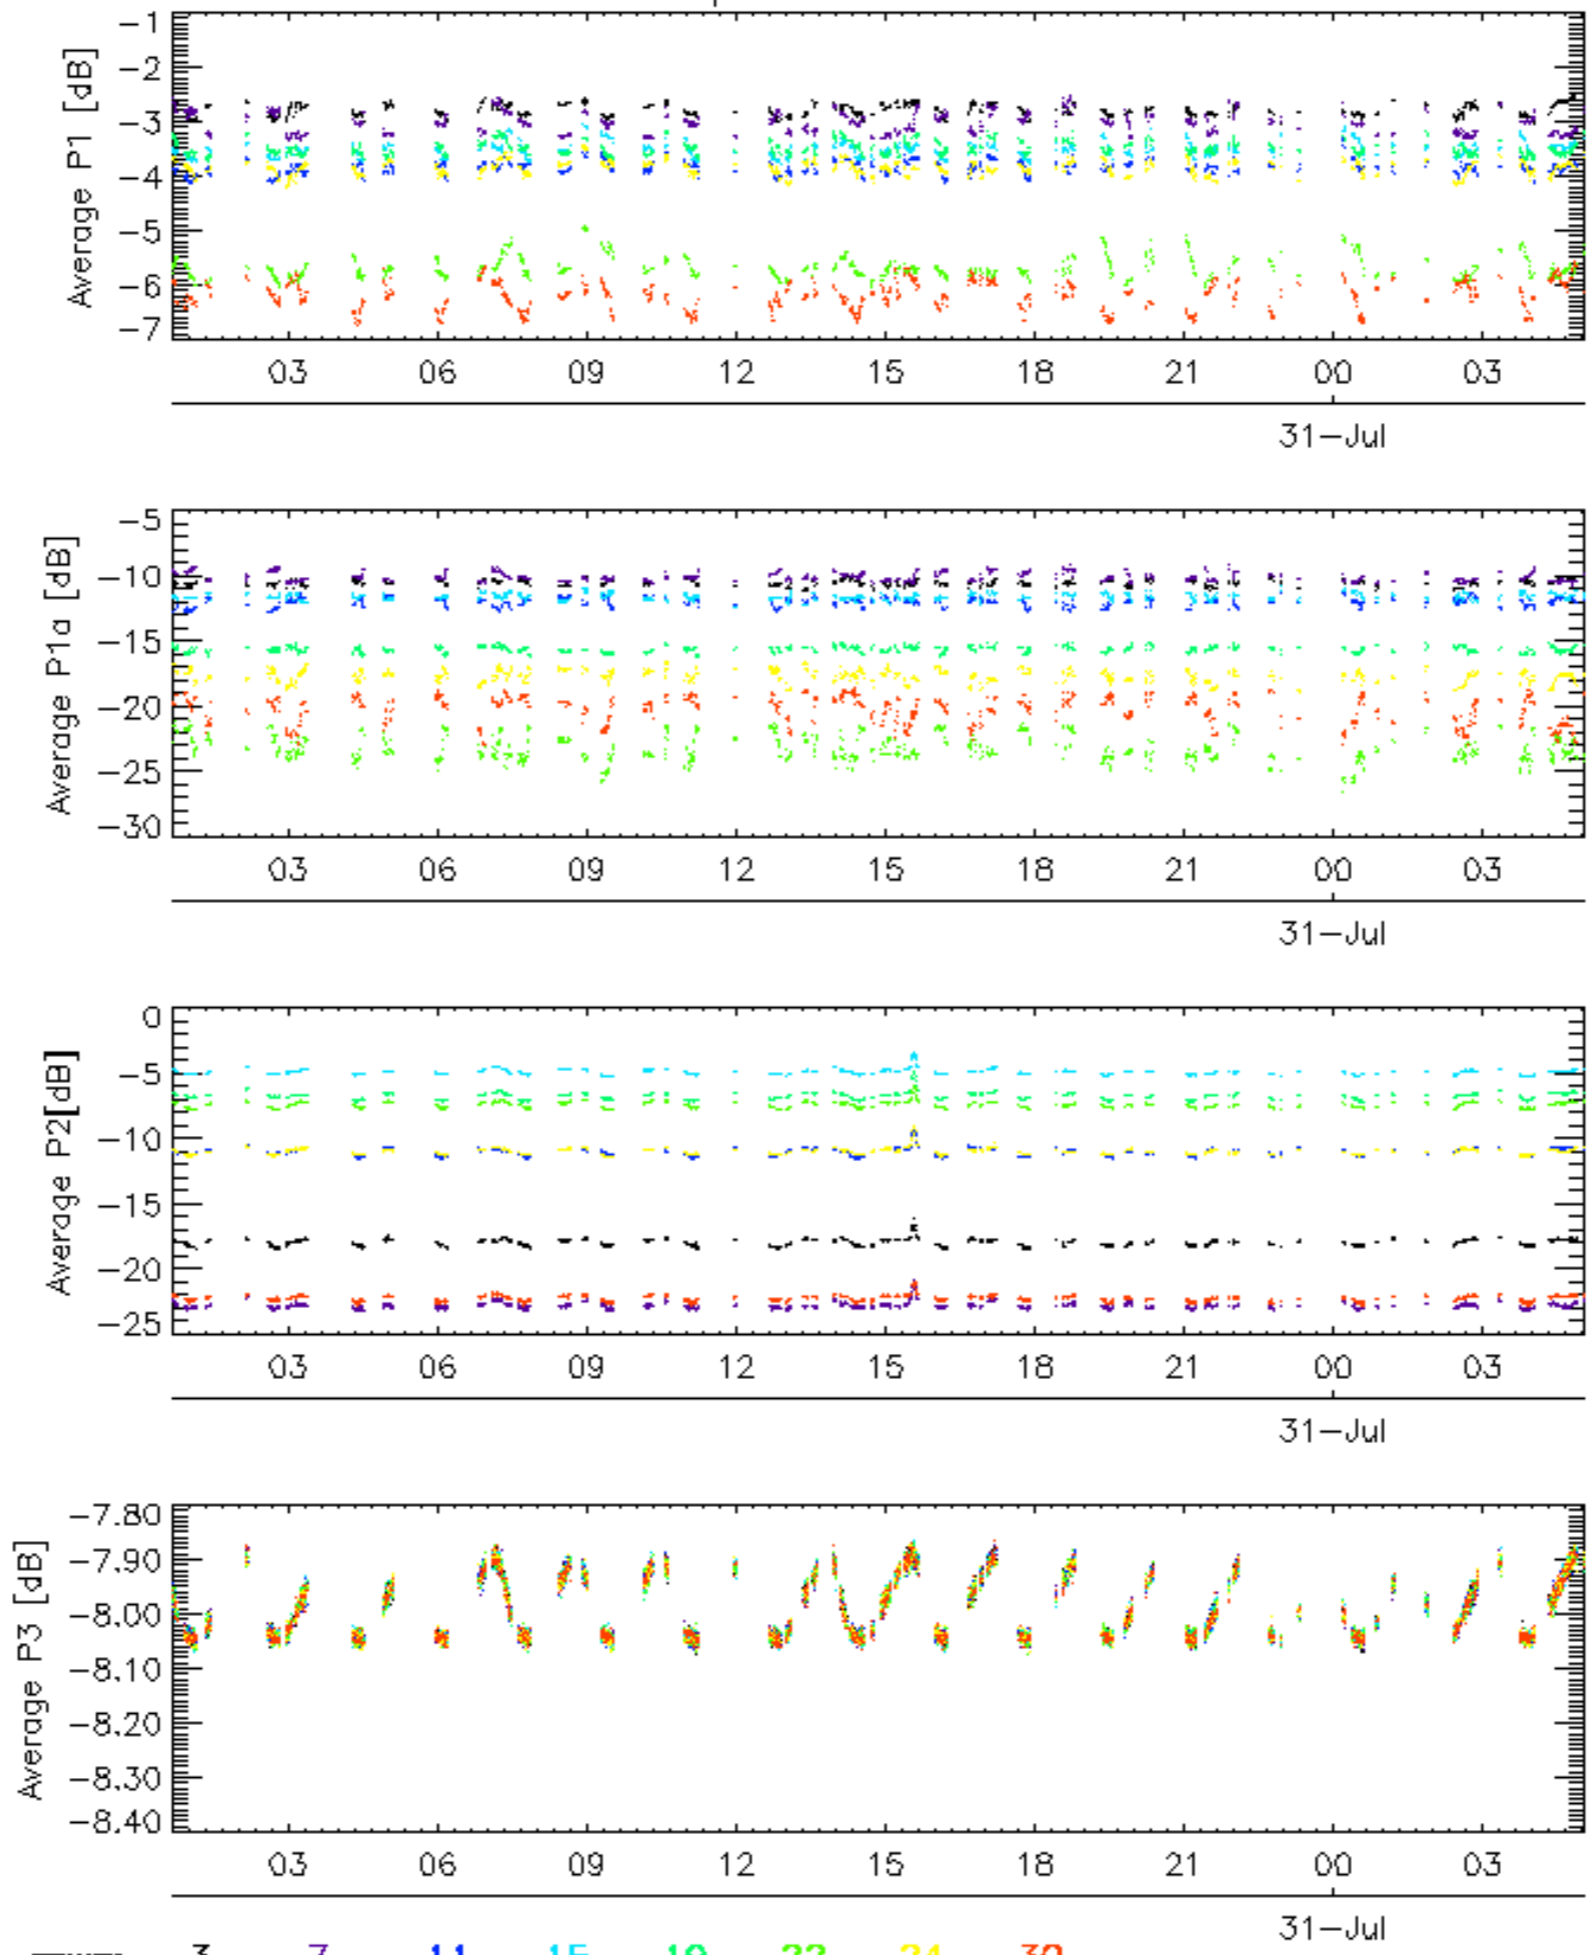


Cal pulses for WVS IS2

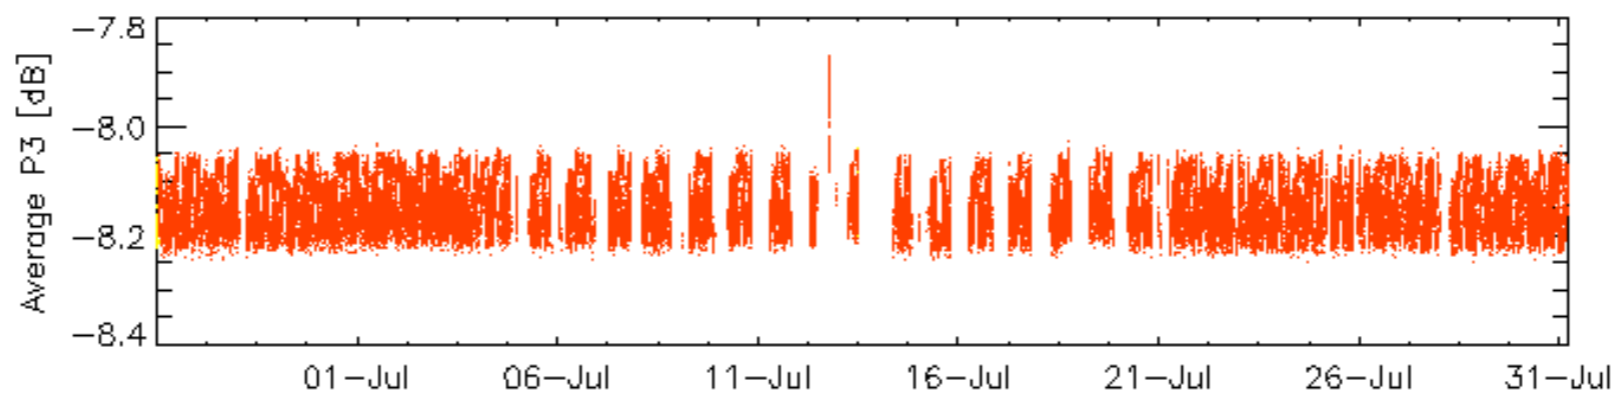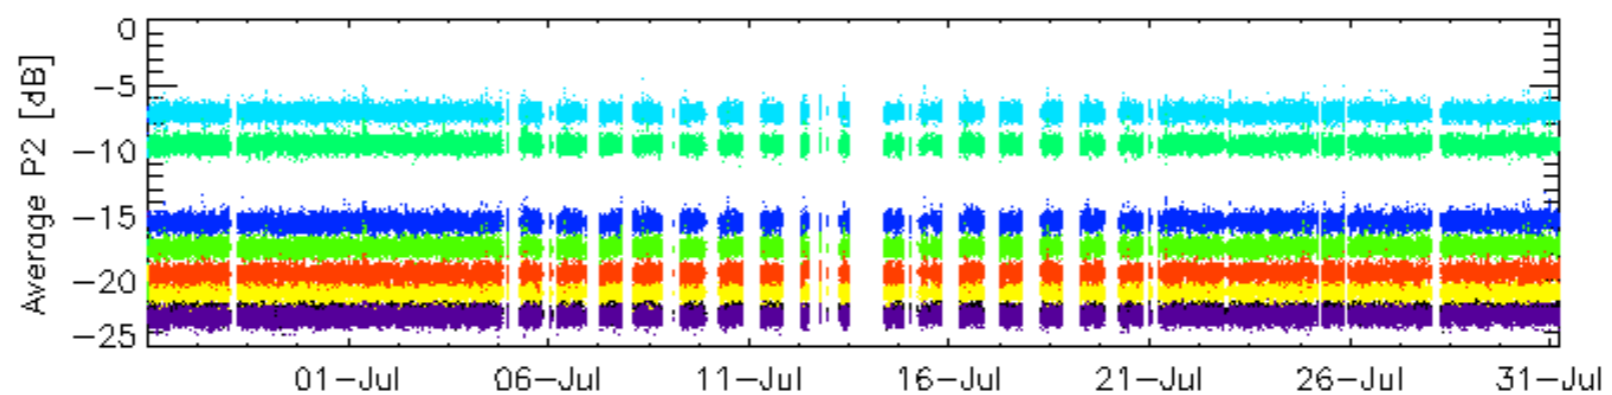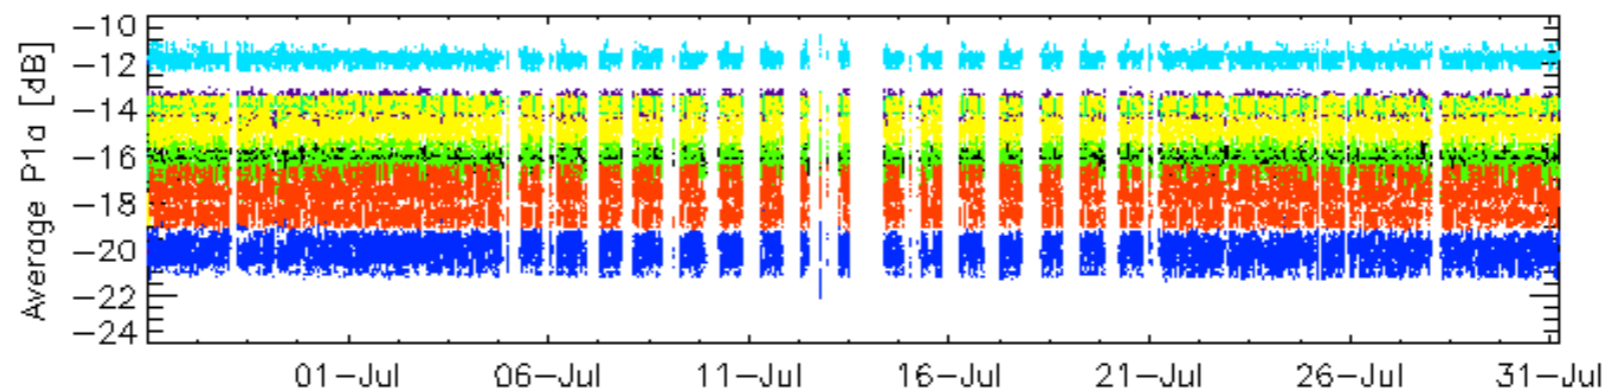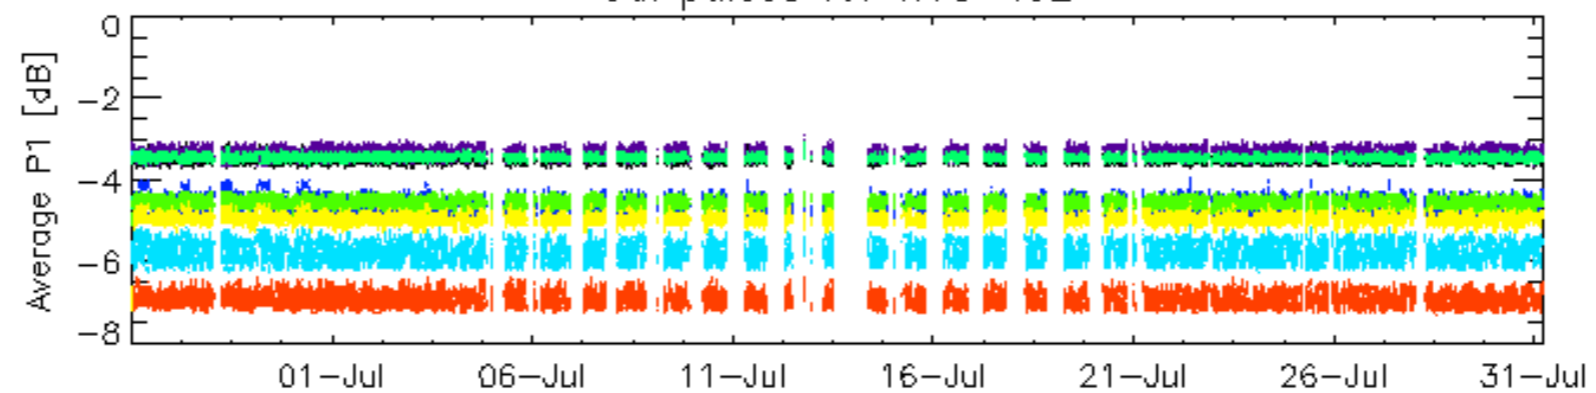










rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

Cal pulses for WVS IS2

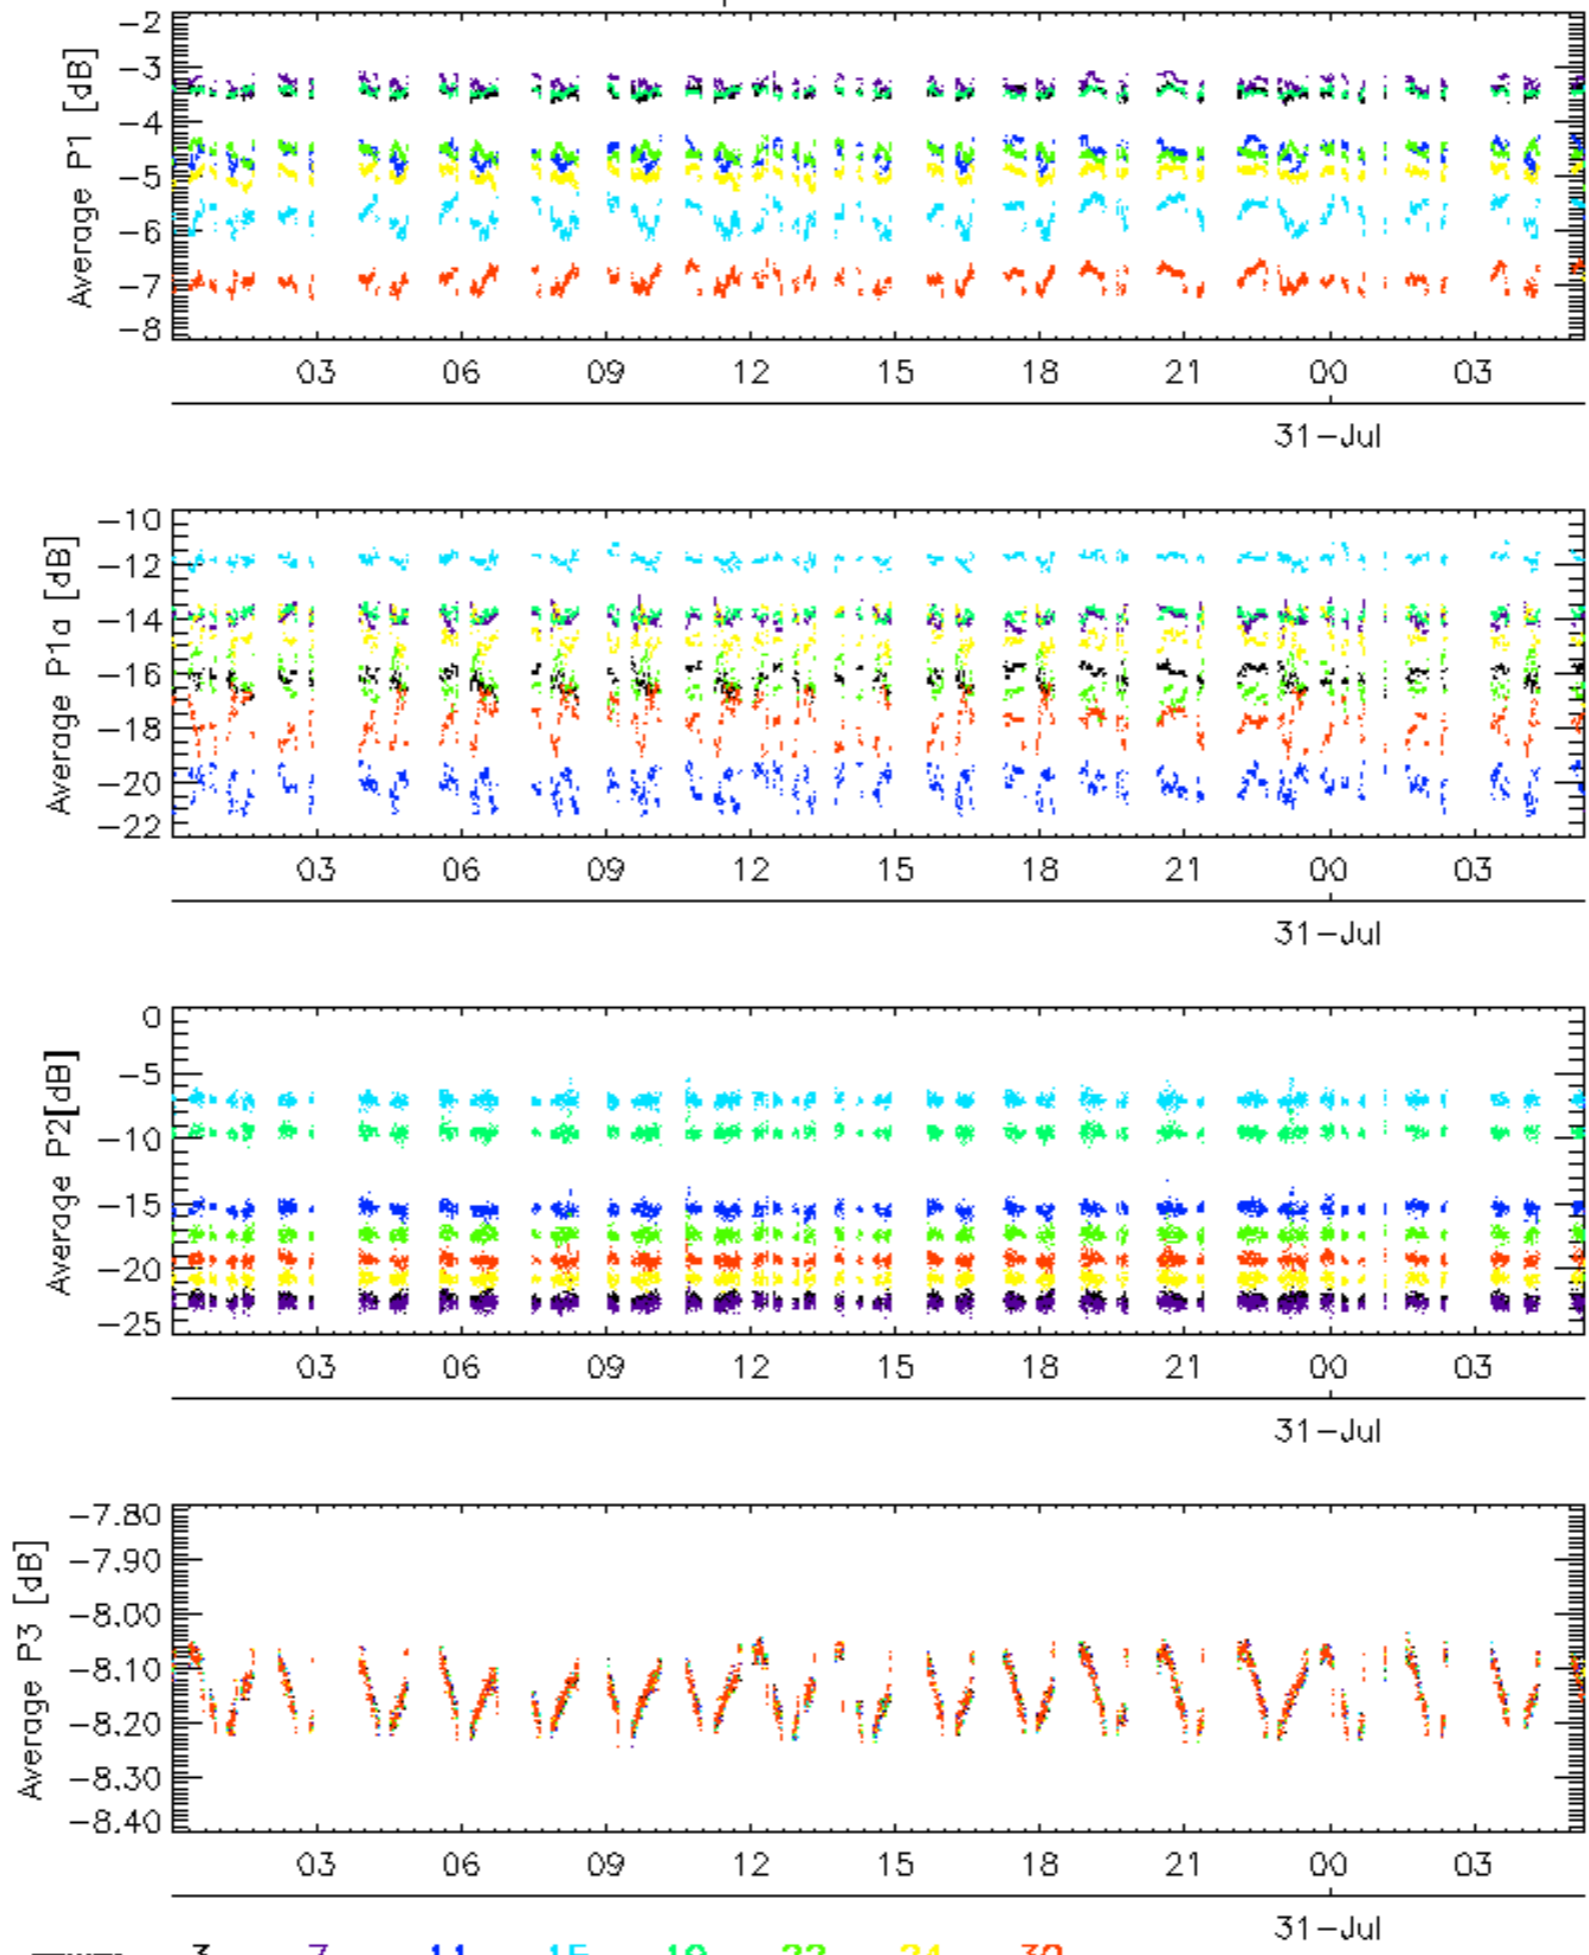


No anomalies observed.

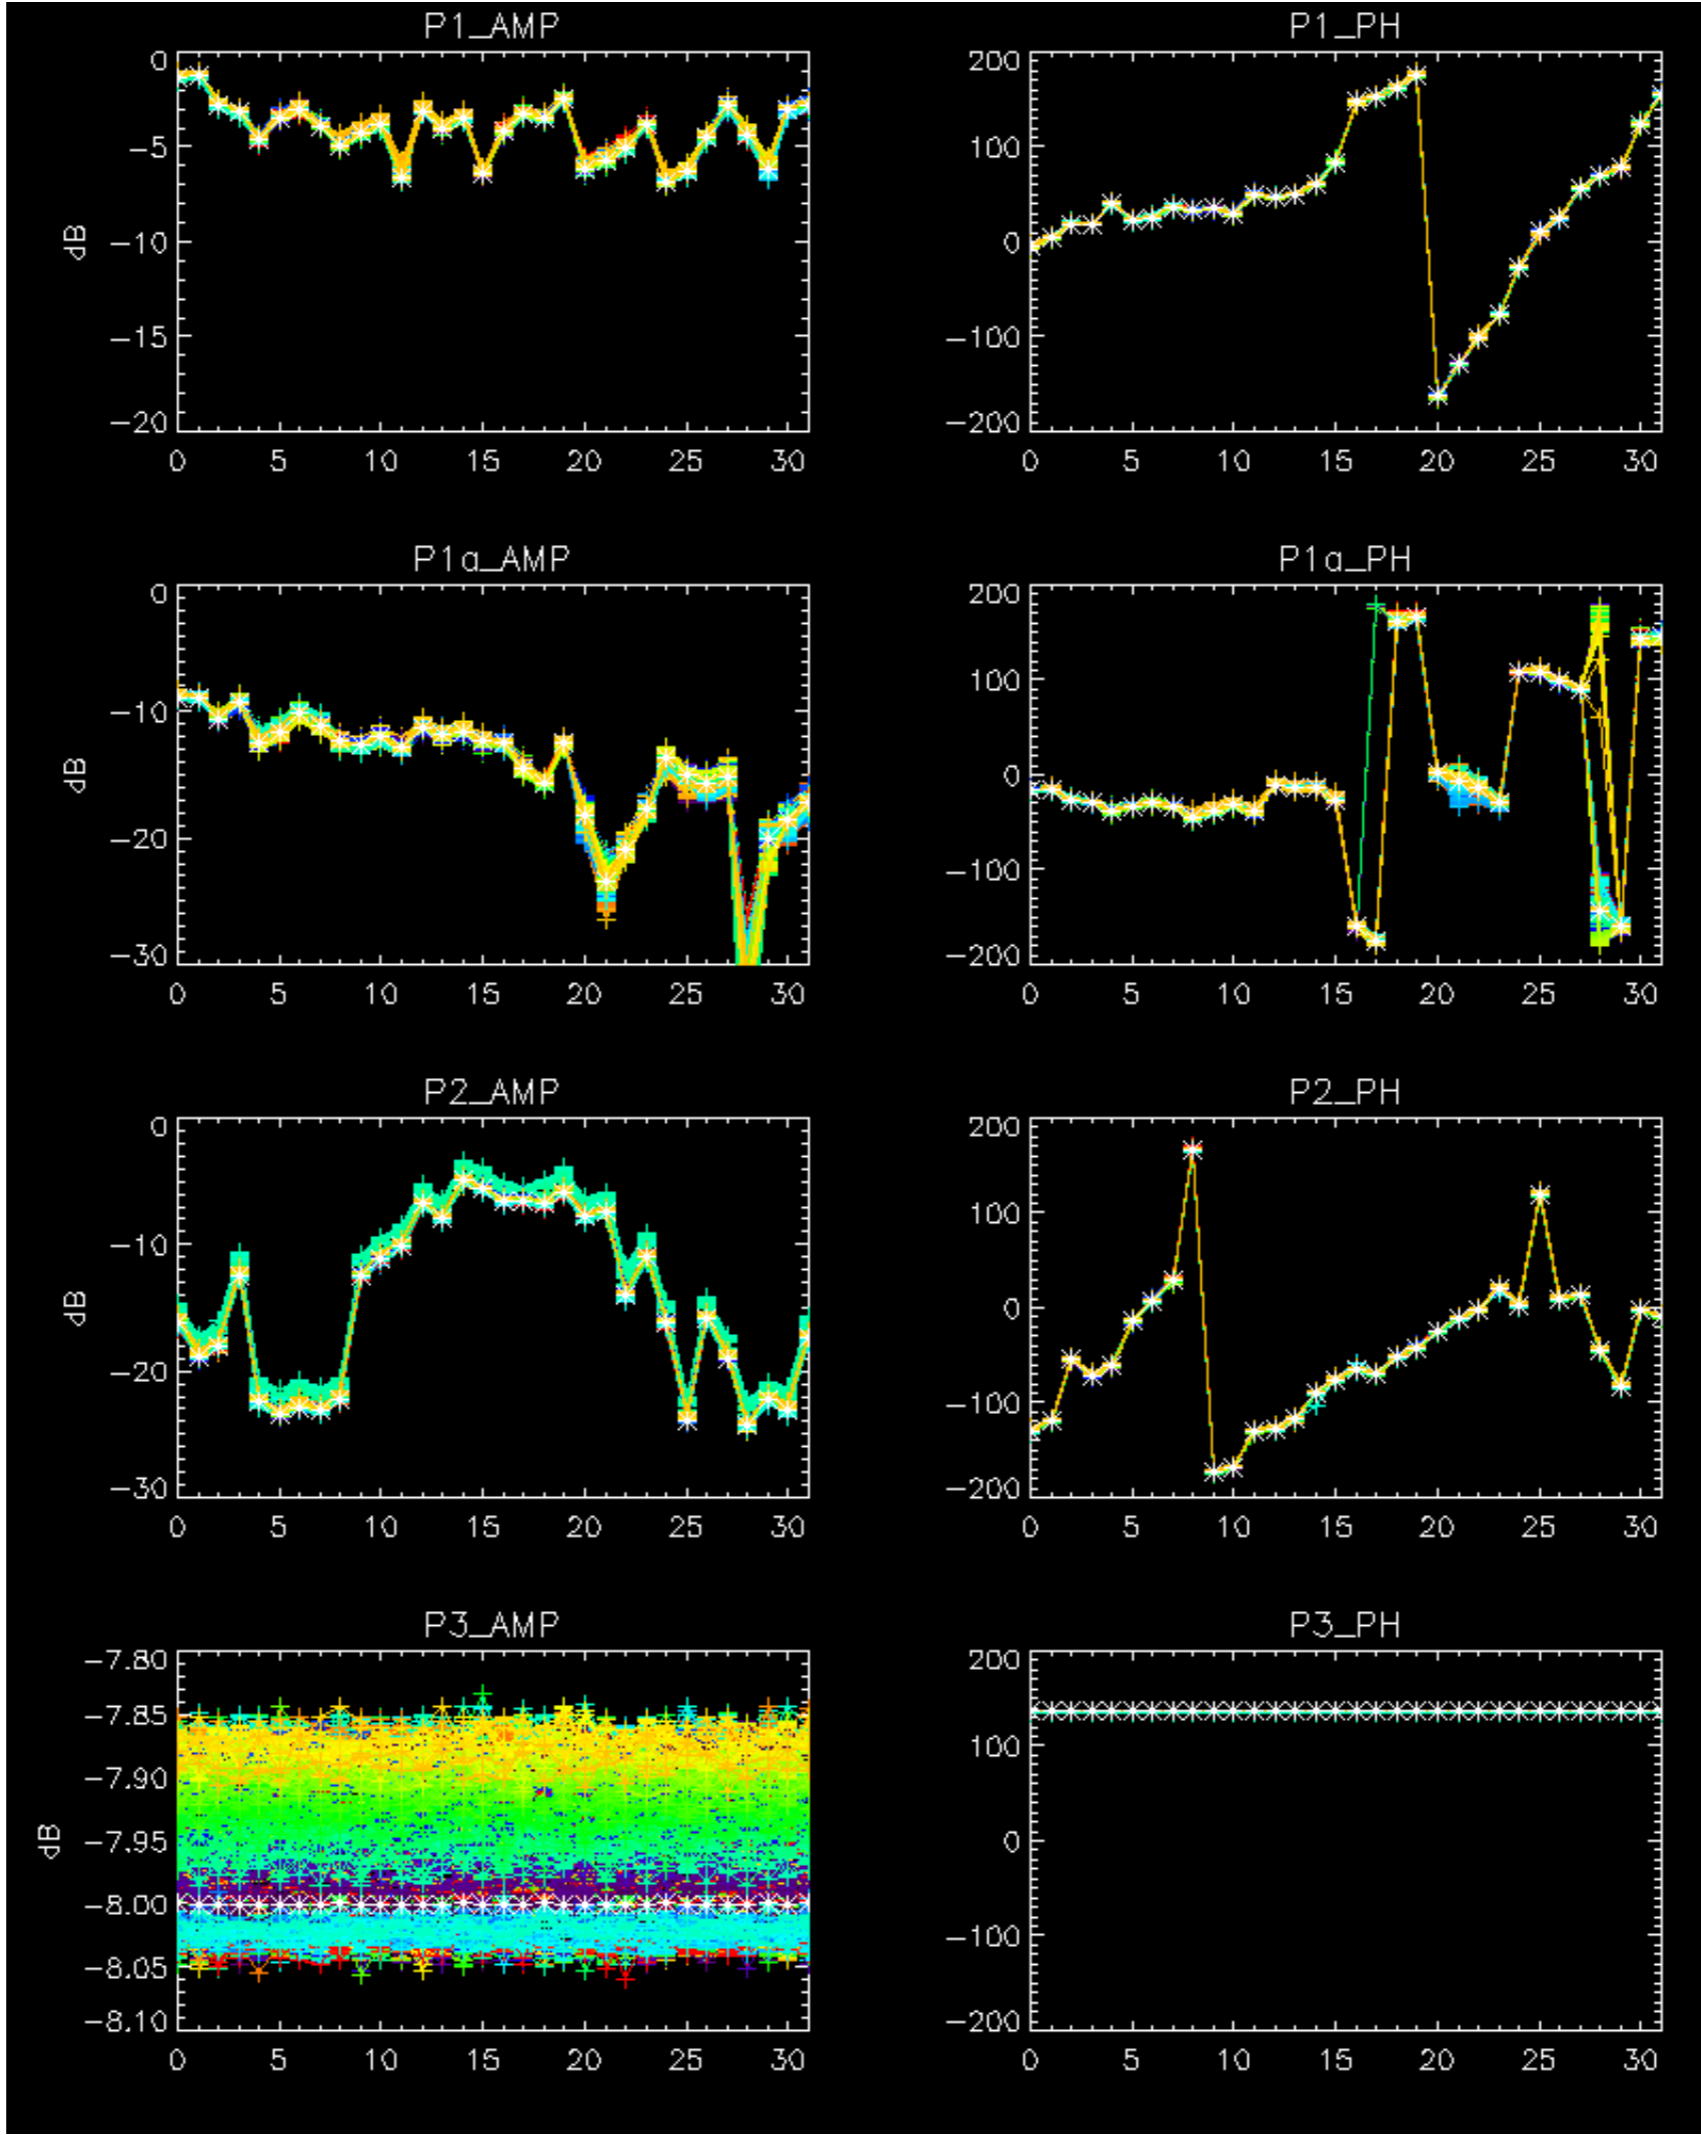

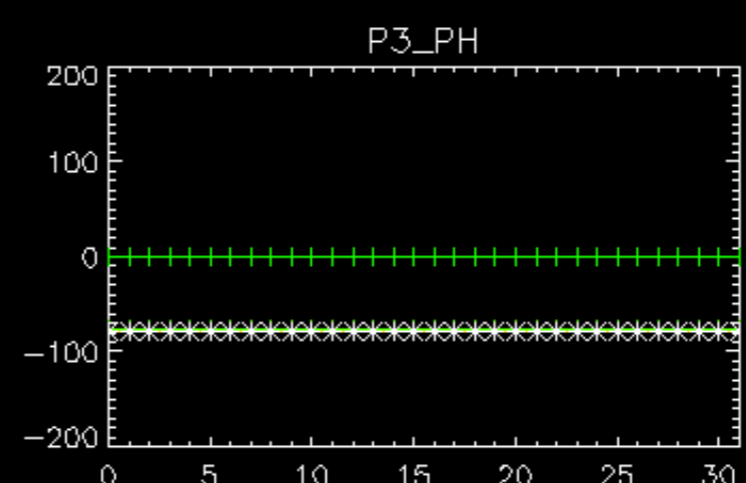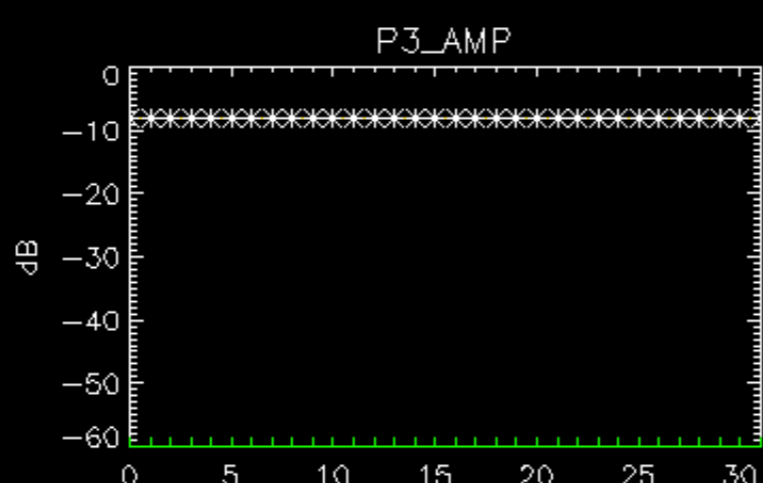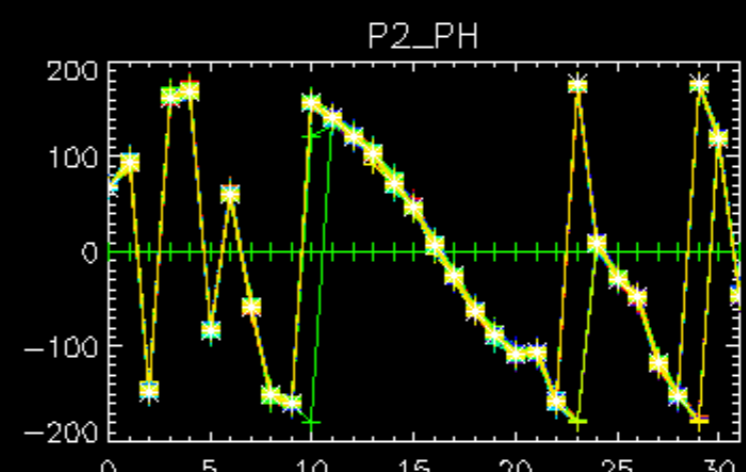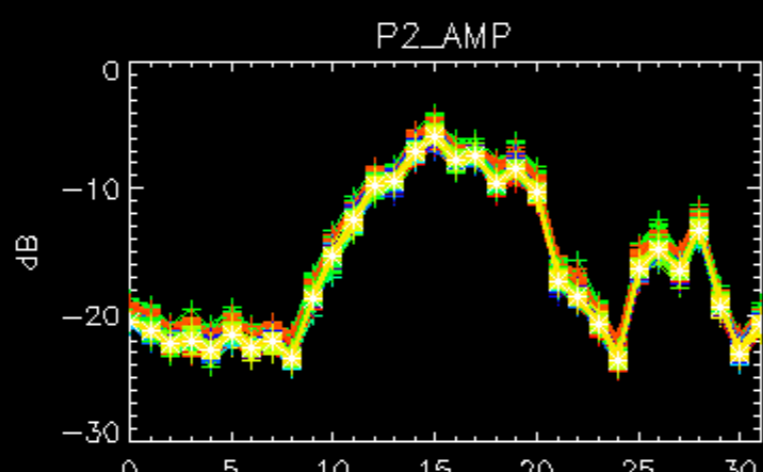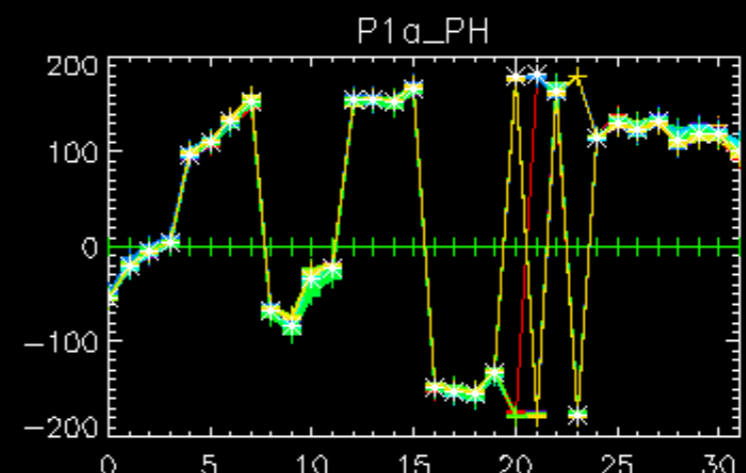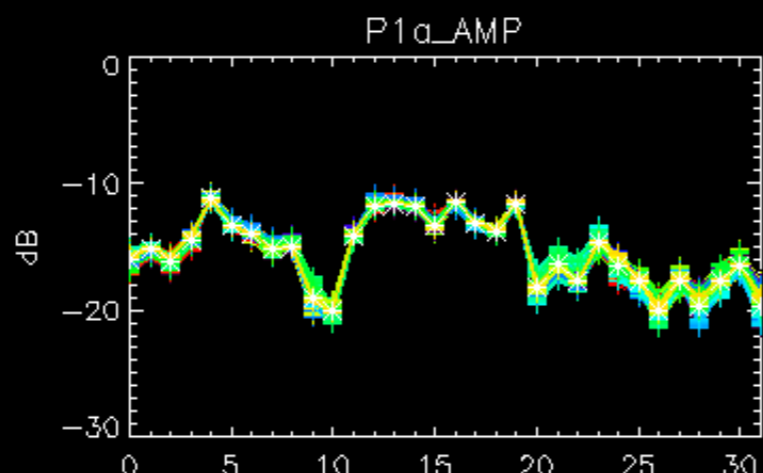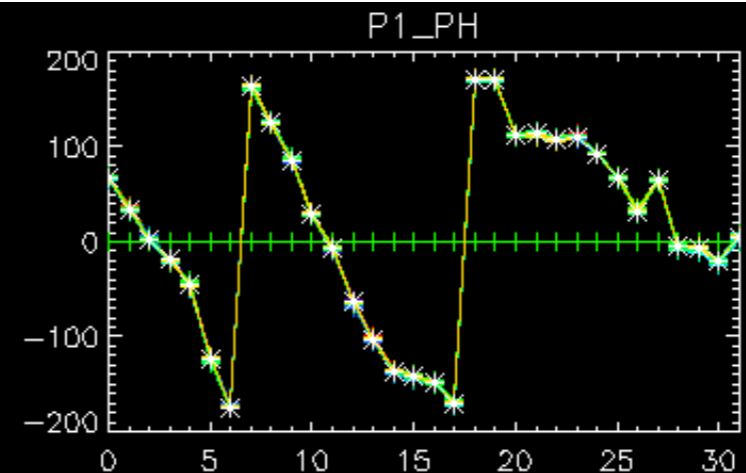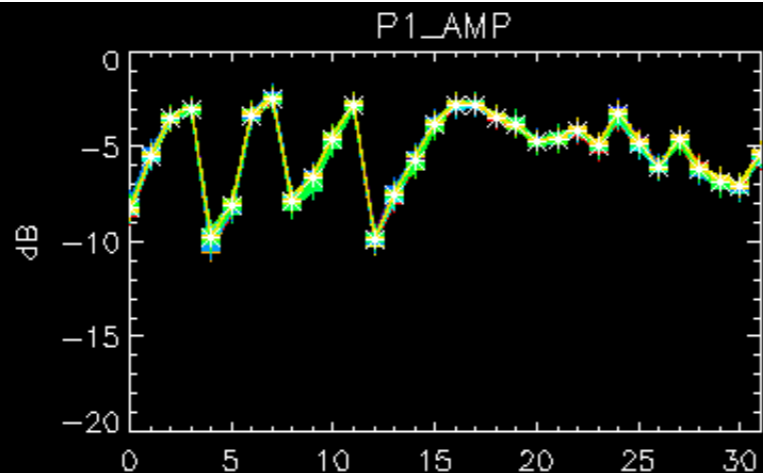


- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.


Doppler 'GM1' 'SS1' ascending

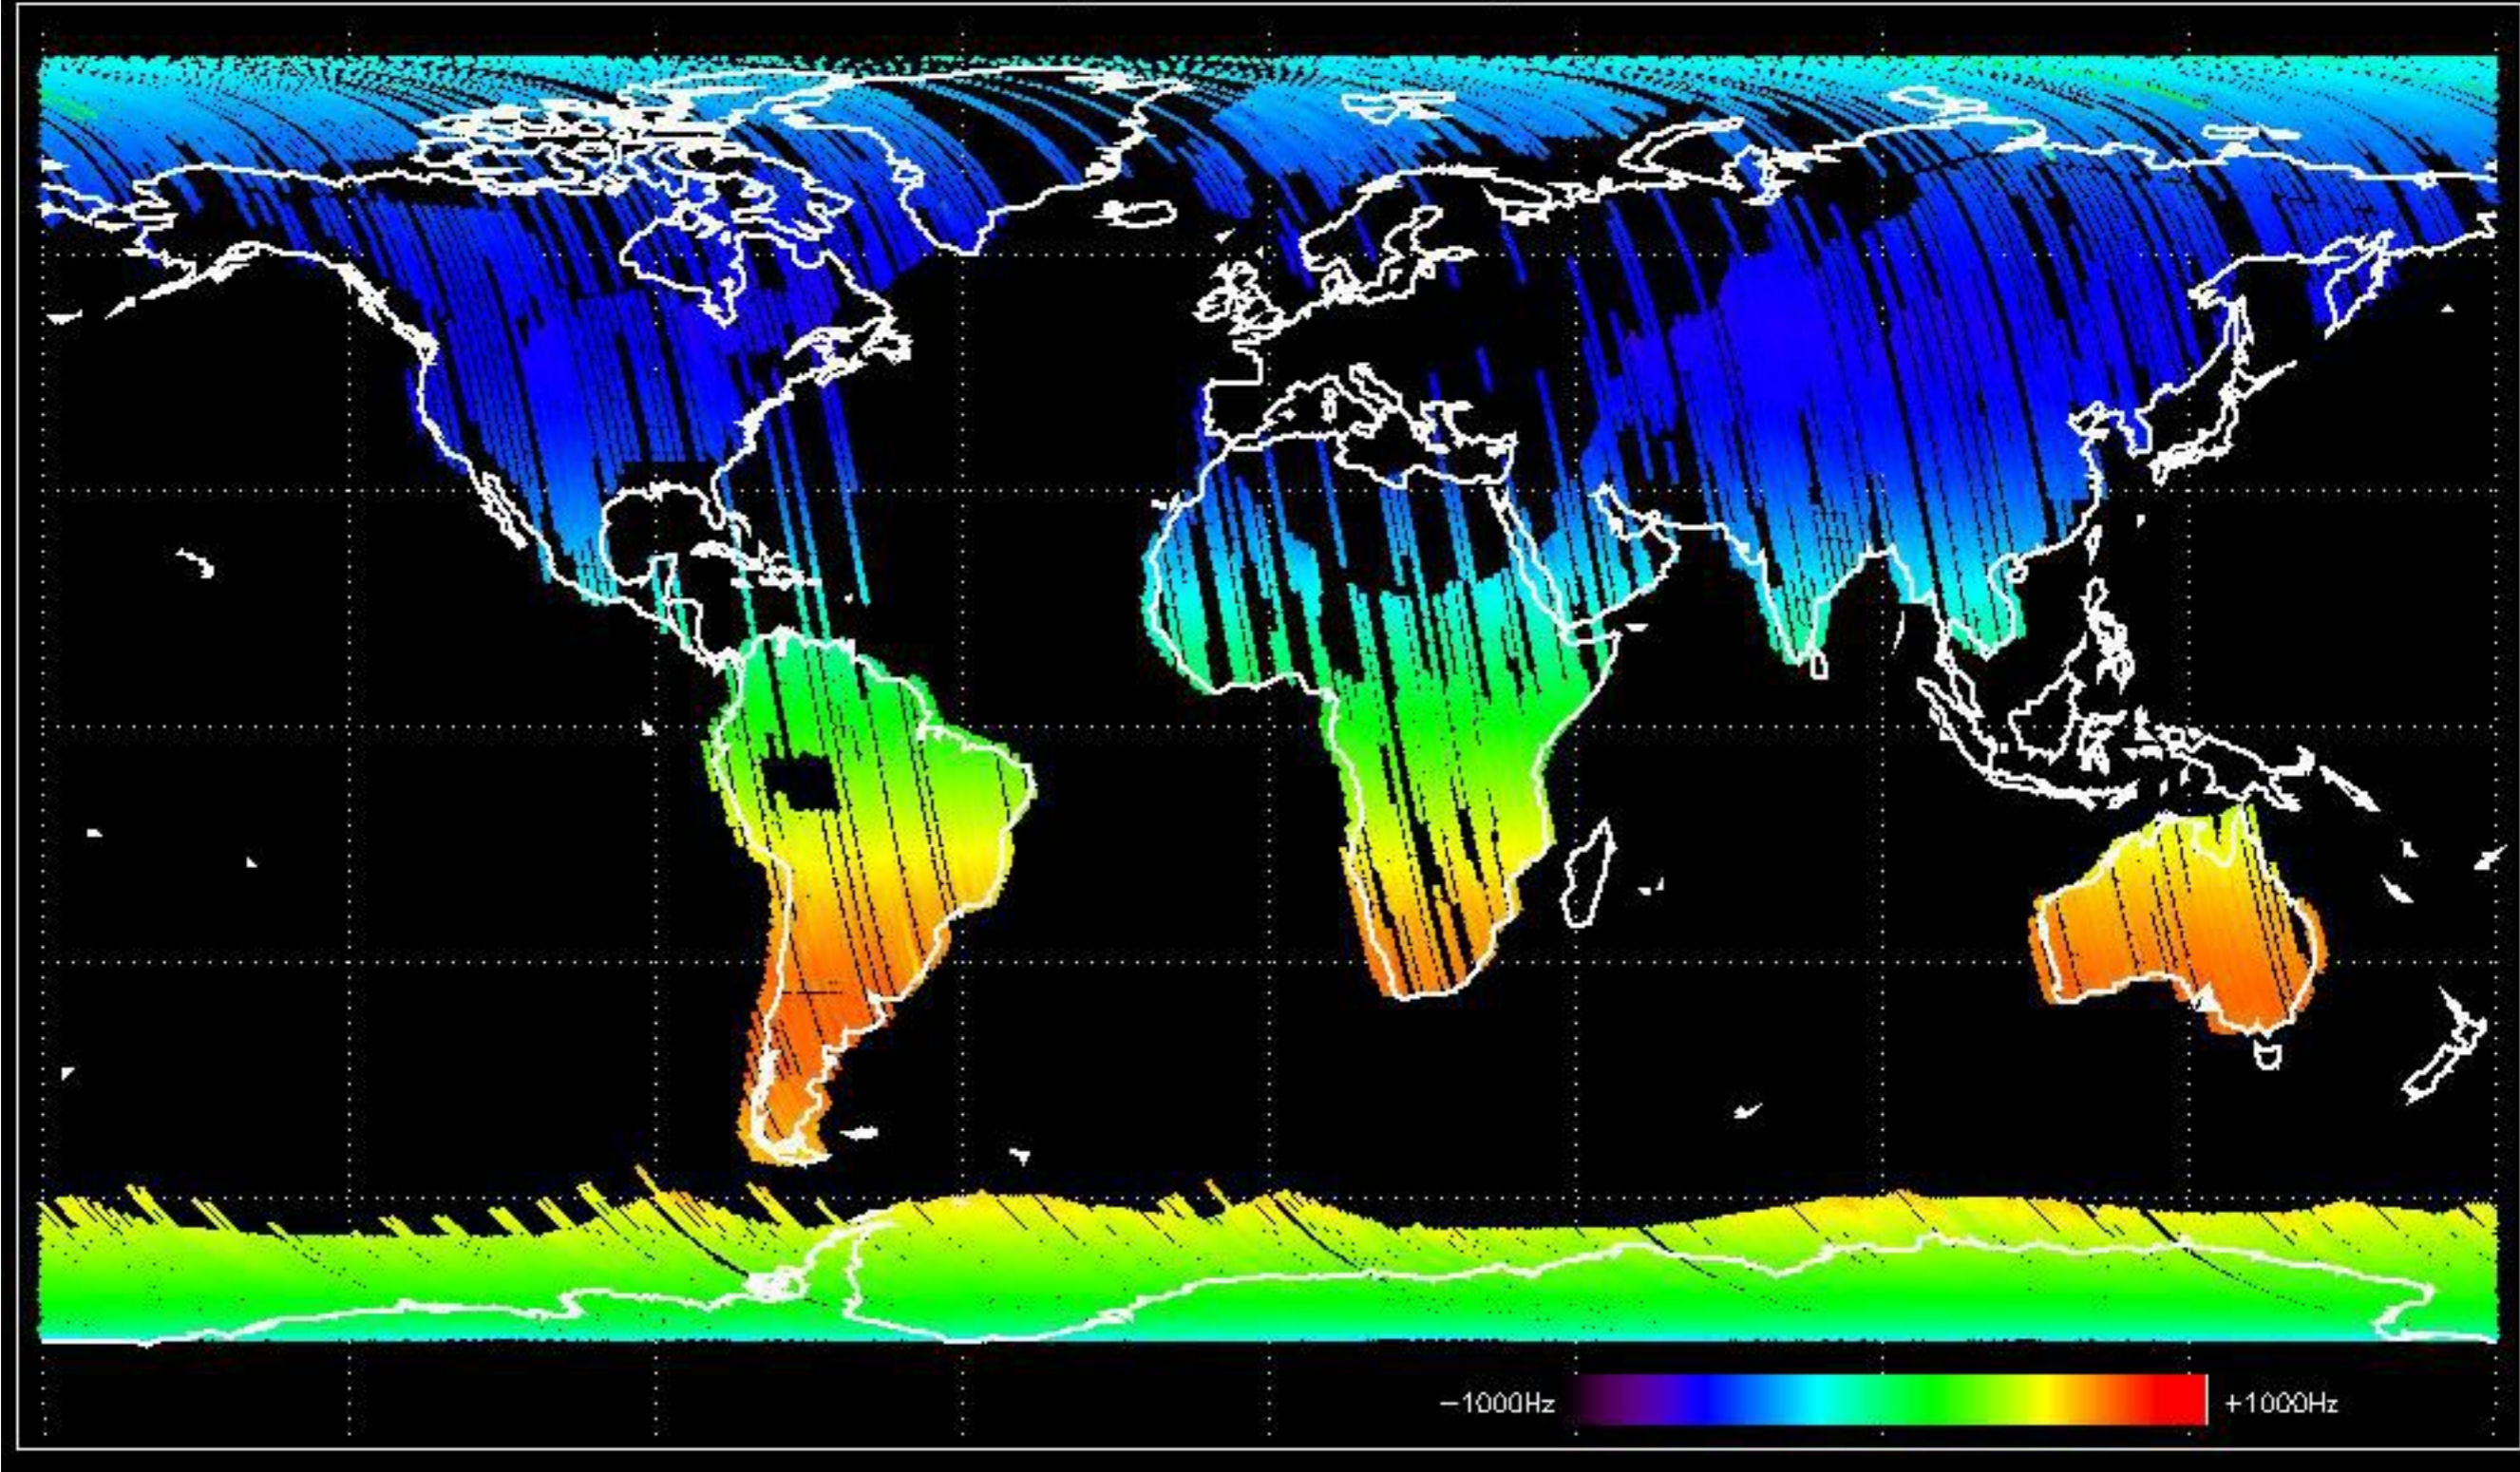


Doppler 'GM1' 'SS1' descending

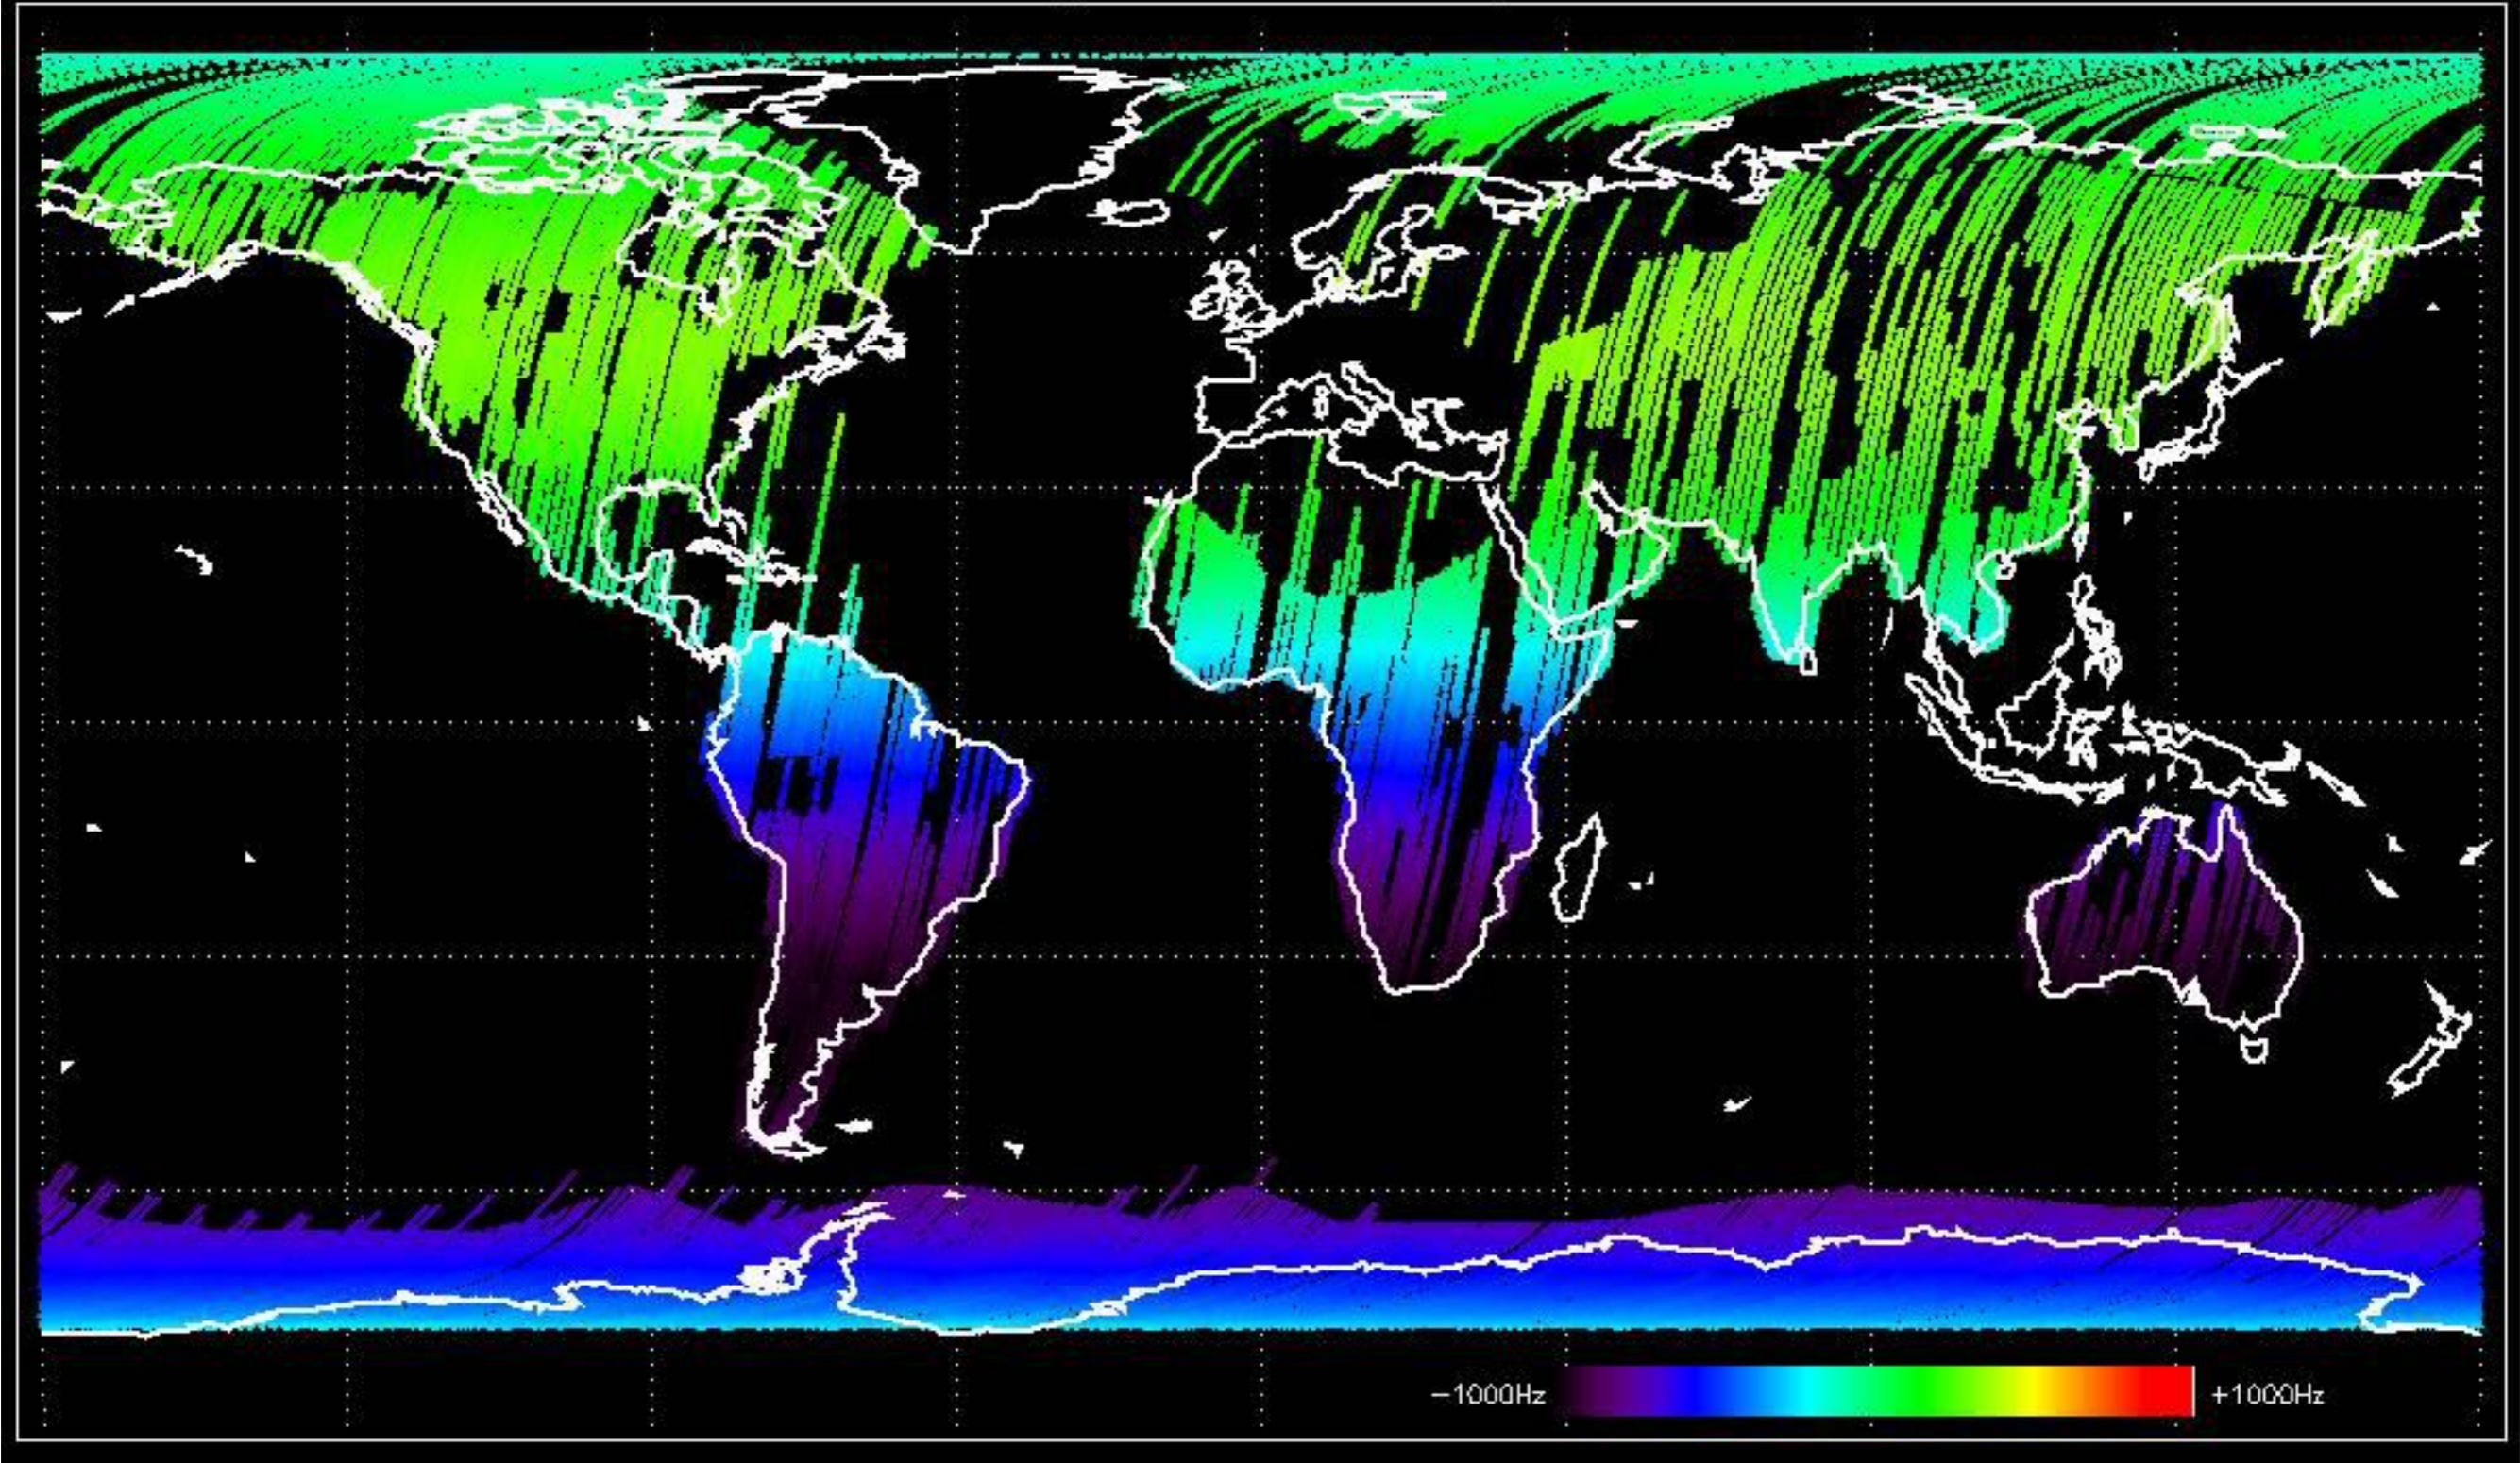




Doppler 'WVS' 'IS2' ascending



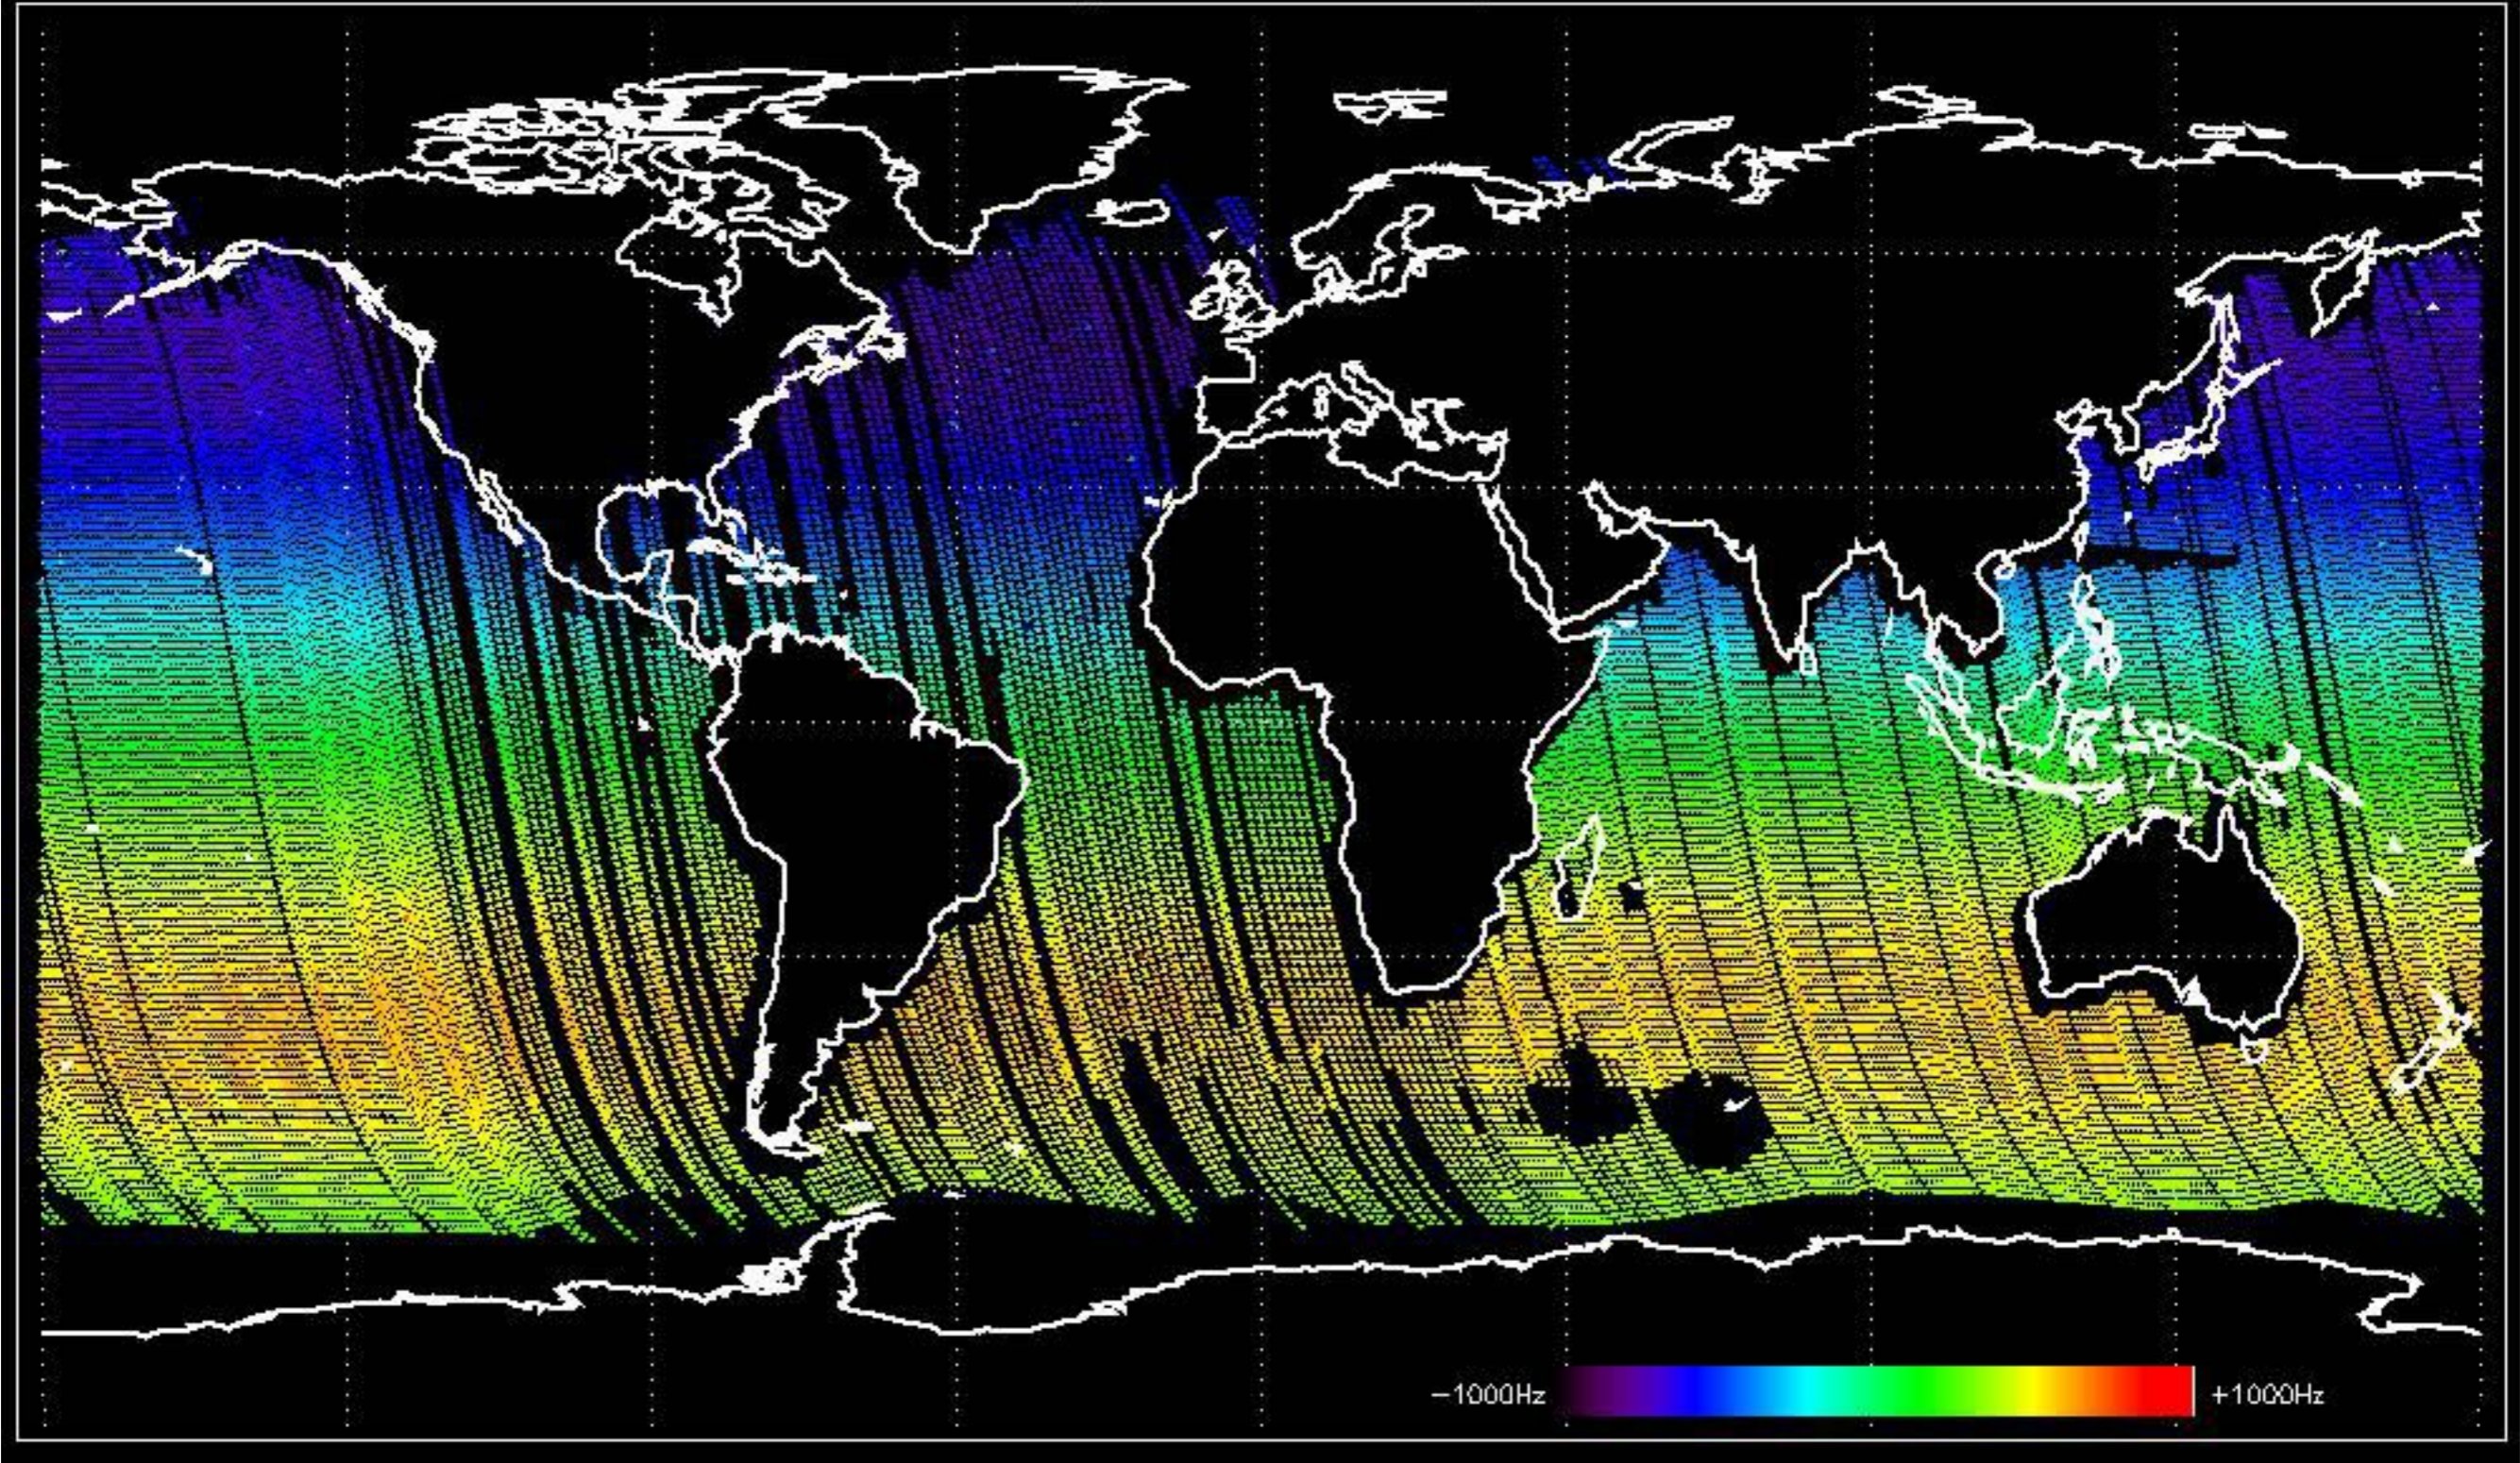


Doppler 'WVS' 'IS2' descending

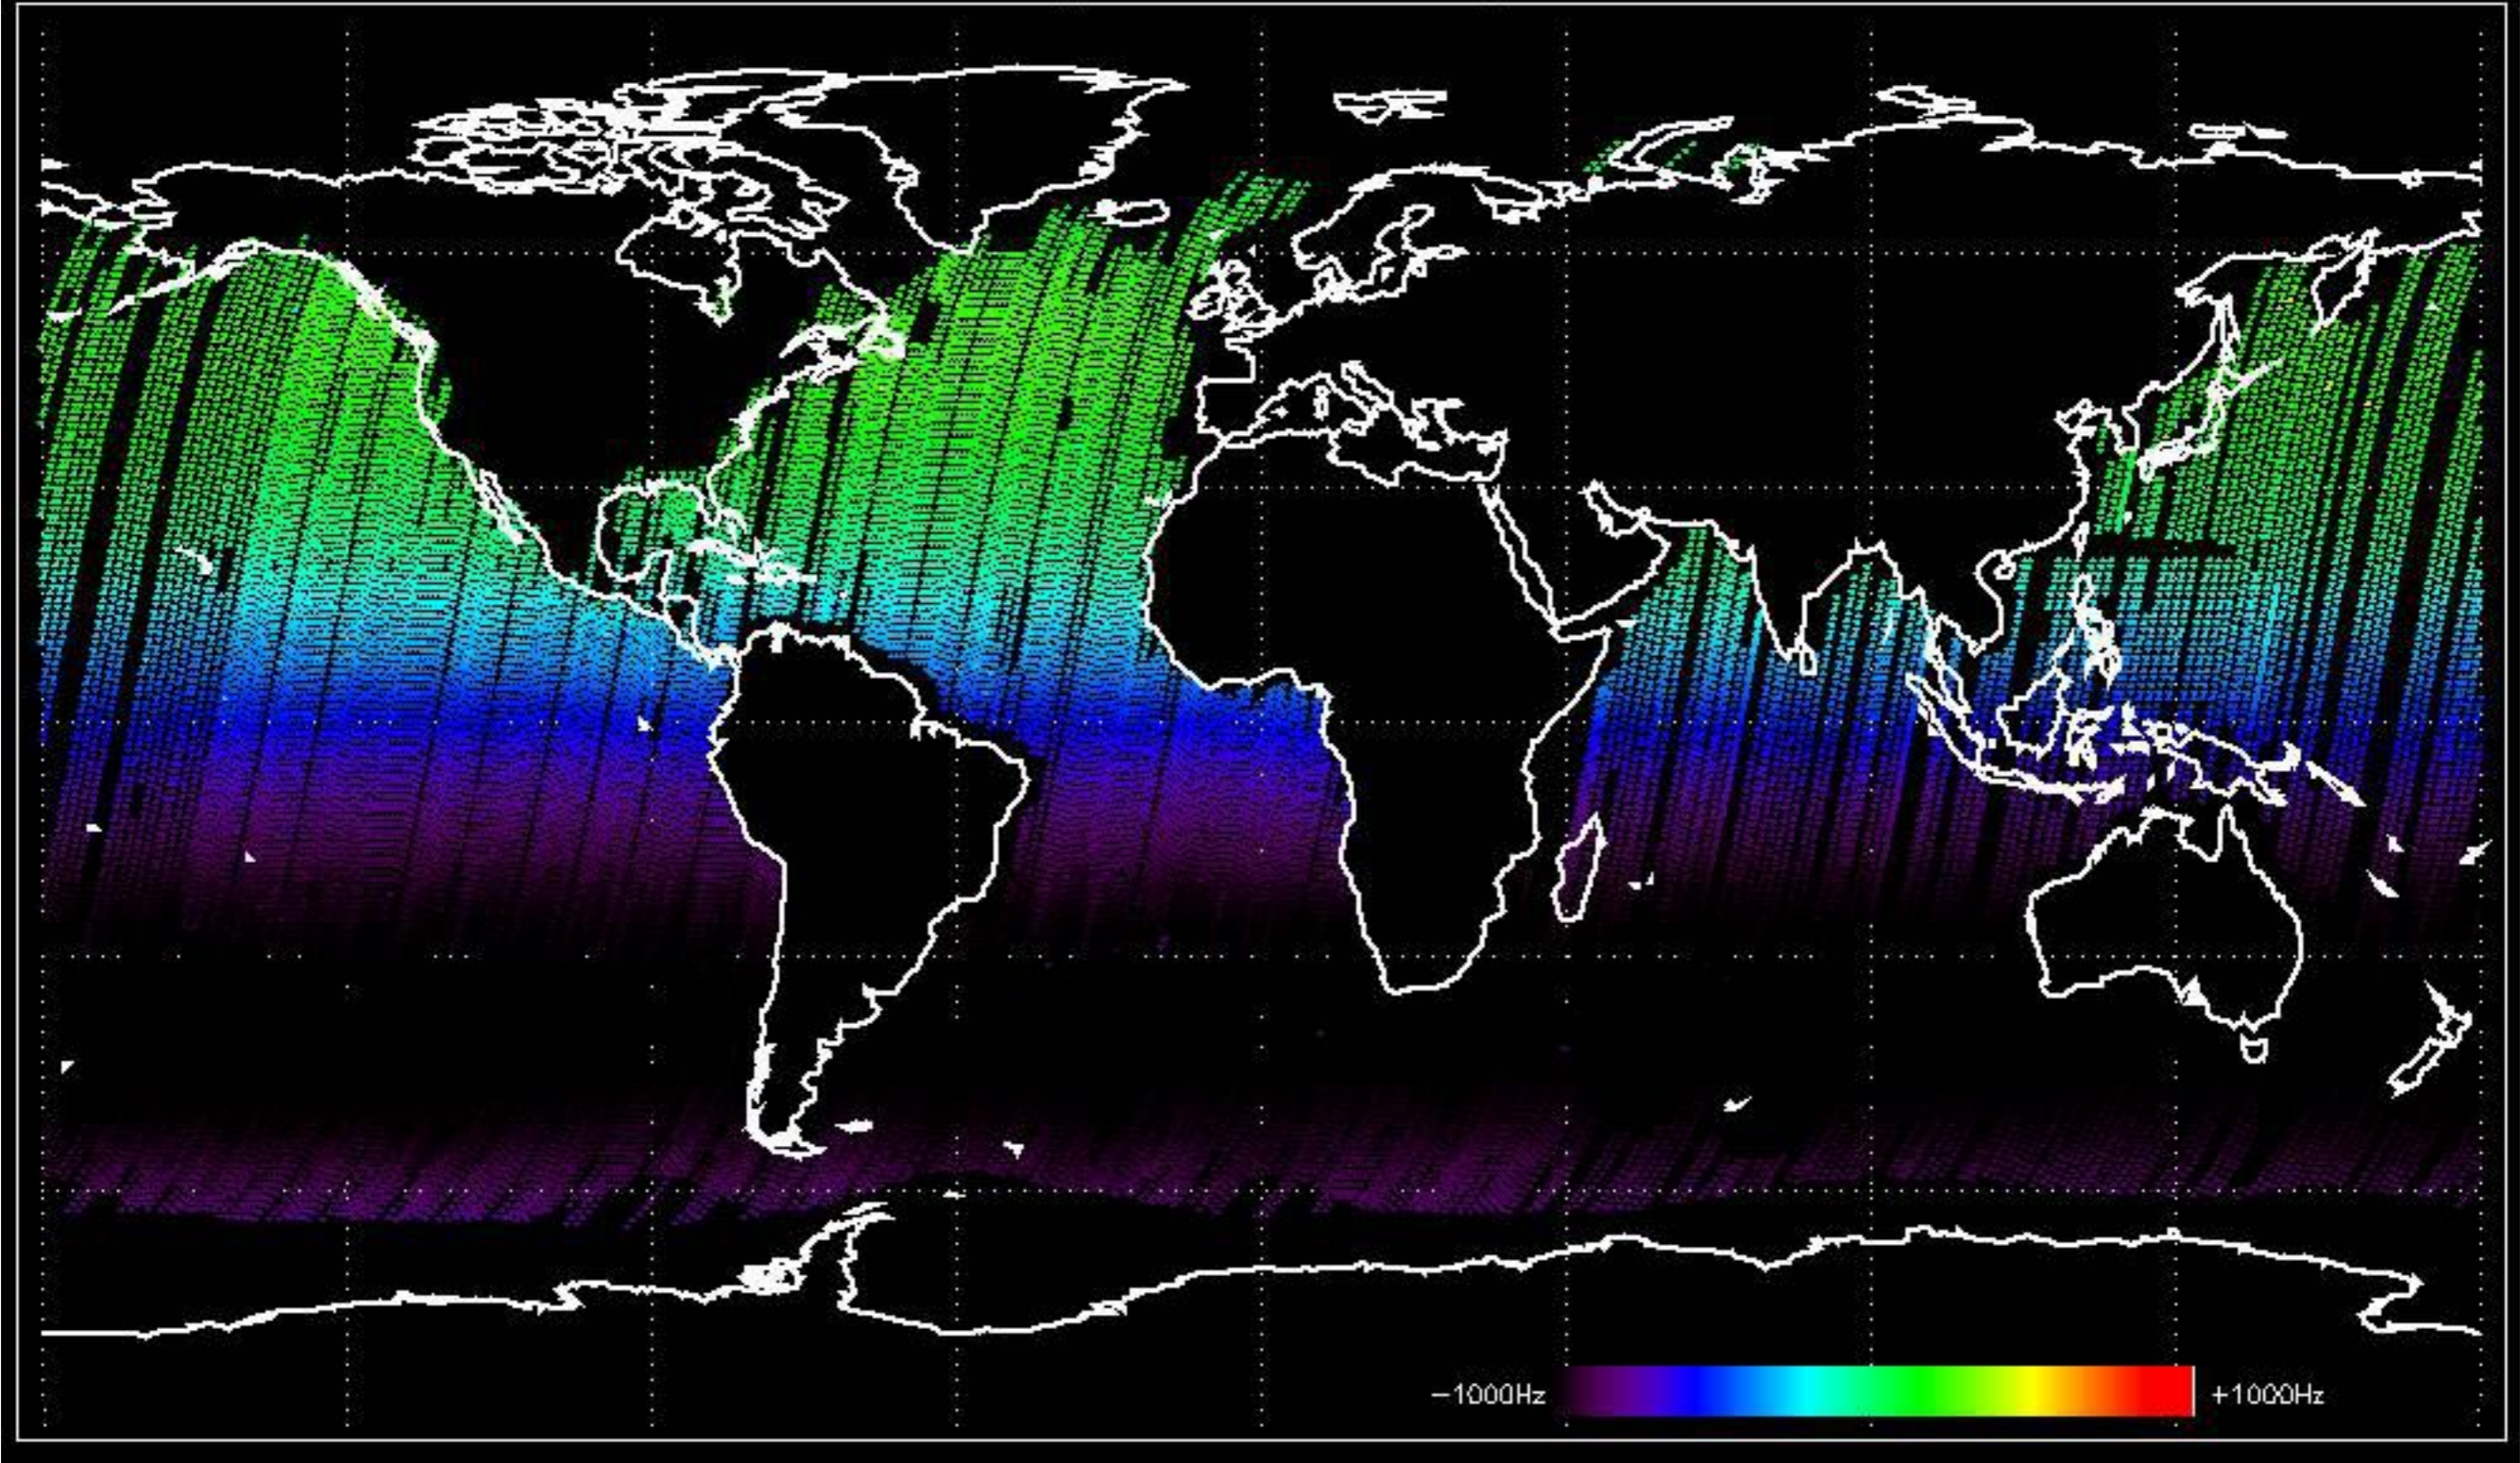


GM1 mode doppler

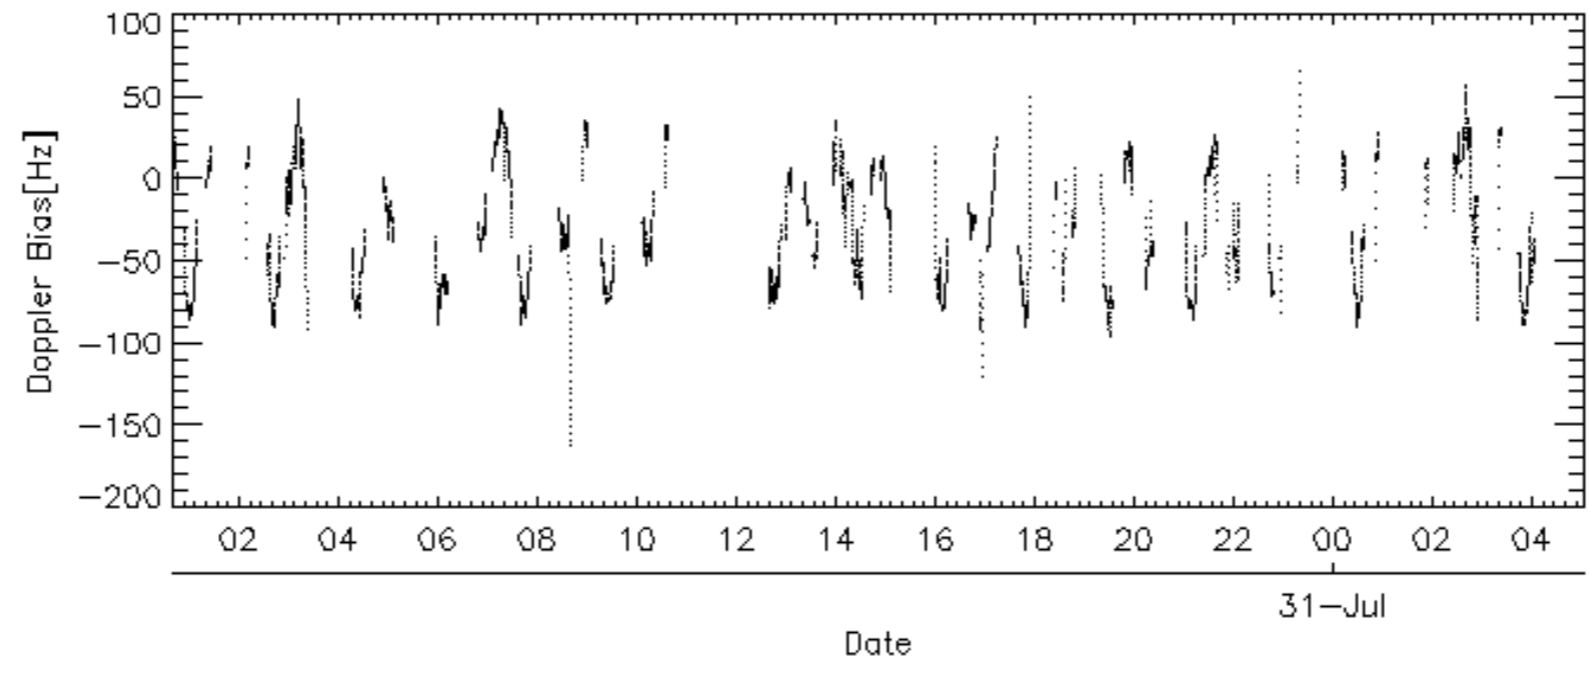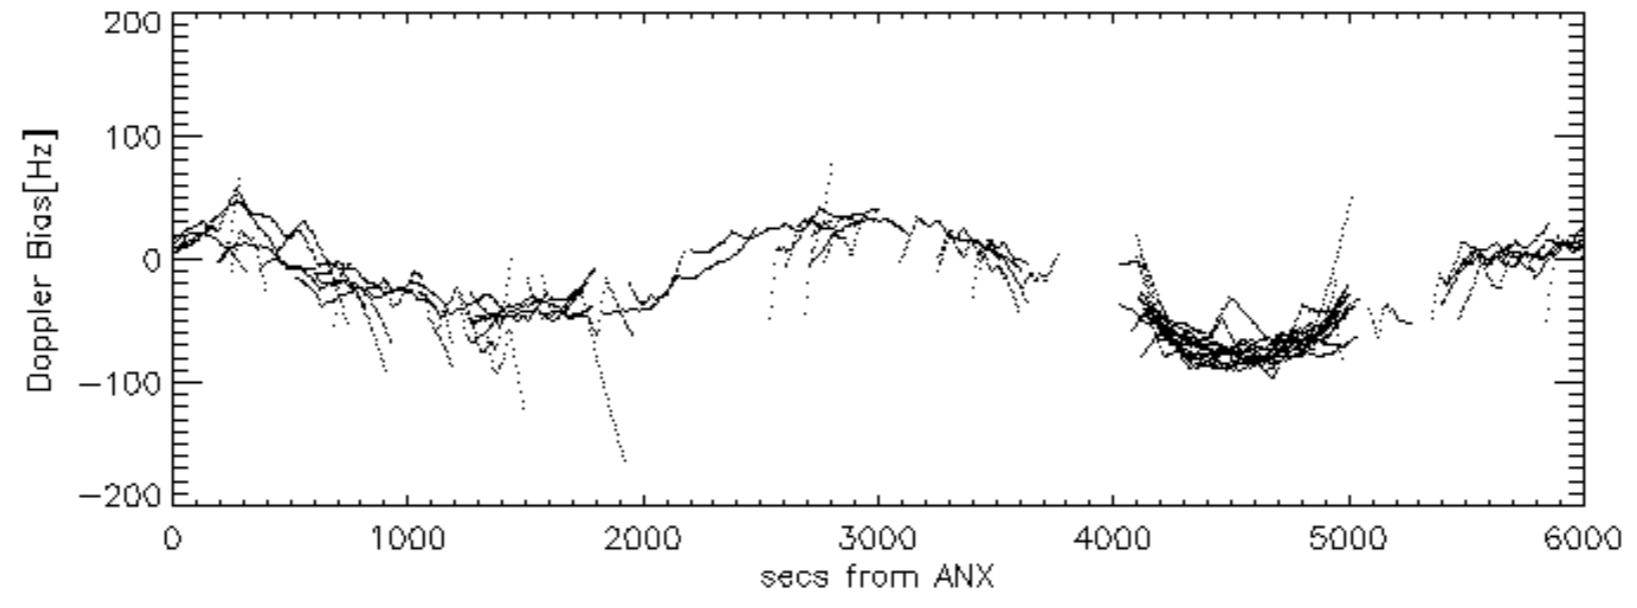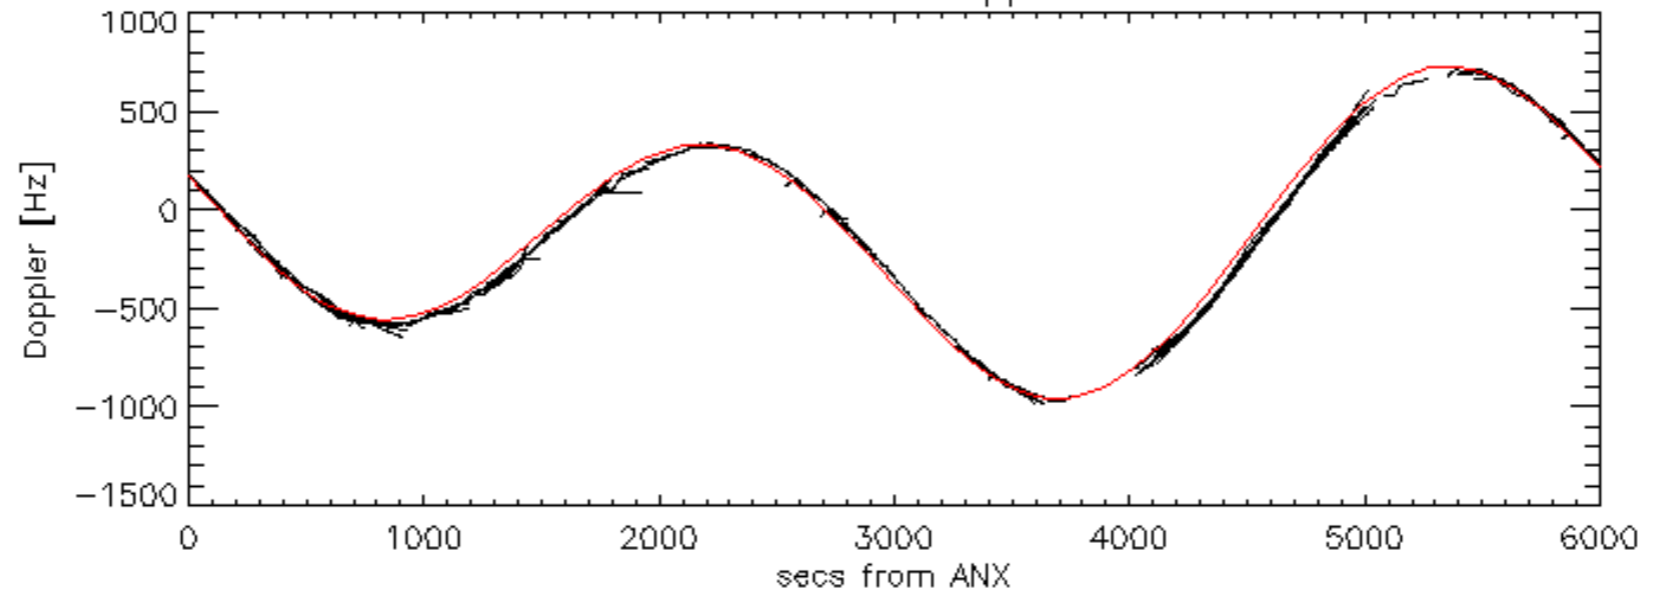


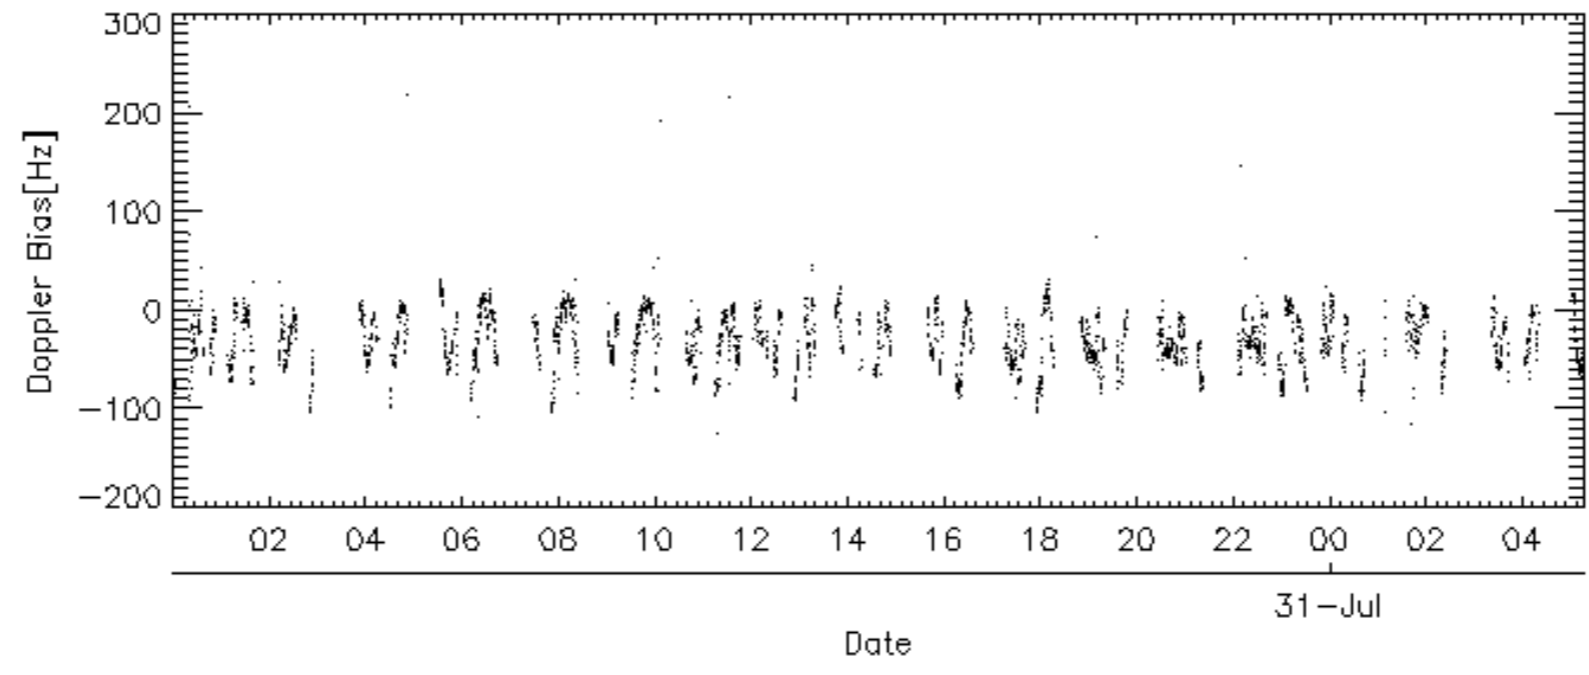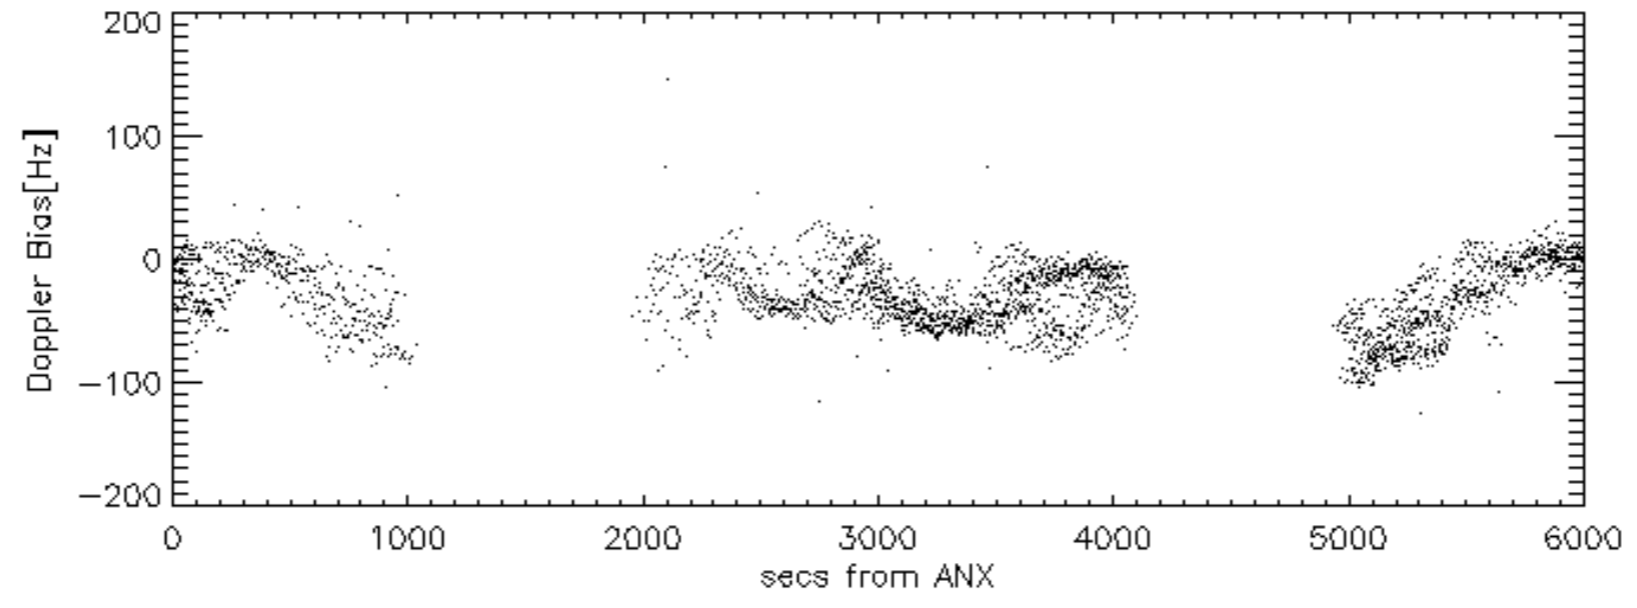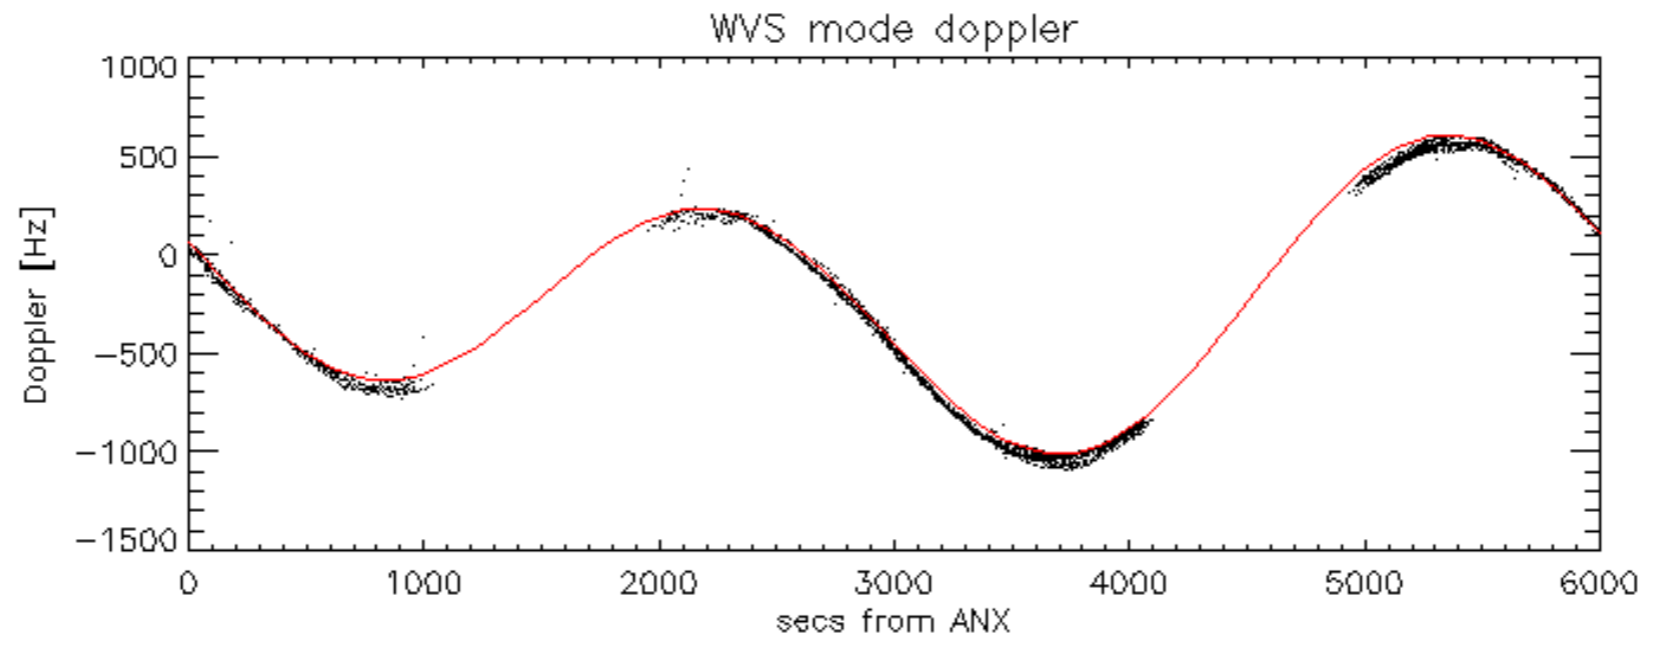


Doppler difference, estimated-predicted 'GM1' 'SS1' ascending -error mean of -34.209824 Hz

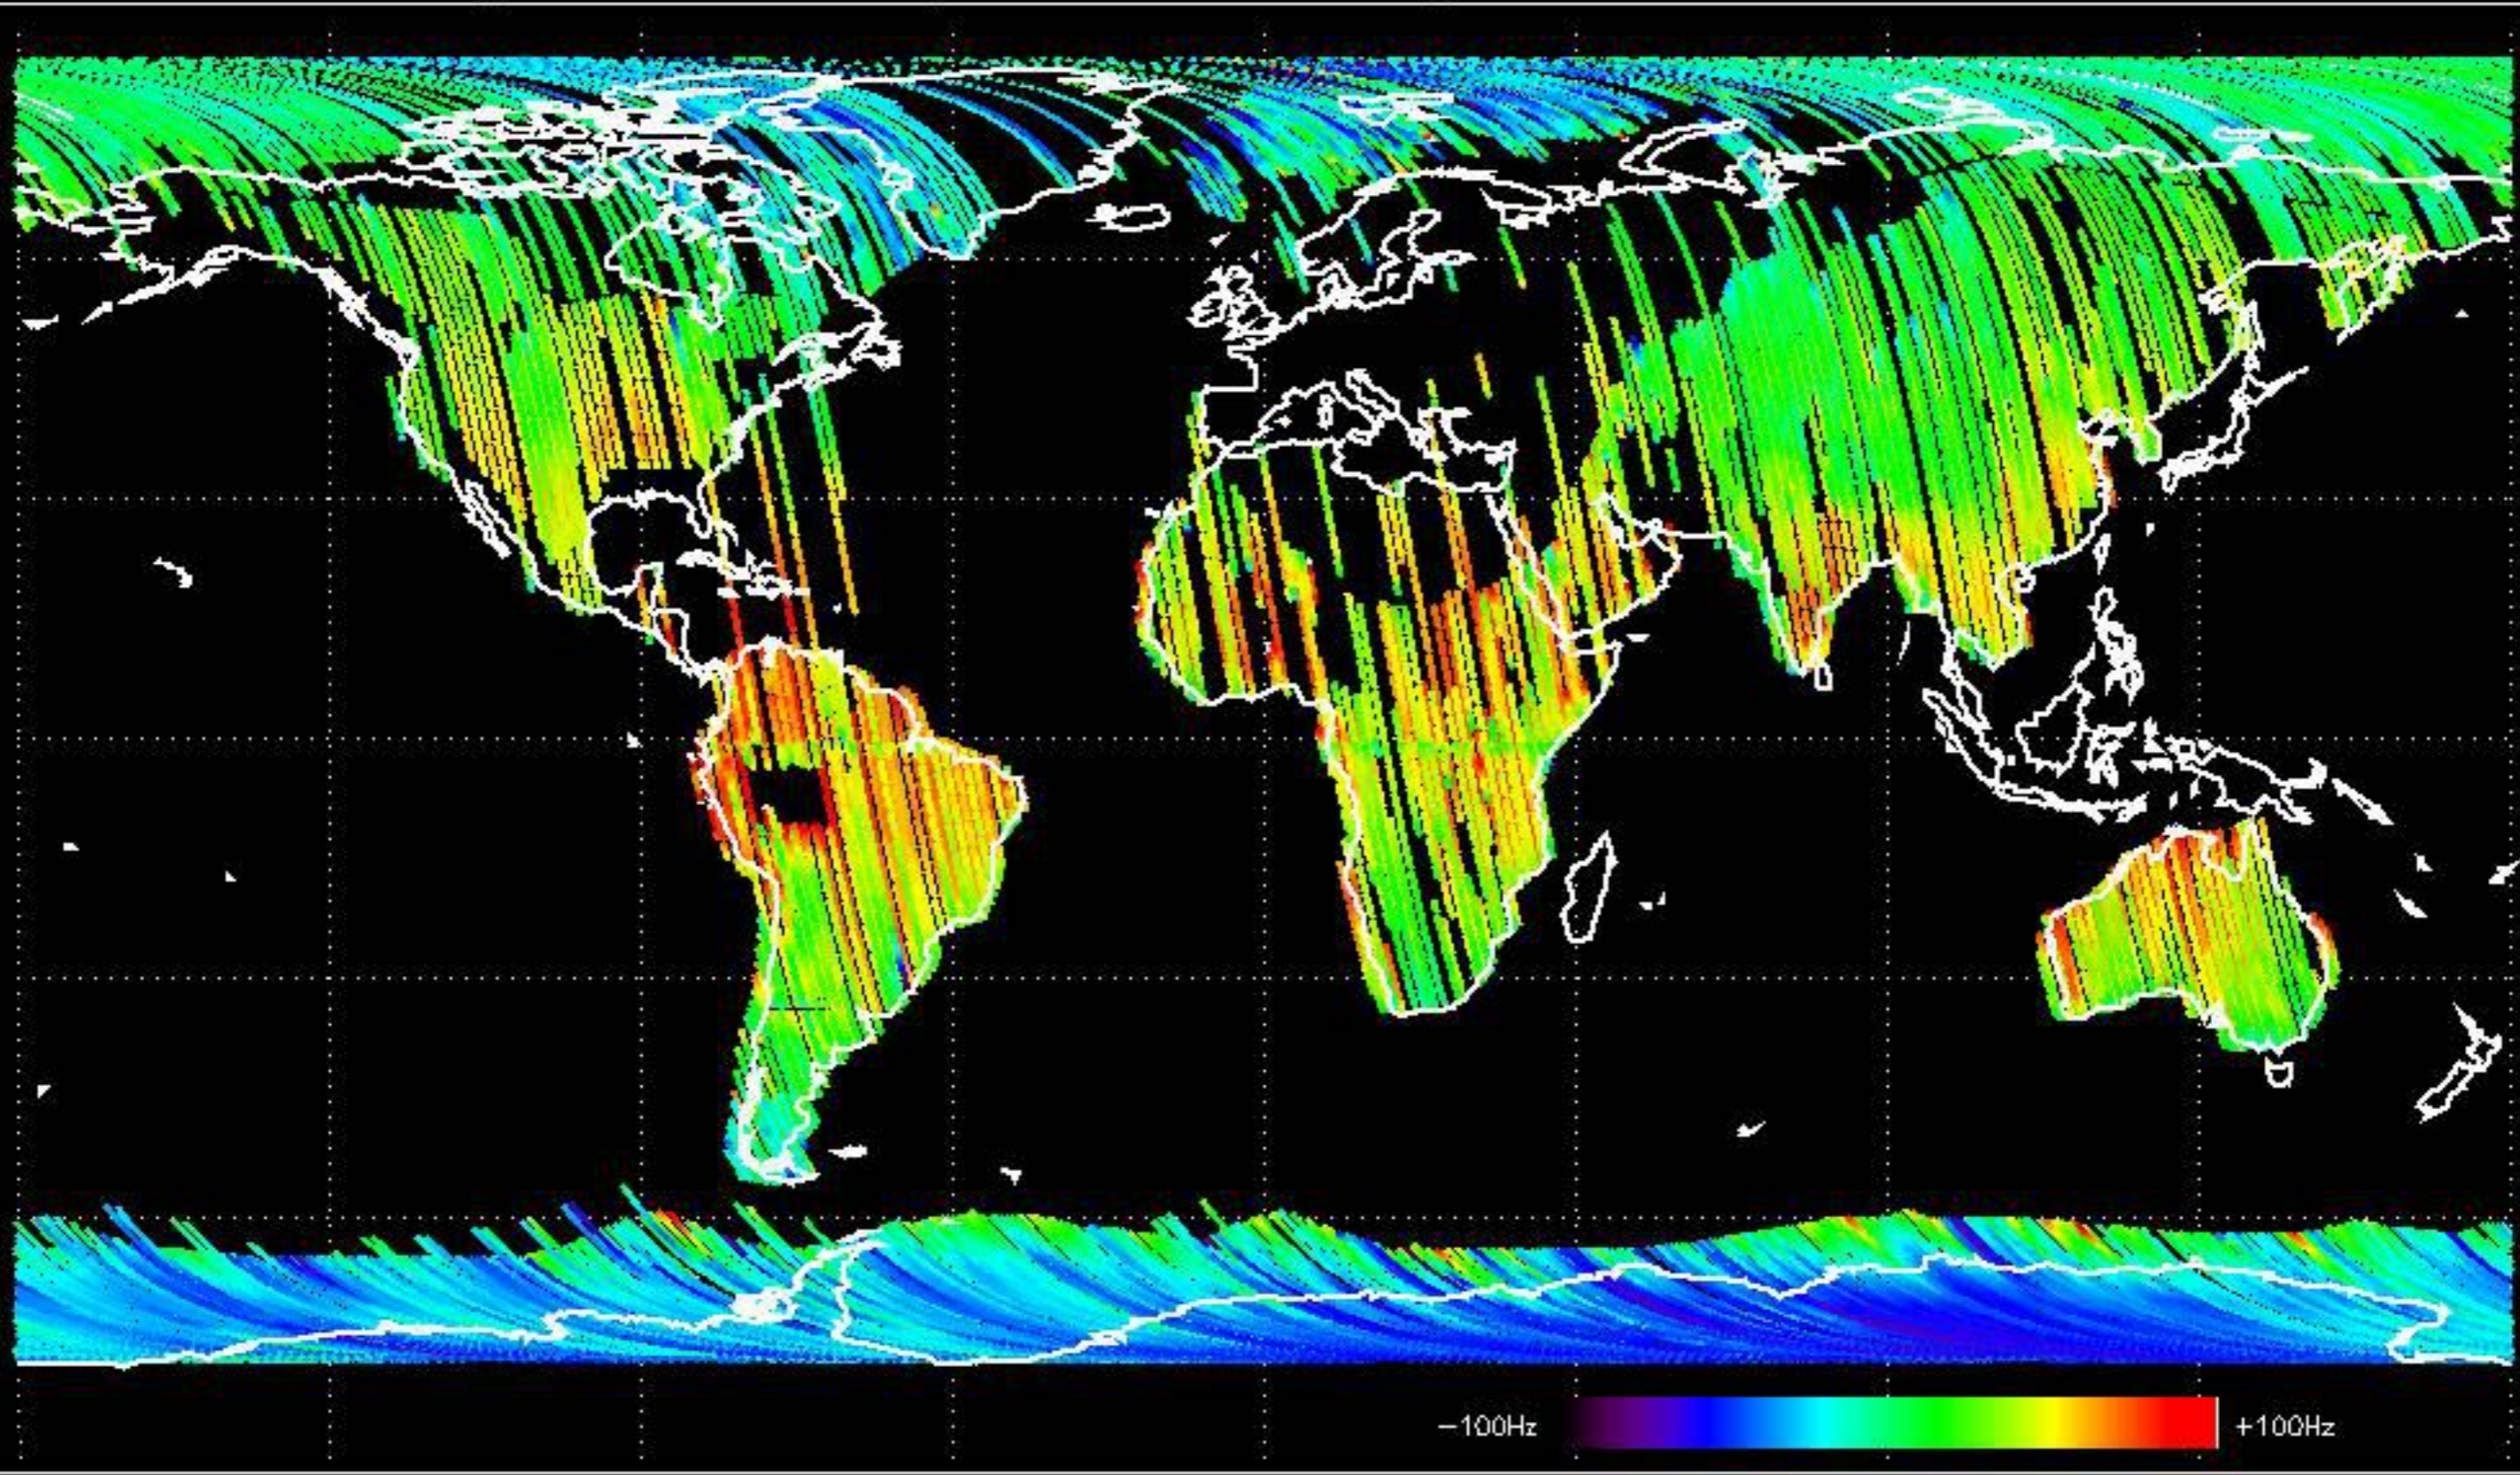


Doppler difference, estimated-predicted 'GM1' 'SS1' descending -error mean of -24.950976 Hz

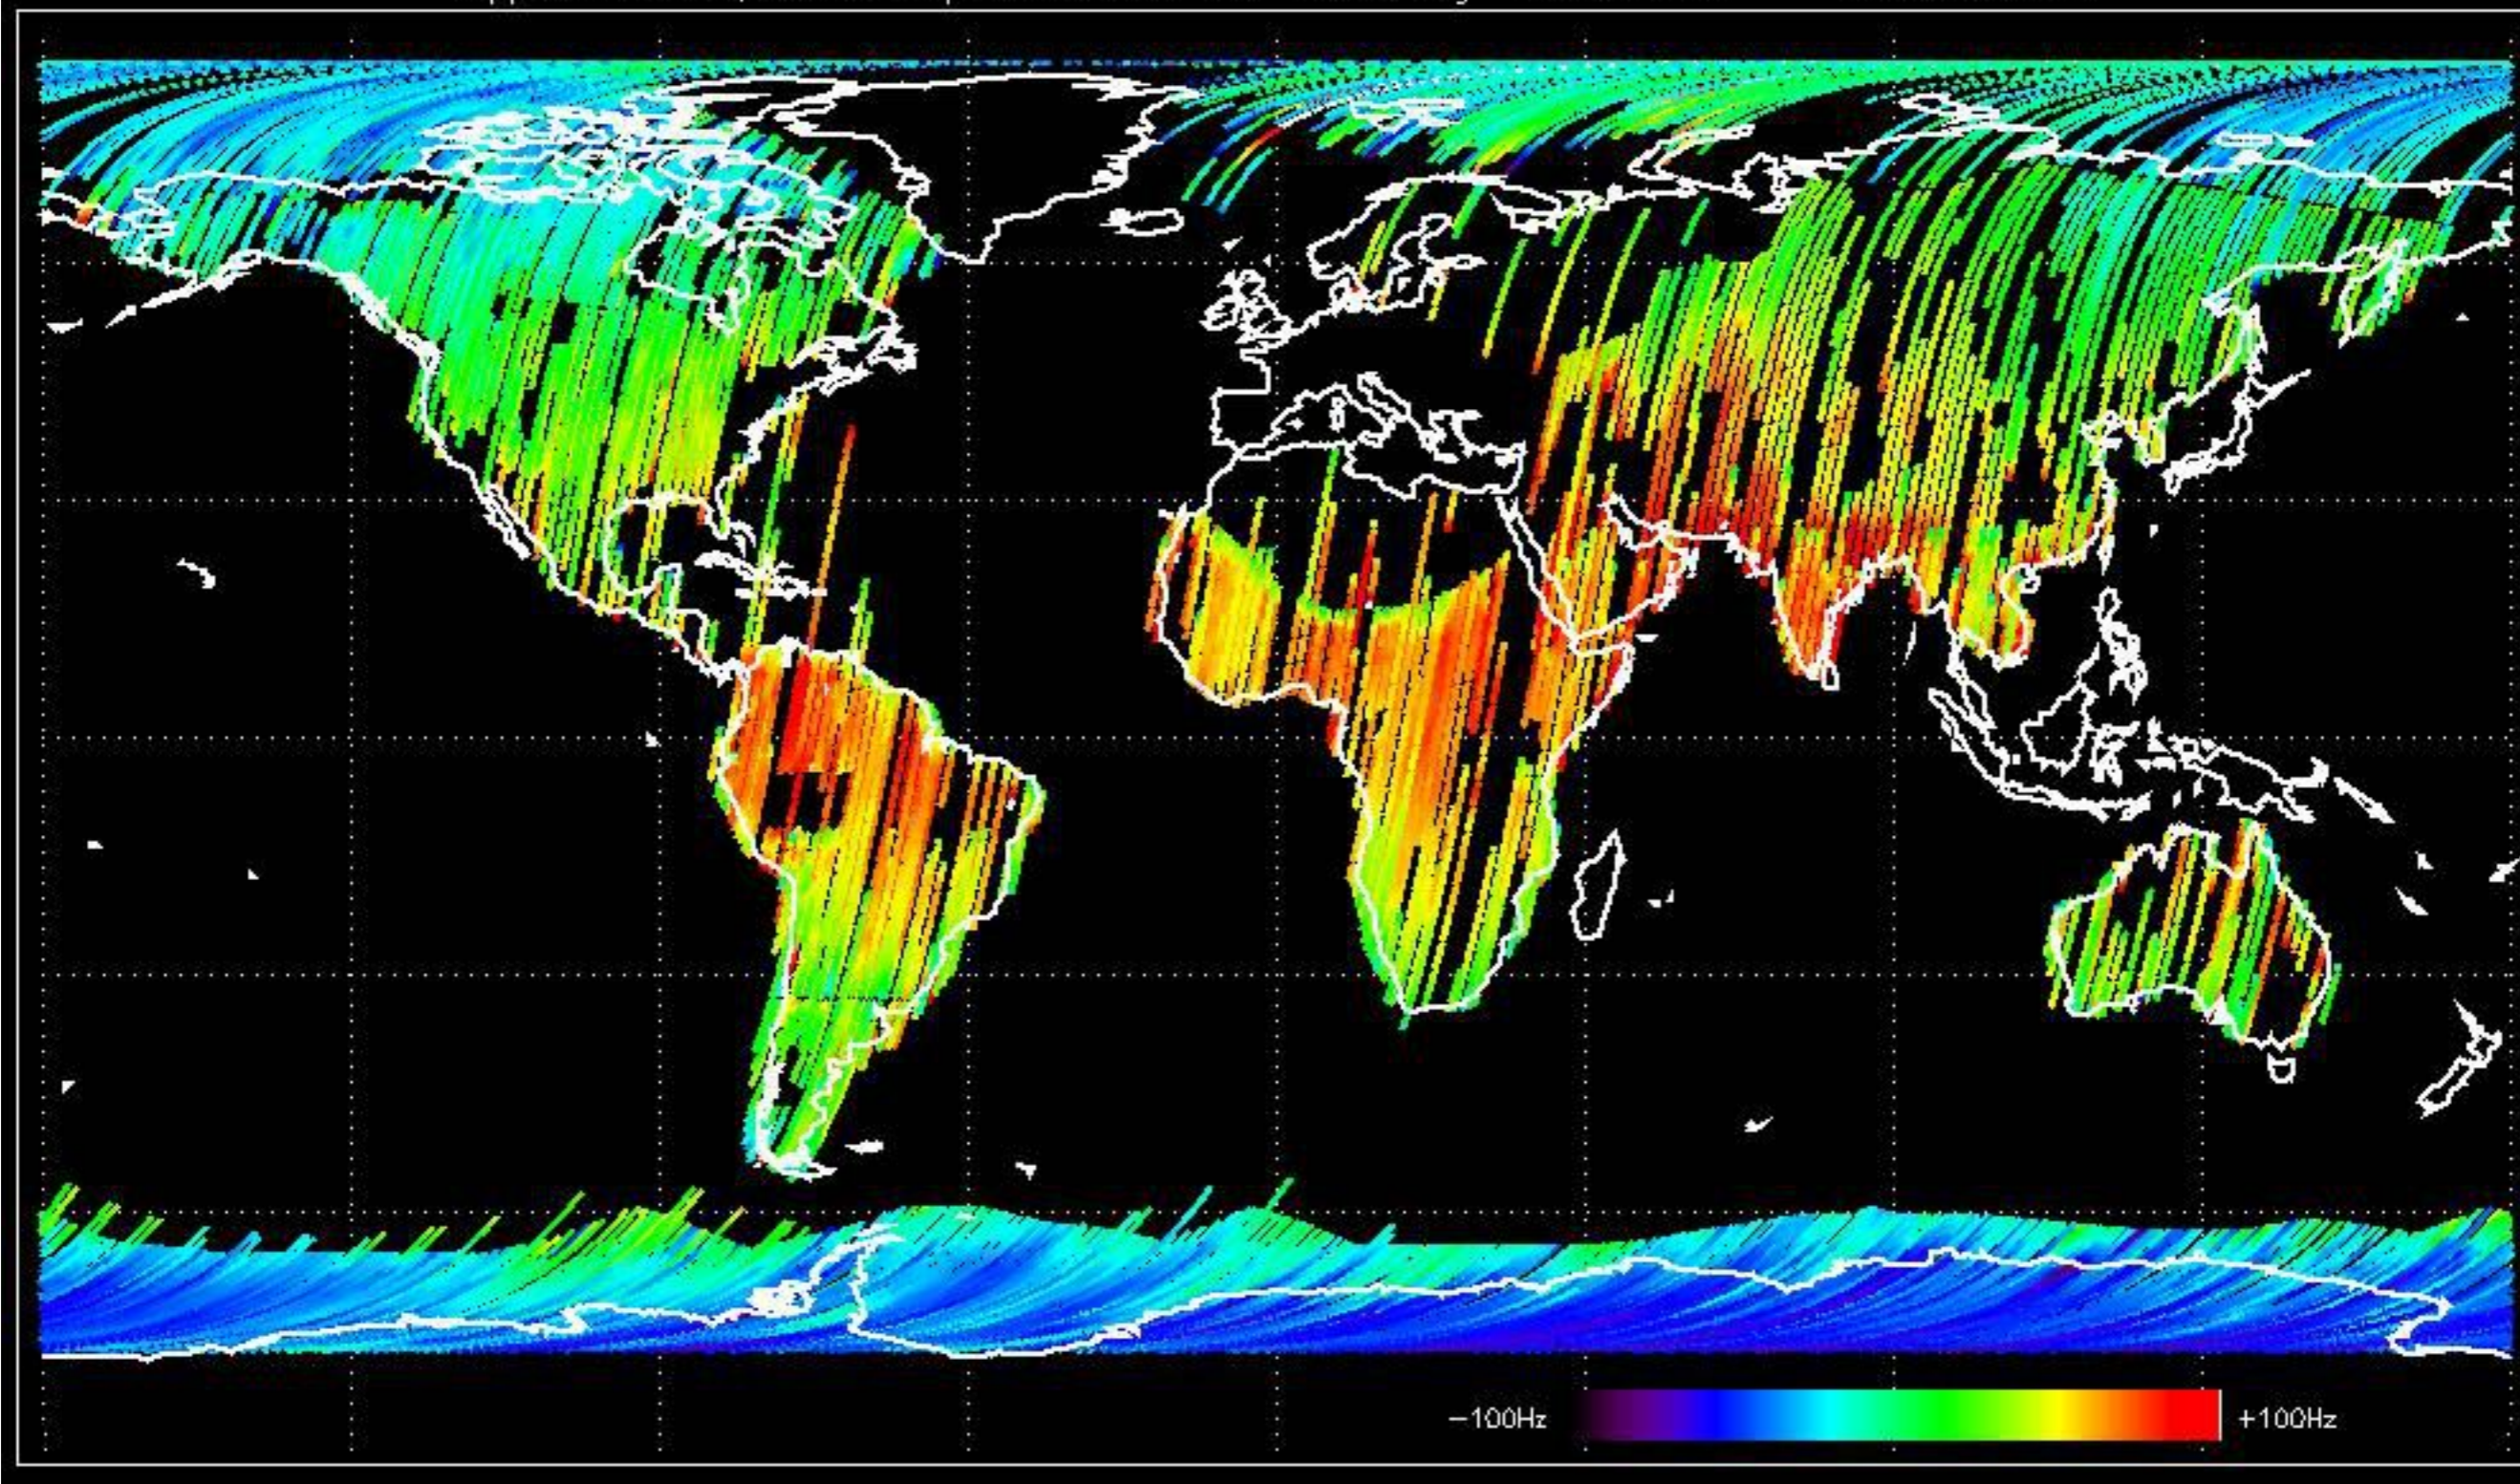

Doppler difference, estimated-predicted 'WVS' 'IS2' ascending -error mean of -28.896934 Hz

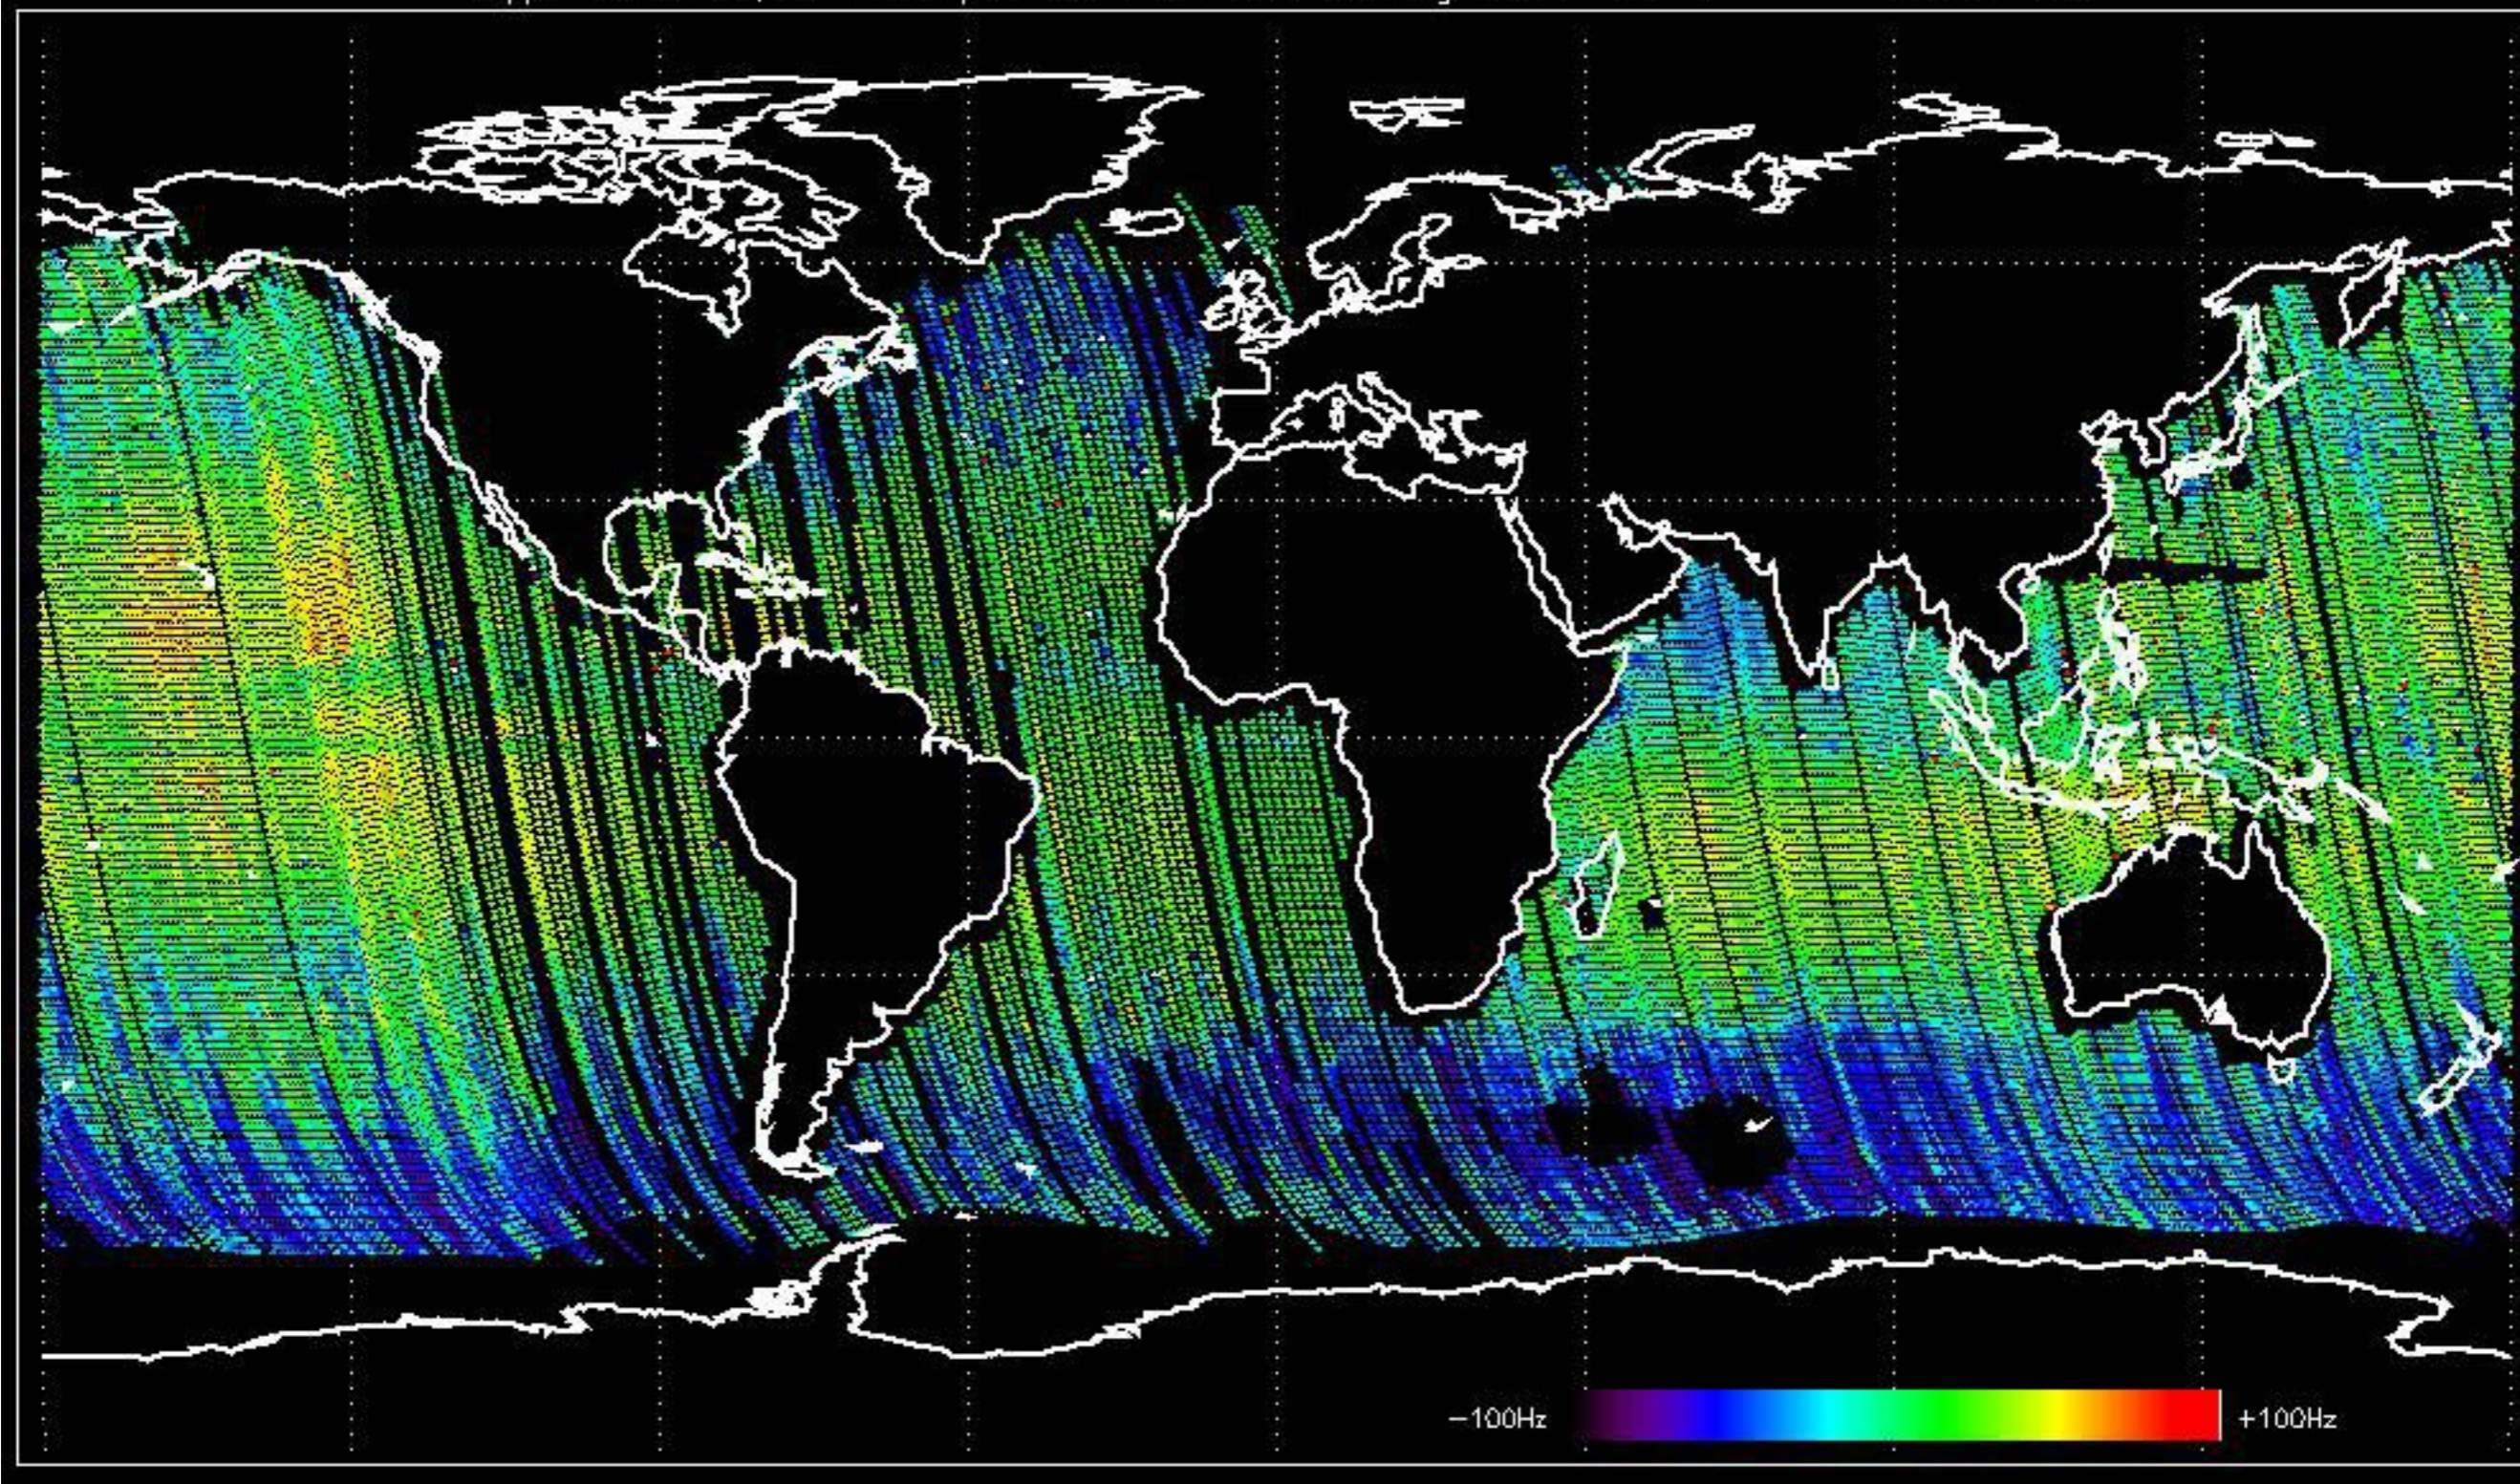





Doppler difference, estimated-predicted 'WVS' 'IS2' descending -error mean of -29.149455 Hz



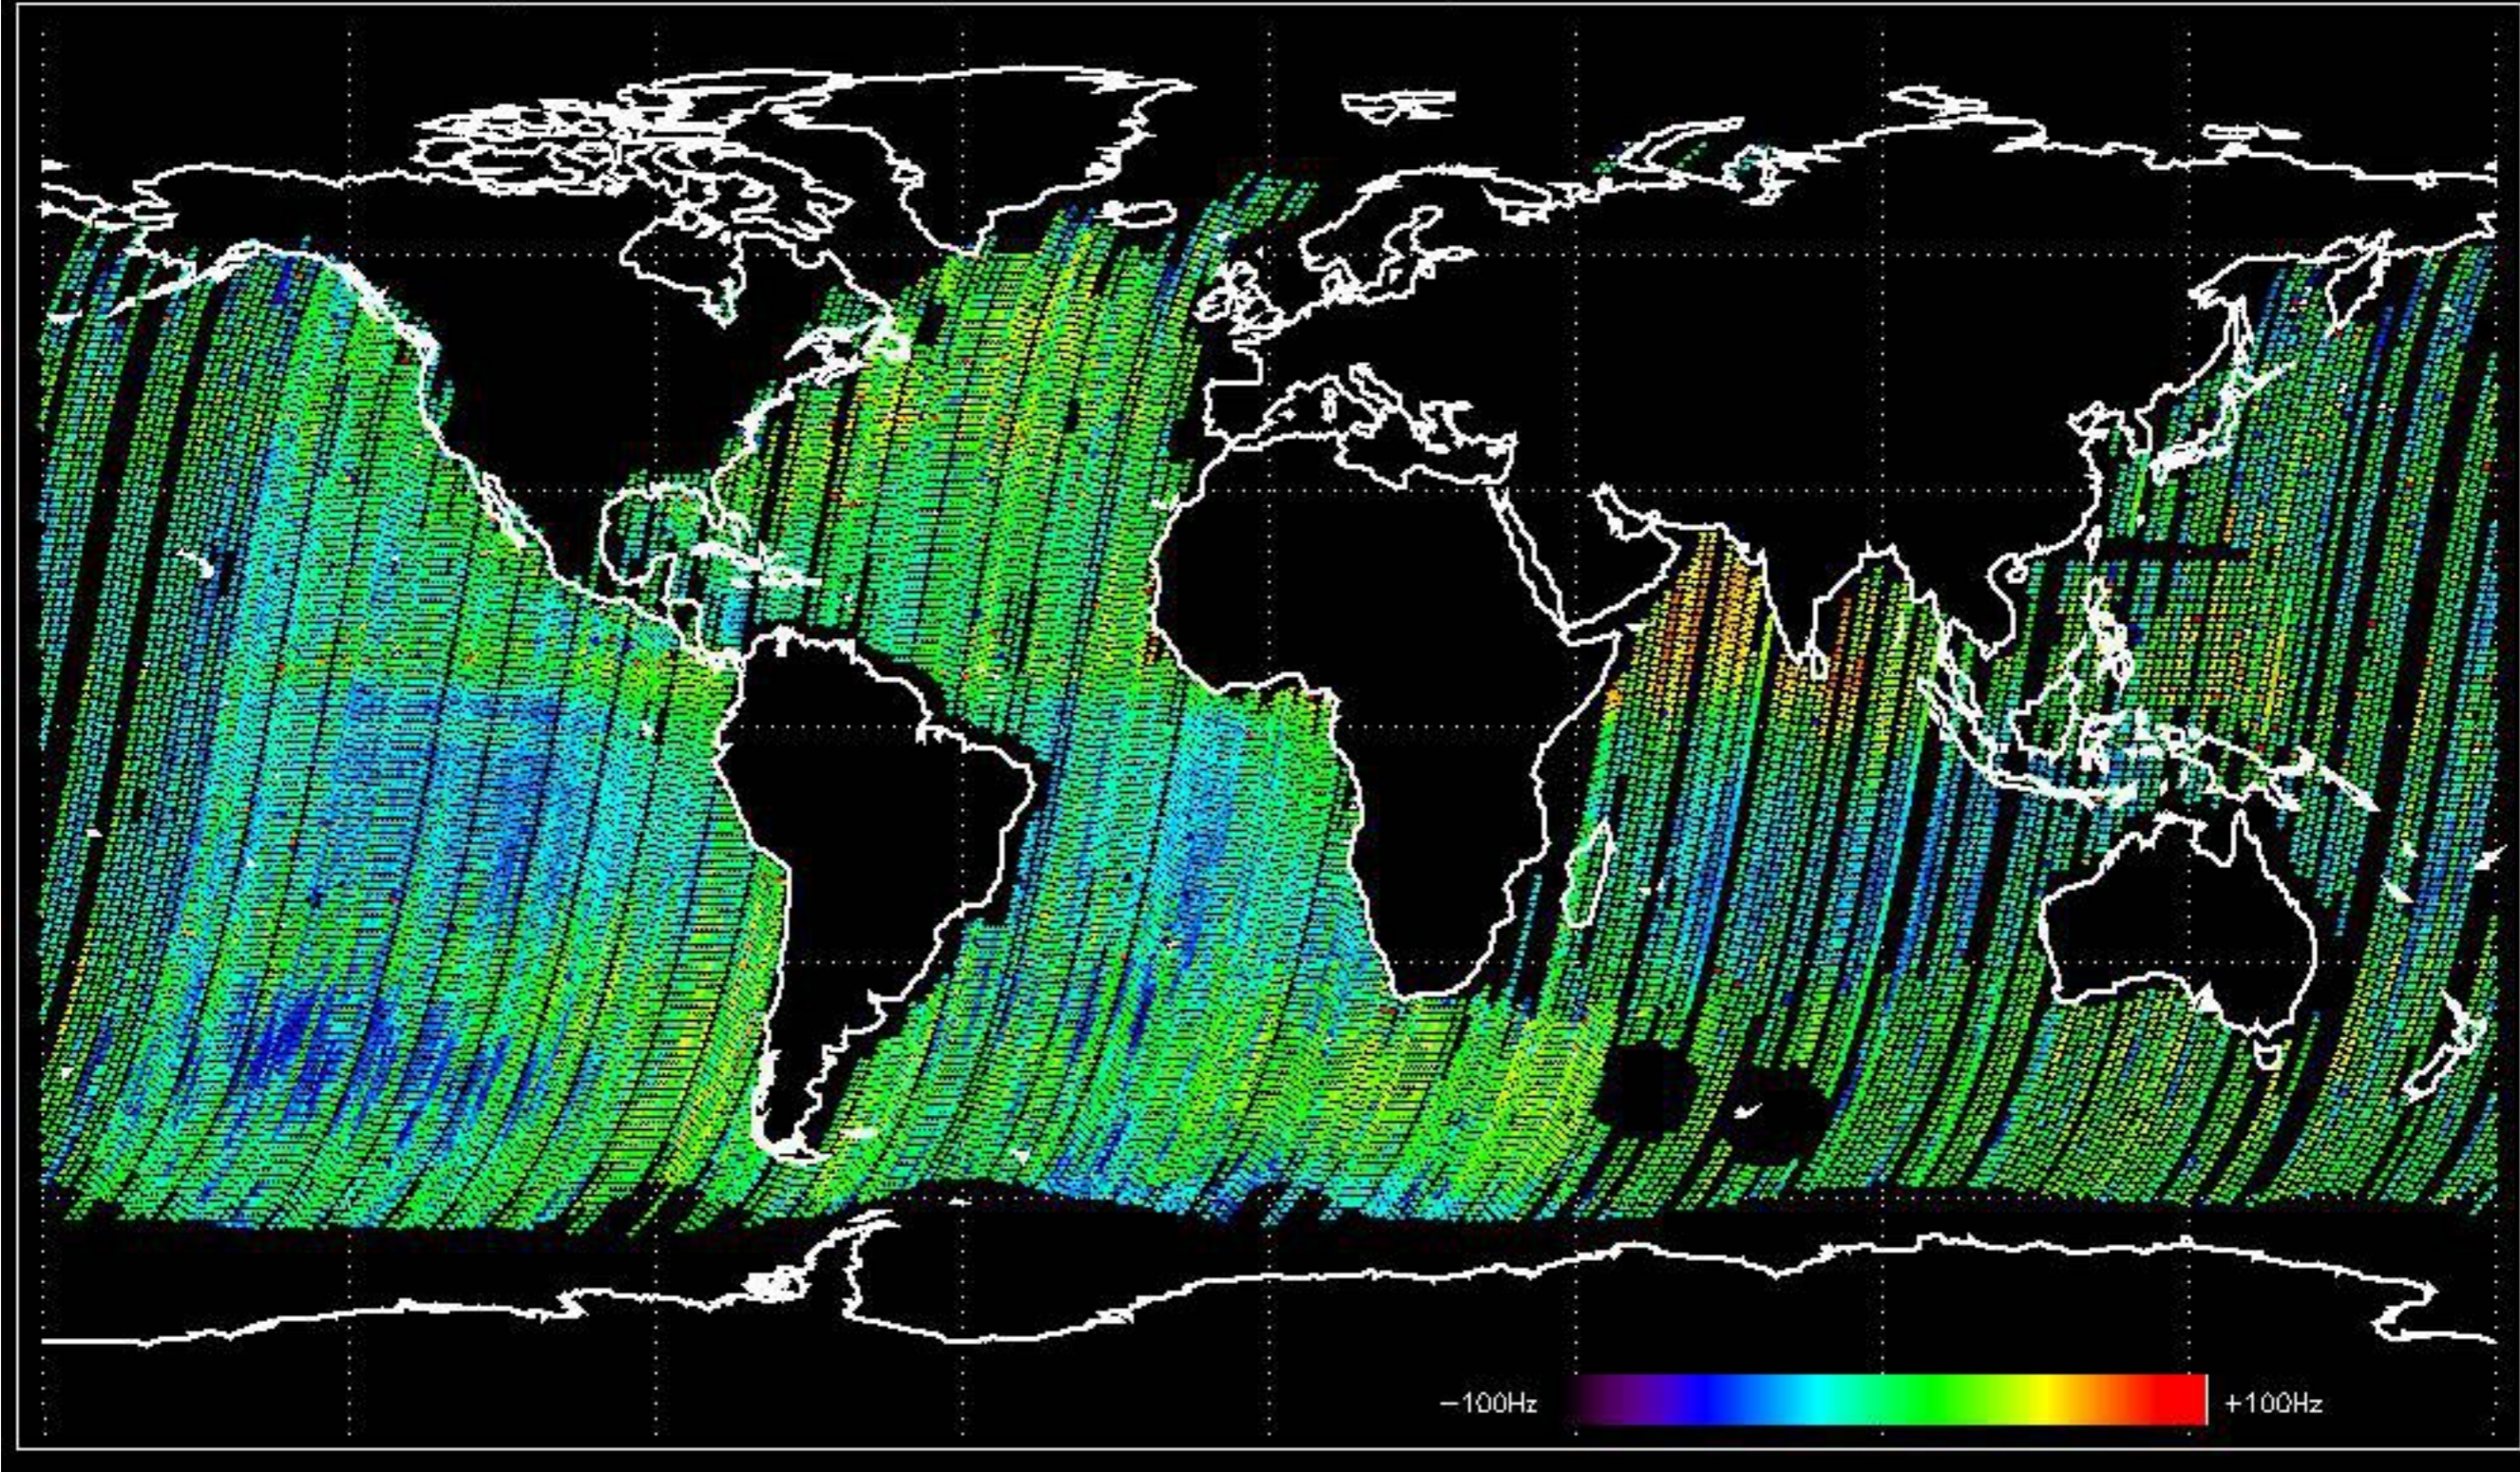



The MS mode provides an internal health check on an individual module basis.
The purpose of this mode is to identify to identify any malfunctioning modules and
to identify modules for which calibration offsets are to be applied.
No anomalies observed on available MS products:


No anomalies observed.

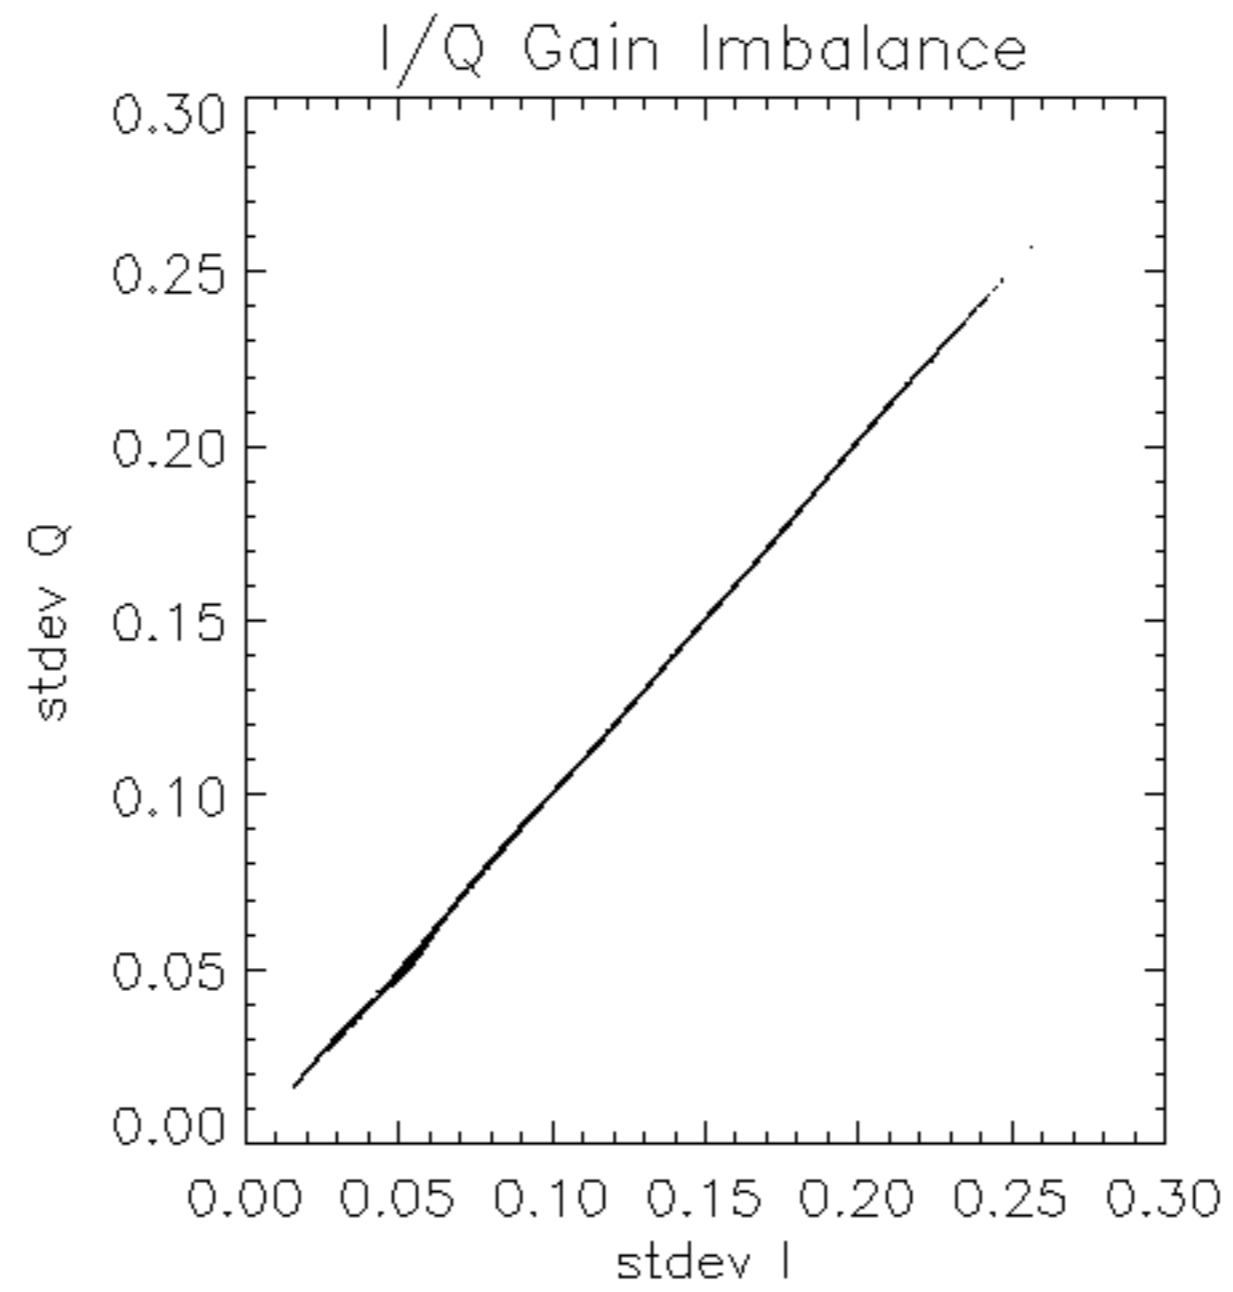

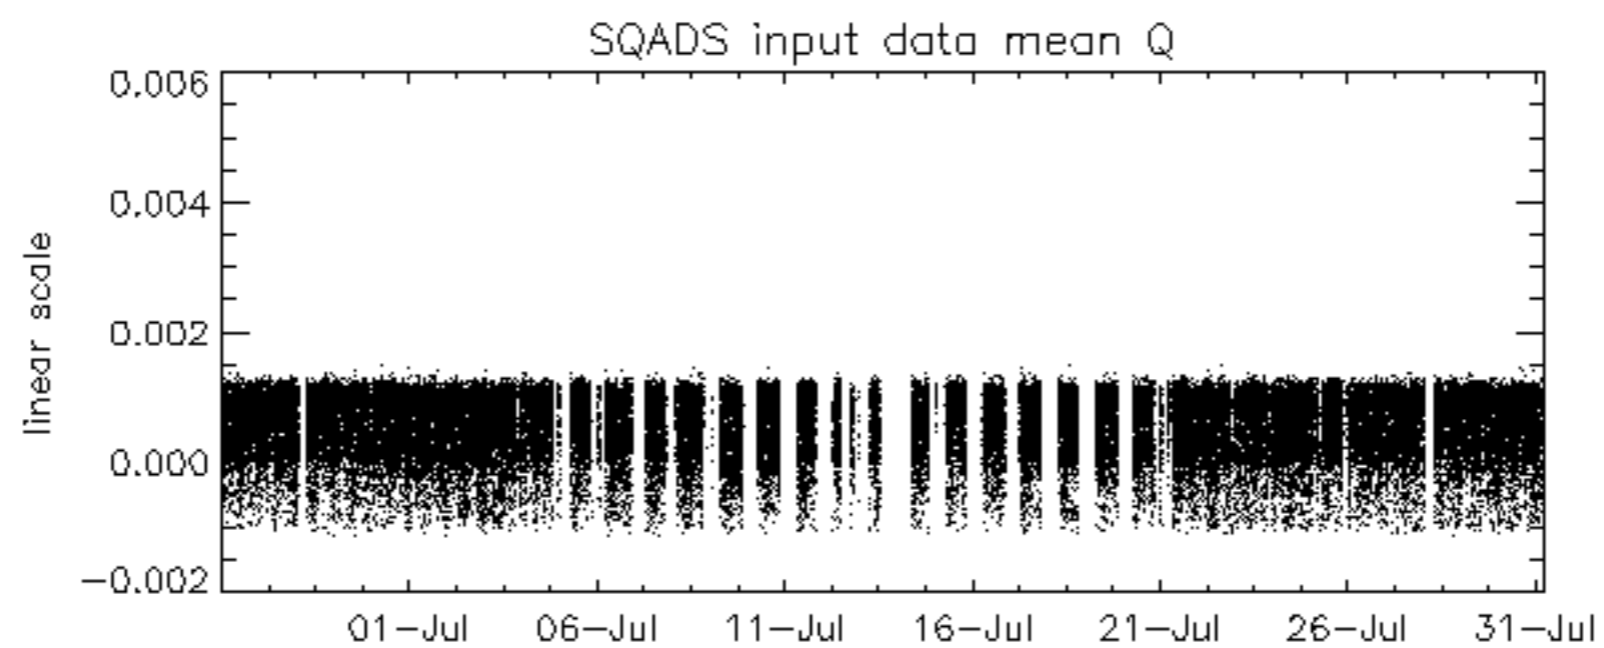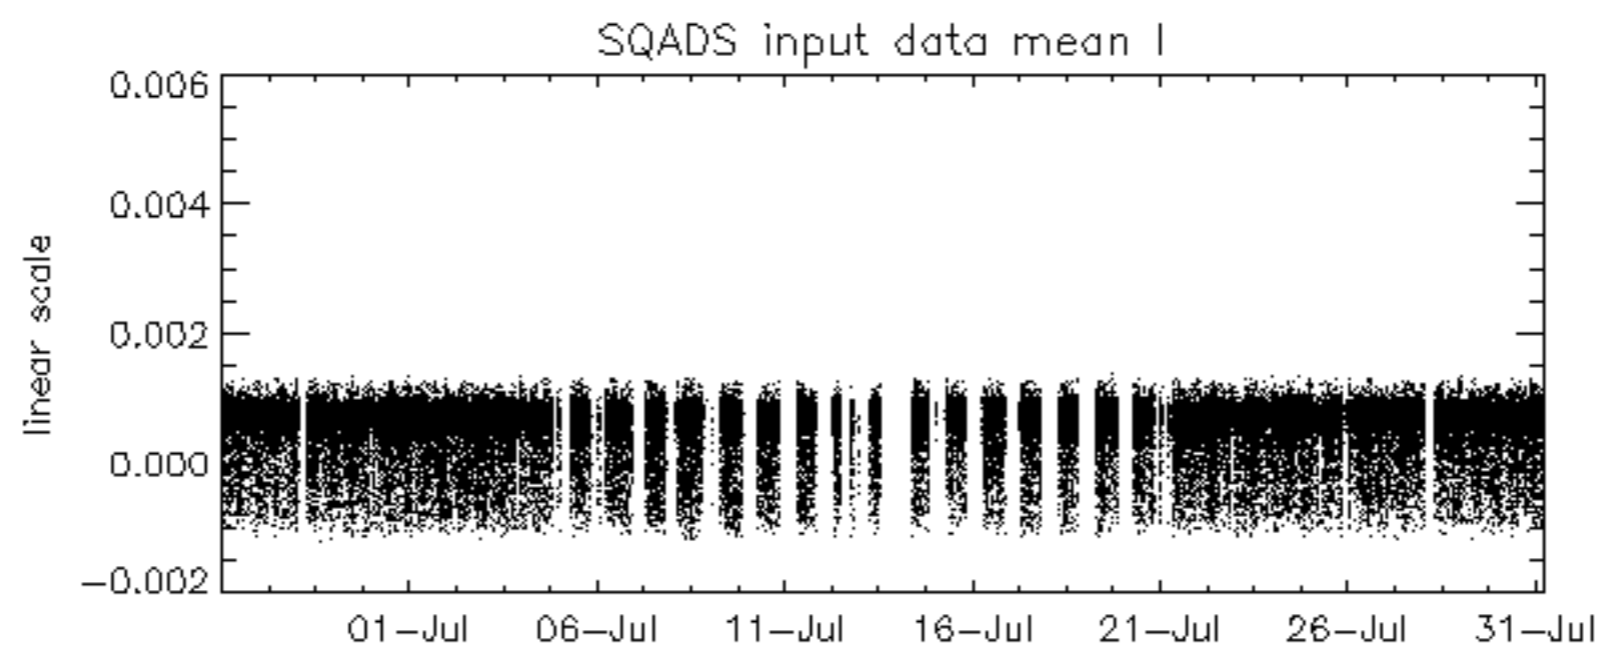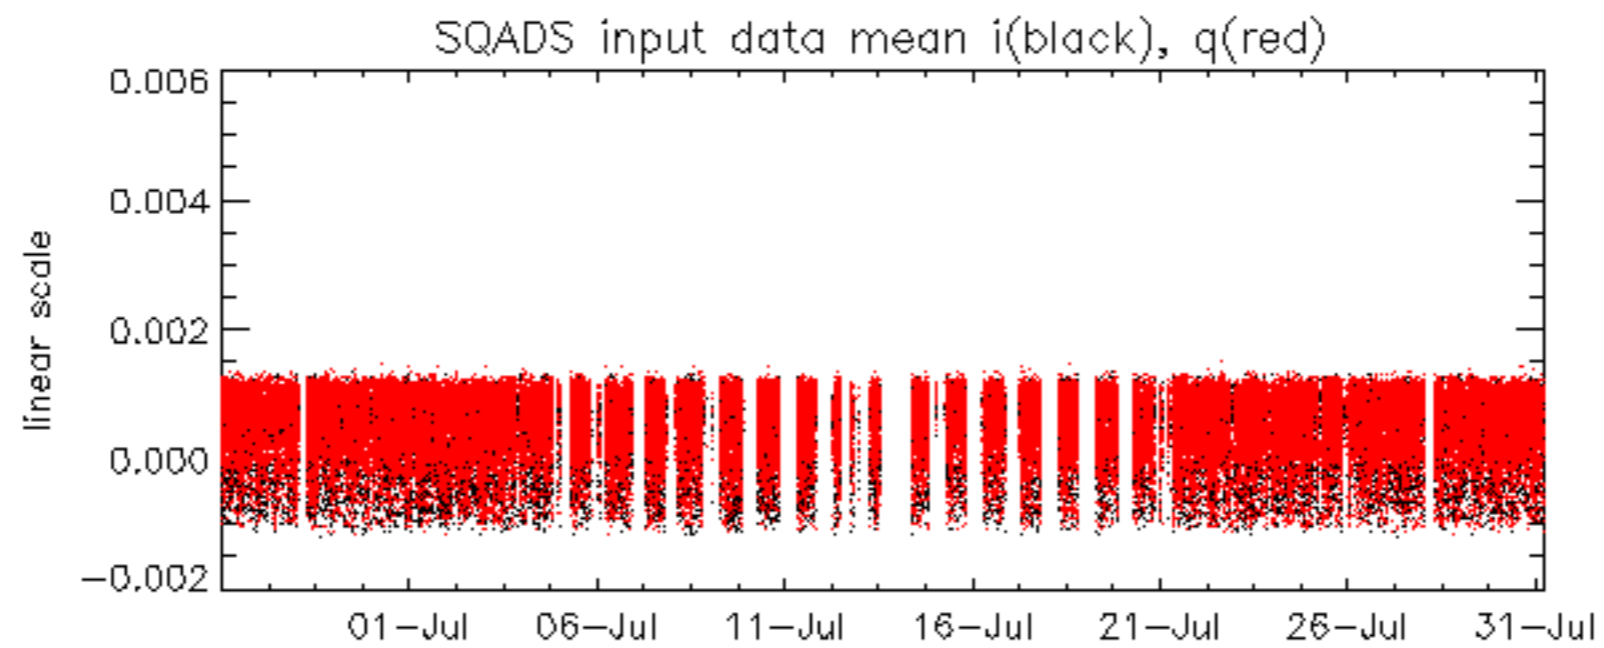


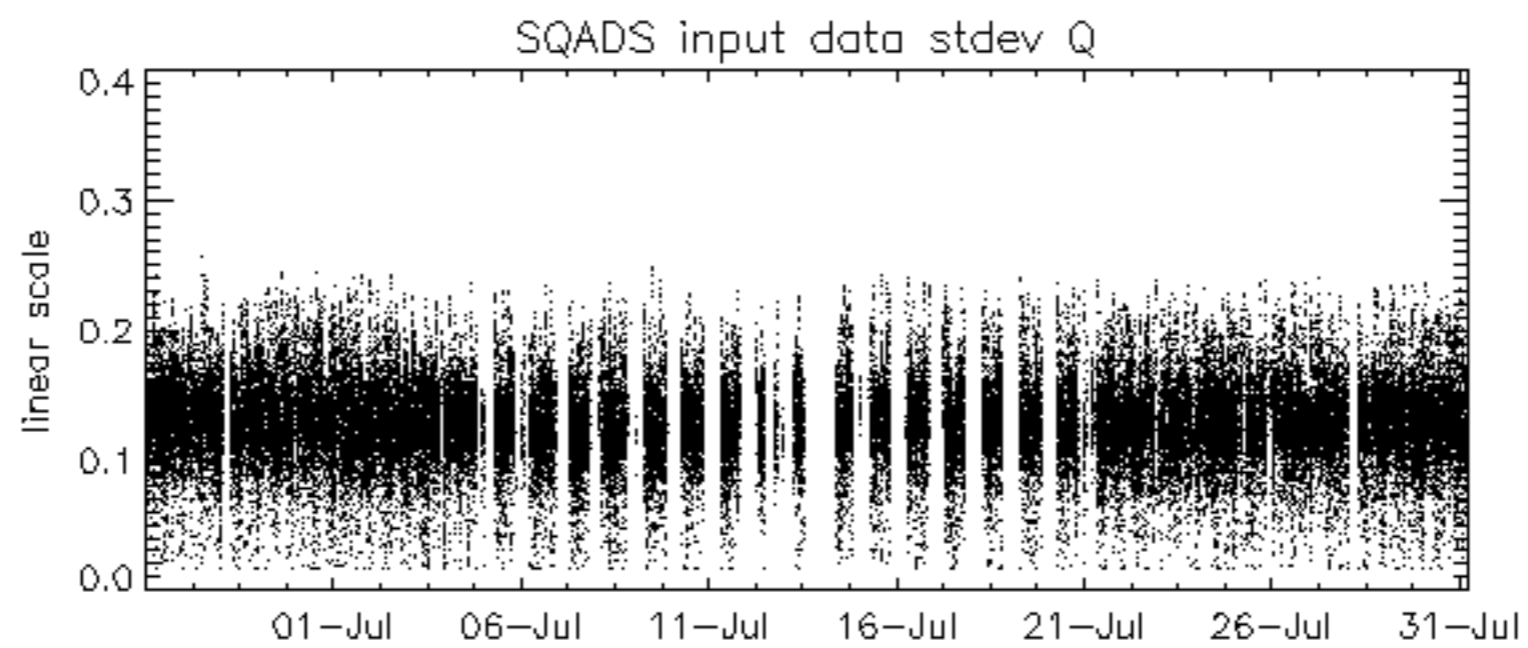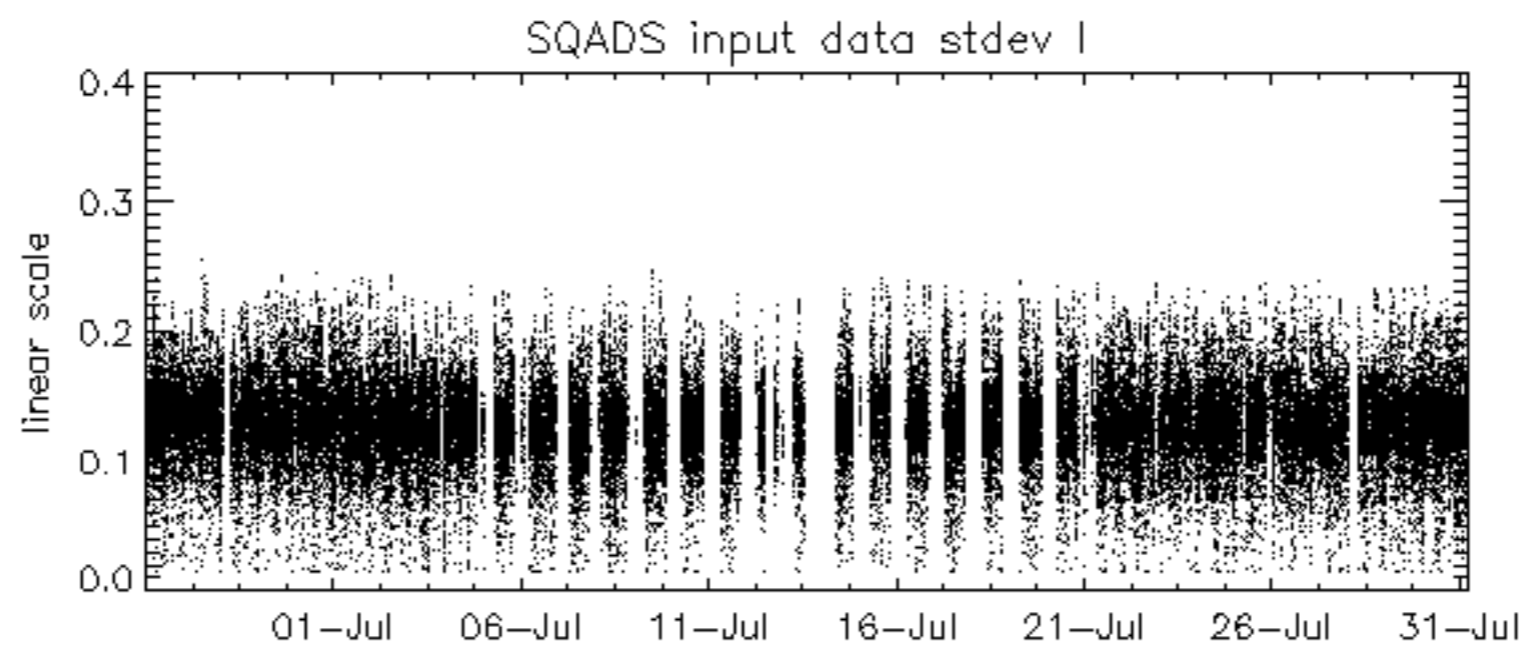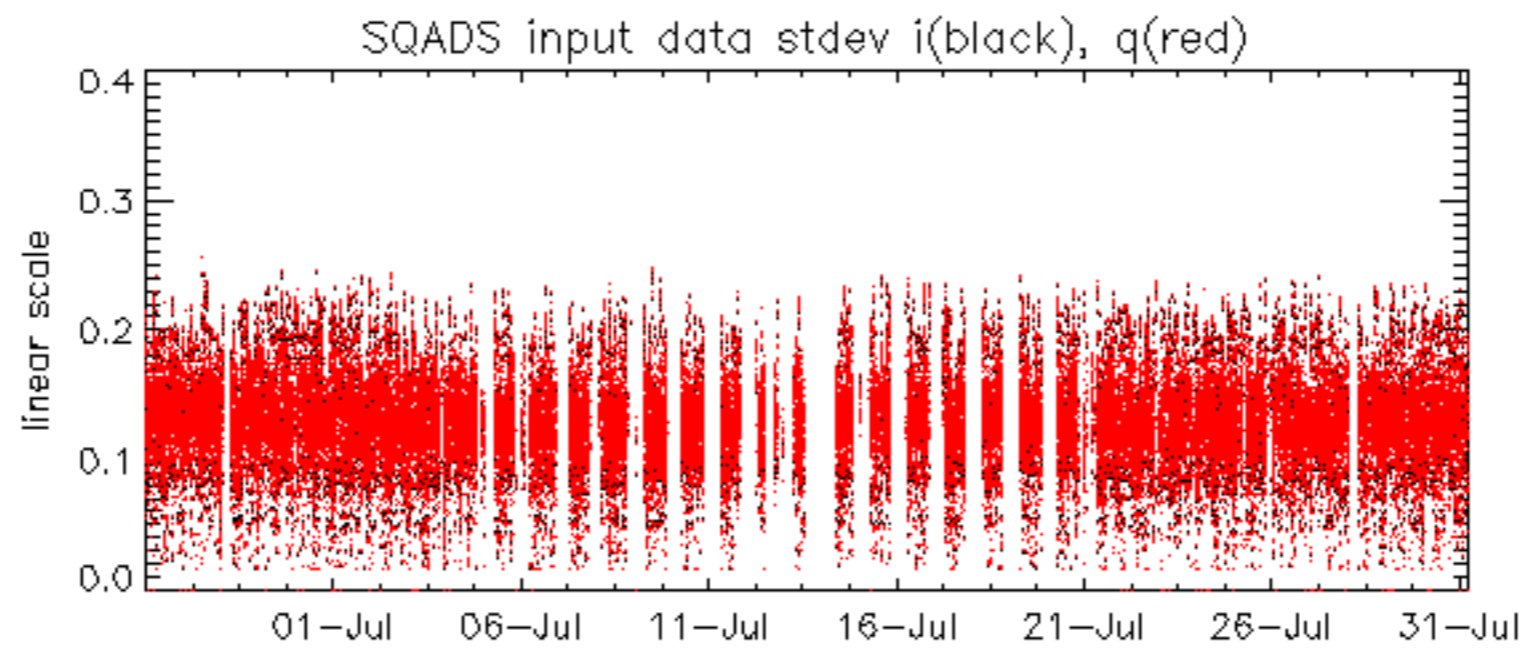

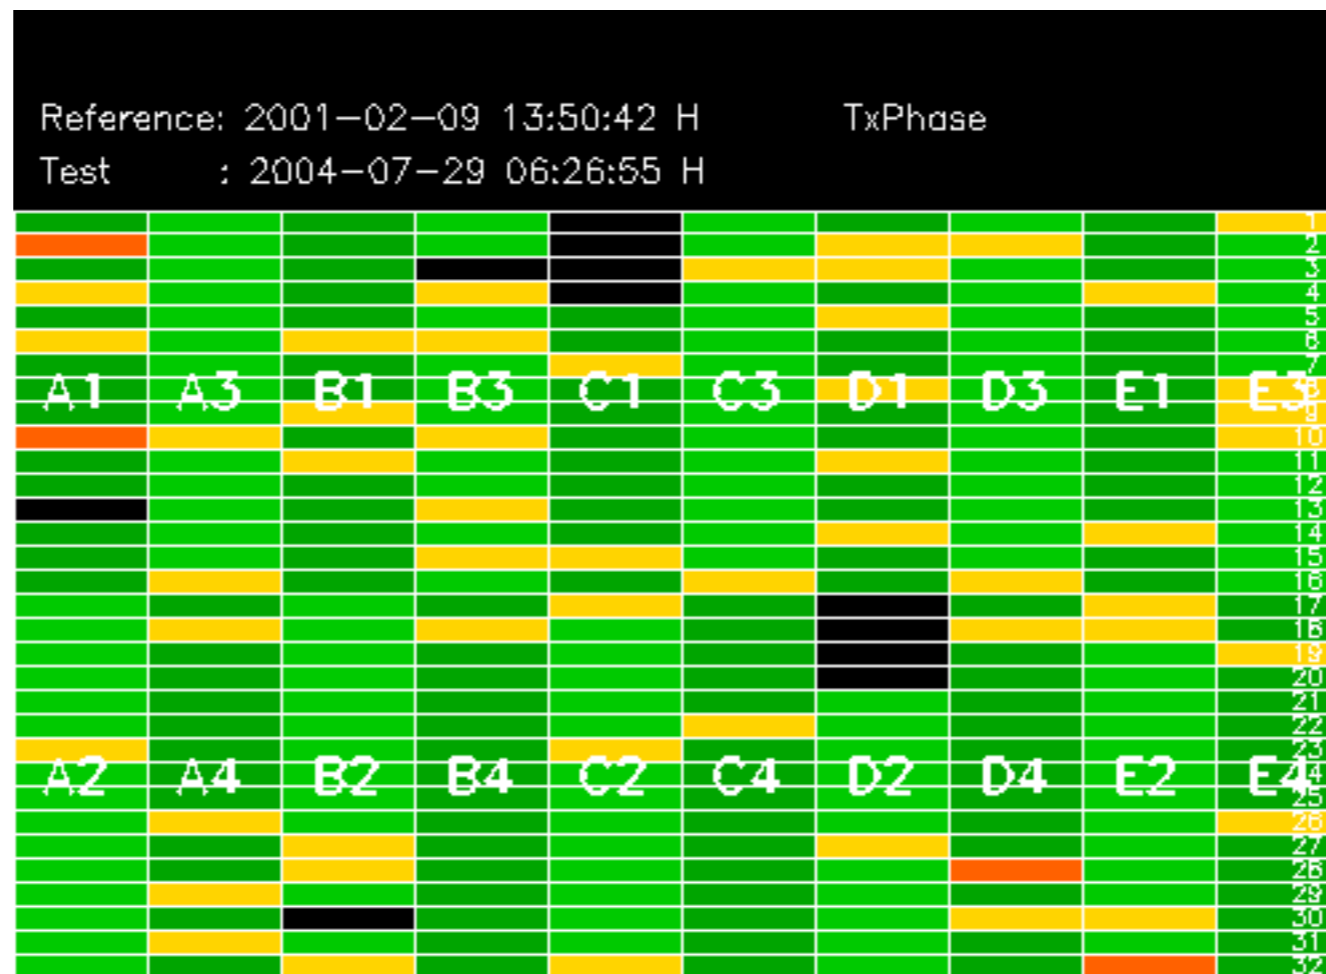


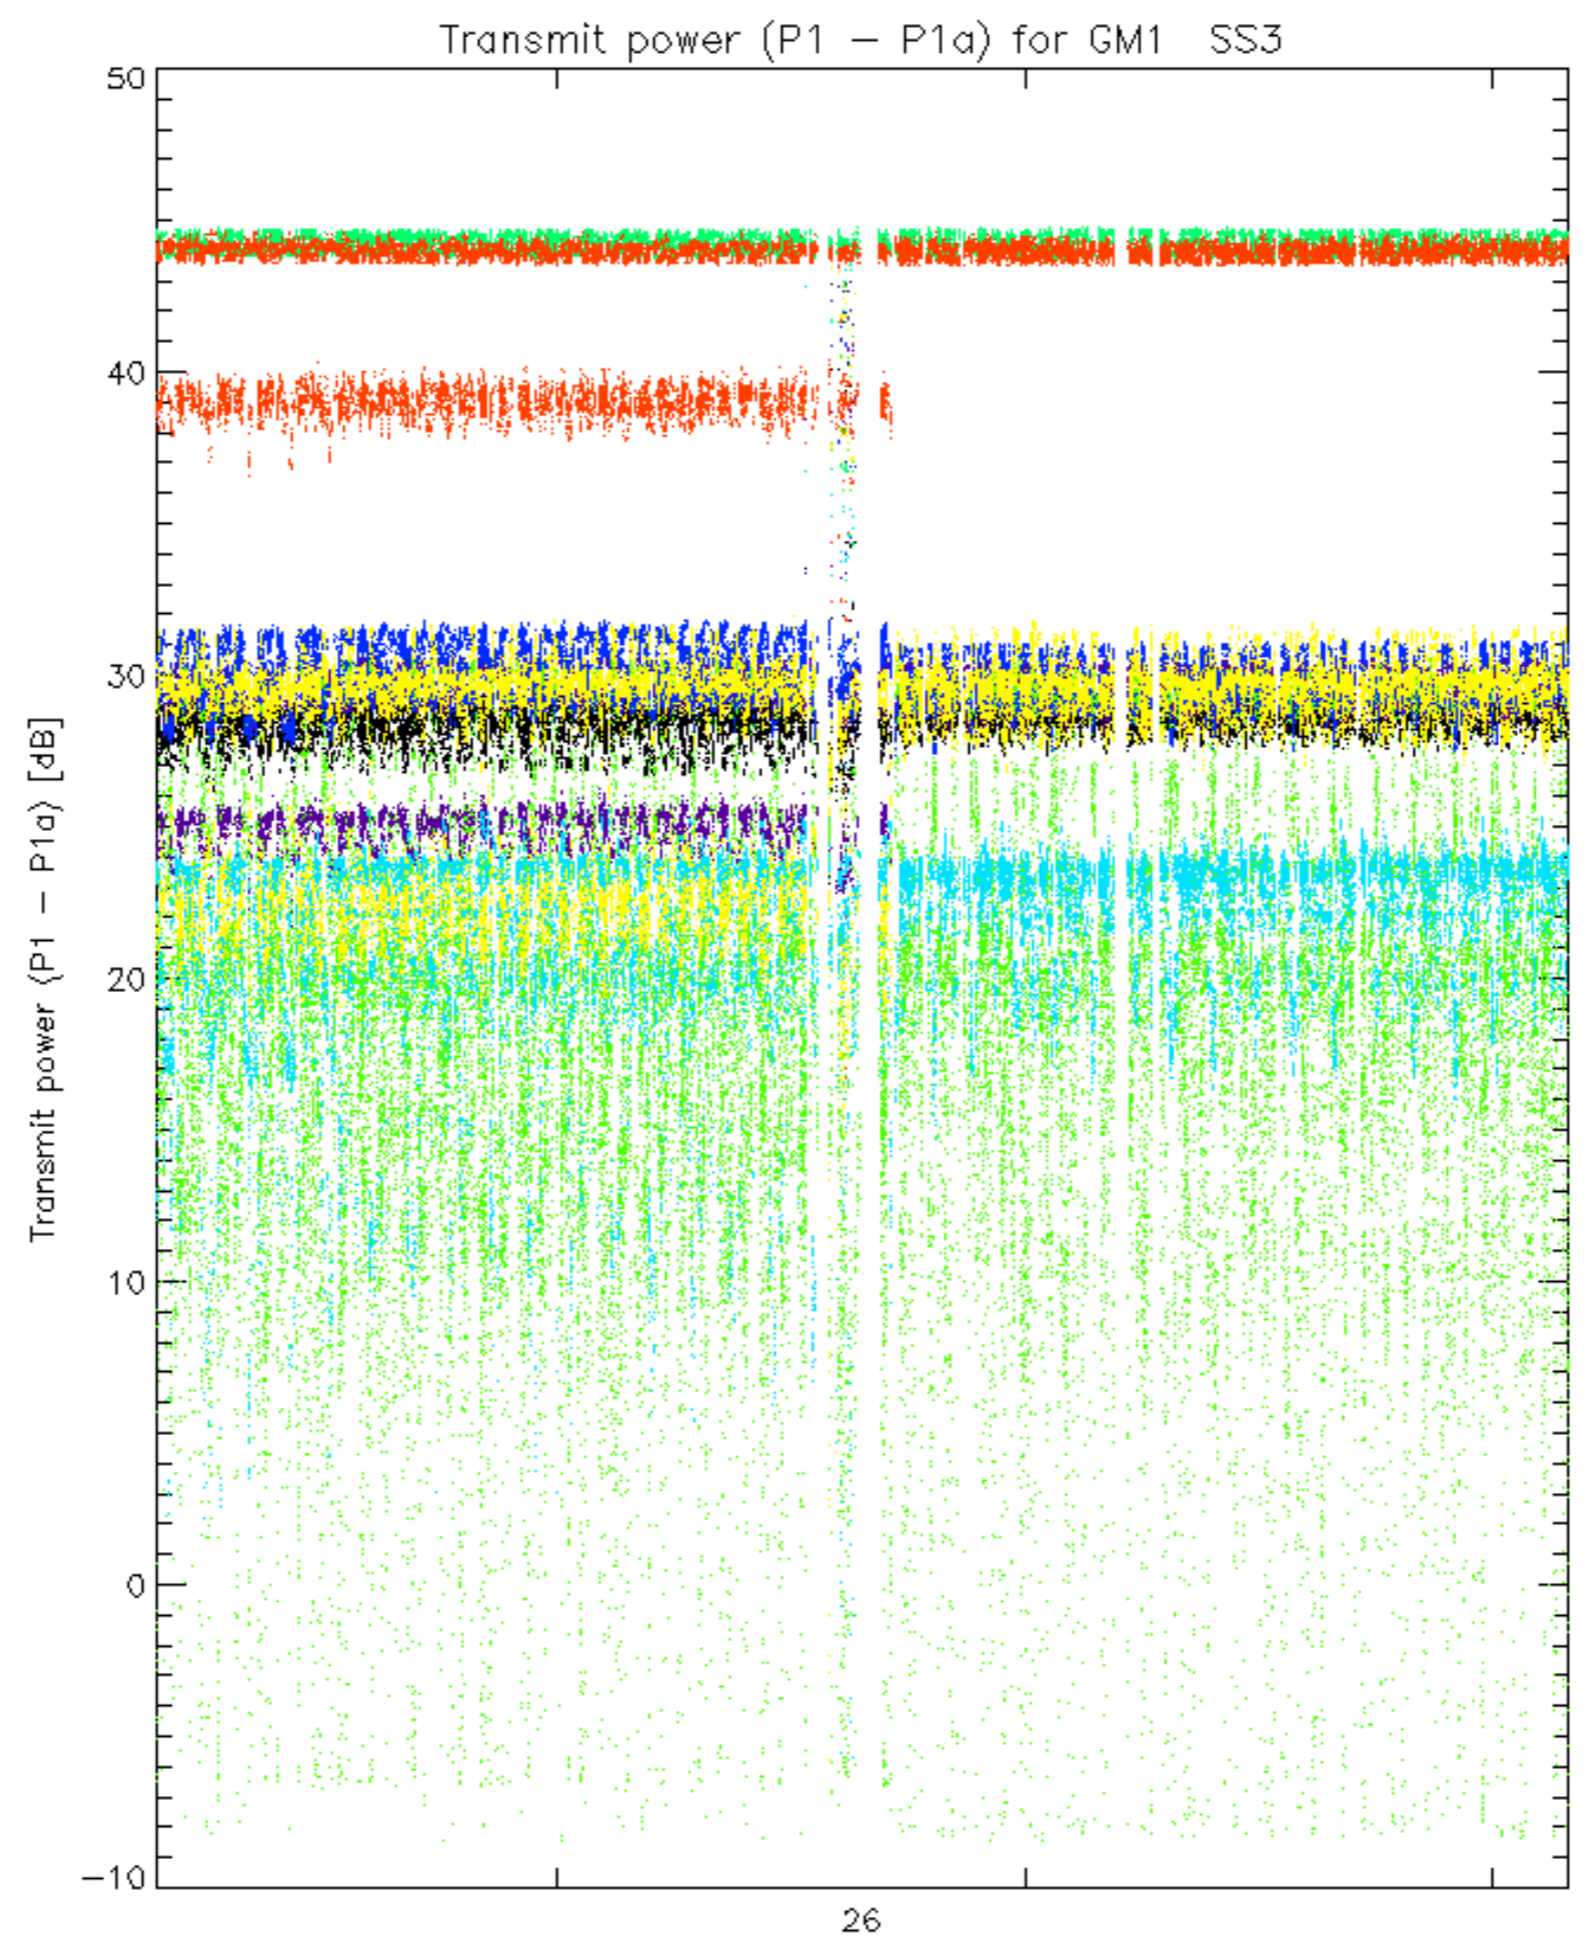


rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

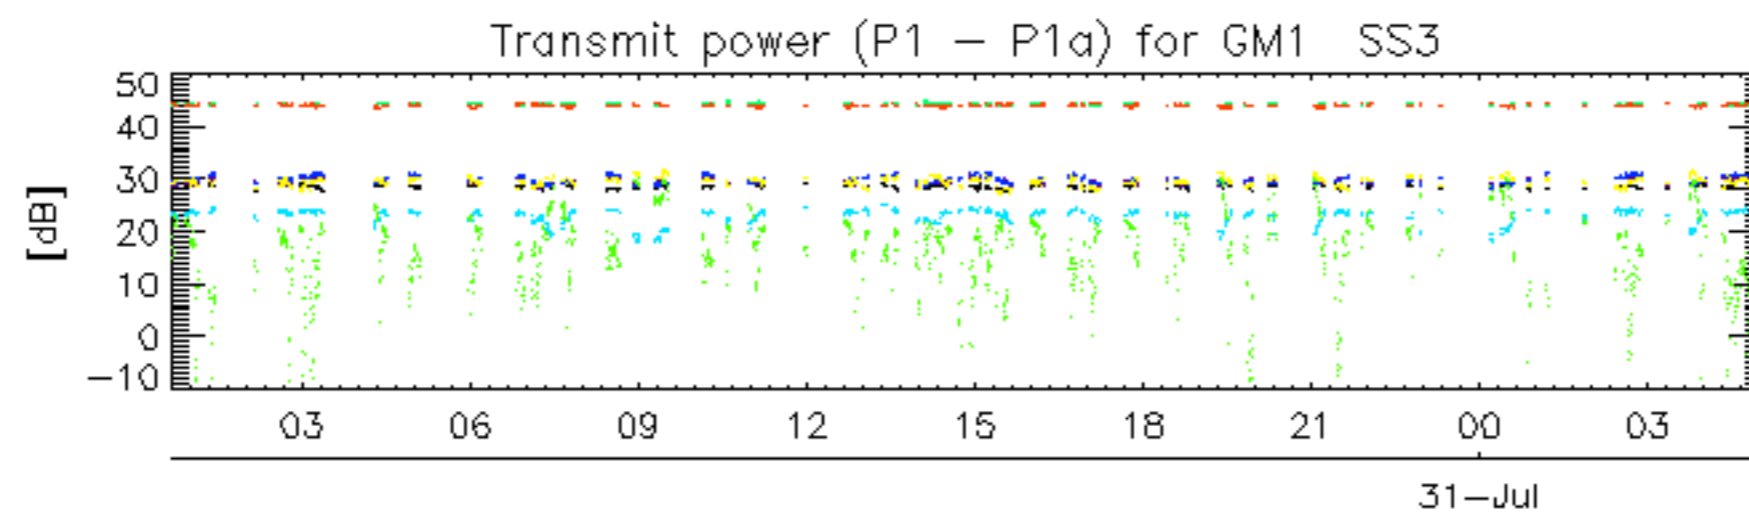

rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

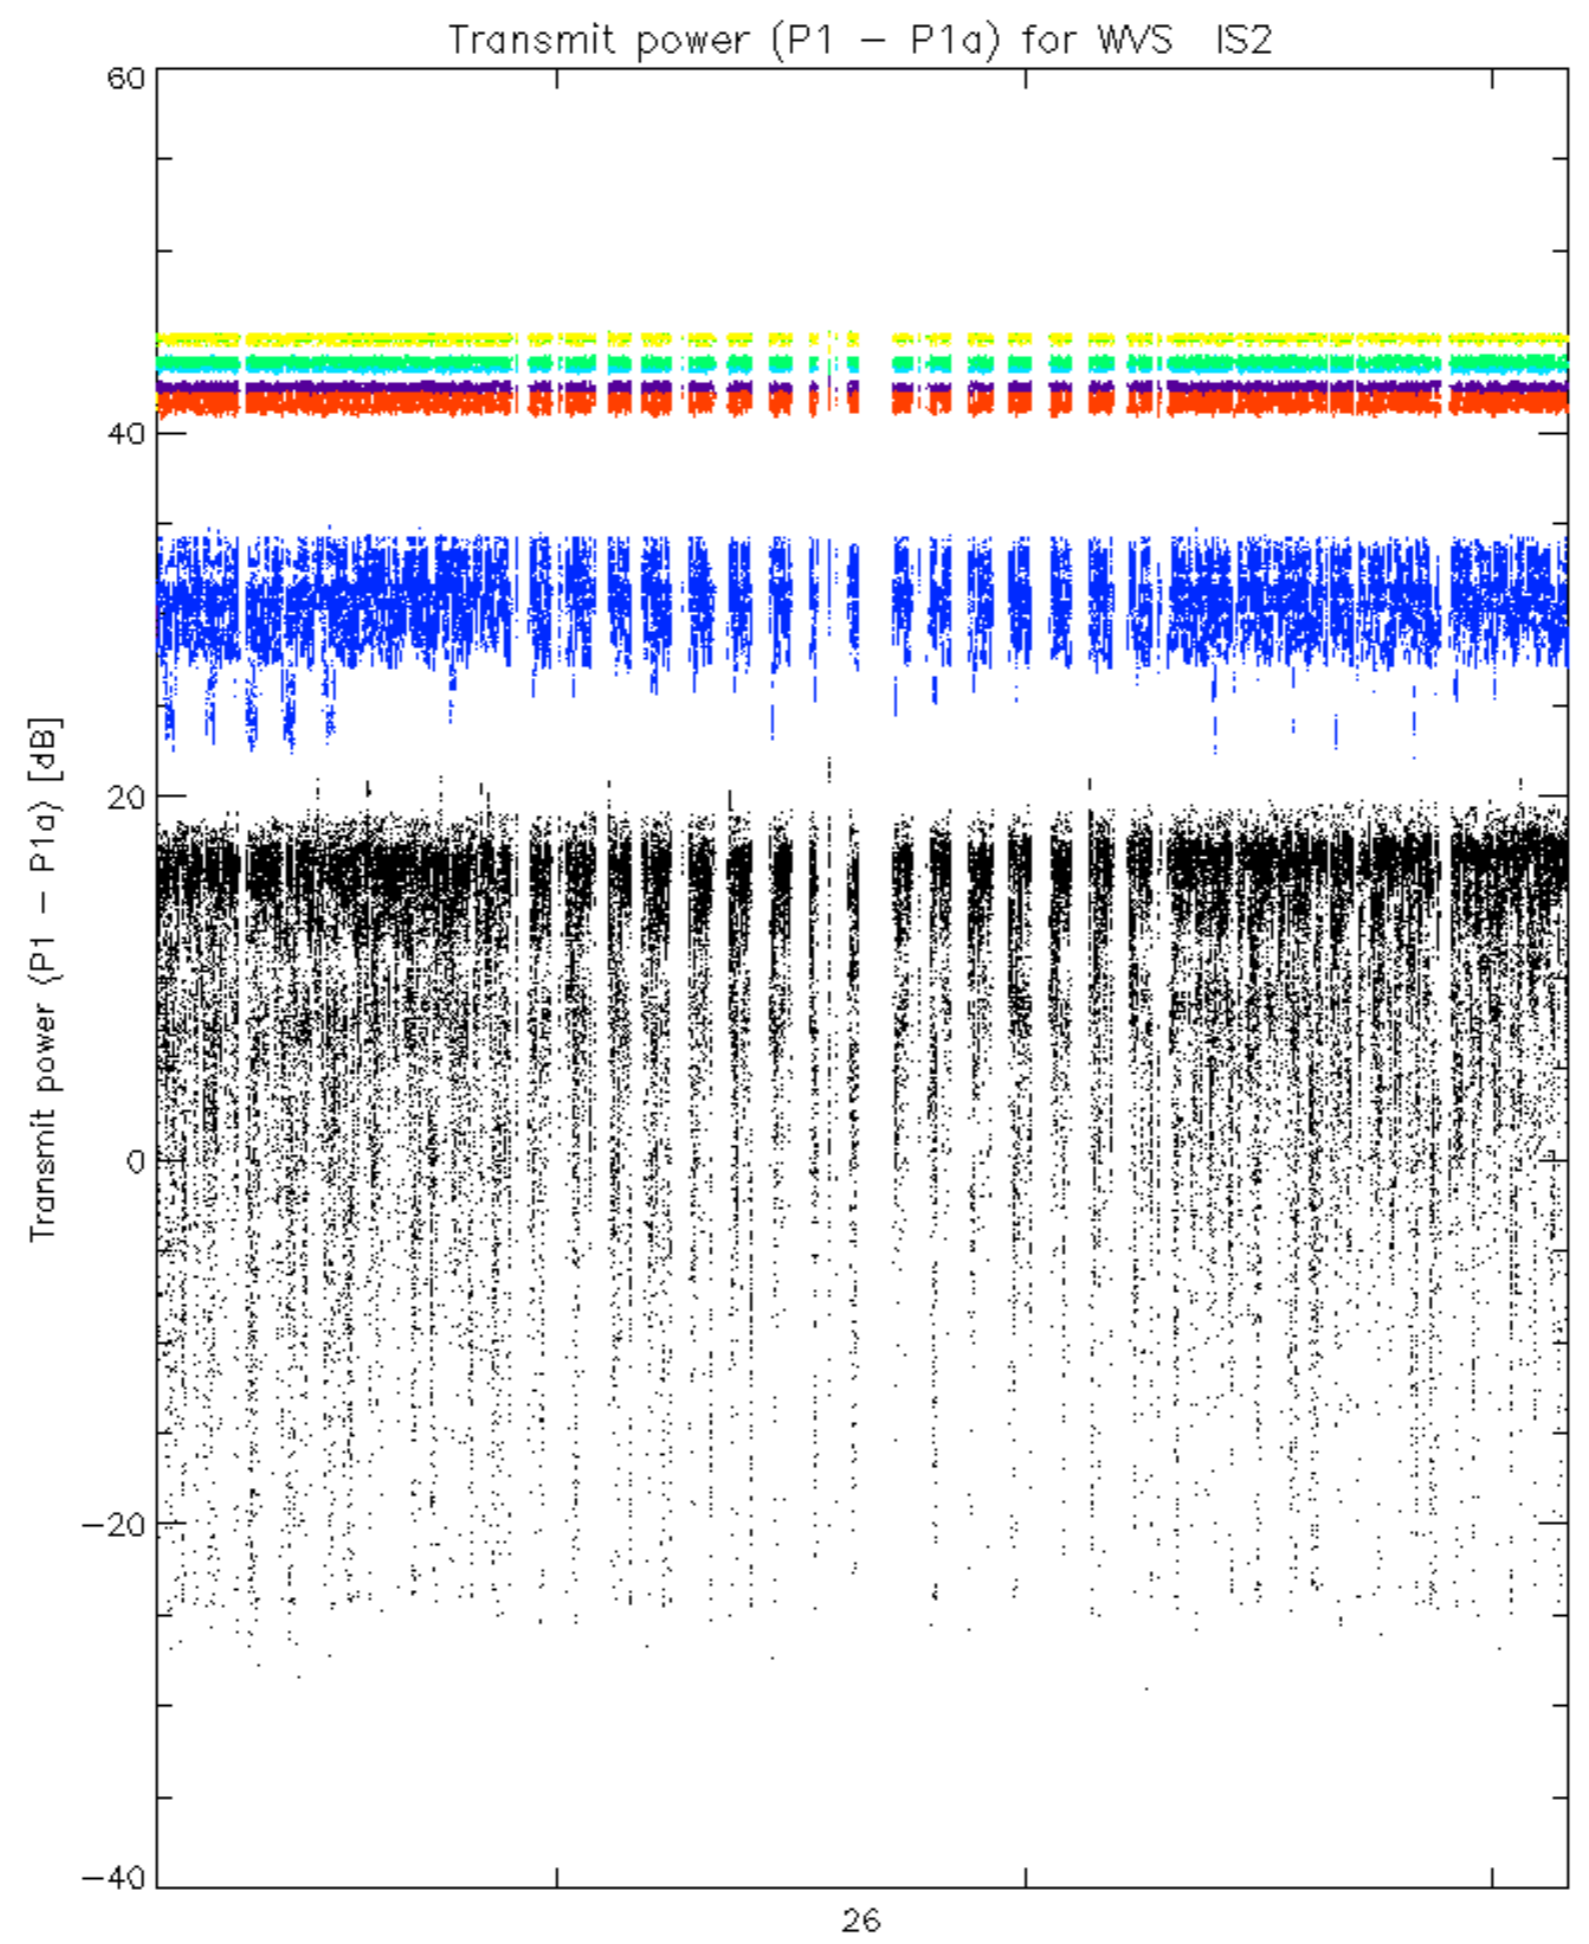

rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

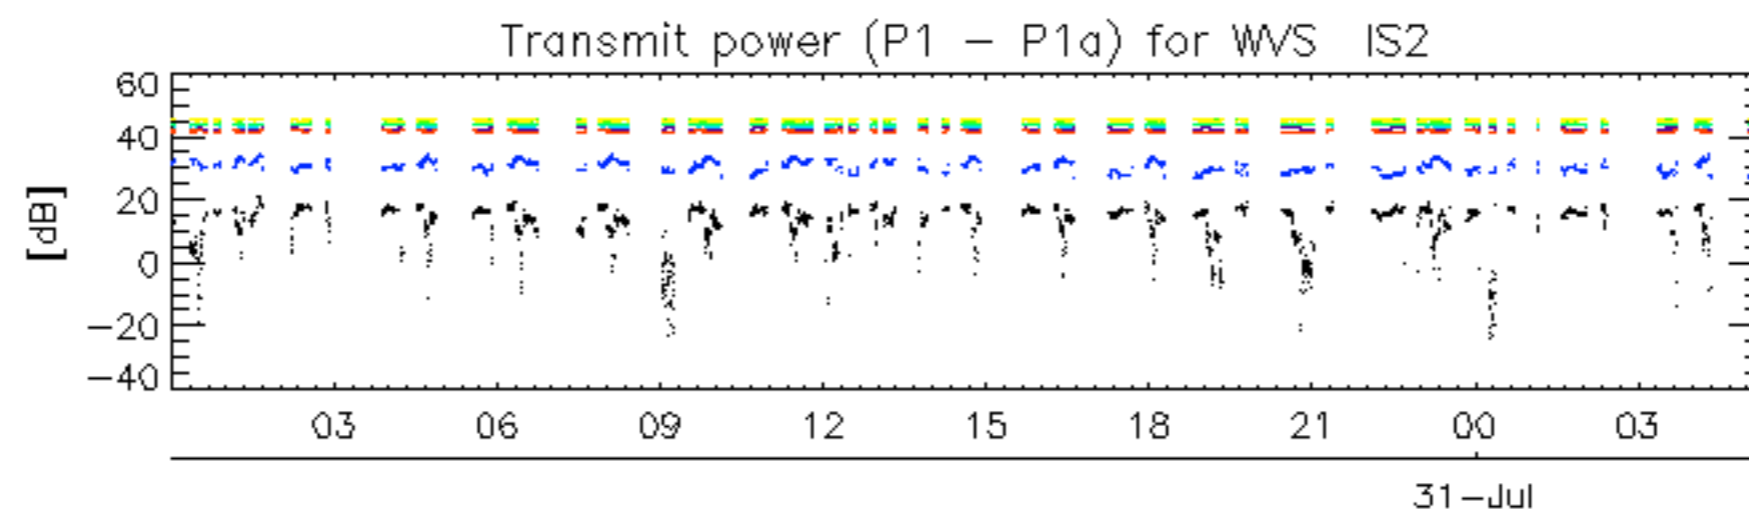

rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

No unavailabilities during the reported period.