

PRELIMINARY REPORT OF 040926

ATTENTION: This report is automatically generated no comments are provided on data analysis

last update on Sun Sep 26 10:50:01 GMT 2004

1. [Introduction](#)
2. [Summary](#)
 - [Instrument Unavailability](#)
 - [Browse Visual Inspection](#)
 - [Module Stepping Results](#)
 - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
 - [Daily statistics](#)
 - [Cyclic statistics](#)
 - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
 - [raw data mean I and Q](#)
 - [raw data stdev I and Q](#)
 - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
 - [Unbiased Doppler Error for WVS](#)
 - [Absolute Doppler for WVS](#)
 - [Doppler evolution versus ANX for WVS](#)
 - [Unbiased Doppler Error for GM1](#)
 - [Absolute Doppler for GM1](#)
 - [Doppler evolution versus ANX for GM1](#)

1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA_WVS_1P), global monitoring products (ASA_GM1_1P), which are the available few hours after the acquisition, on the browse (BP) products and on the Module Stepping (MS) product.

2 - Summary

2.1 - Instrument Unavailability

No unavailabilities during the reported period.

2.2 - Browse Visual Inspection

2.3 - Data Analysis

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.

3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis. The purpose of this mode is to identify any malfunctioning modules and to identify modules for which calibration offsets are to be applied. No anomalies observed on available MS products:

Polarisation	Start Time
V	20040924 063526
H	20040925 060349

MSM in V/V polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>

MSM in H/H polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>

4 - Internal calibration Results

No anomalies observed.

4.1 - Daily statistics

4.1.1 - Evolution for WVS

Evolution of cal pulses for WVS

4.1.2 - Evolution for GM1

Evolution of cal pulses for GM1

4.2 - Cyclic statistics

4.2.1 - Evolution for WVS

Evolution of cal pulses for WVS

P1a Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

P1 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P1	-3.468355	0.022493	-0.022538
7	P1	-3.338247	0.022350	-0.007757
11	P1	-4.647646	0.039652	-0.027431
15	P1	-5.762019	0.085151	-0.048961
19	P1	-3.512570	0.078371	-0.037898
22	P1	-4.557777	0.107817	-0.018510
24	P1	-5.001489	0.124025	-0.038915
30	P1	-7.034360	0.147778	-0.115593

3	P1	-16.225672	0.393561	-0.029363
7	P1	-14.012335	0.064679	-0.018033
11	P1	-20.248507	0.249377	-0.102086
15	P1	-11.775147	0.040091	0.041296
19	P1	-14.031857	1.095135	-0.150360
22	P1	-16.041182	0.353590	0.262478
24	P1	-14.469692	0.305885	0.140818
30	P1	-17.948832	0.623794	-0.152578

P2 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P2	-22.308334	0.085350	0.010360
7	P2	-22.601616	0.121435	0.035405
11	P2	-15.215049	0.145927	0.127536
15	P2	-7.061846	0.097256	0.021293
19	P2	-9.567876	0.150573	0.044456
22	P2	-17.314131	0.110734	0.080183
24	P2	-20.760664	0.090443	-0.033586
30	P2	-19.174465	0.082565	0.108504

P3 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P3	-8.153975	0.003061	-0.008679
7	P3	-8.153972	0.003062	-0.008686
11	P3	-8.153968	0.003062	-0.008693
15	P3	-8.153972	0.003061	-0.008673
19	P3	-8.153973	0.003061	-0.008672
22	P3	-8.153979	0.003061	-0.008625
24	P3	-8.153989	0.003060	-0.008590
30	P3	-8.154023	0.003058	-0.007835

4.2.2 - Evolution for GM1

Evolution of cal pulses for GM1	
⊗	
⊗	

P1a Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

P1 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P1	-2.830601	0.047047	-0.064777
7	P1	-3.028912	0.082339	-0.048108
11	P1	-3.889734	0.062905	-0.046845
15	P1	-3.535124	0.079173	-0.031651
19	P1	-3.521129	0.097752	-0.063027
22	P1	-5.730018	0.124287	-0.035809
24	P1	-3.959692	0.054796	-0.071385
30	P1	-6.210942	0.097480	-0.009108
3	P1	-10.819728	0.163755	-0.360409
7	P1	-10.113278	0.145749	-0.022890
11	P1	-12.168672	0.107436	-0.006064
15	P1	-11.681489	0.074252	-0.075161
19	P1	-15.735992	2.064156	-0.122615
22	P1	-23.349386	1.521602	0.141826
24	P1	-17.970451	0.355150	-0.147703
30	P1	-20.412491	1.273767	0.092803

P2 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P2	-17.988266	0.047062	0.044605
7	P2	-22.737305	0.038375	0.054292
11	P2	-10.921324	0.059005	0.143137
15	P2	-4.961779	0.029362	0.008862
19	P2	-6.774059	0.044154	0.008653
22	P2	-7.422278	0.036380	0.076890
24	P2	-11.060845	0.041734	0.004275
30	P2	-22.147171	0.027227	0.083247

P3 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

3	P3	-8.005226	0.003051	-0.007299
7	P3	-8.005269	0.003049	-0.007365
11	P3	-8.005320	0.003045	-0.007537
15	P3	-8.005362	0.003040	-0.007504
19	P3	-8.005338	0.003049	-0.007446
22	P3	-8.005356	0.003045	-0.007394
24	P3	-8.005375	0.003073	-0.007544
30	P3	-8.005254	0.003051	-0.007696

4.3 - cal pulses monitoring (all rows)

4.3.1 - Evolution for WVS



4.3.2 - Evolution for GM1



5 - RAW data statistics

No anomalies observed.

5.1 - Input mean I/Q

channel	stat	DSS-B
MEAN I	mean	0.000469409
	stdev	2.18149e-07
MEAN Q	mean	0.000538471
	stdev	2.35104e-07



5.2 - Input stdev I/Q

channel	stat	DSS-B
STDEV I	mean	0.127347
	stdev	0.000956445

STDEV Q	mean	0.127568
	stdev	0.000965897





5.3 - Gain imbalance I/Q





6 - Doppler Analysis

Preliminary report. The data is not yet controlled

6.1 - Unbiased Doppler Error for WVS

Evolution of unbiased Doppler error (Real - Expected)	
	
	Acsending
	
	Descending

6.2 - Absolute Doppler for WVS

Evolution of Absolute Doppler	
	
	Acsending
	
	Descending

6.3 - Doppler evolution versus ANX for WVS

Evolution Doppler error versus ANX	
	

6.4 - Unbiased Doppler Error for GM1

Evolution of unbiased Doppler error (Real - Expected)	
<input type="checkbox"/>	
	Ascending
<input type="checkbox"/>	
	Descending





6.5 - Absolute Doppler for GM1

Evolution of Absolute Doppler	
<input type="checkbox"/>	
	Ascending
<input type="checkbox"/>	
	Descending

6.6 - Doppler evolution versus ANX for GM1


Evolution Doppler error versus ANX	
<input type="checkbox"/>	

Cal pulses for GM1 SS3

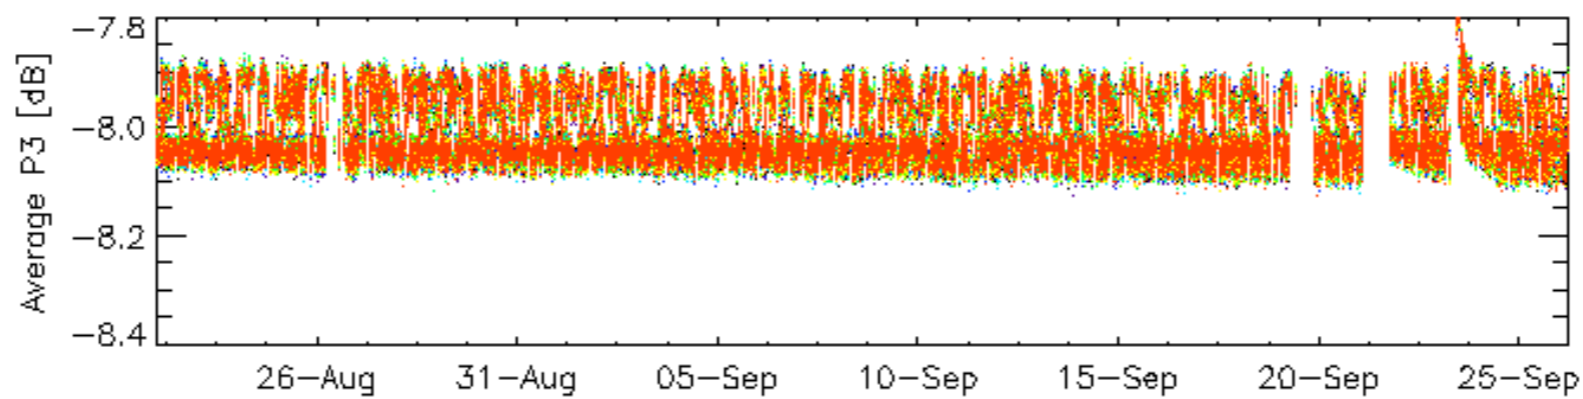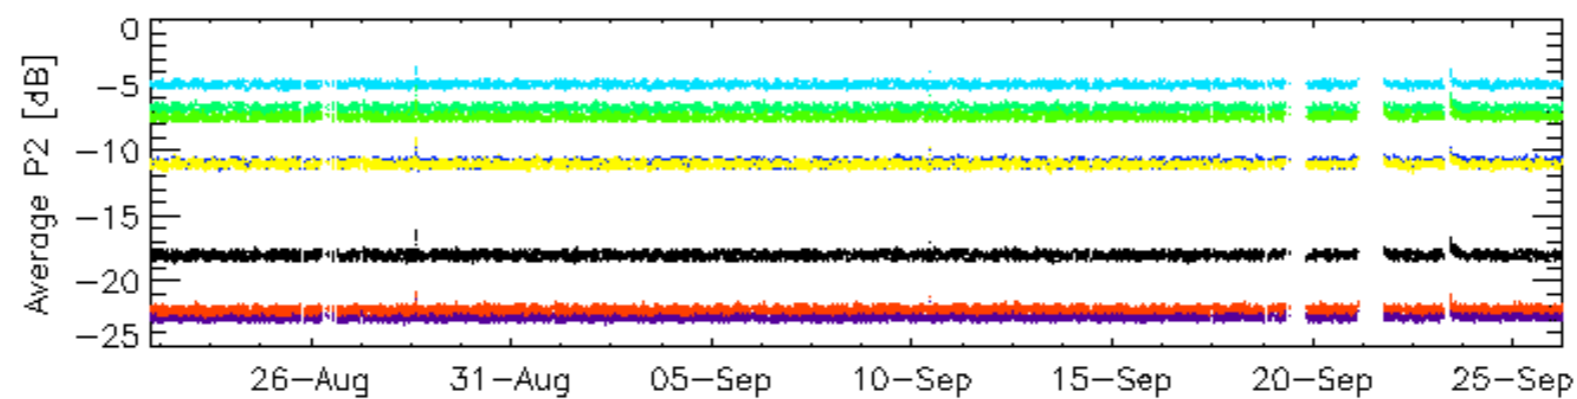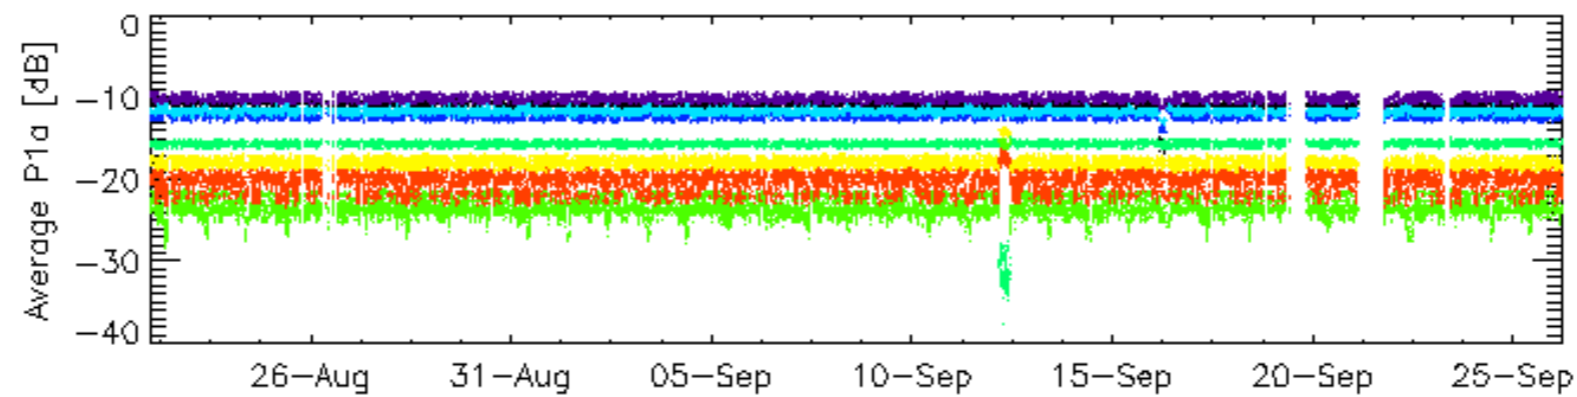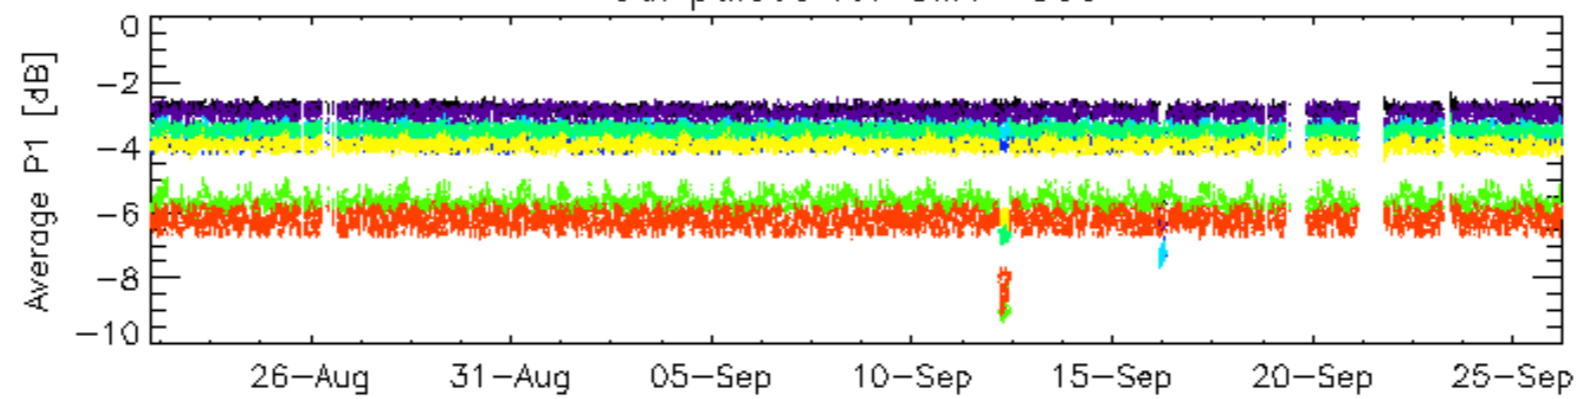





rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

Cal pulses for GM1 SS3

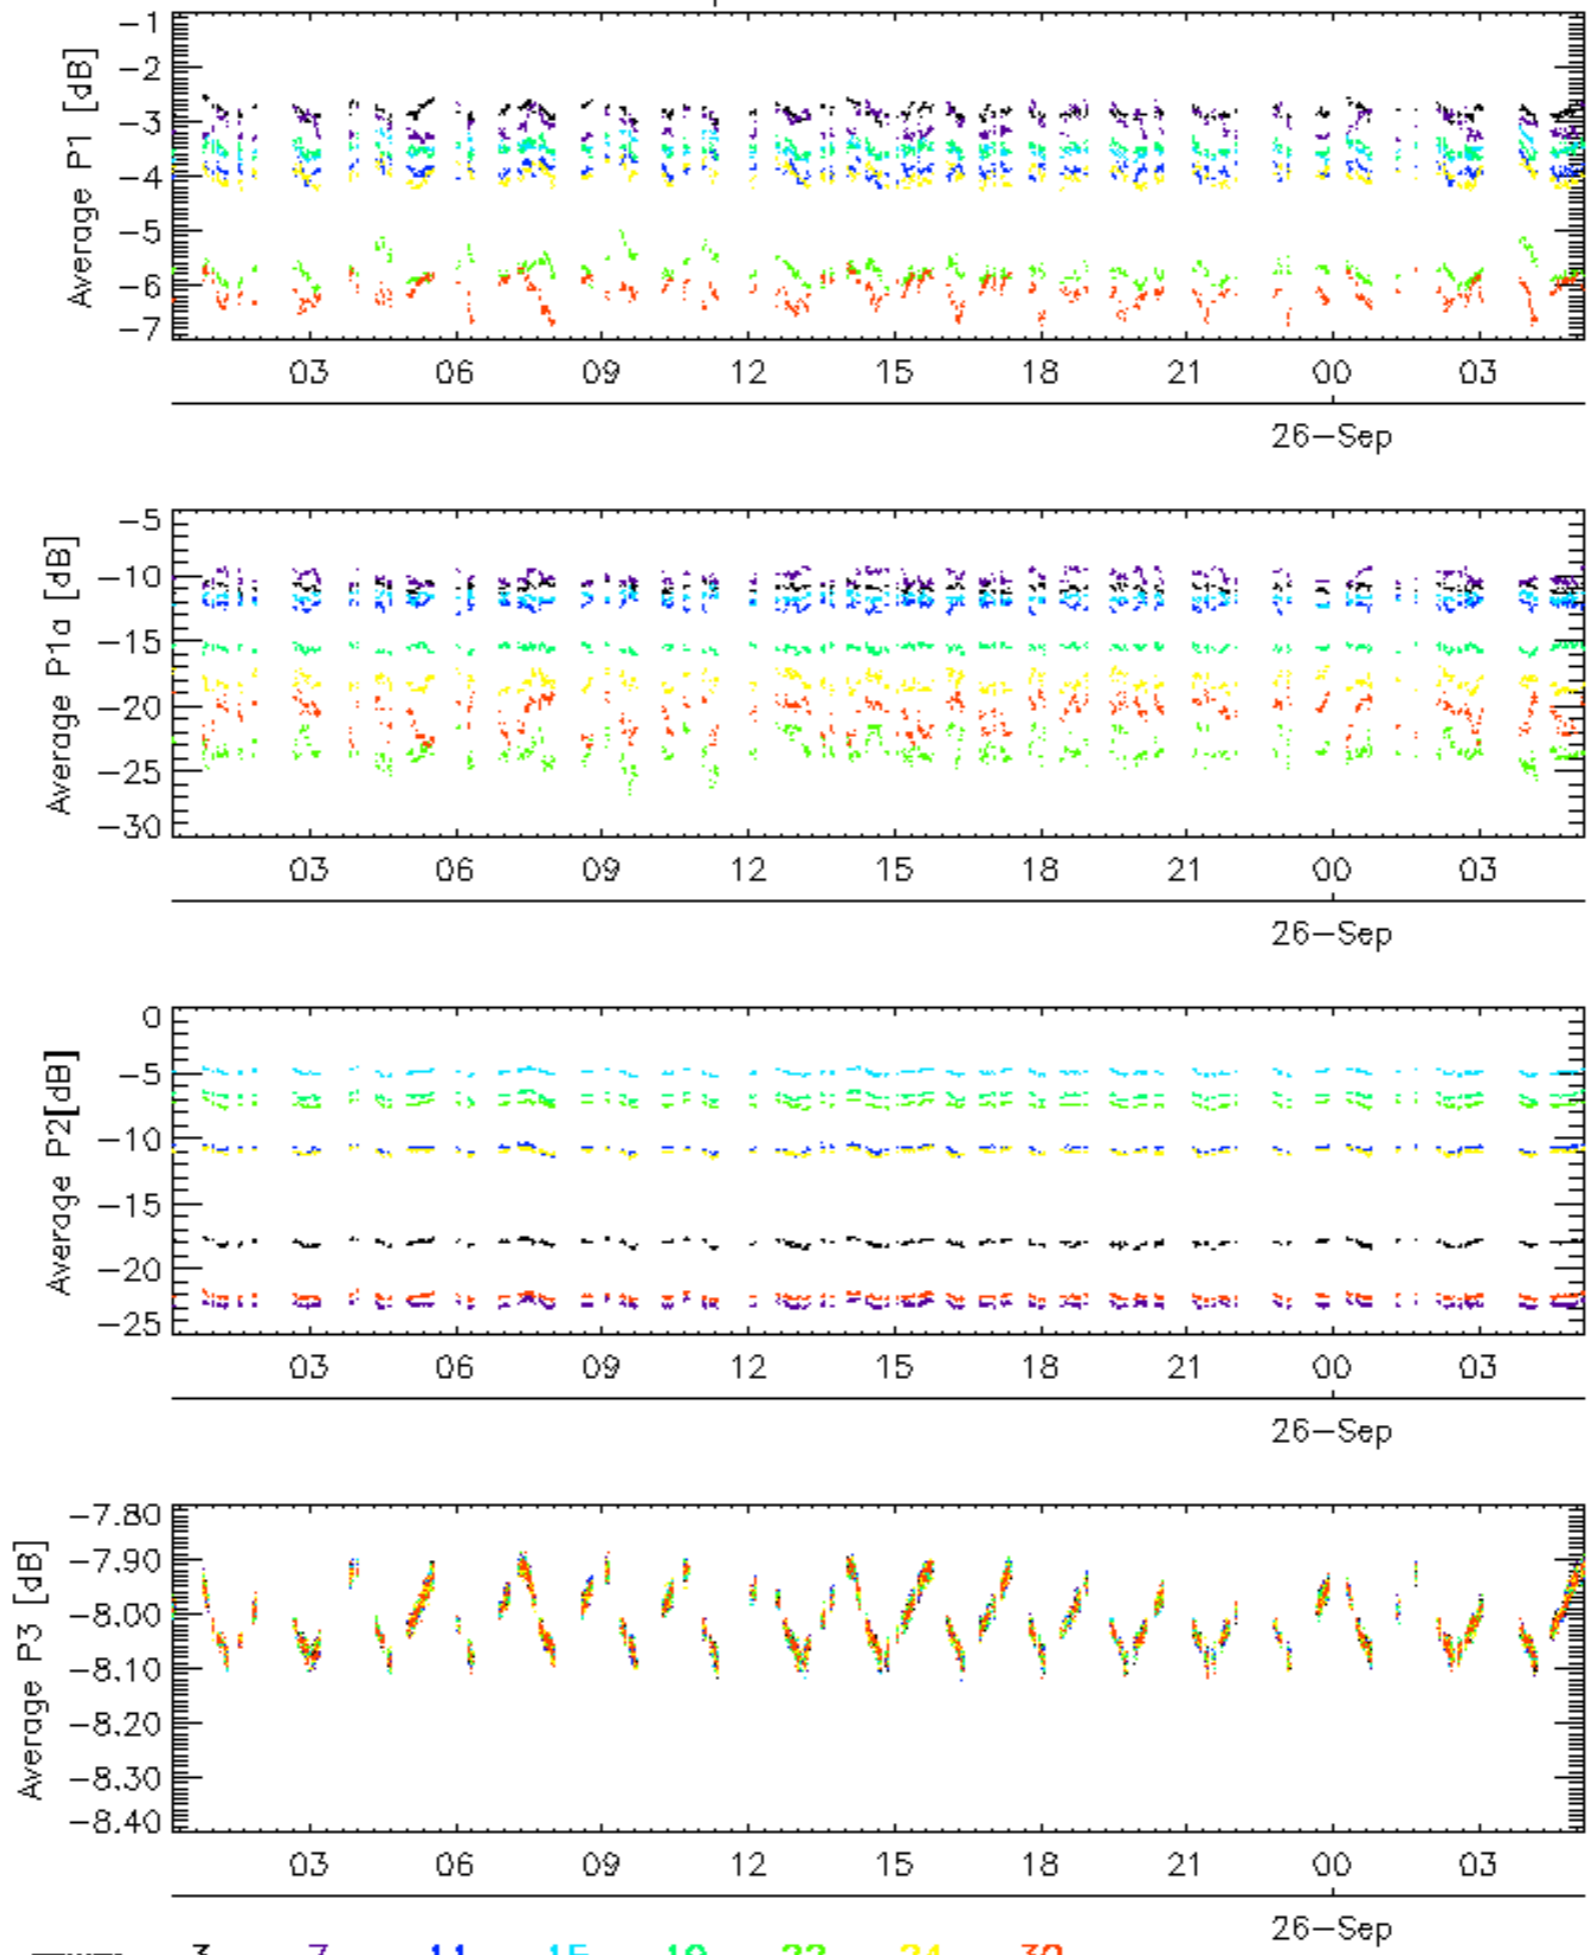


rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

Cal pulses for WVS IS2

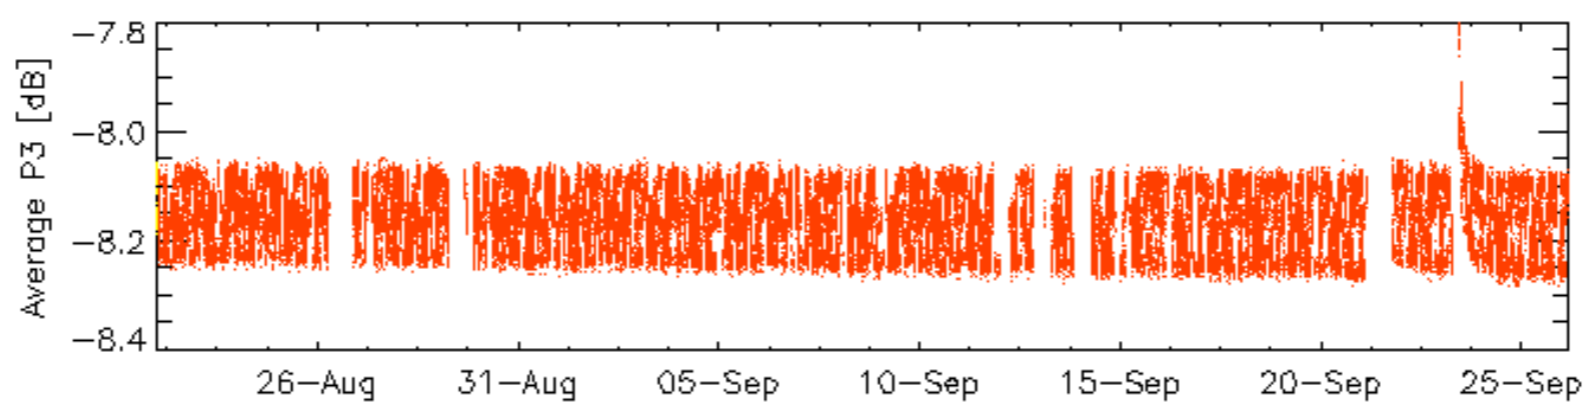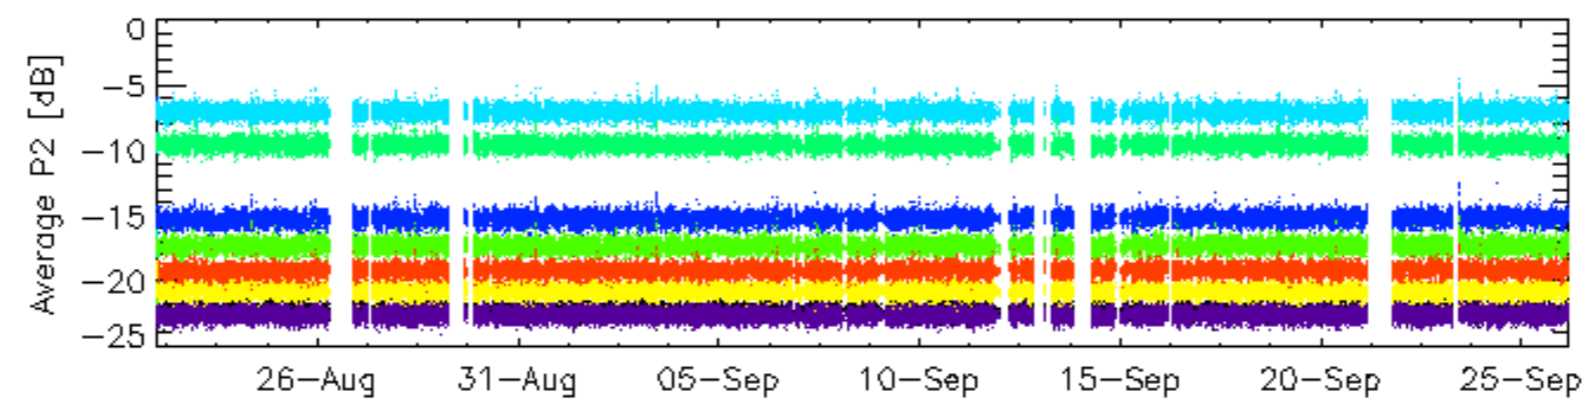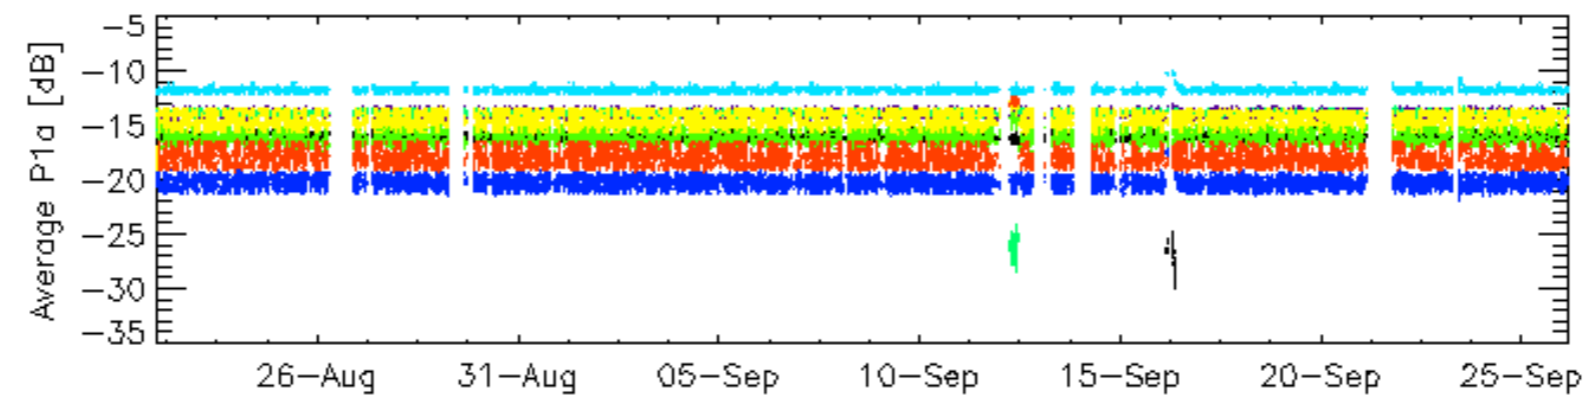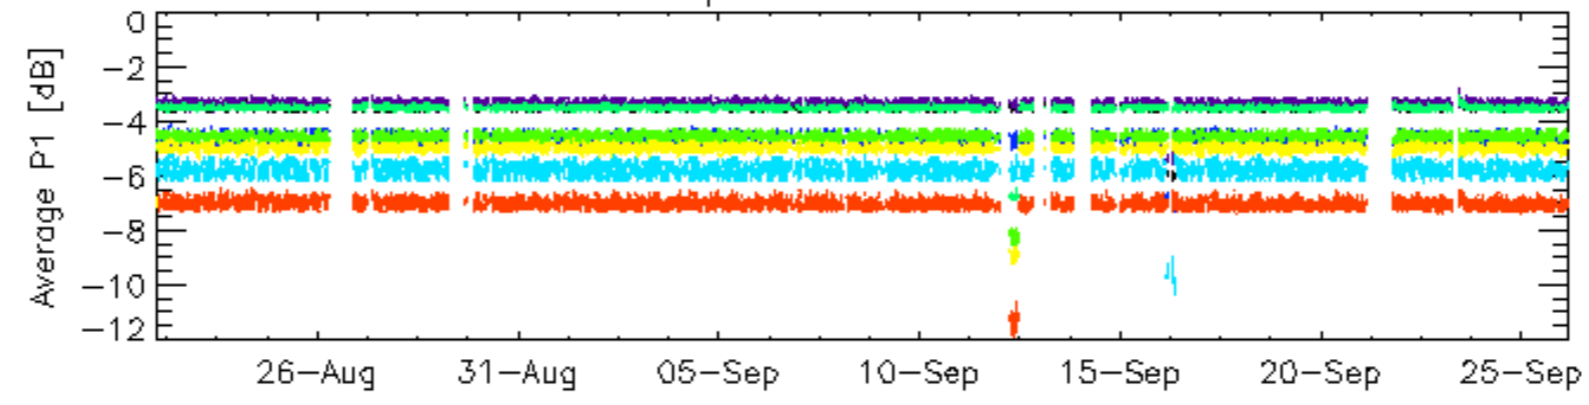



rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

Cal pulses for WVS IS2

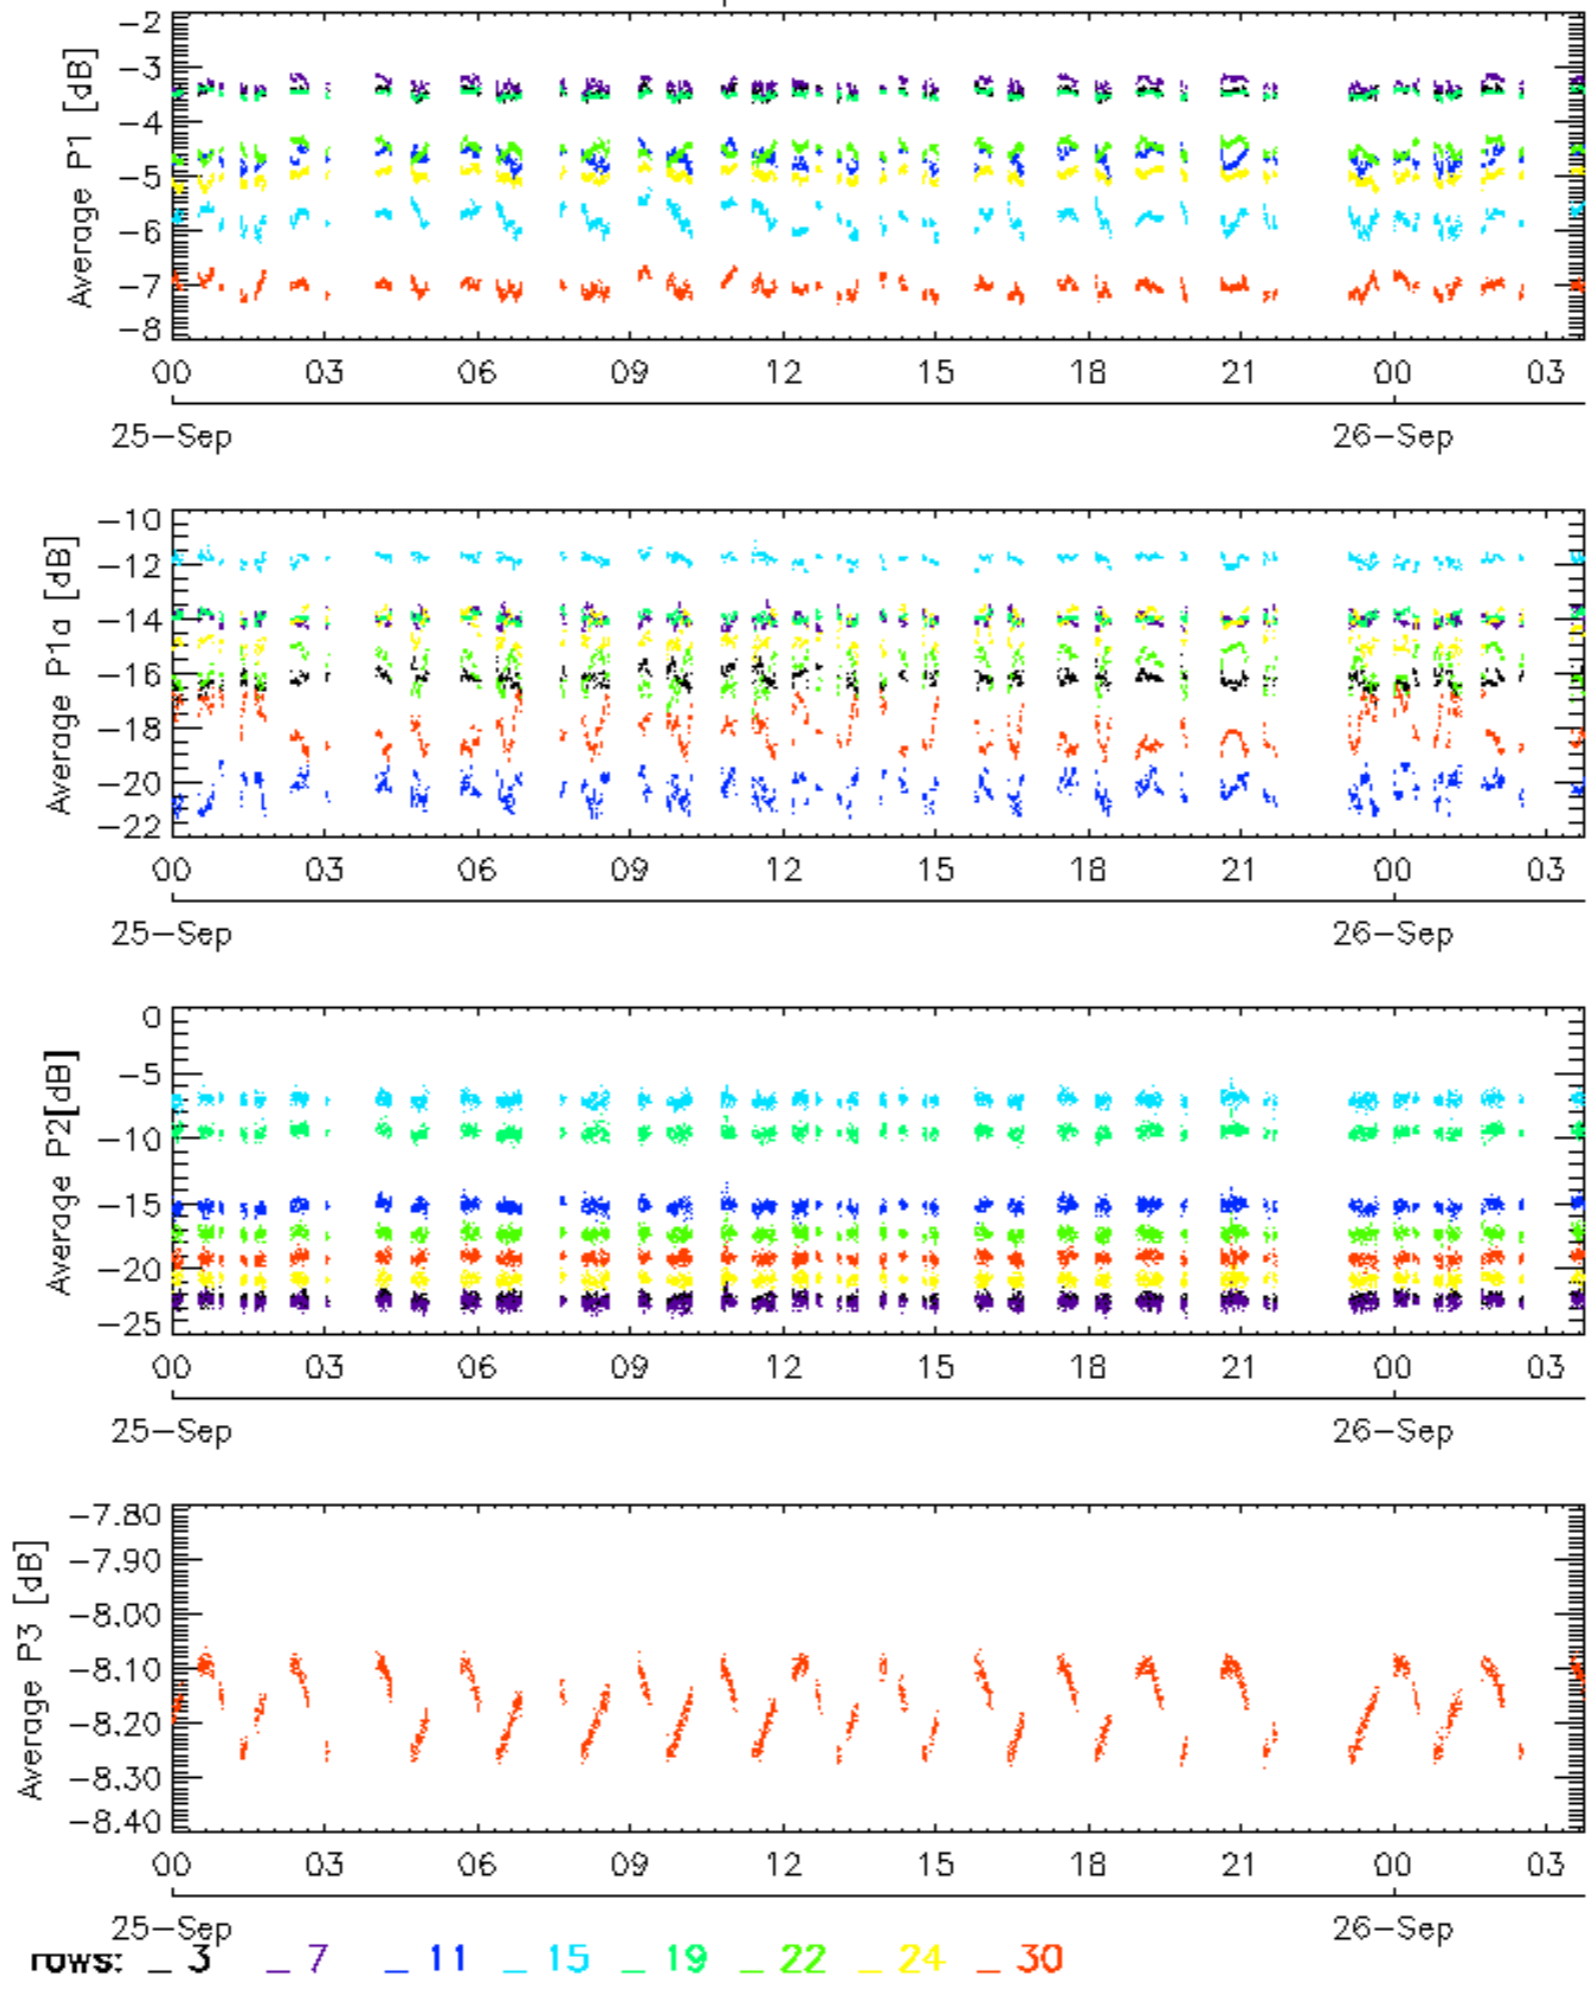


No anomalies observed.

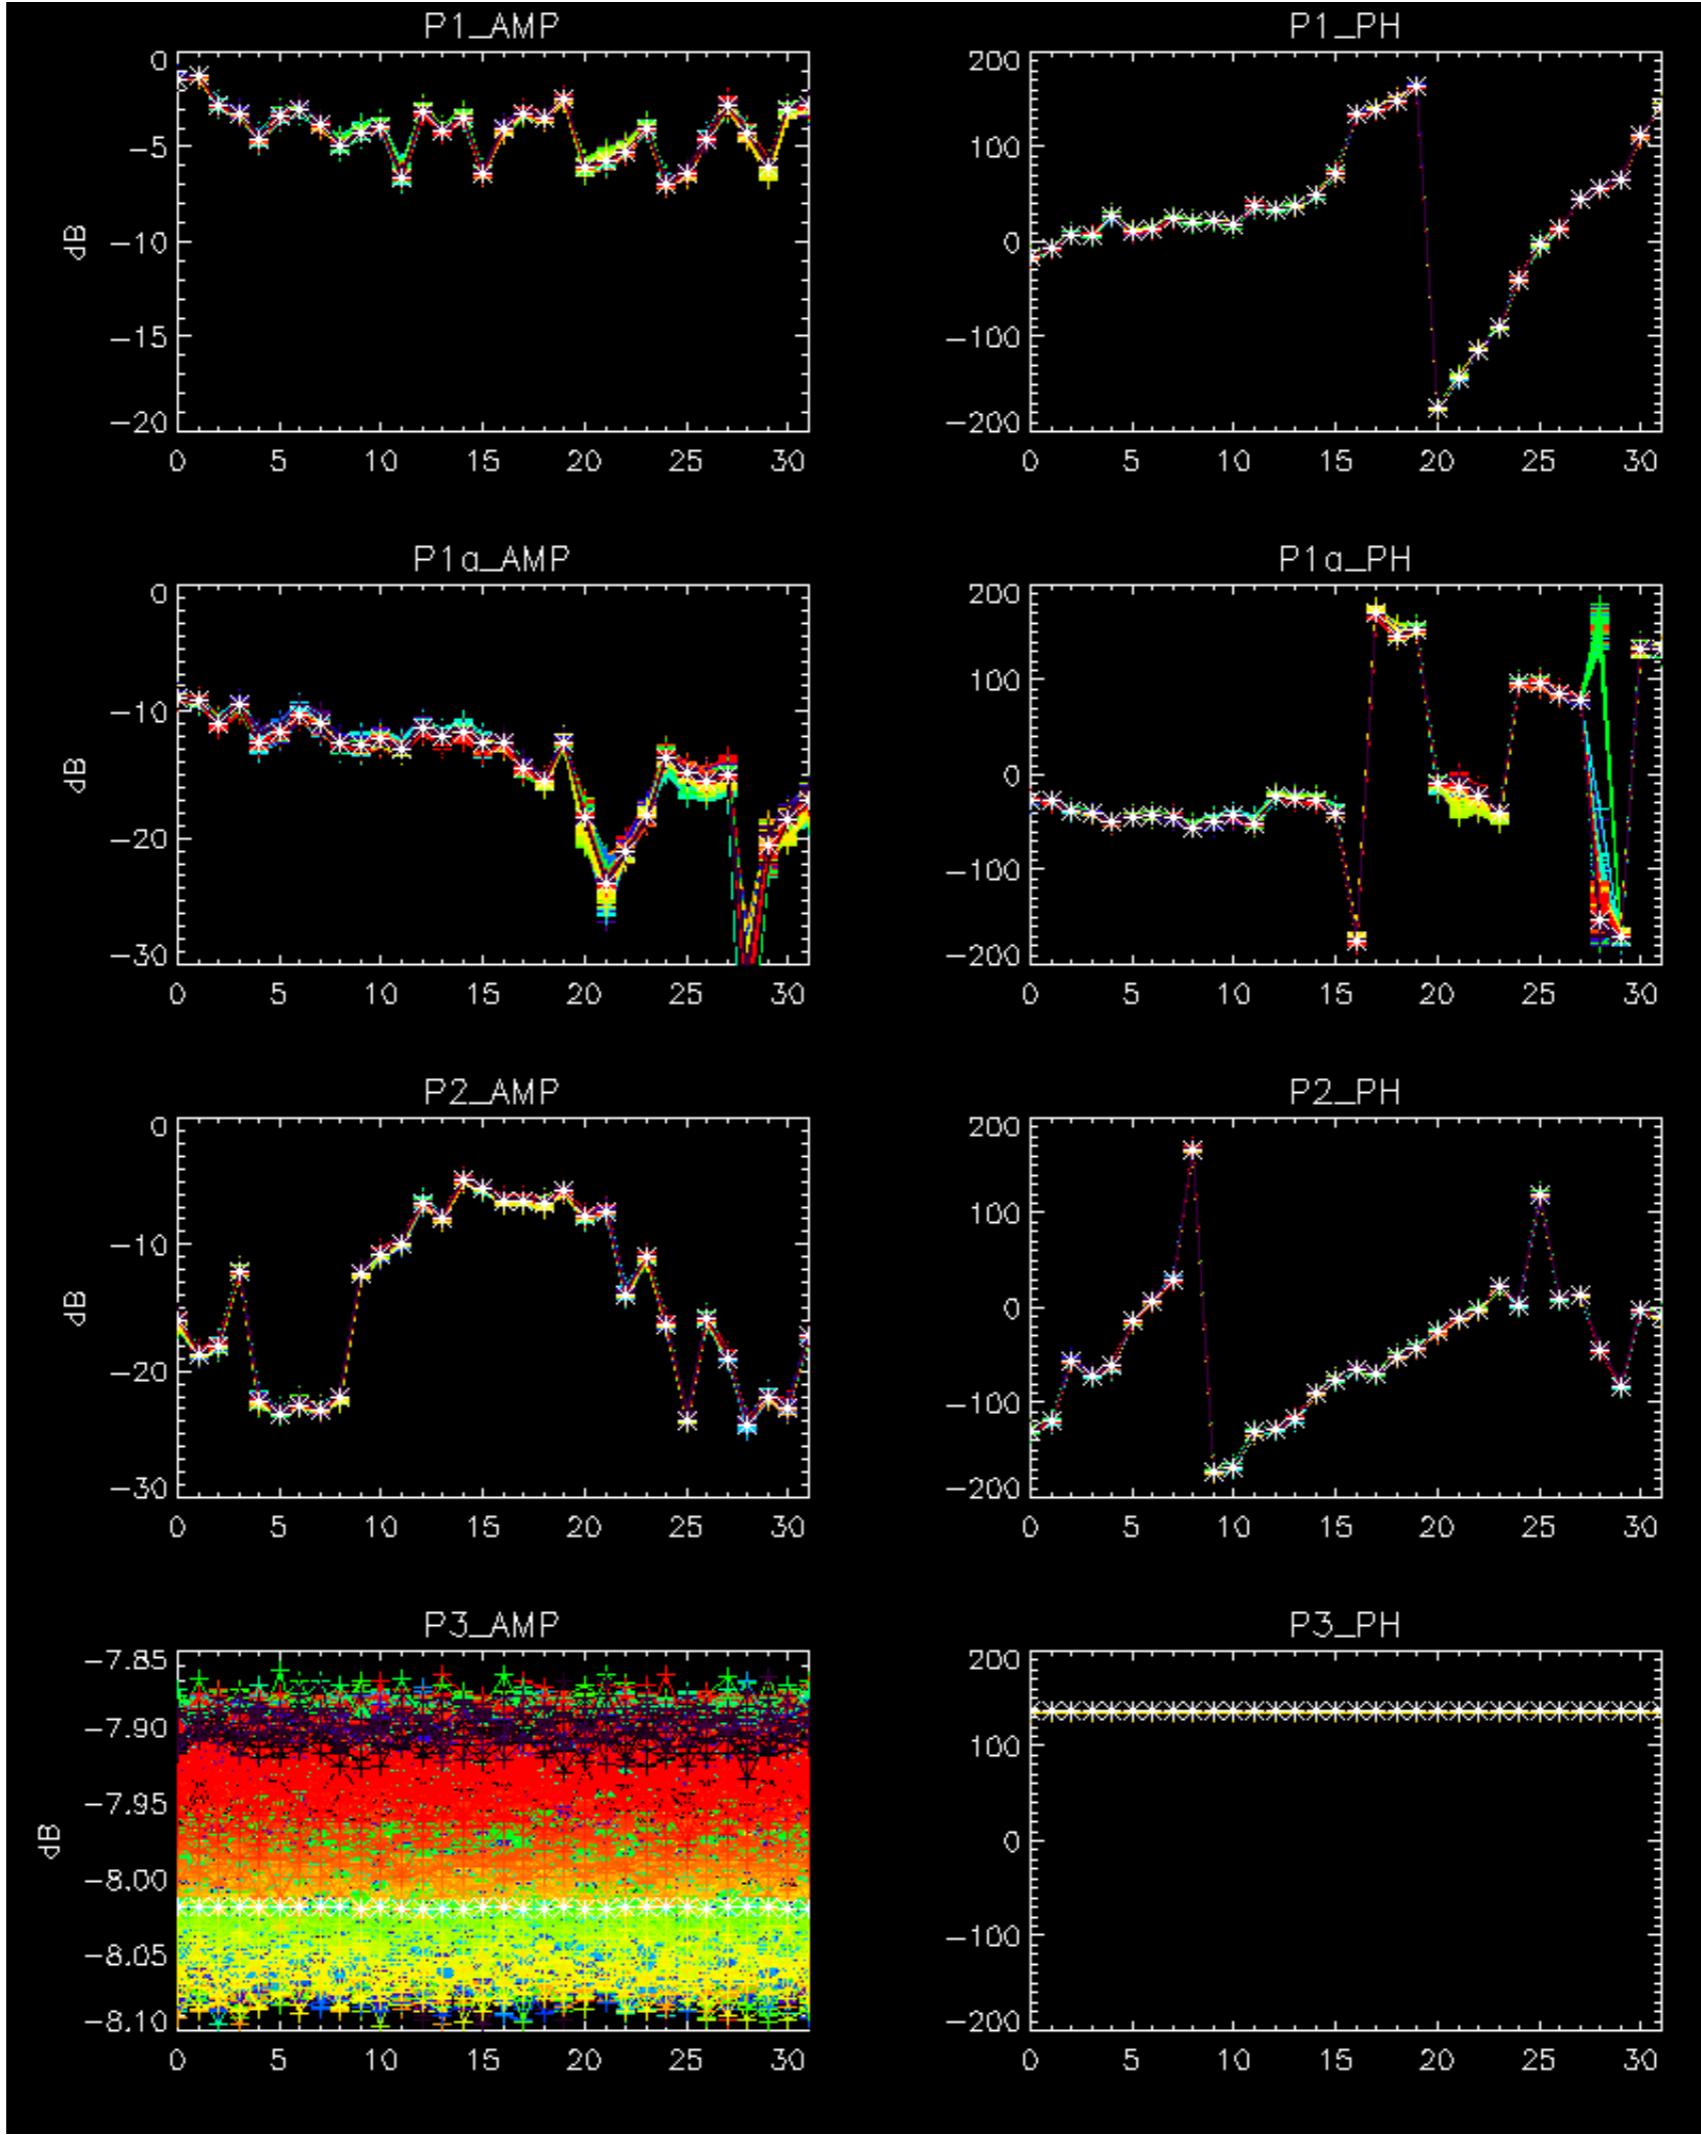

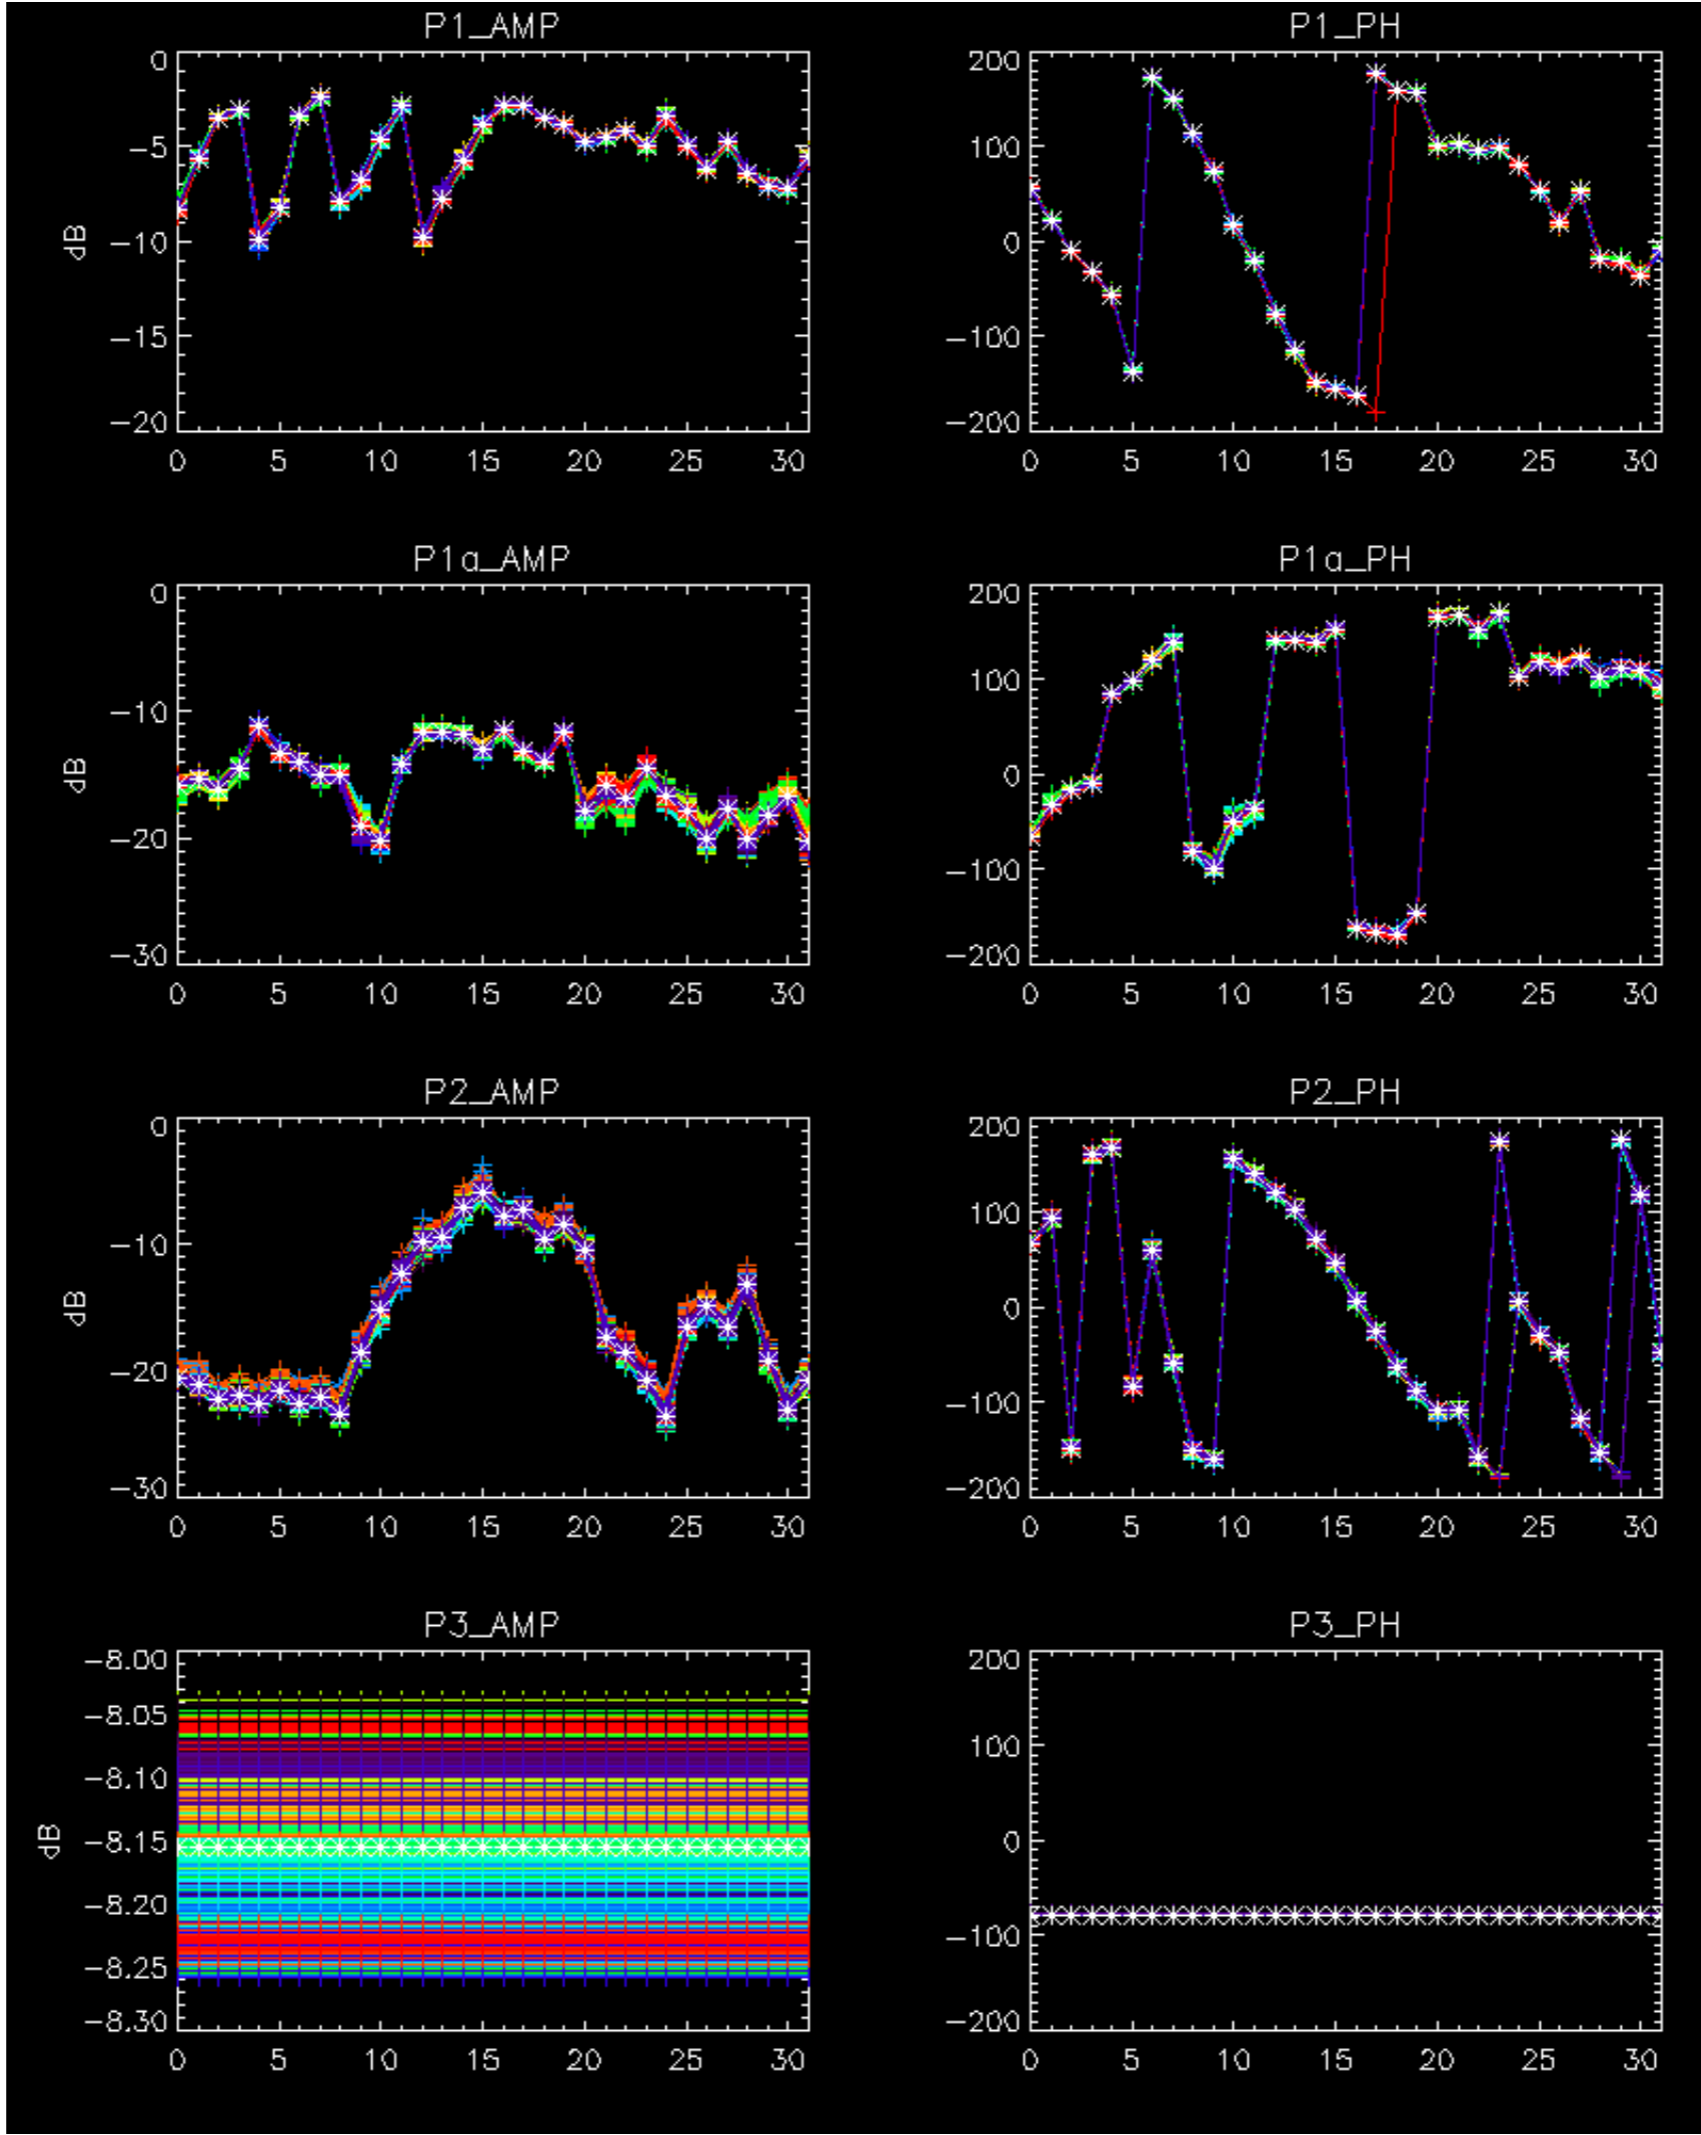


- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.


Doppler 'GM1' 'SS1' ascending

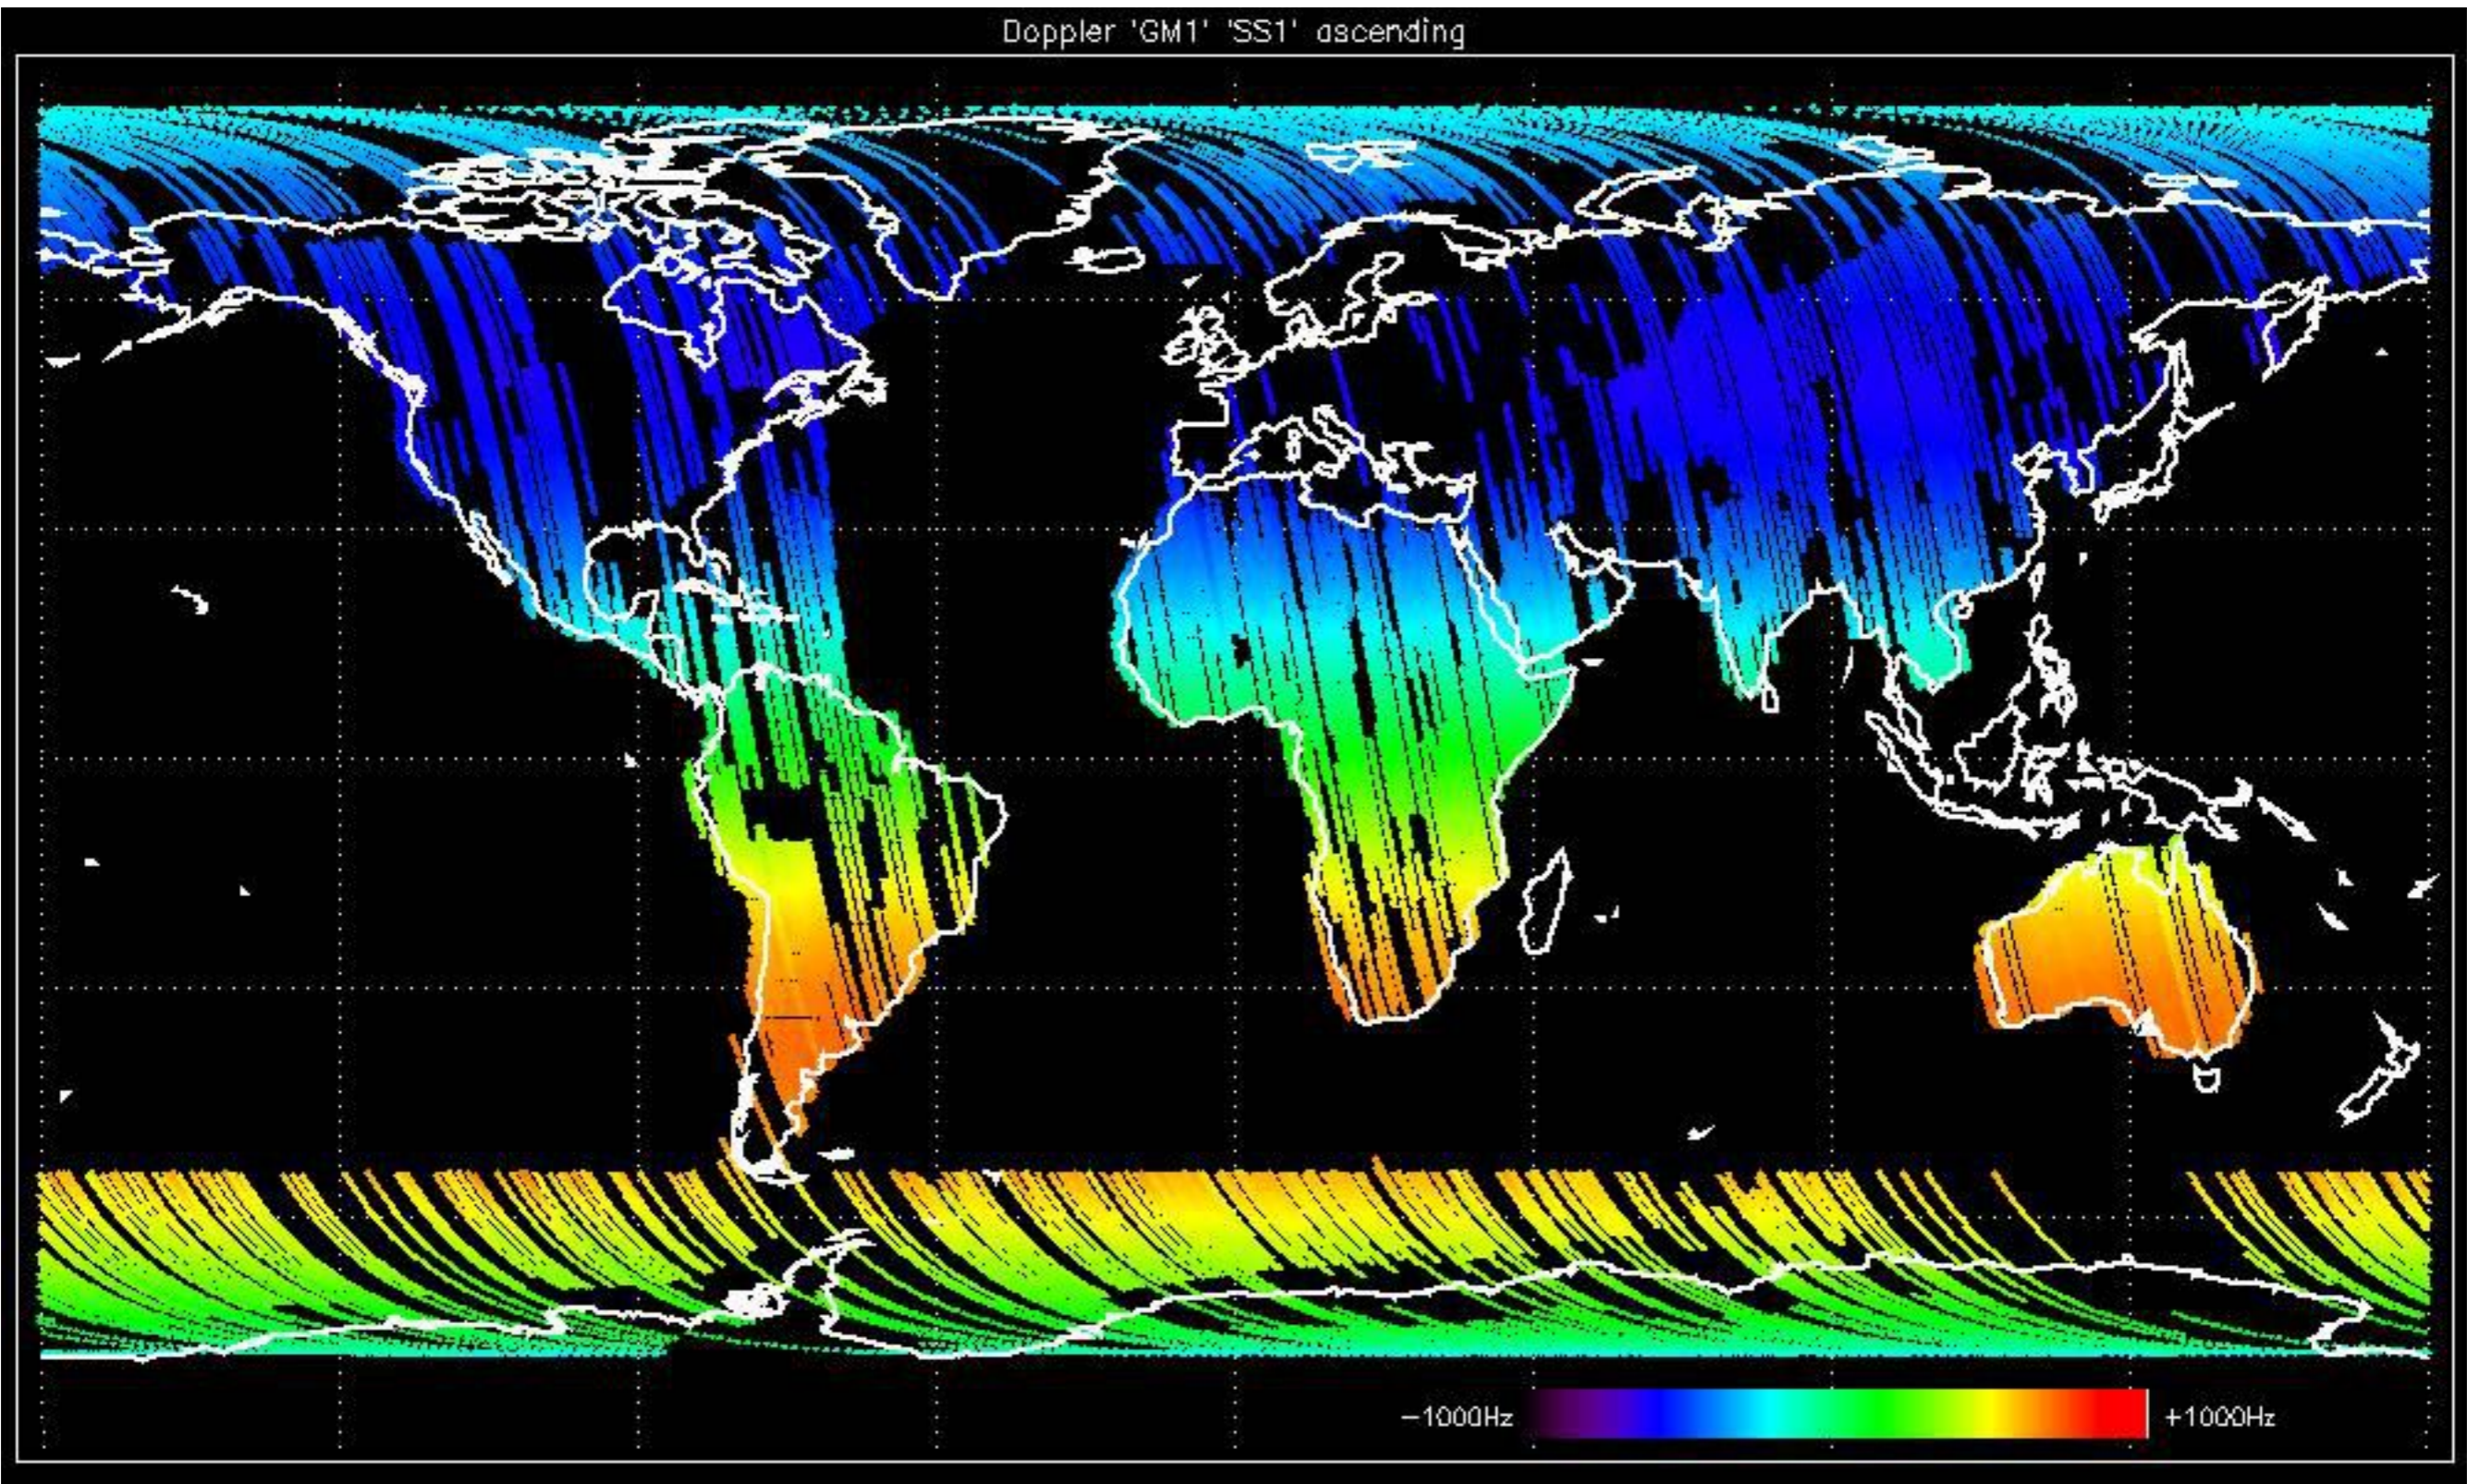


Doppler 'GM1' 'SS1' descending



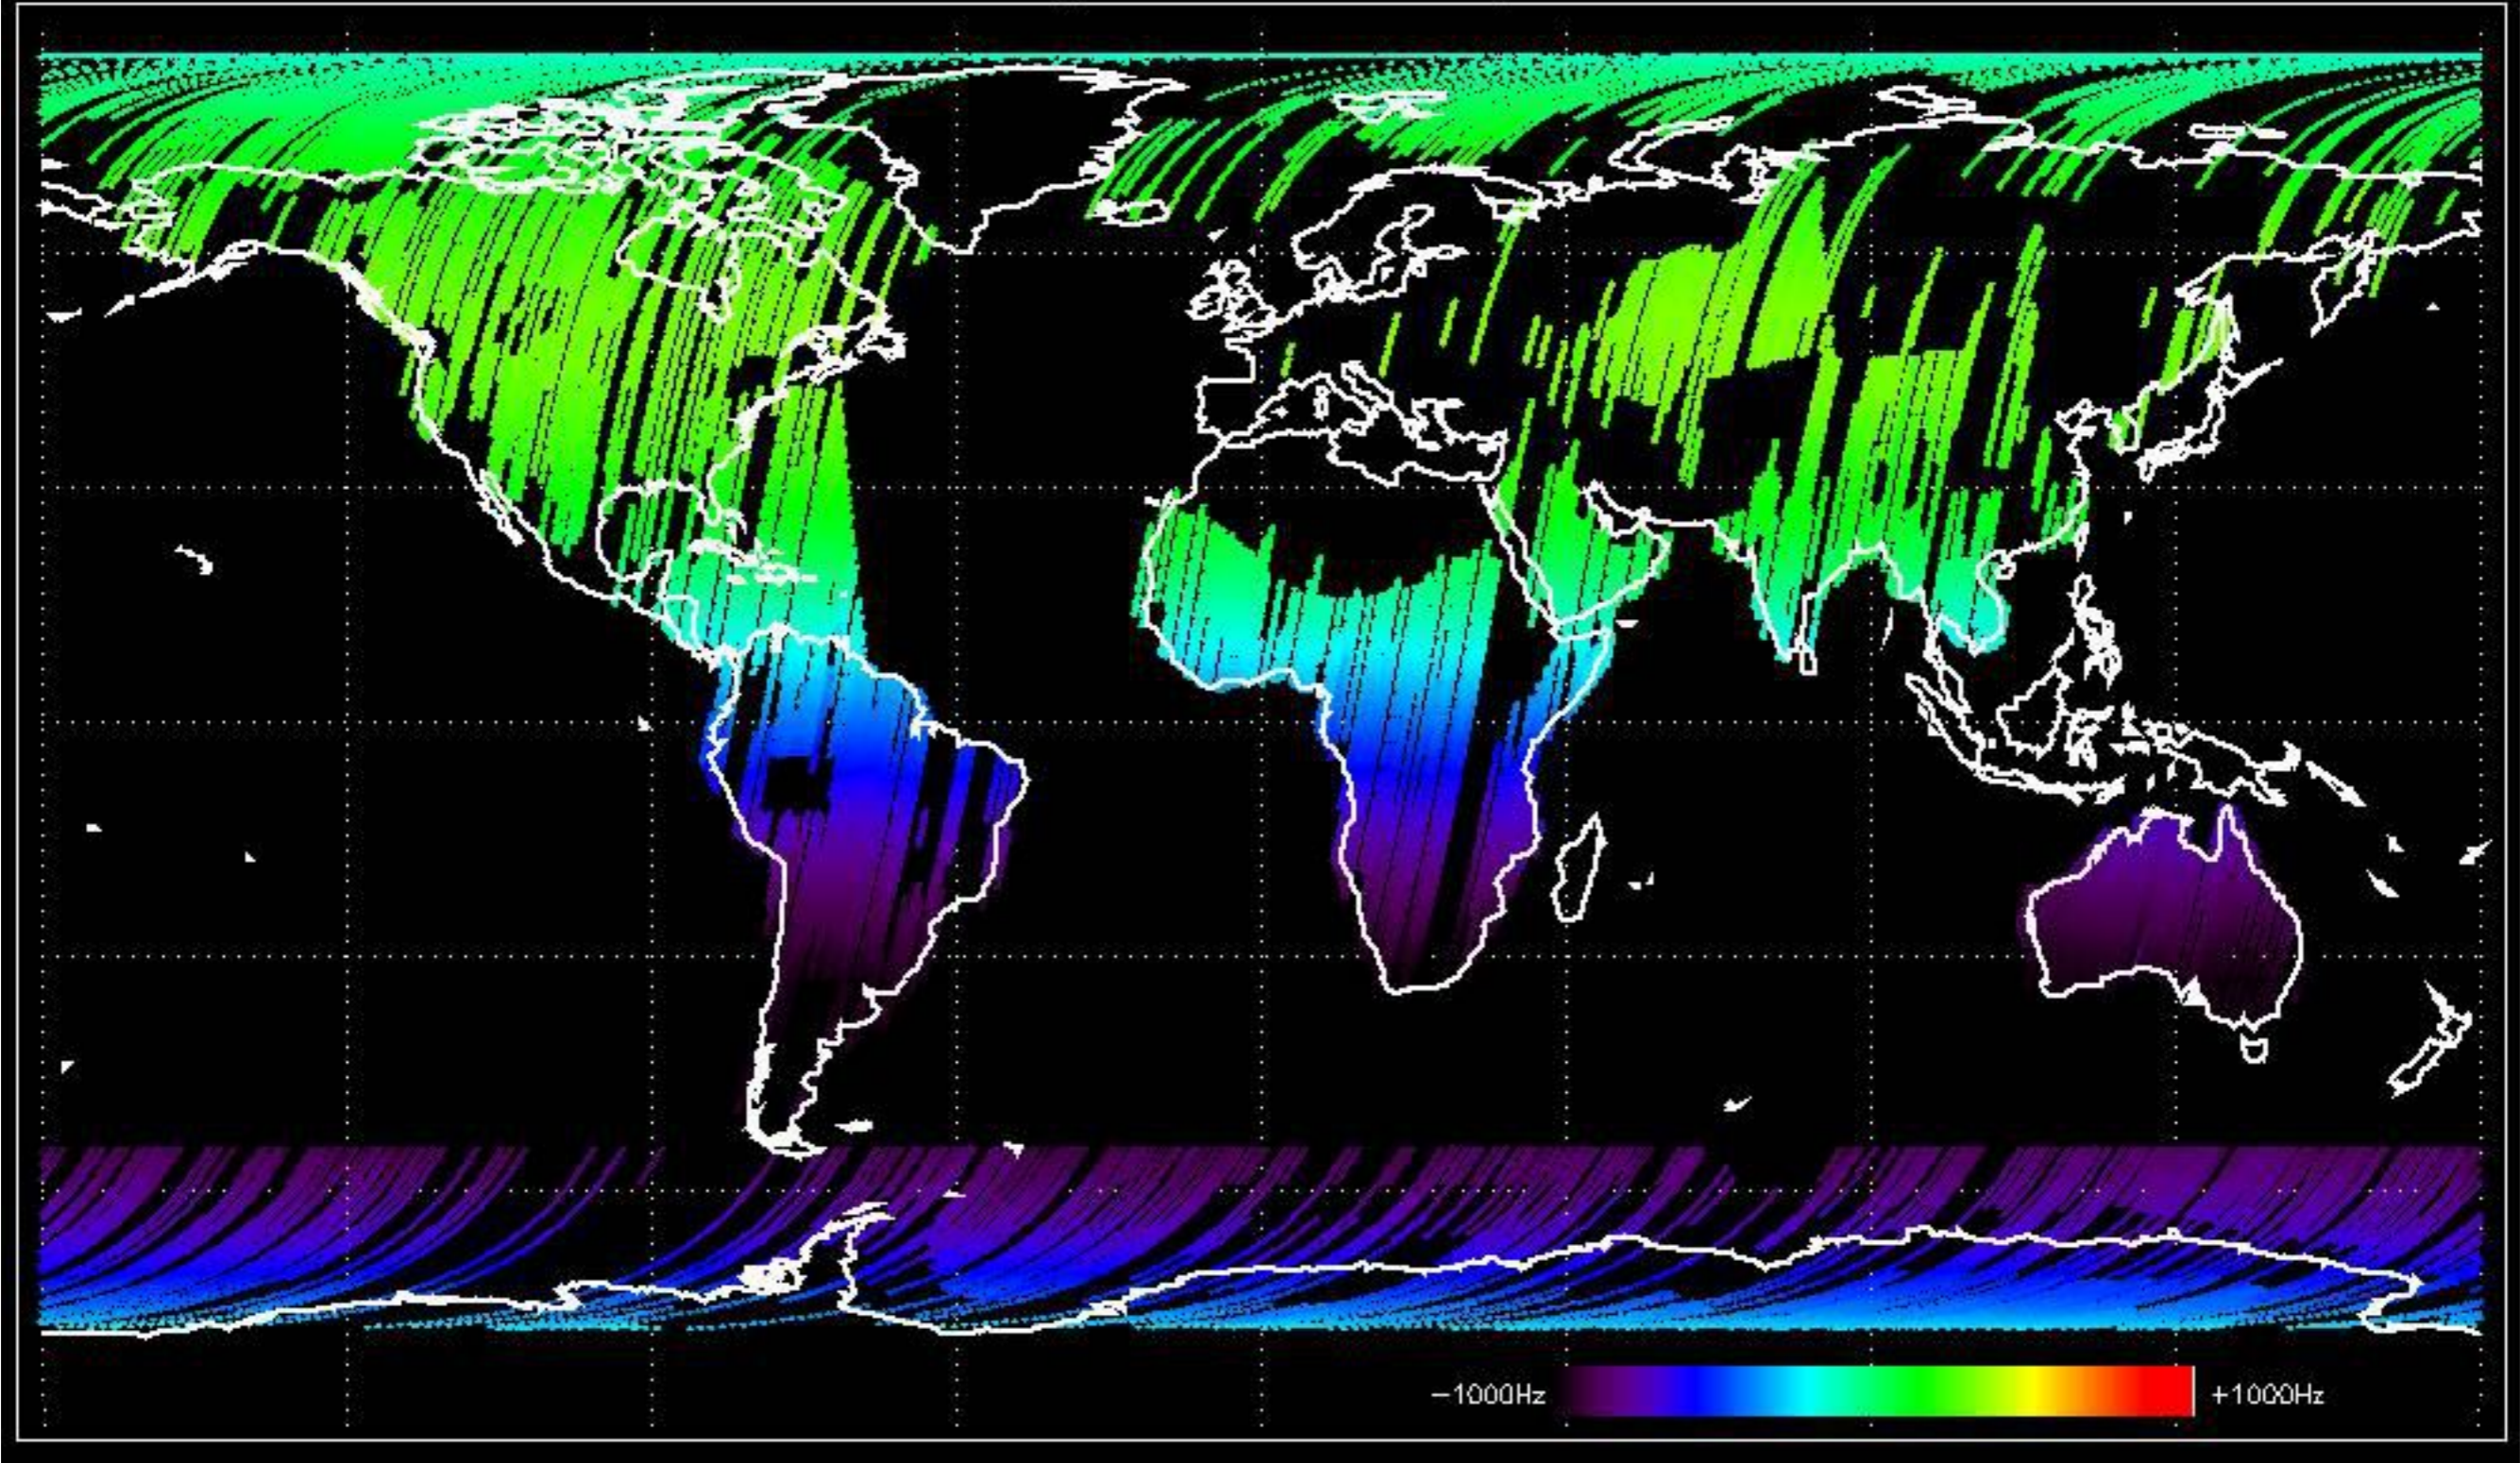





Doppler 'WVS' 'IS2' ascending

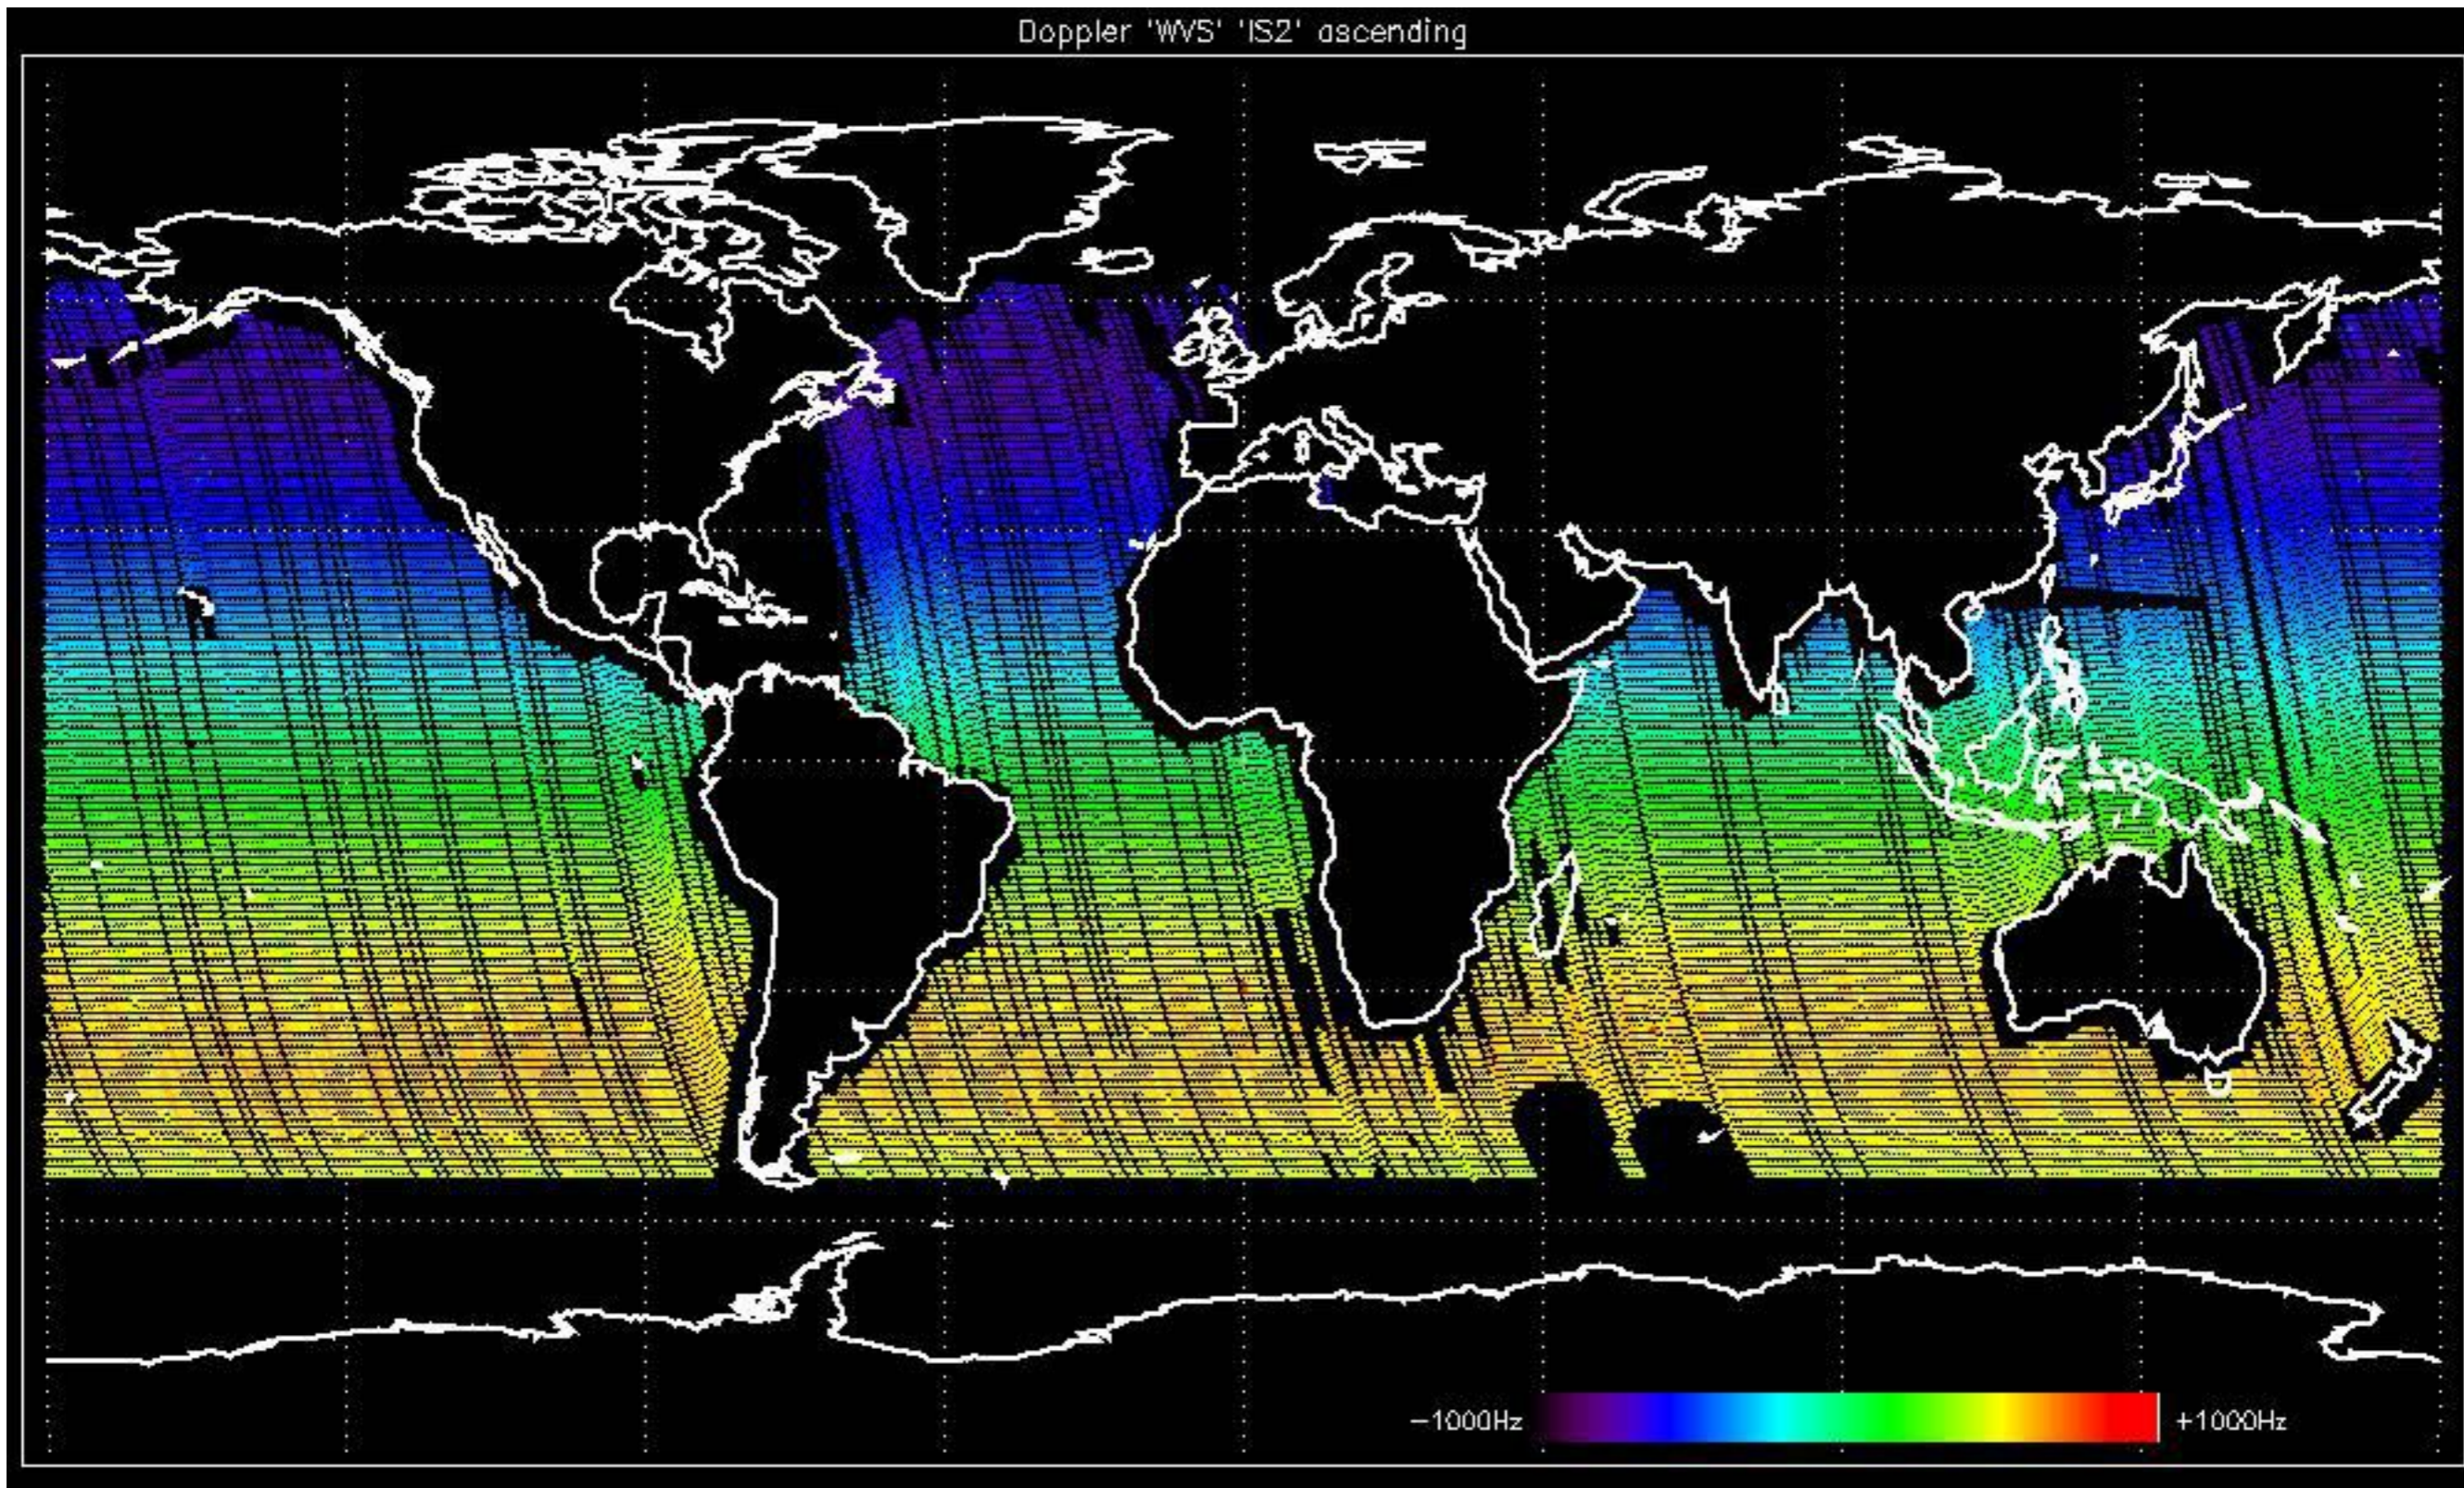


Doppler 'WVS' 'IS2' descending

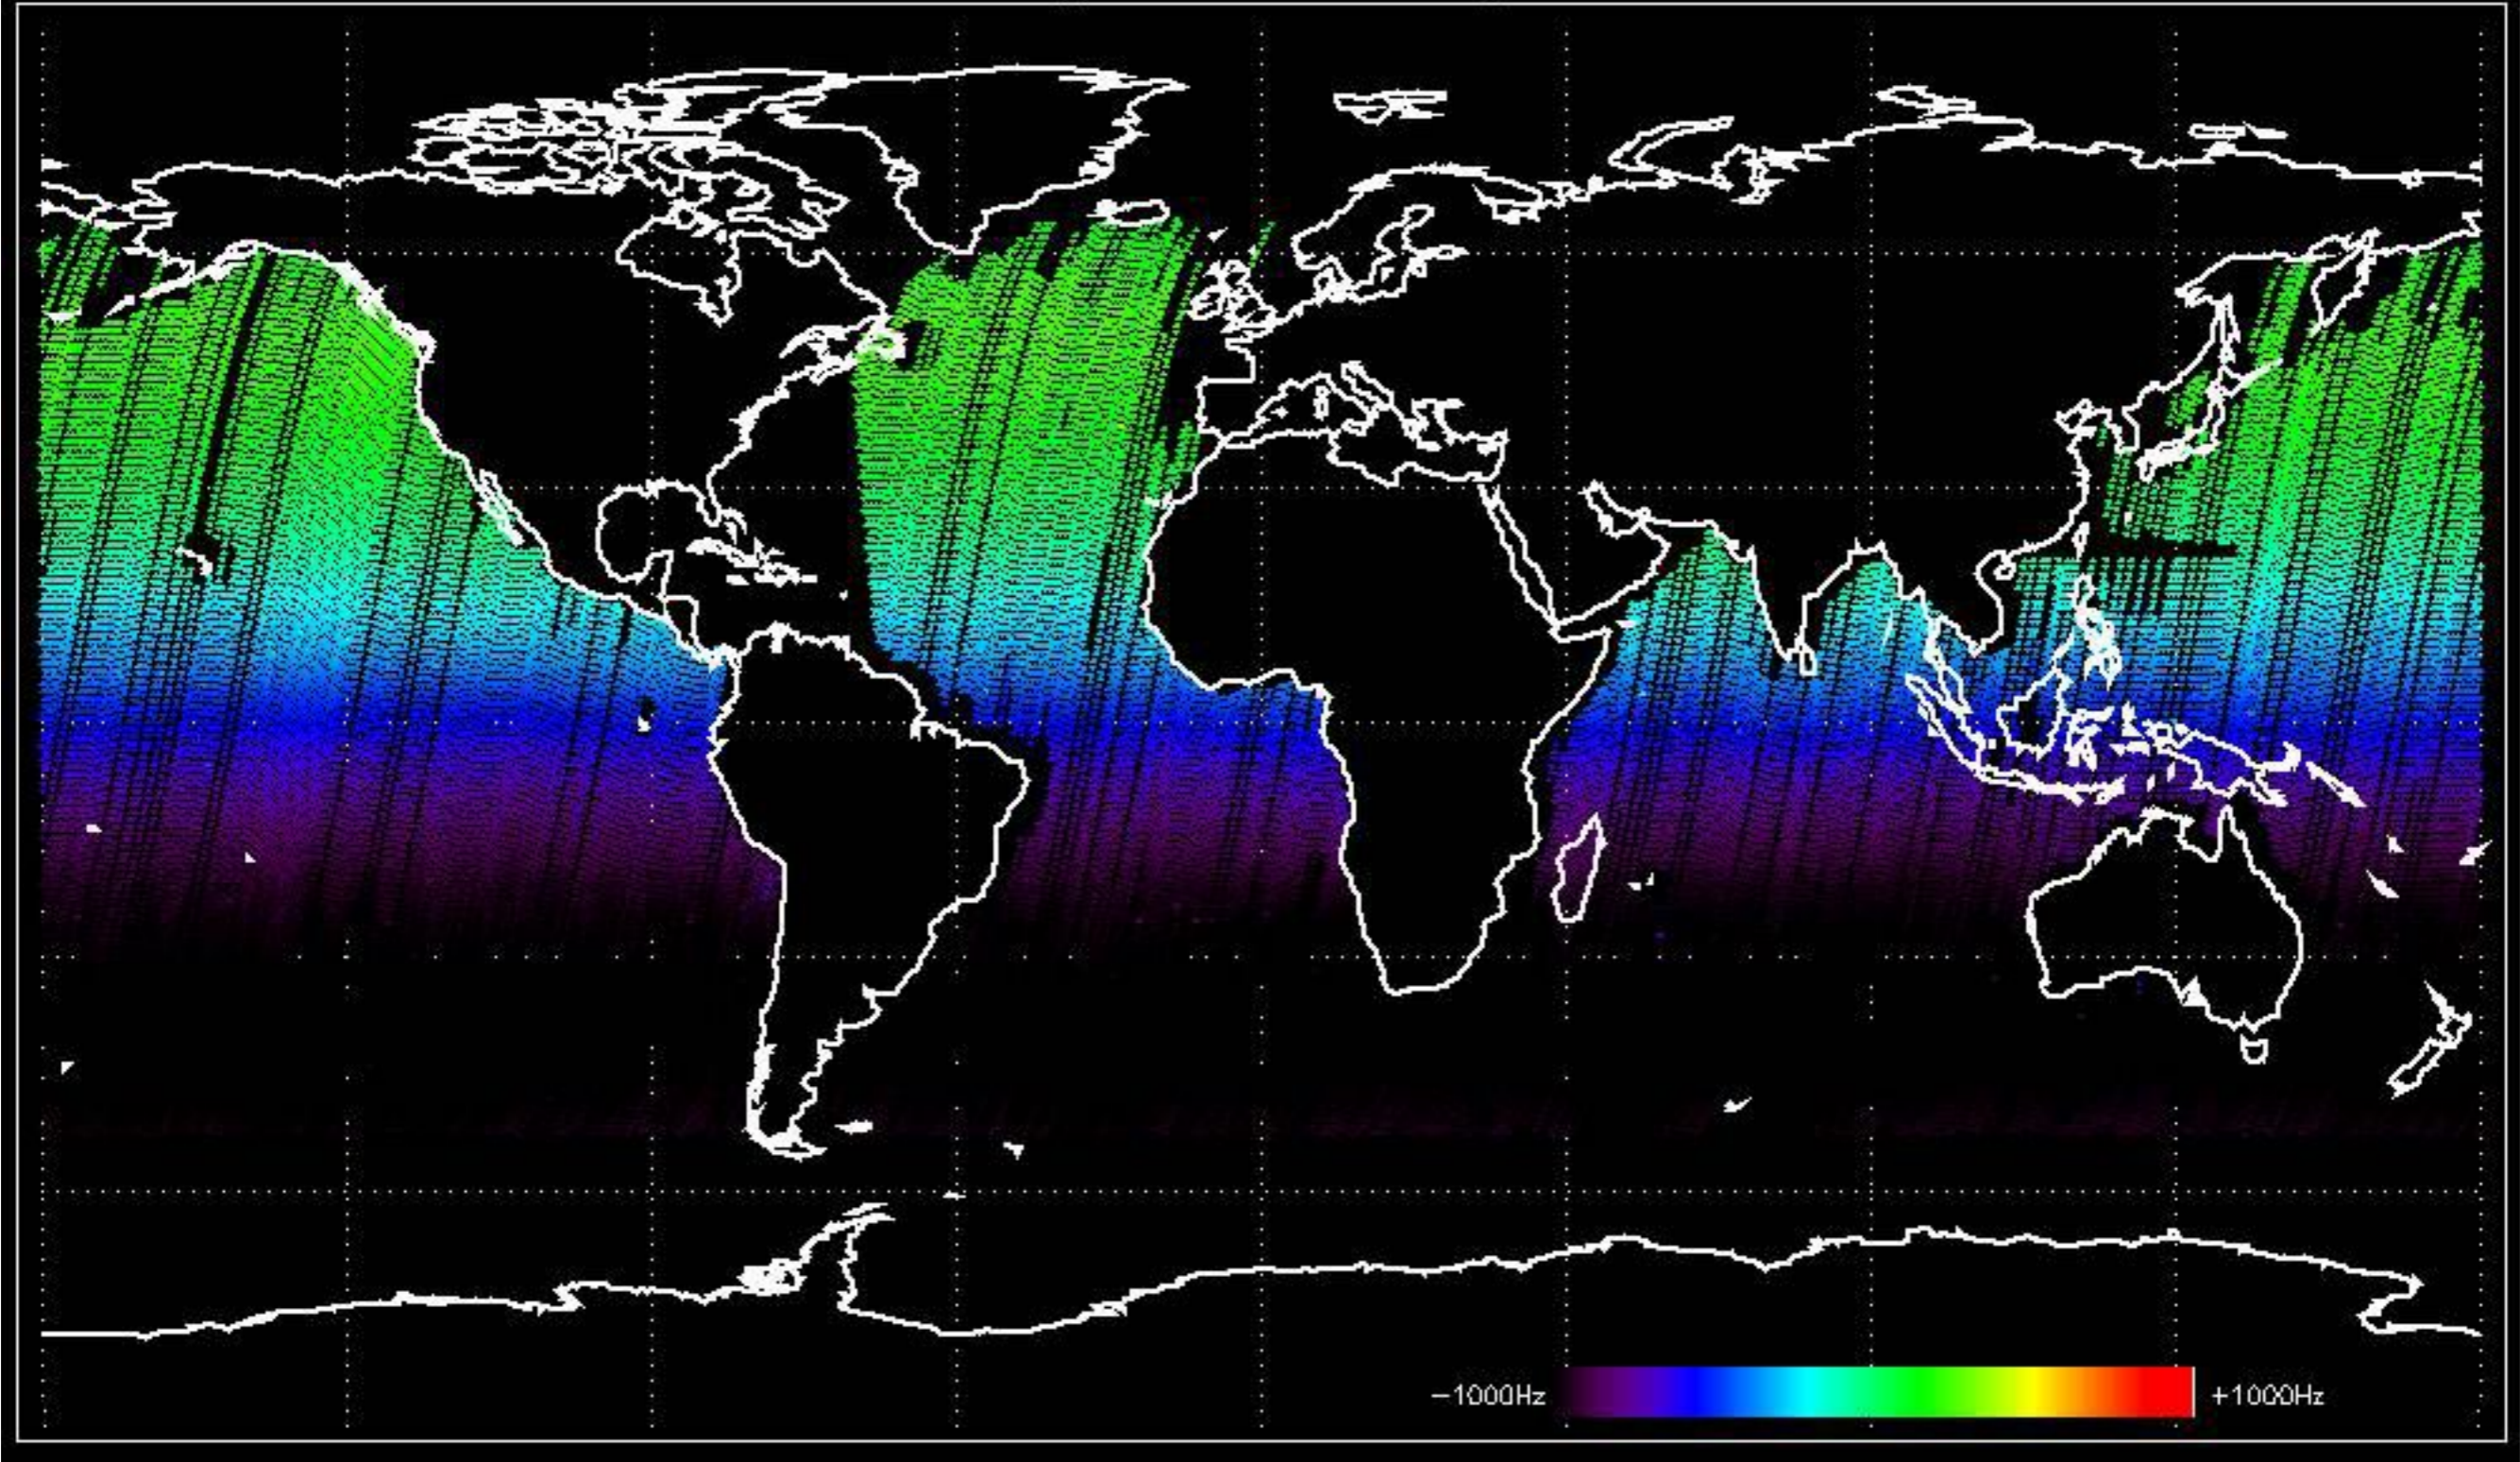

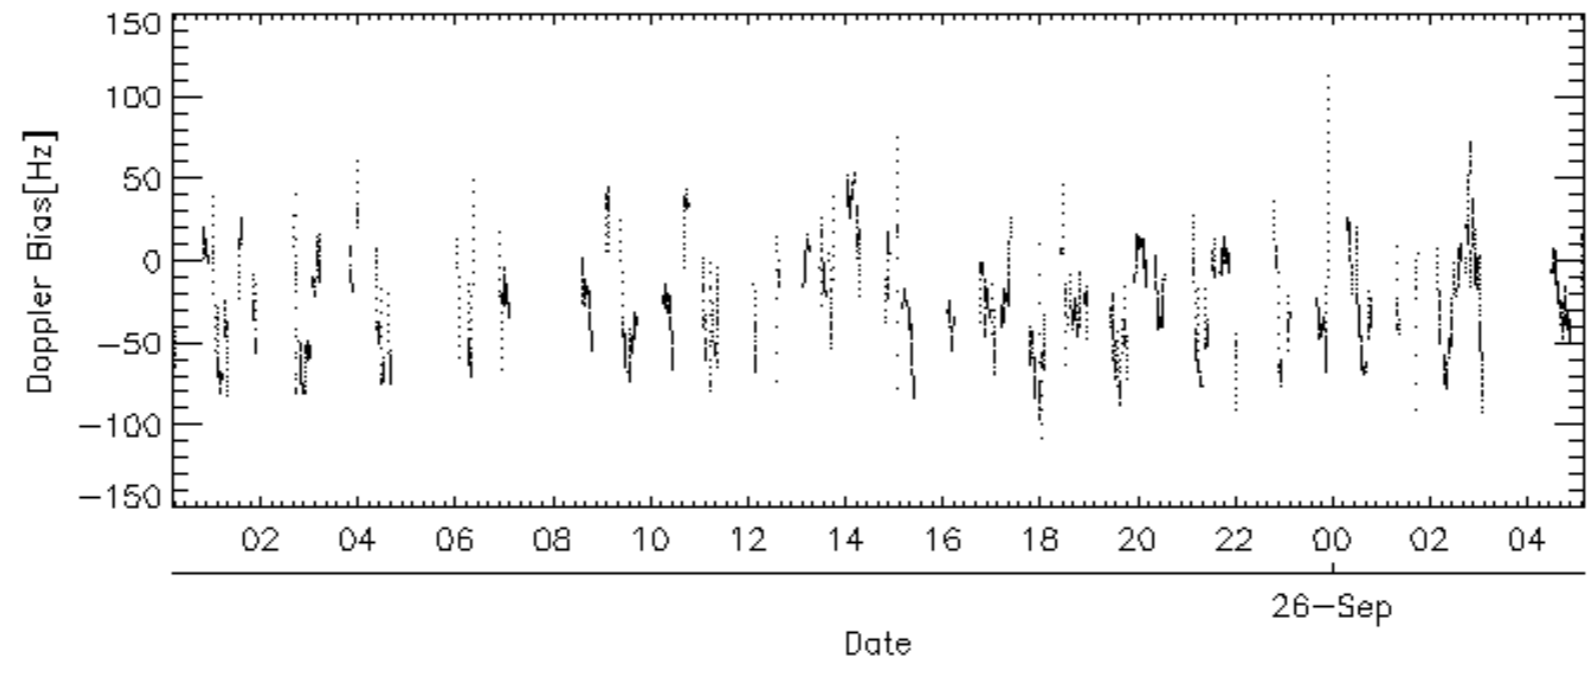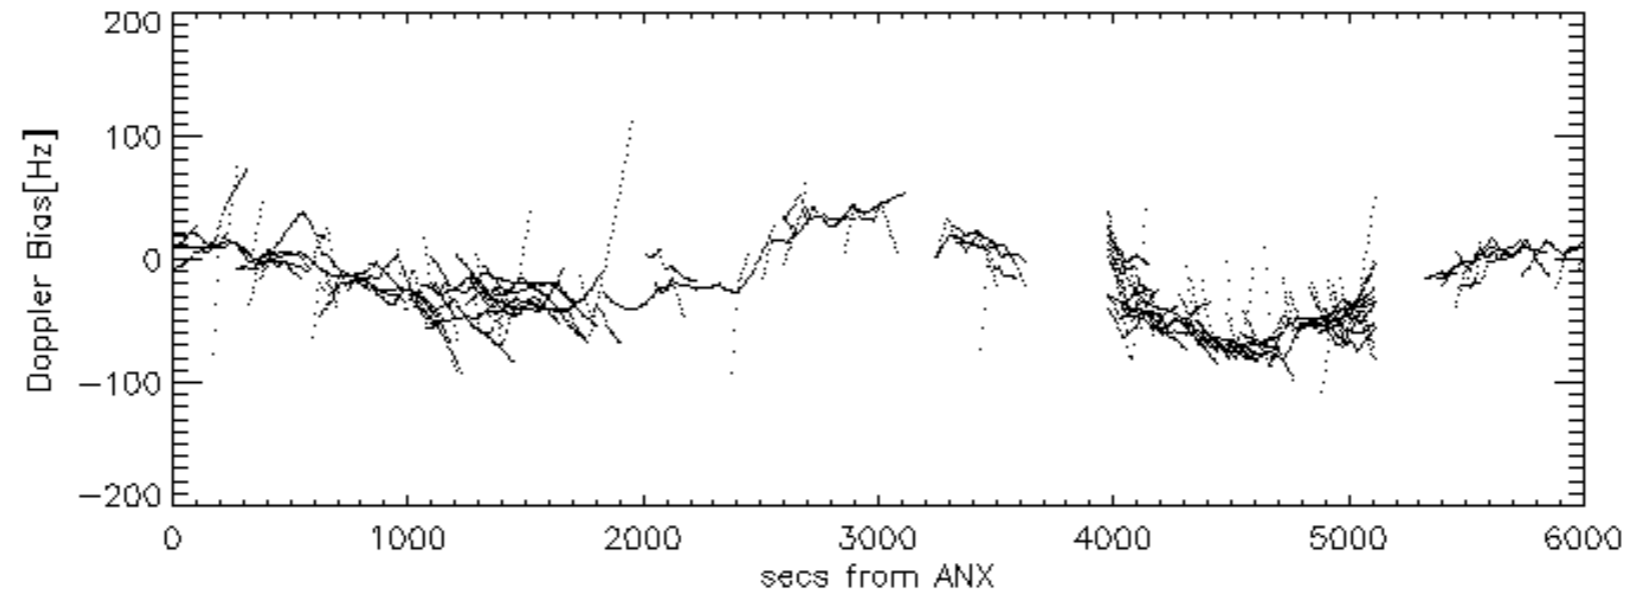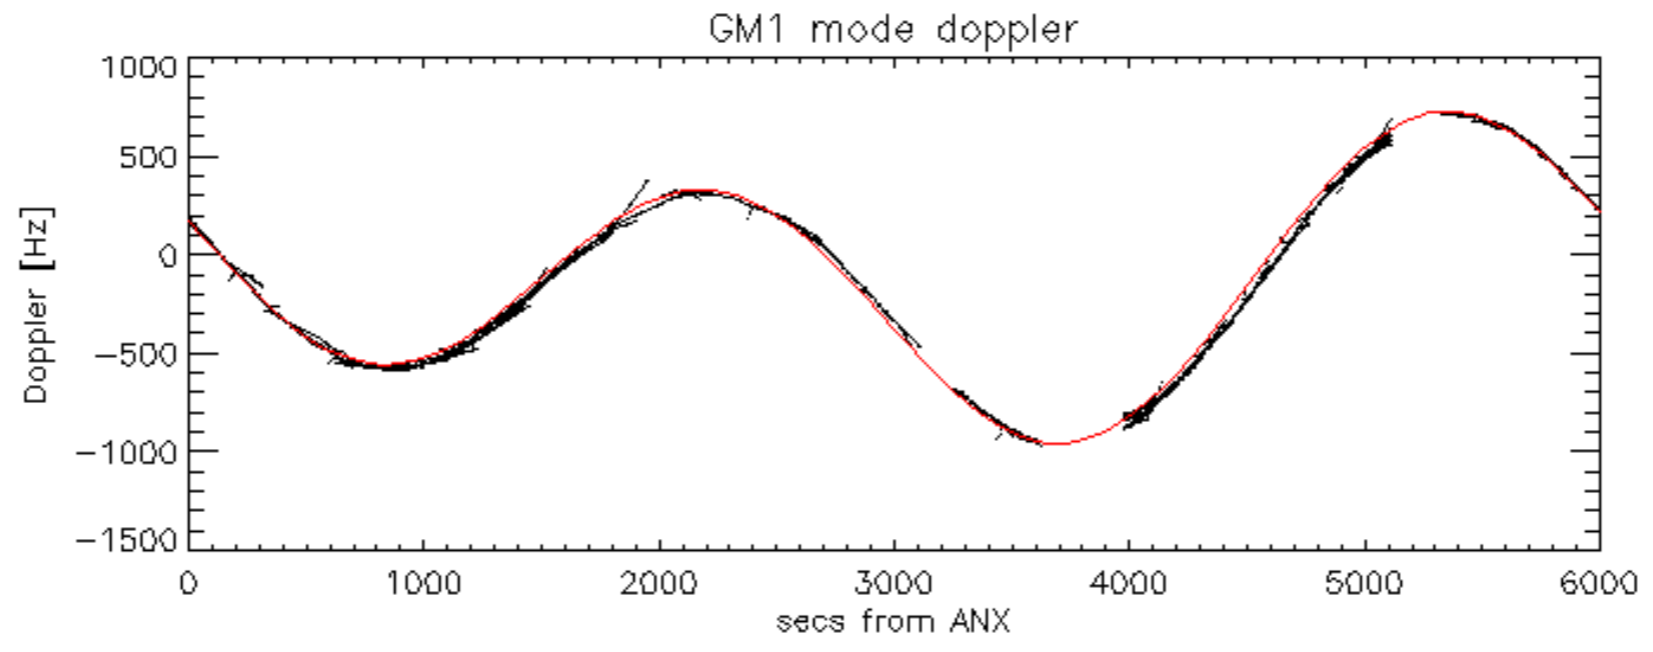


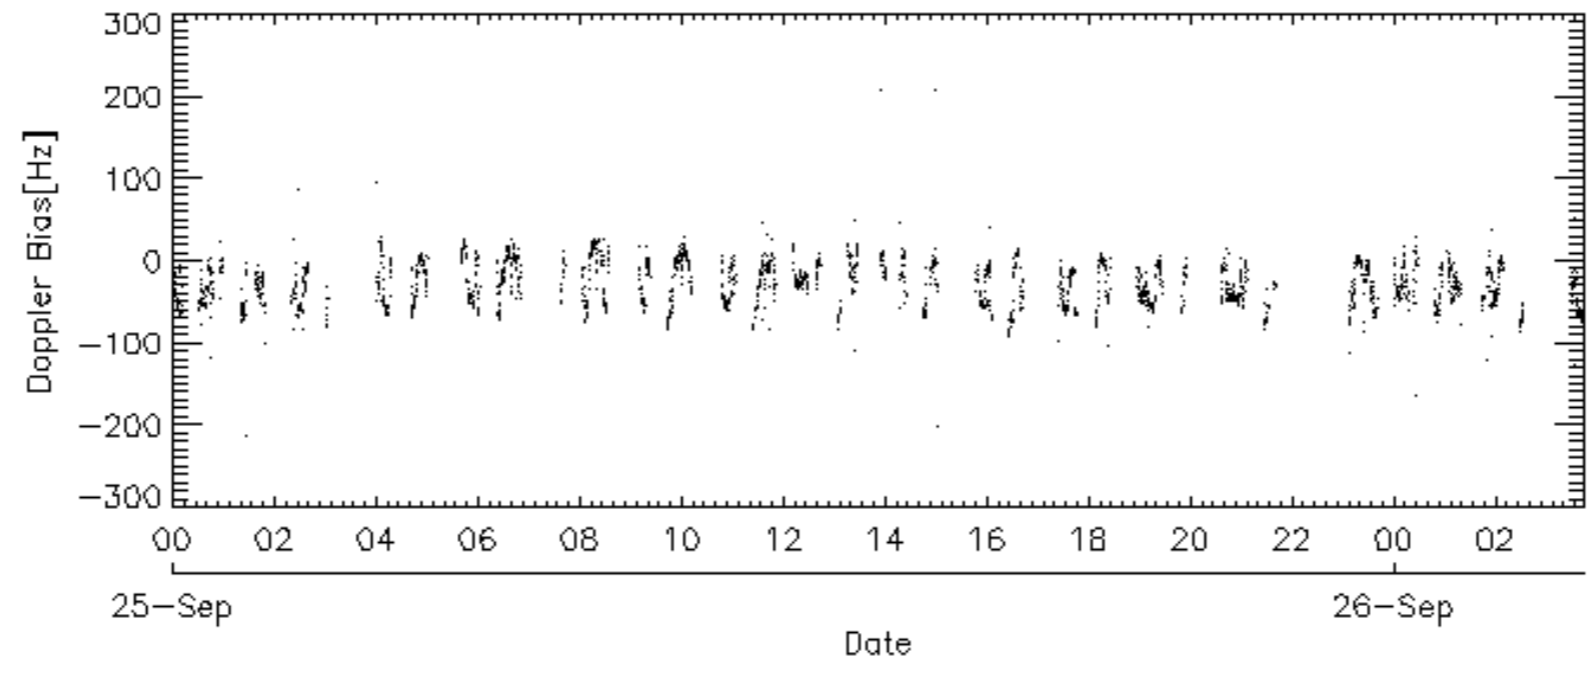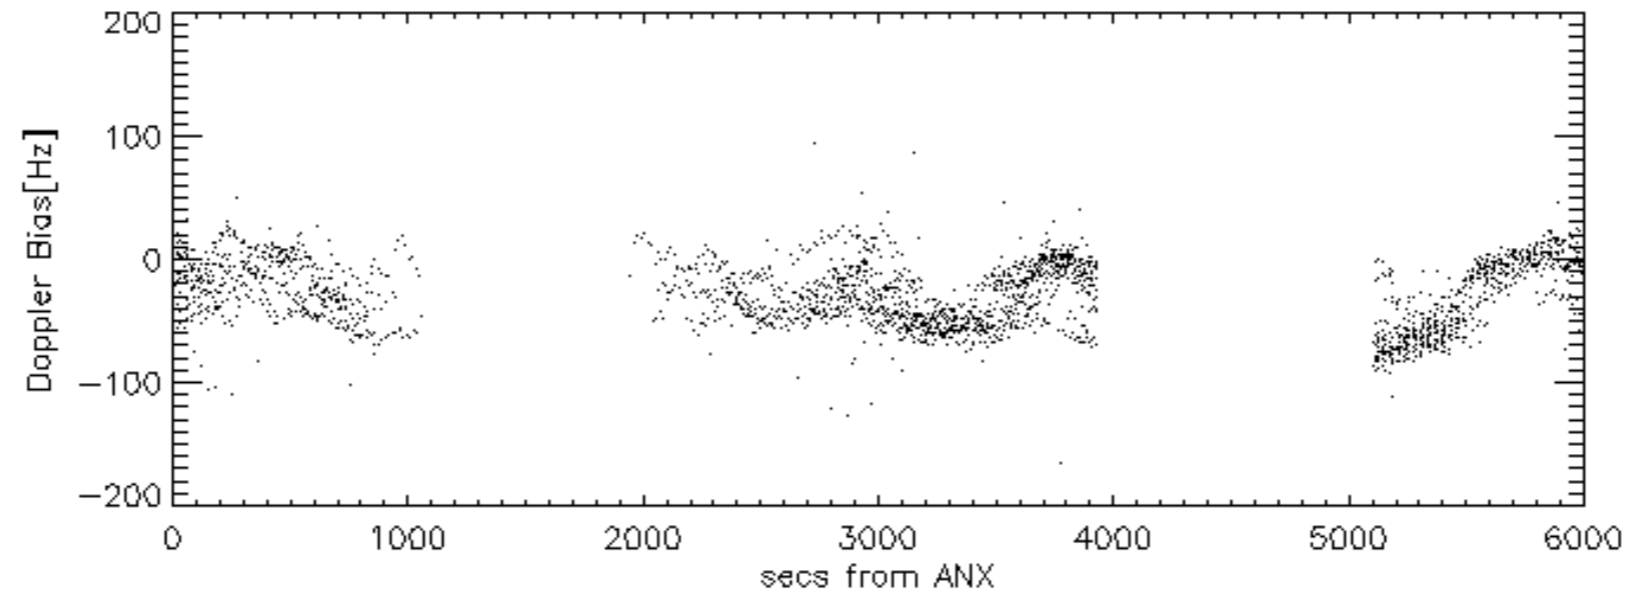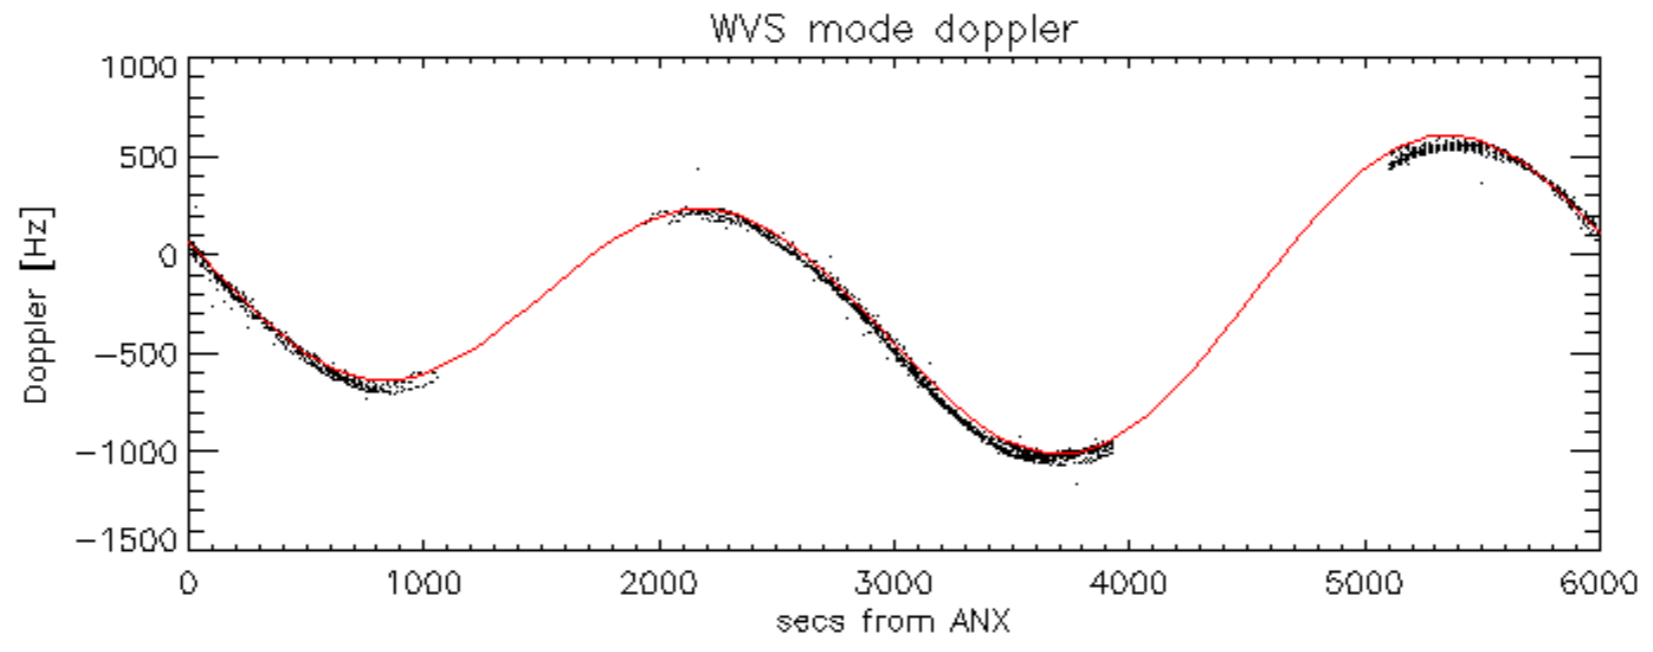


Doppler difference, estimated-predicted 'GM1' 'SS1' ascending -error mean of -30.815354 Hz

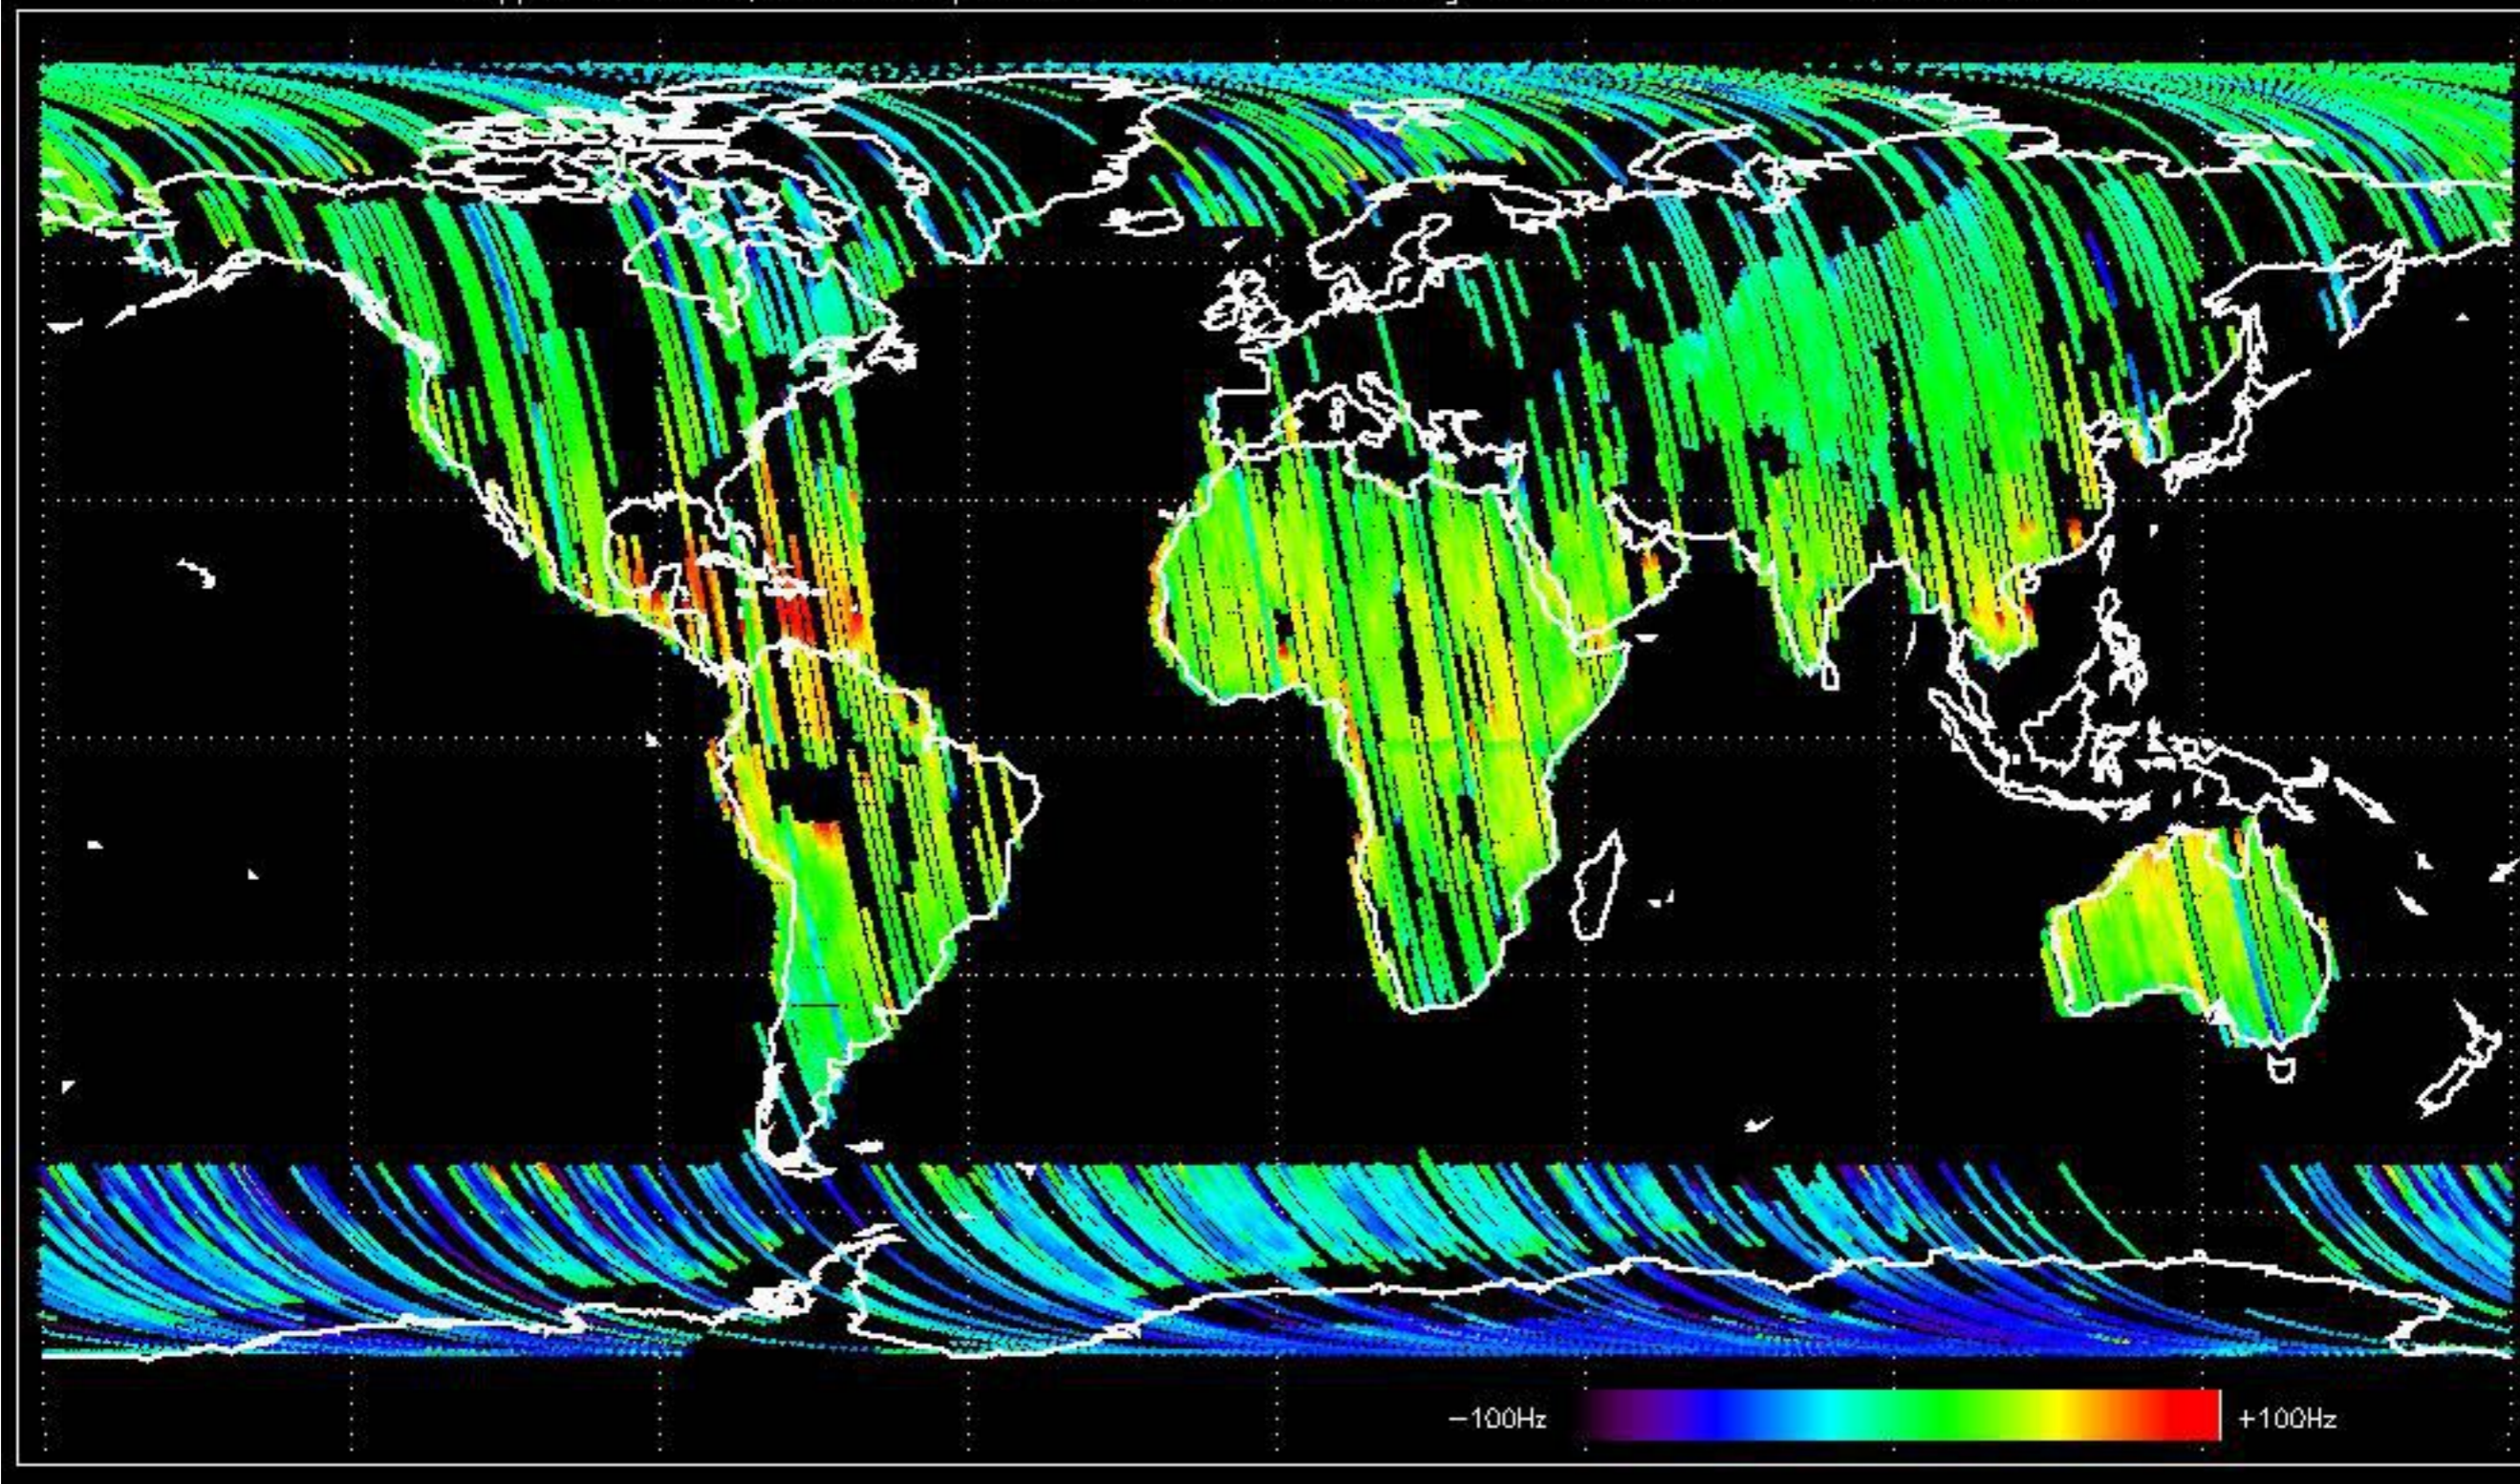


Doppler difference, estimated-predicted 'GM1' 'SS1' descending -error mean of -19.936388 Hz

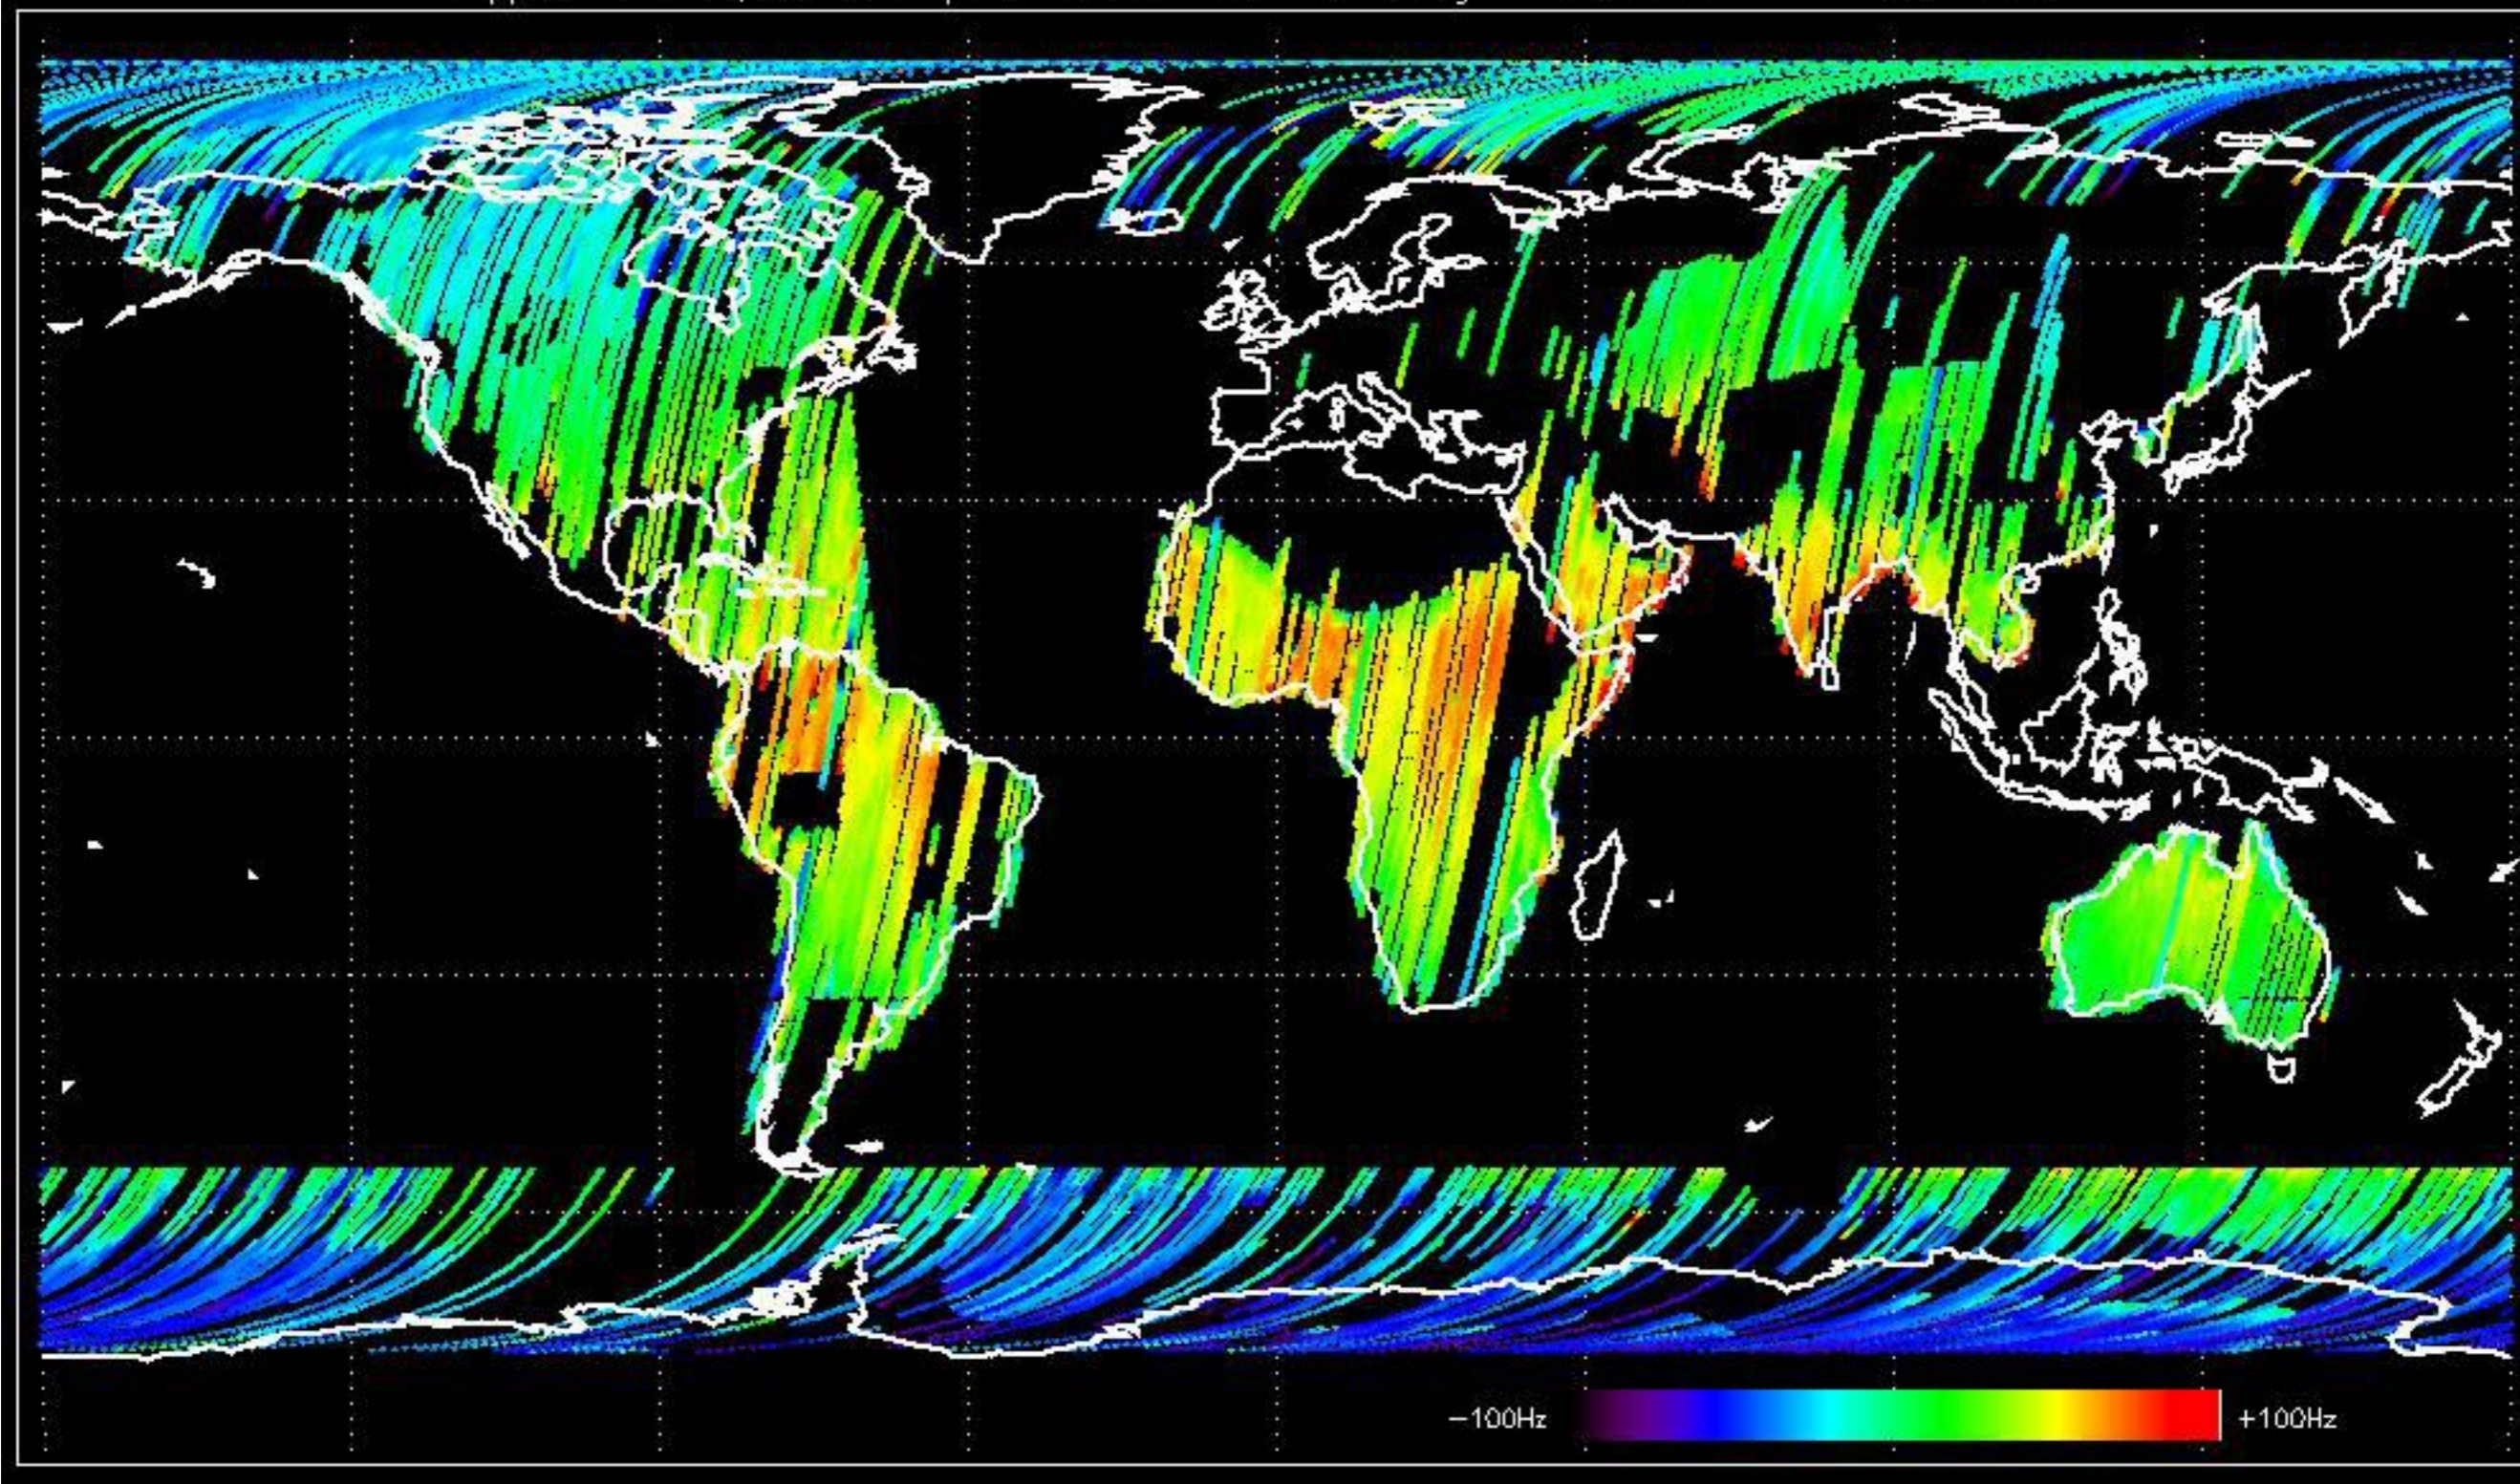

Doppler difference, estimated-predicted 'WVS' 'IS2' ascending -error mean of -30.762219 Hz

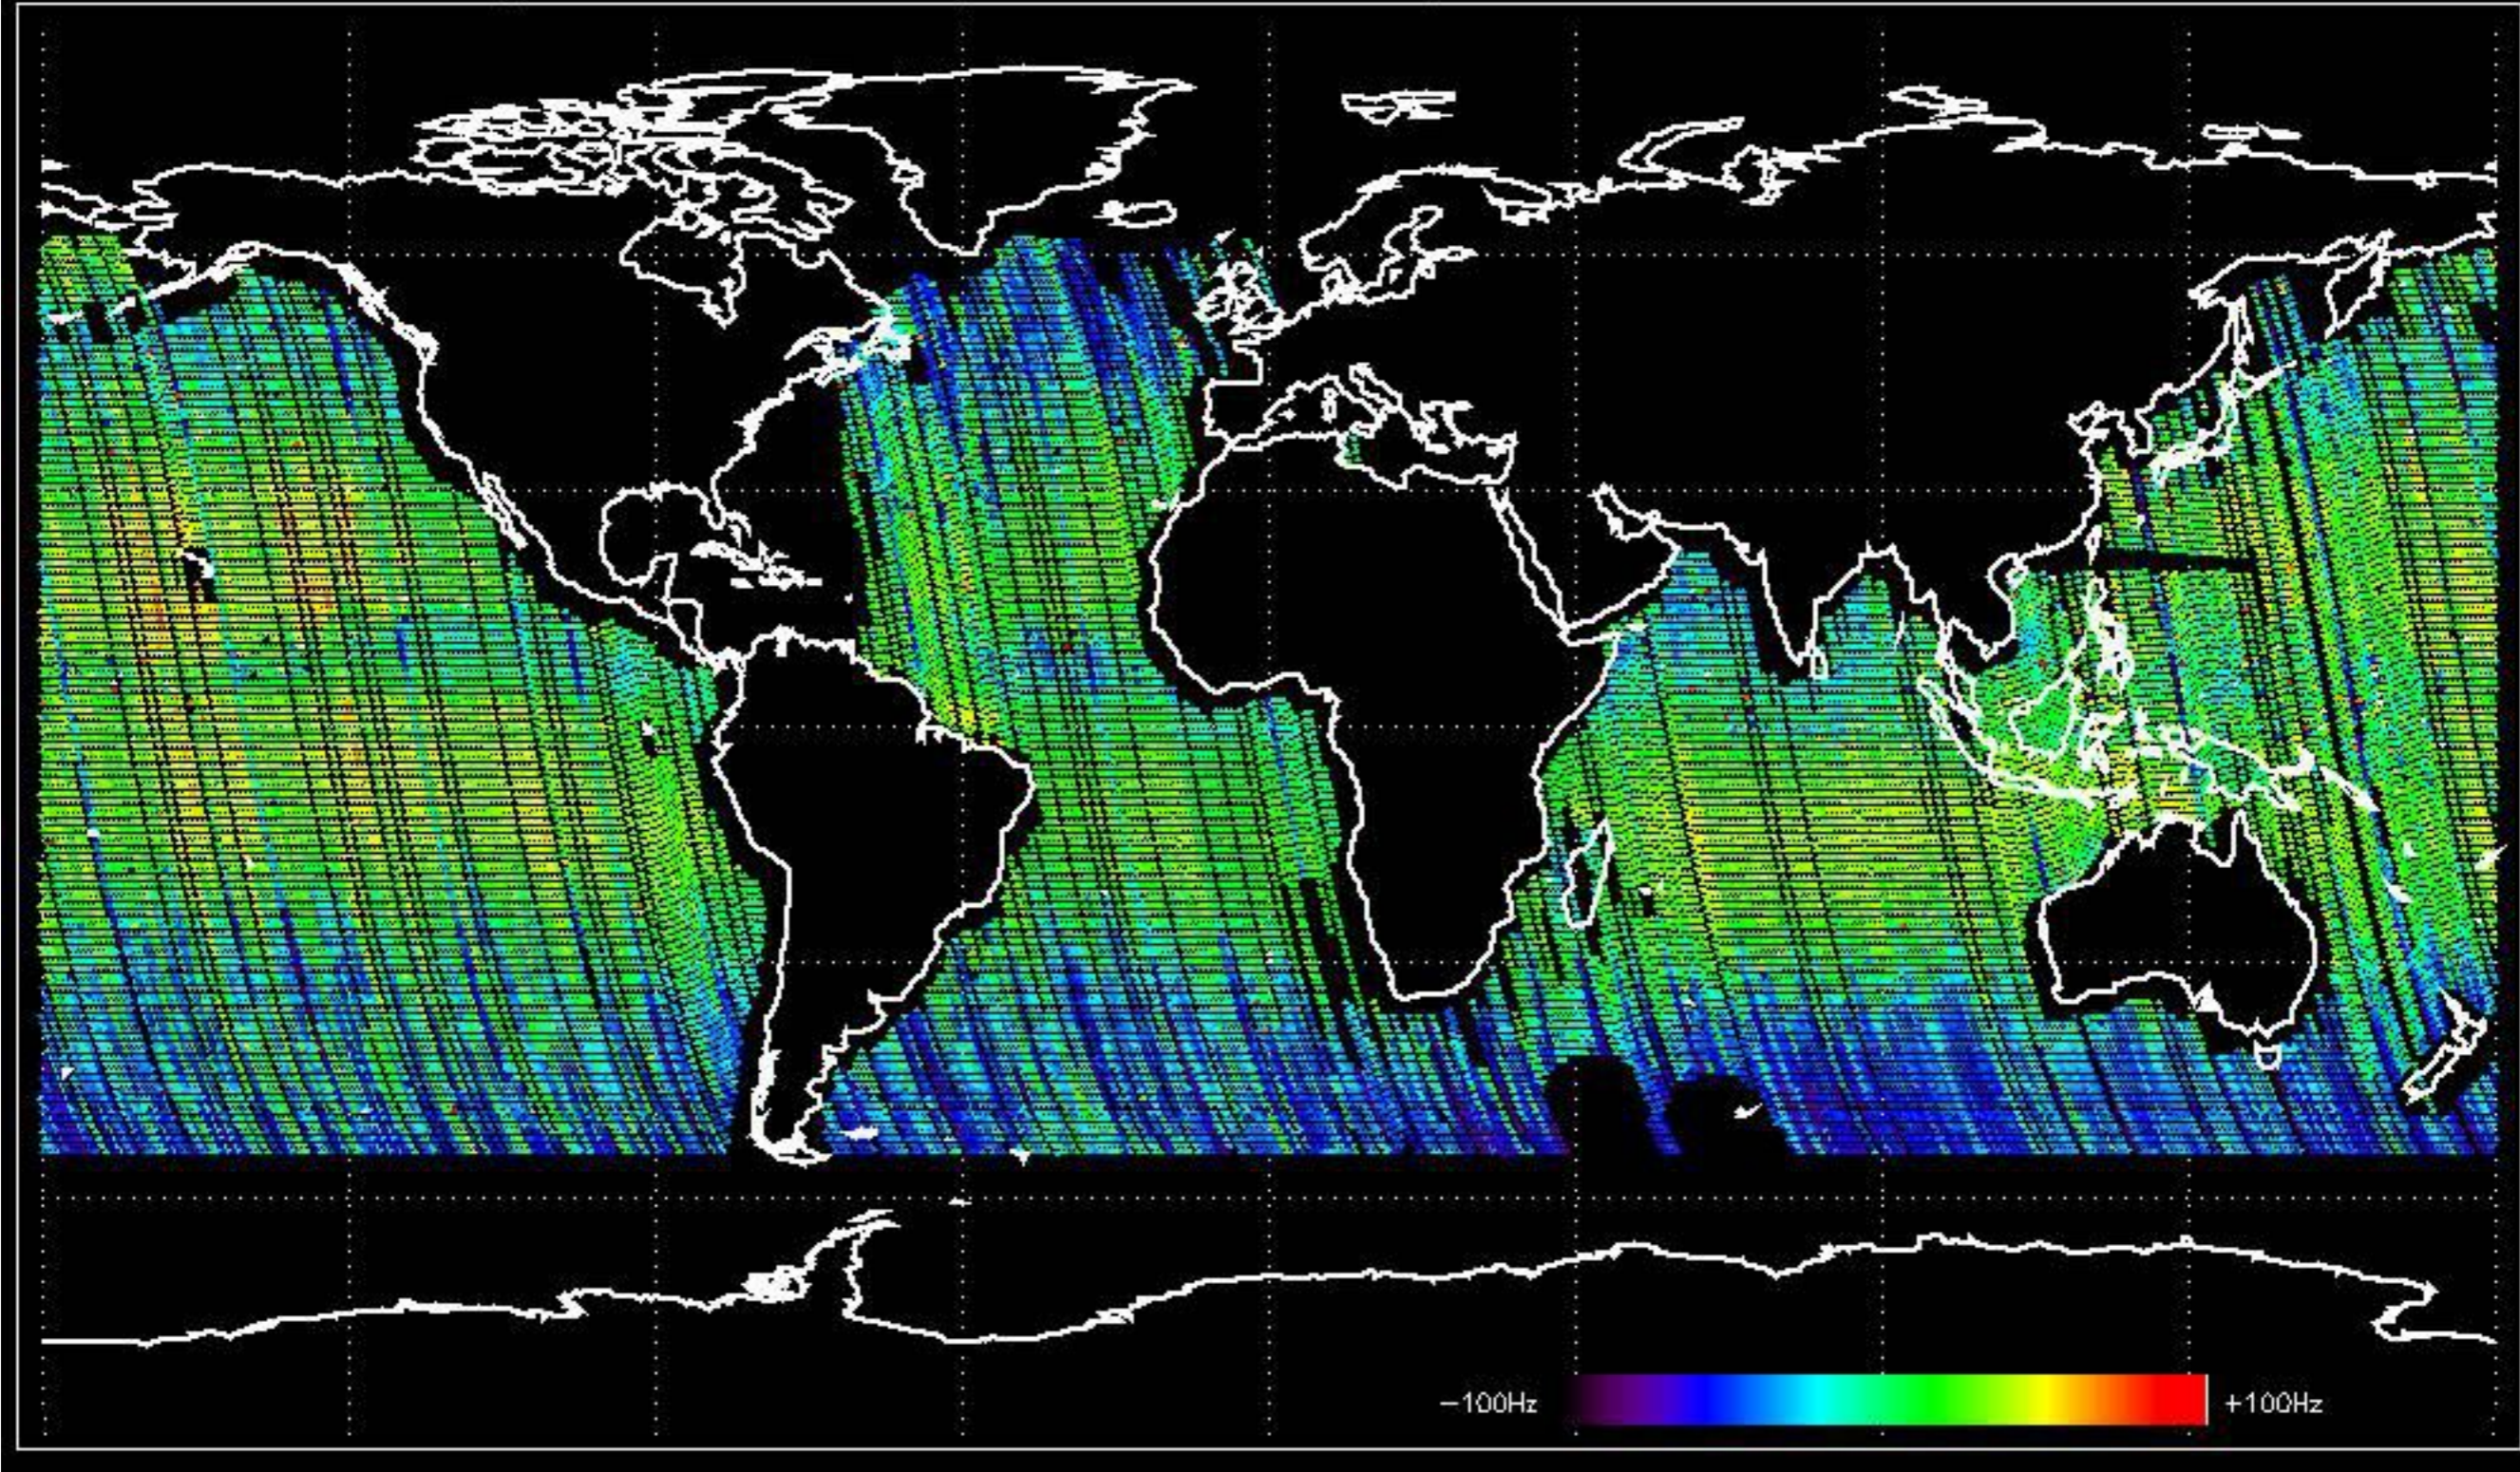





Doppler difference, estimated-predicted 'WVS' 'IS2' descending -error mean of -32.670763 Hz



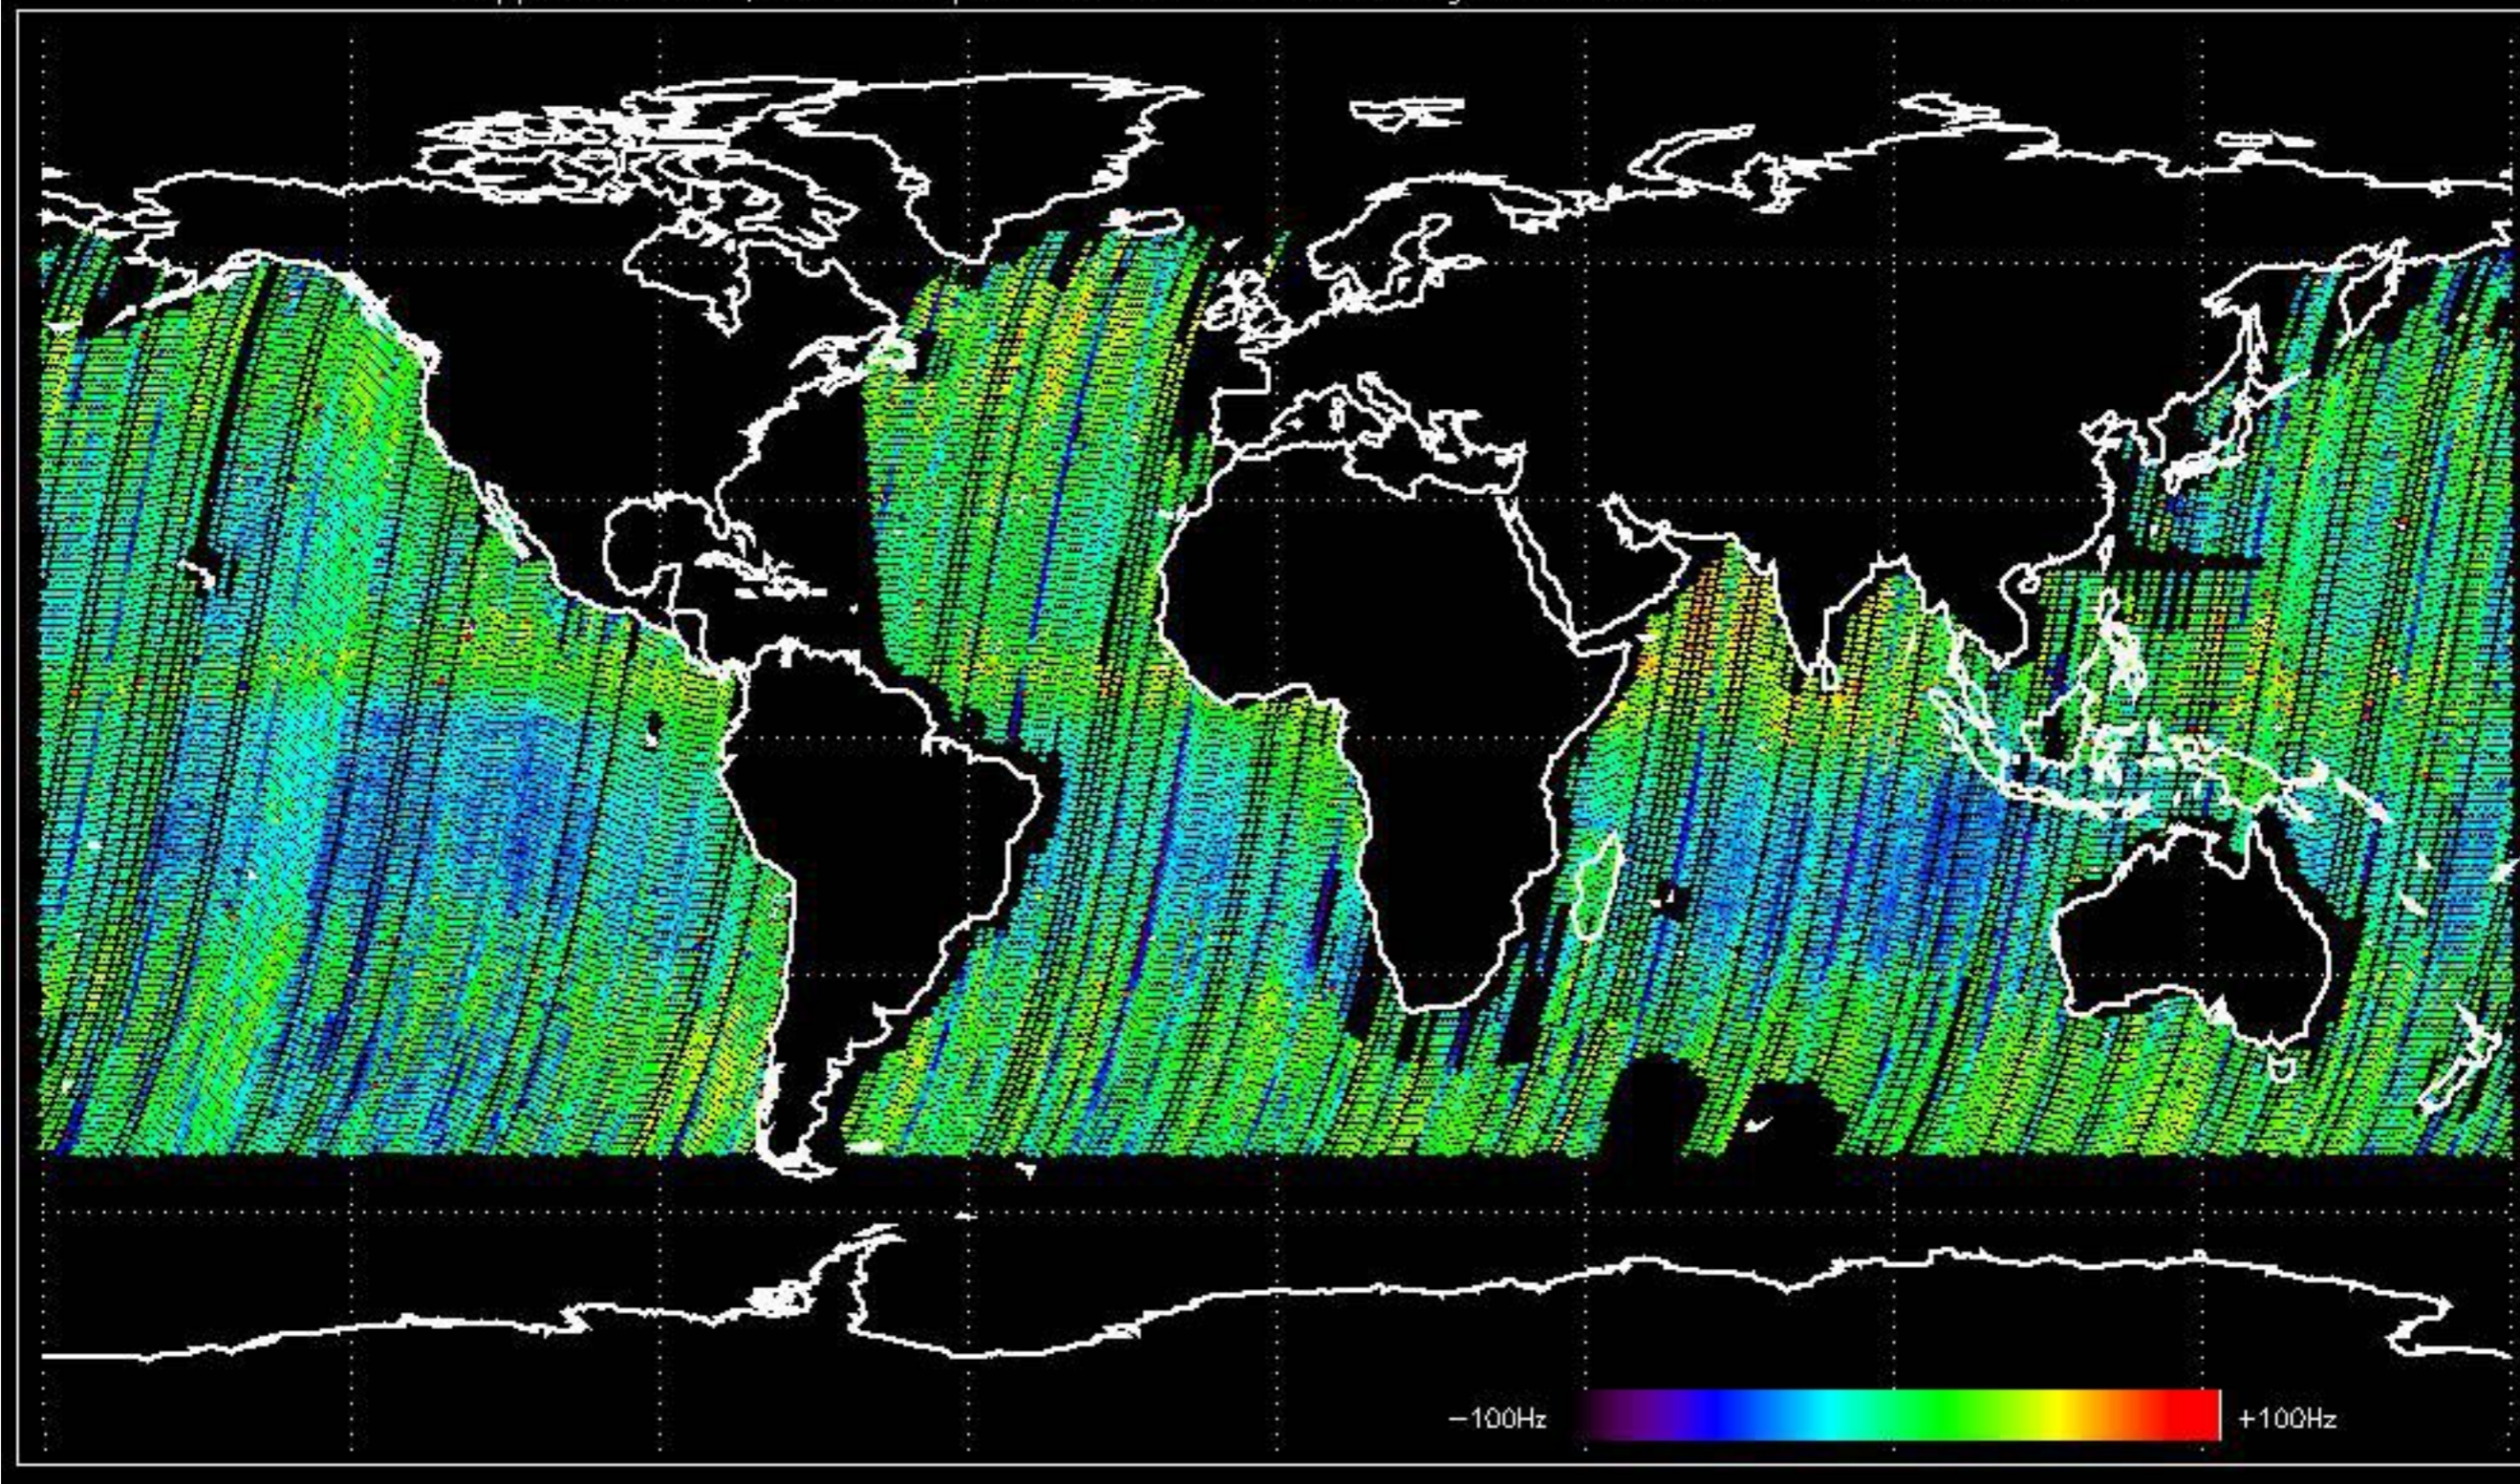



The MS mode provides an internal health check on an individual module basis.
The purpose of this mode is to identify to identify any malfunctioning modules and
to identify modules for which calibration offsets are to be applied.
No anomalies observed on available MS products:


No anomalies observed.

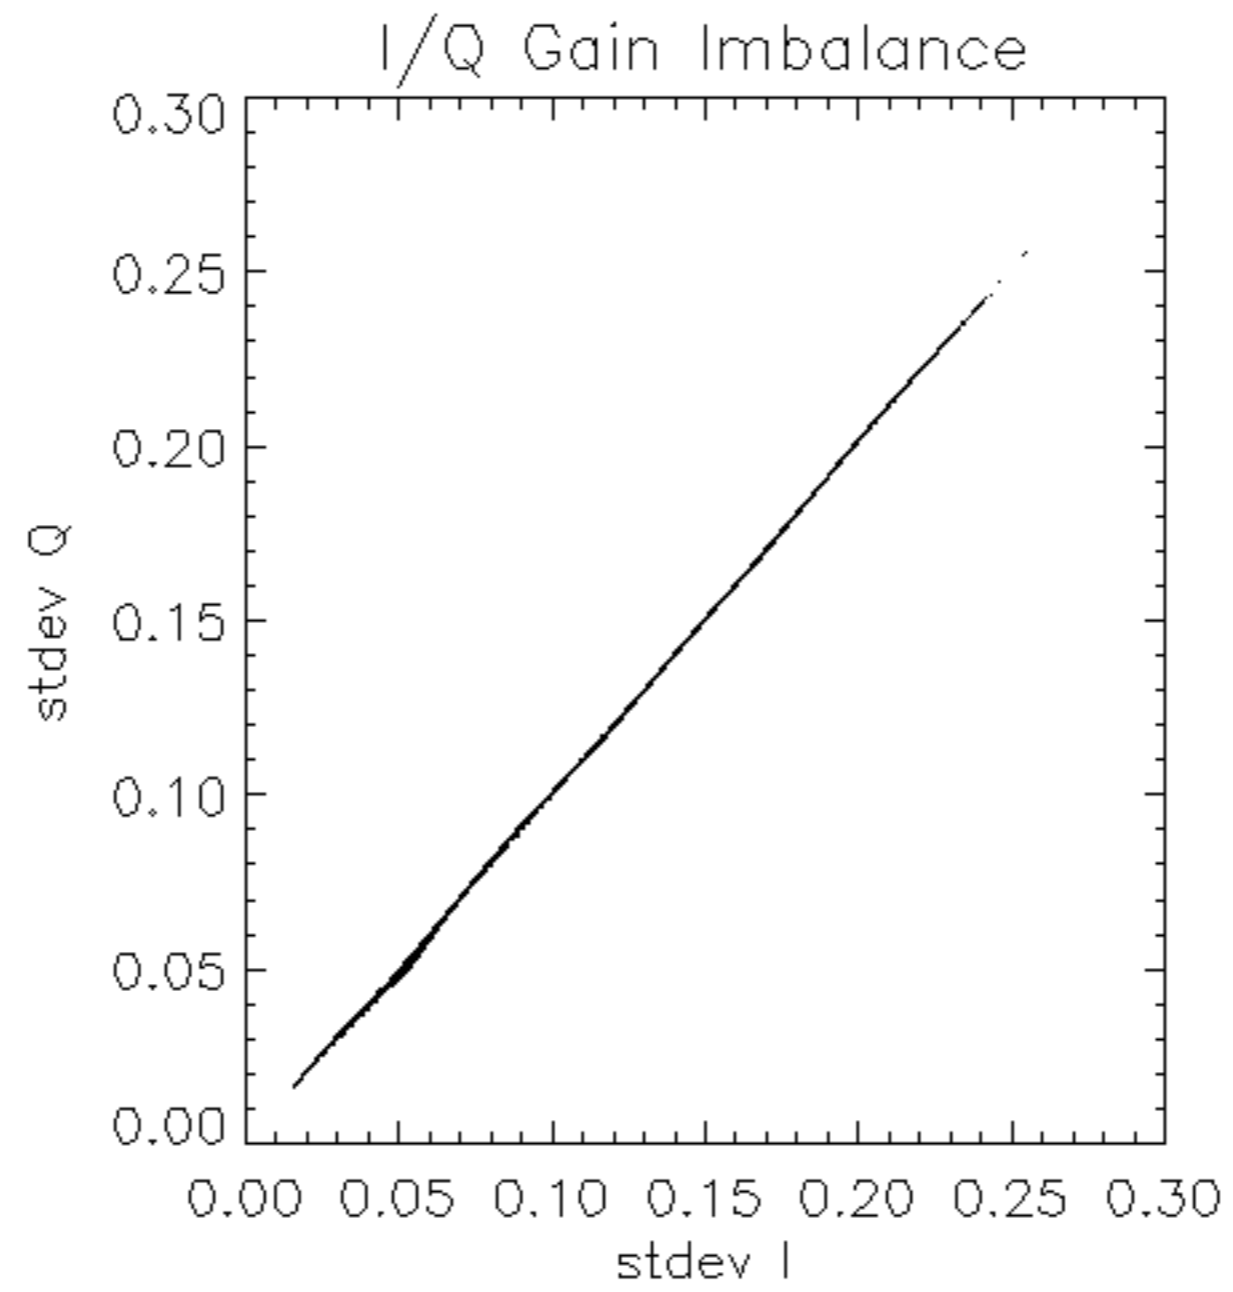


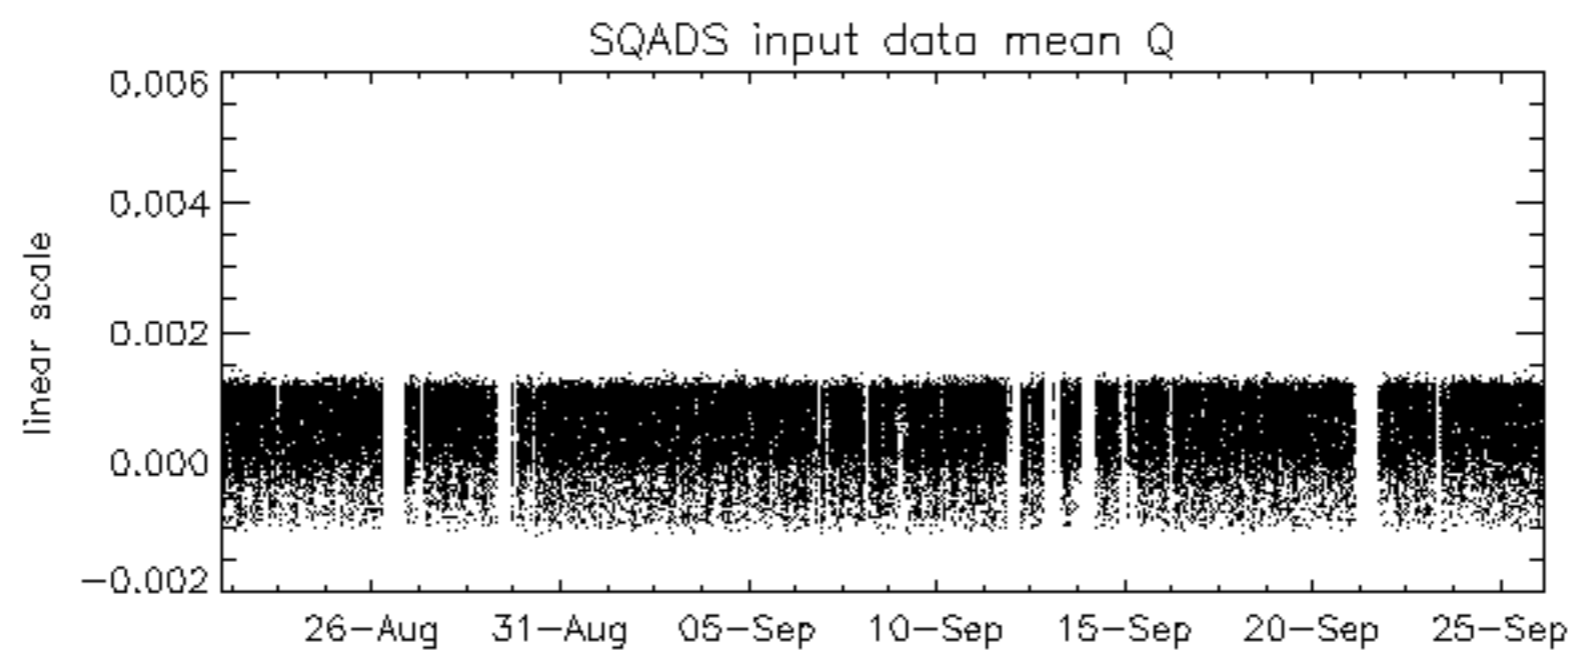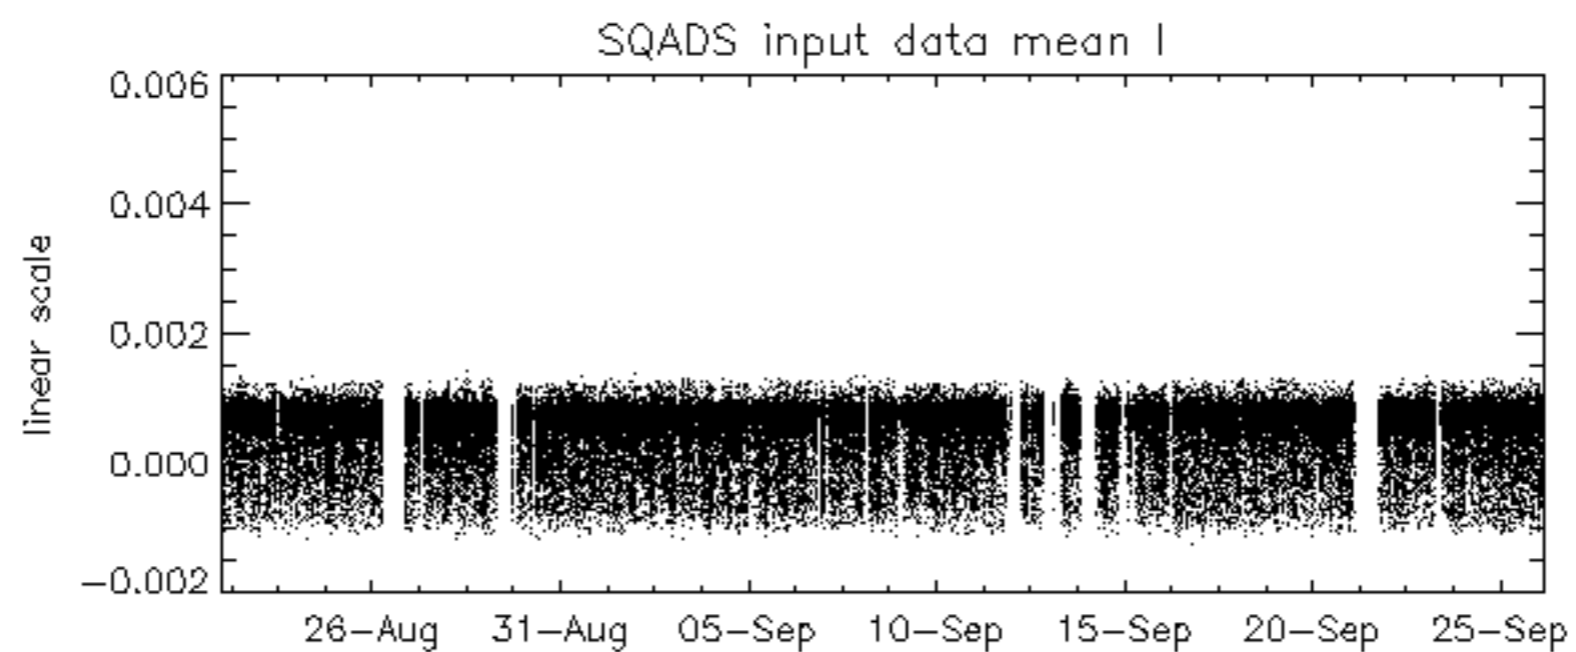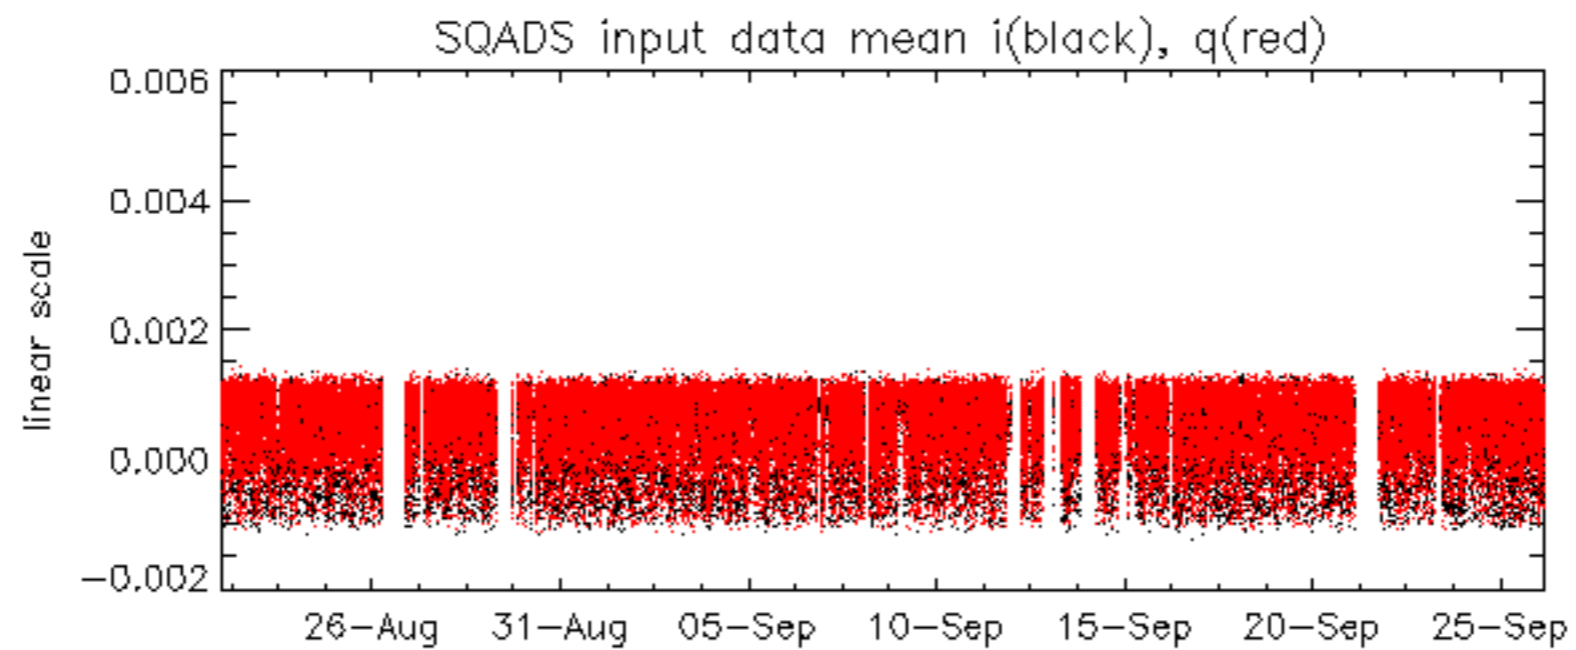

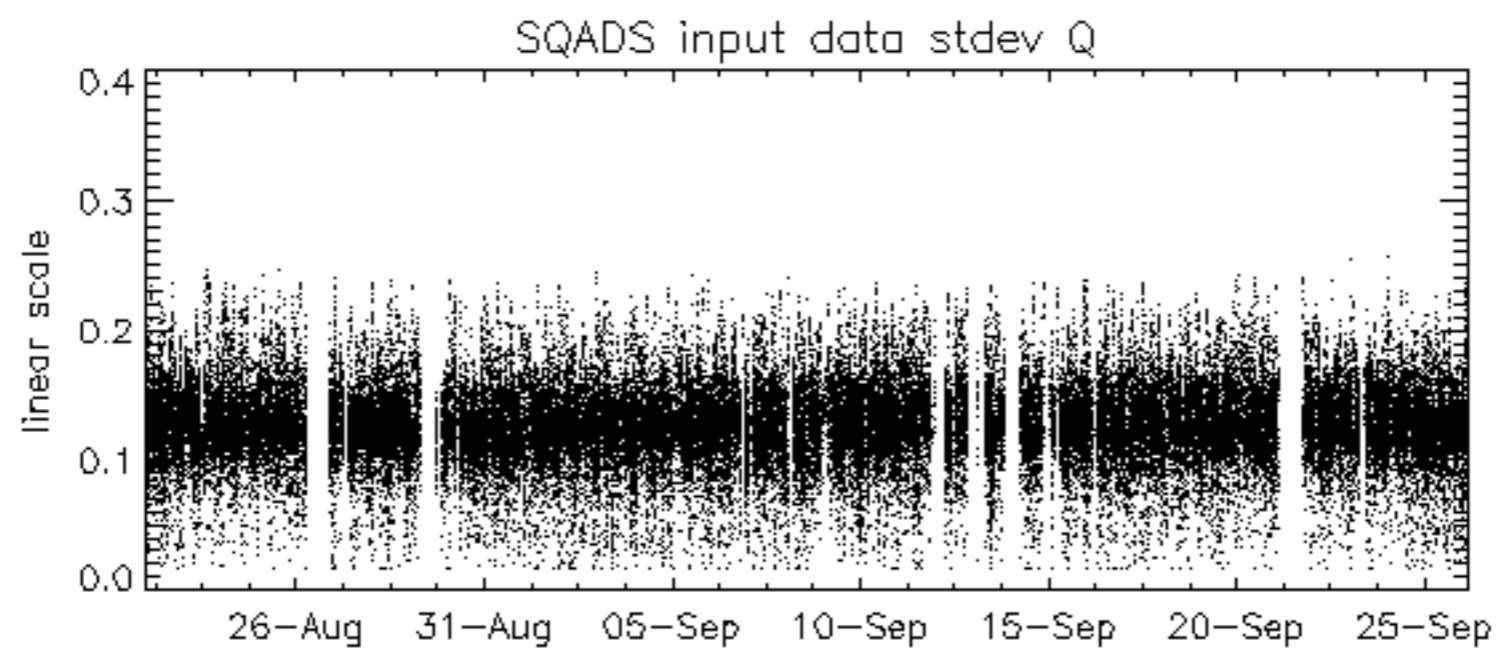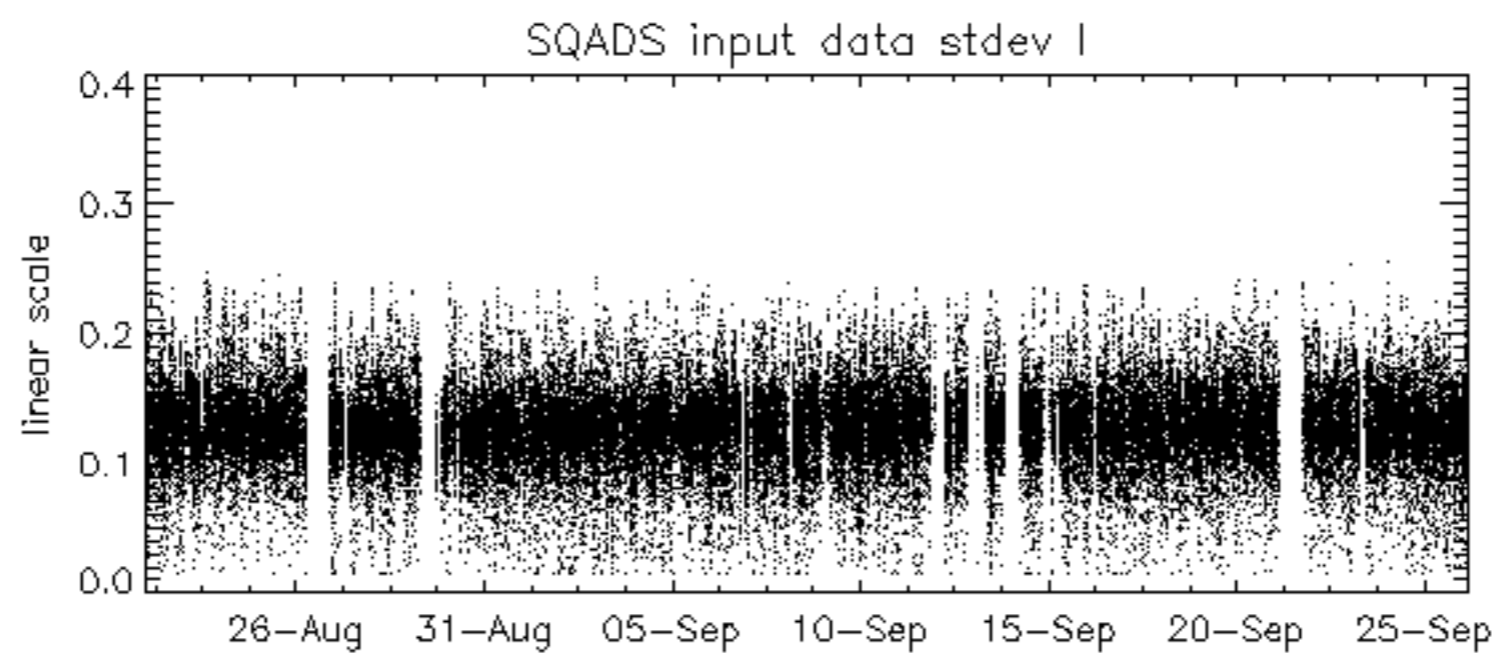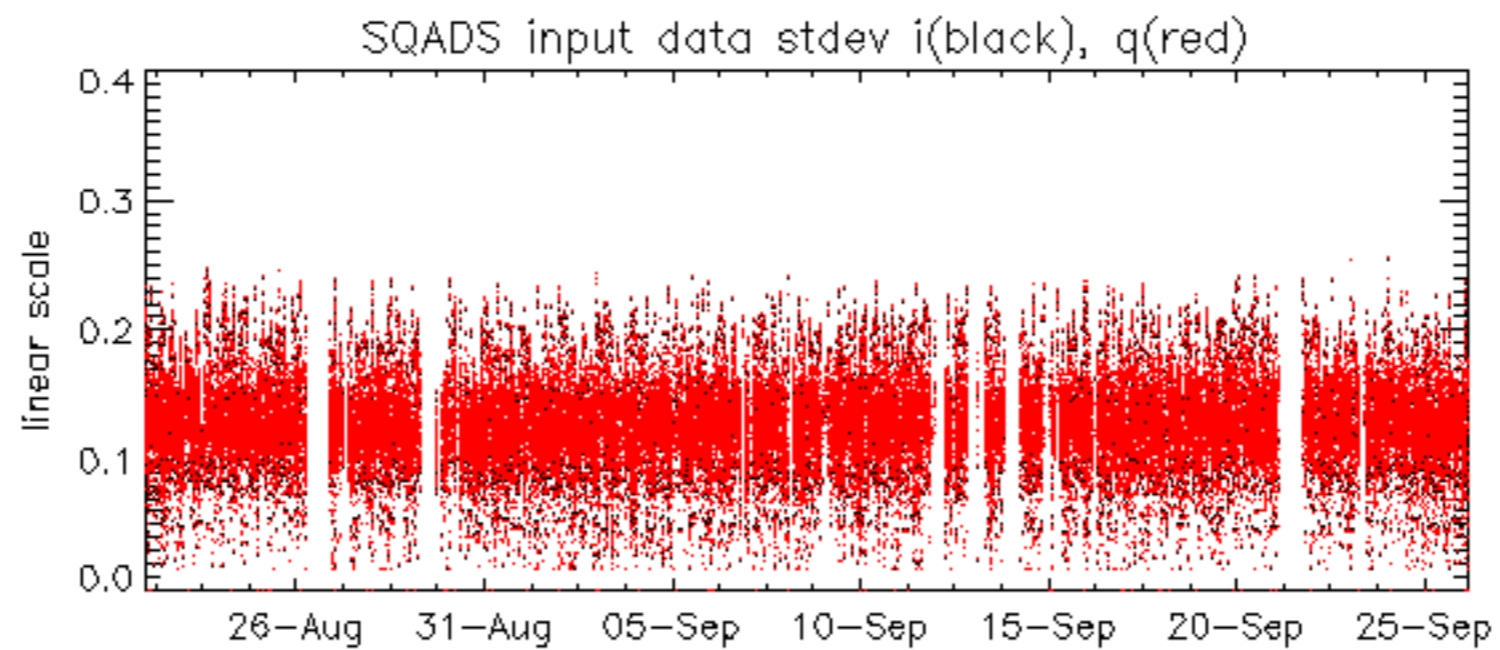


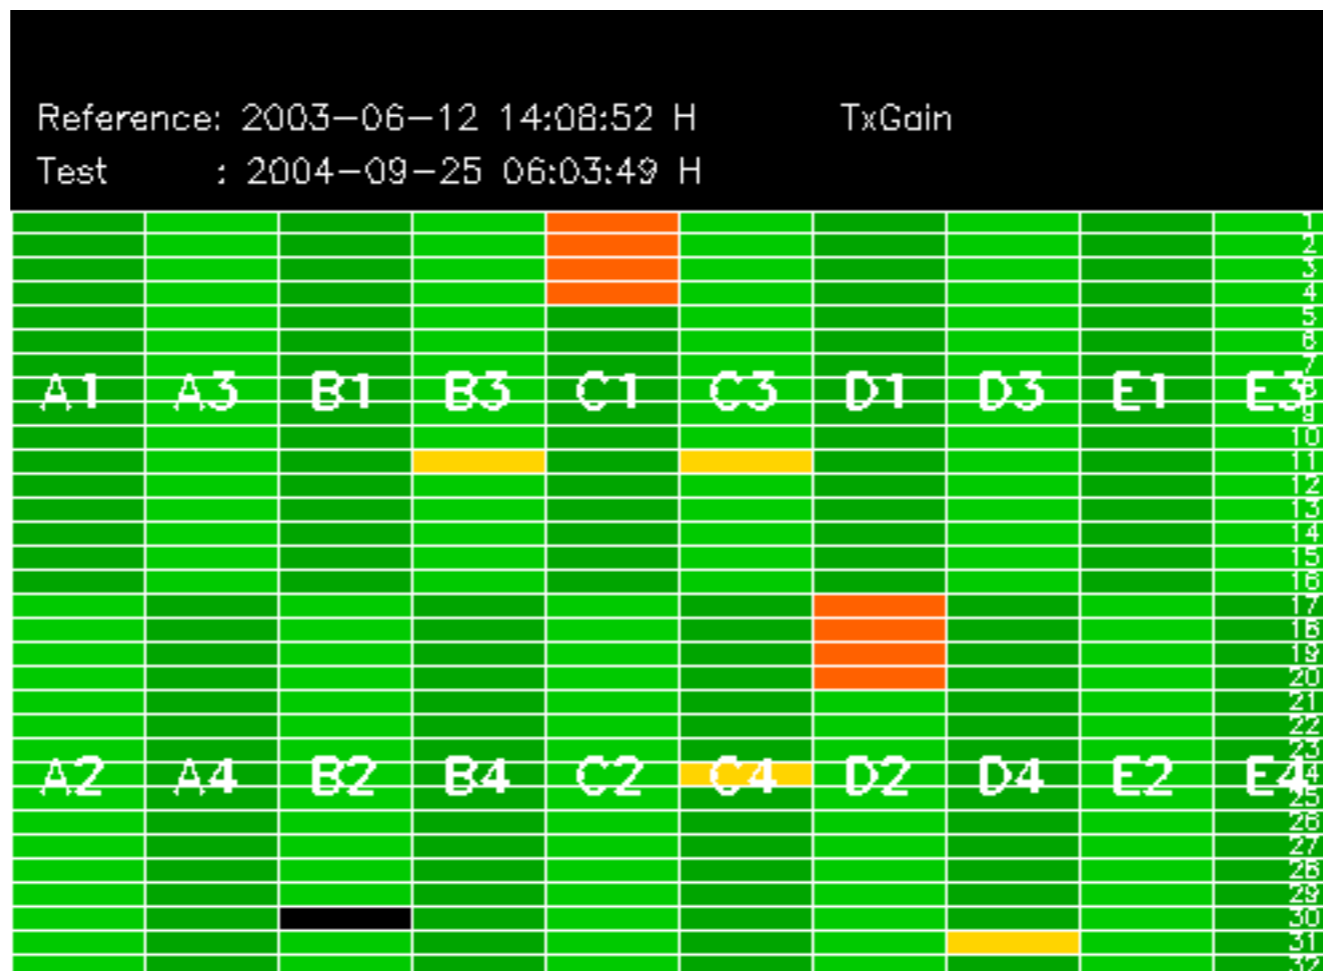

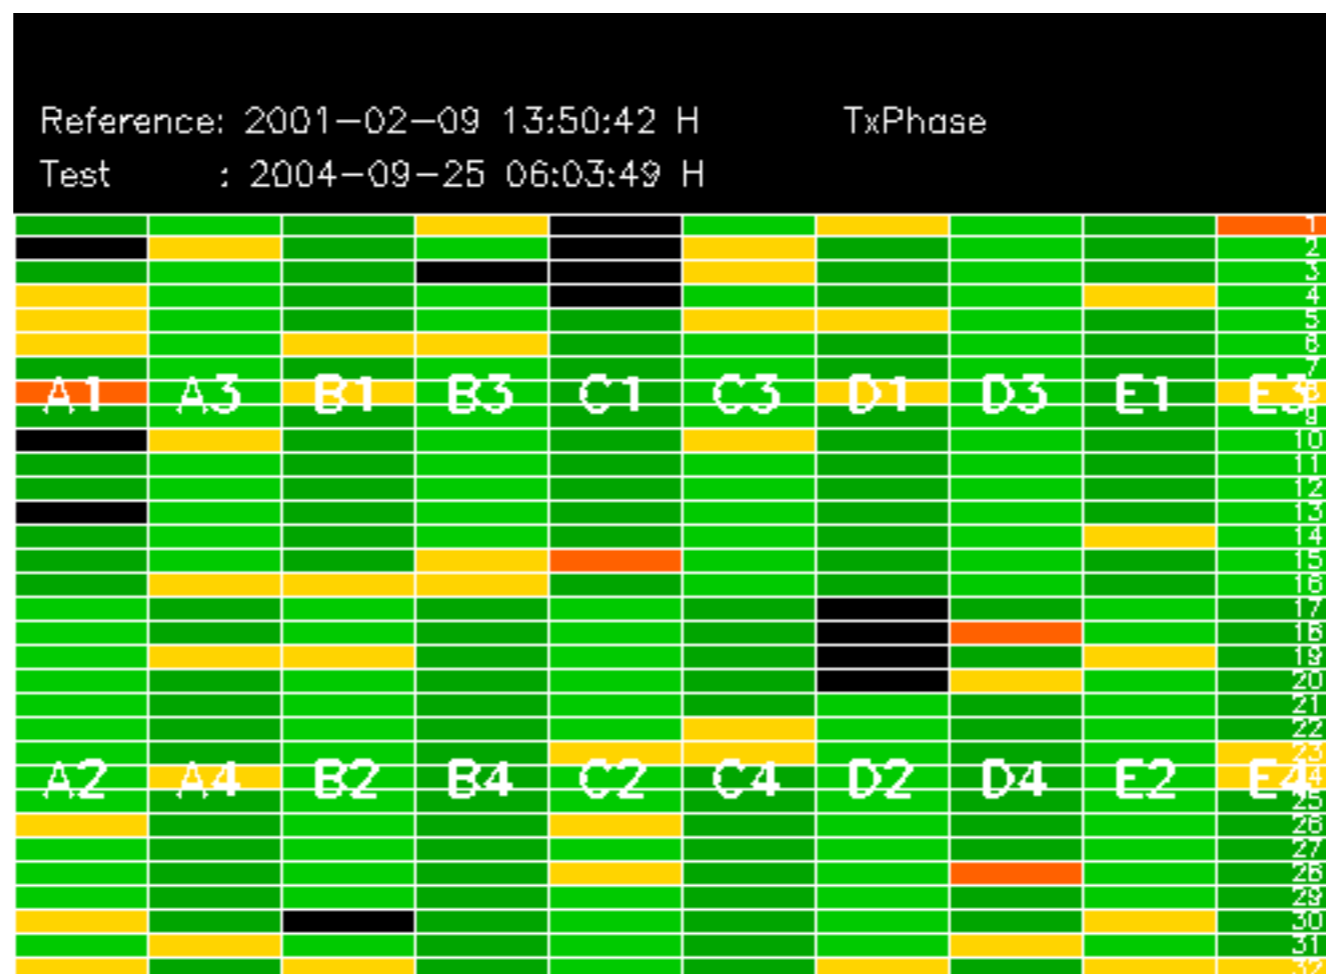


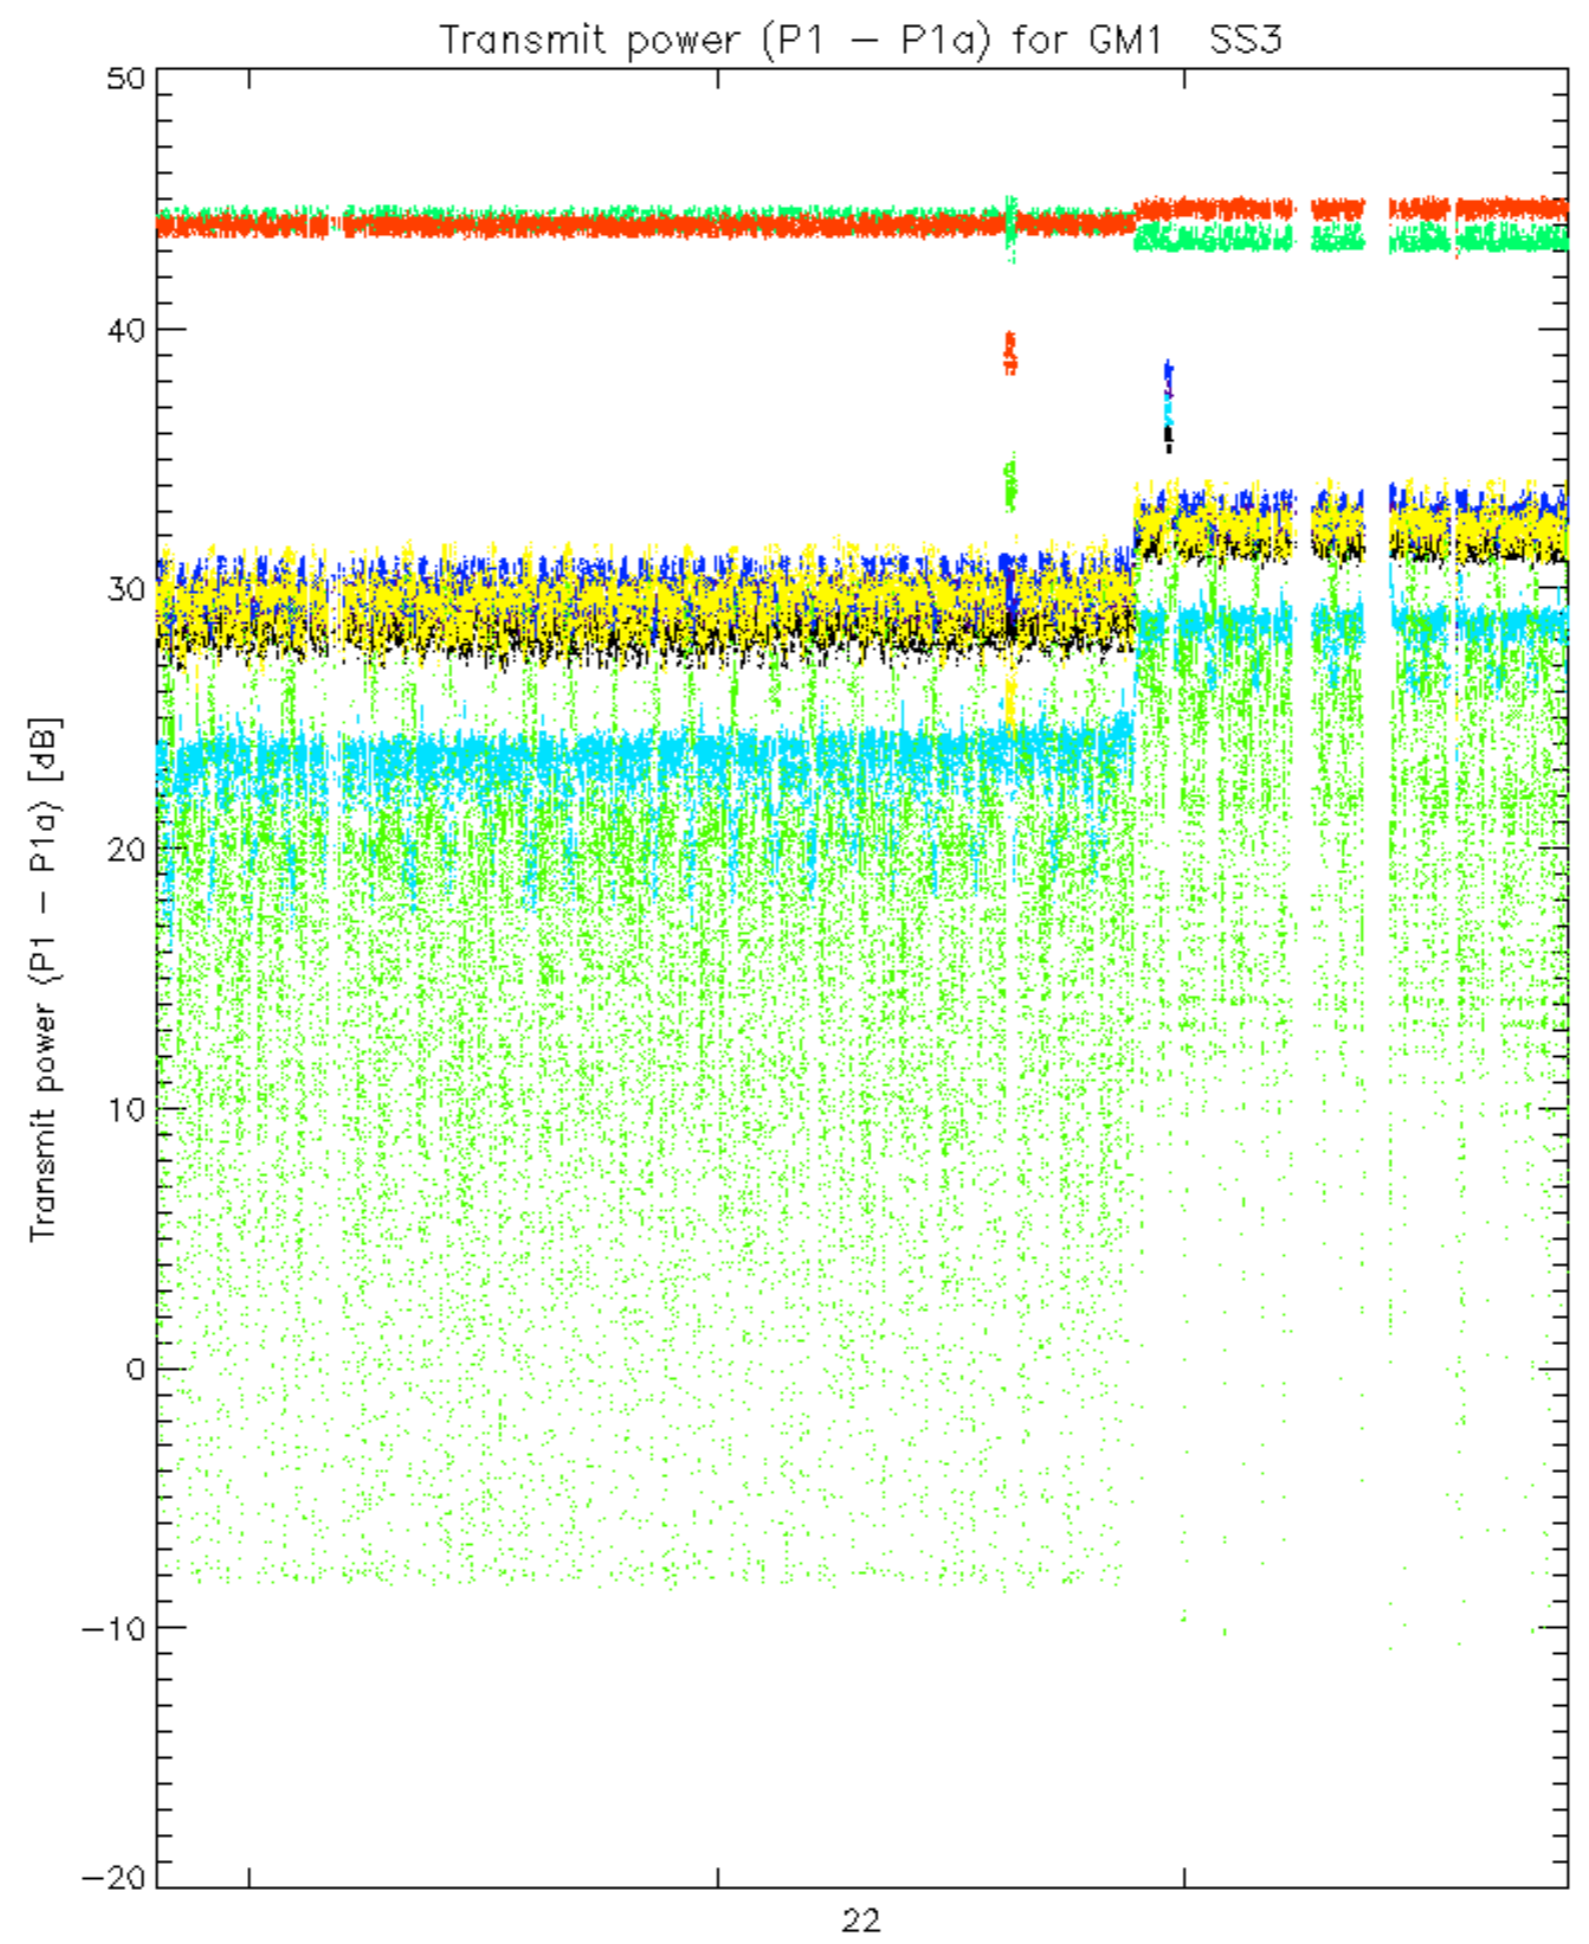


rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

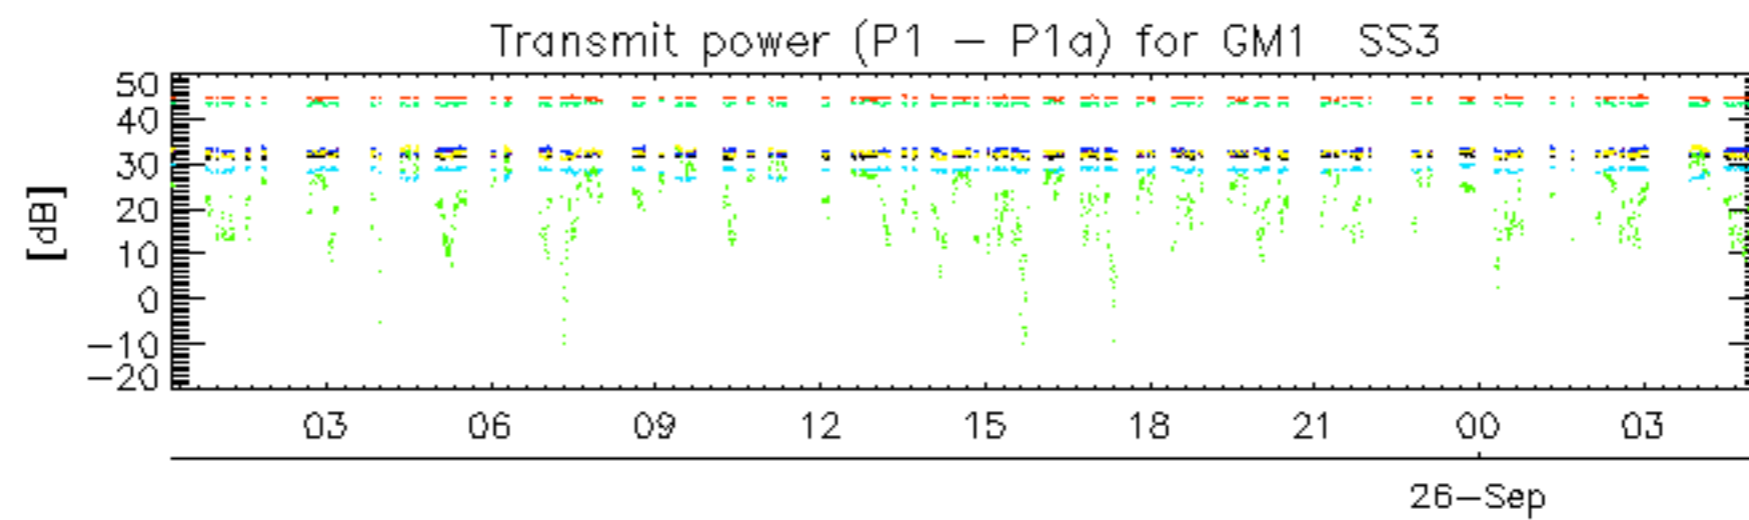

rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

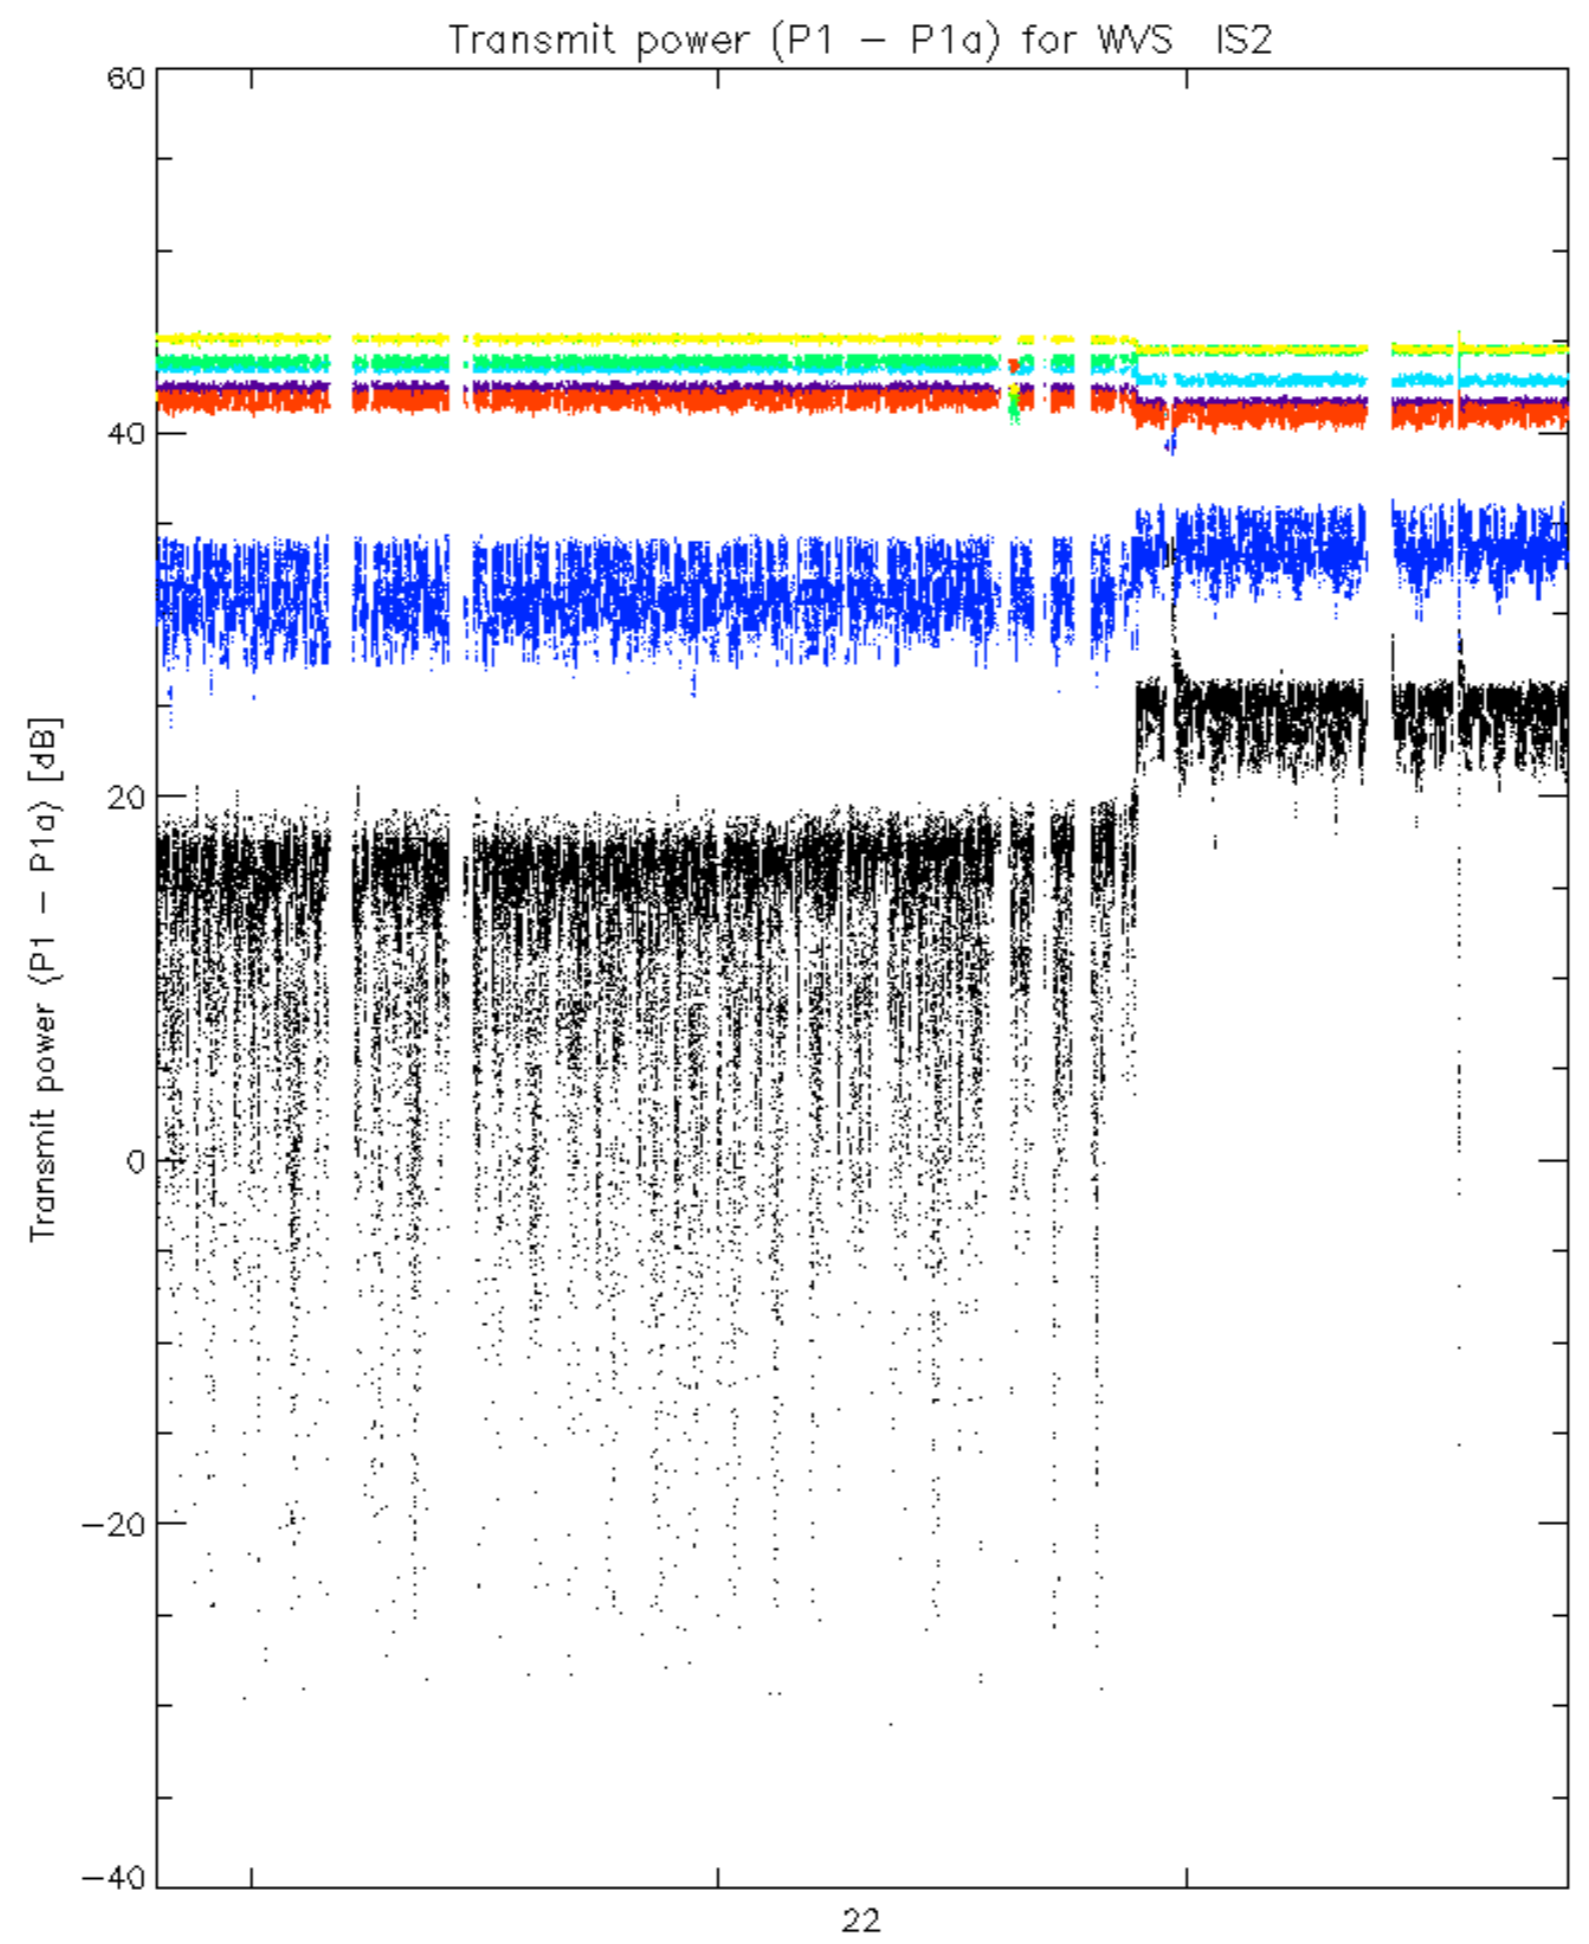

rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

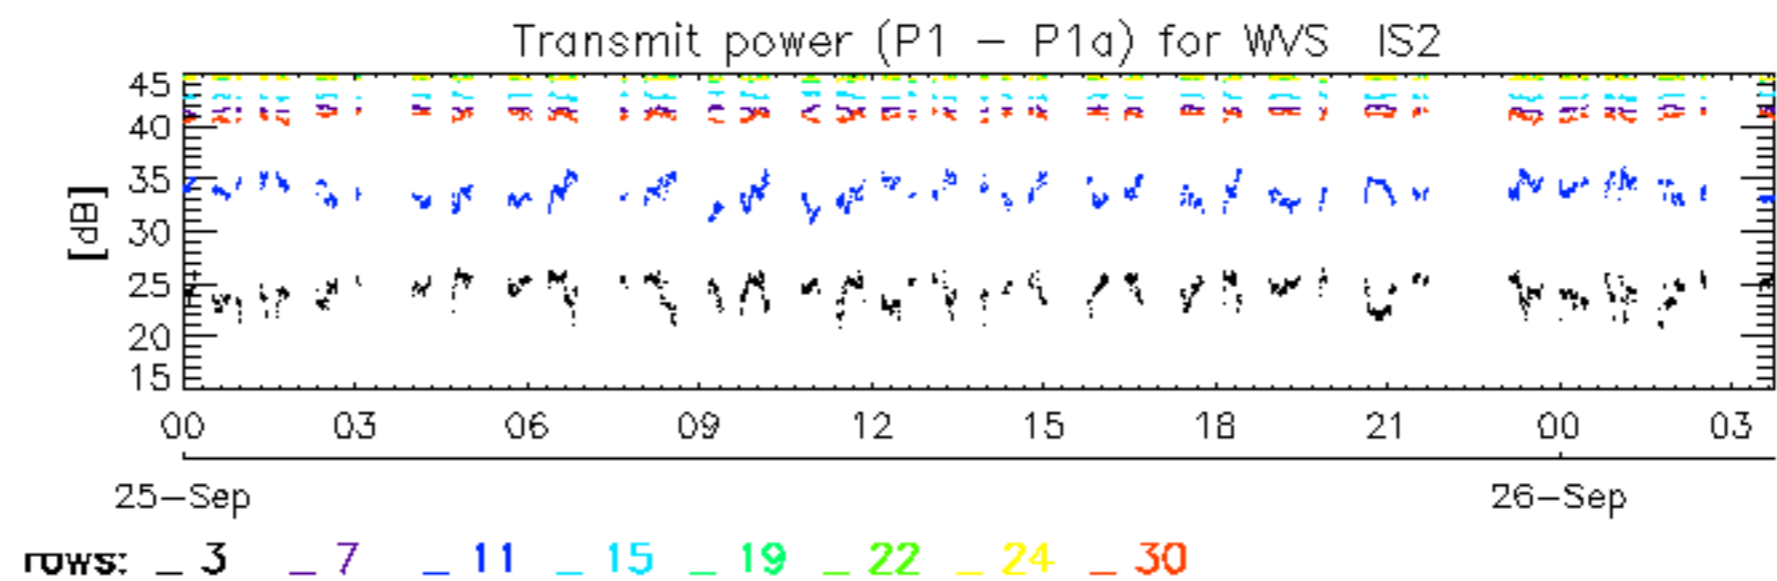

No unavailabilities during the reported period.