

PRELIMINARY REPORT OF 041026

ATTENTION: This report is automatically generated no comments are provided on data analysis

last update on Tue Oct 26 10:50:01 GMT 2004

1. [Introduction](#)
2. [Summary](#)
 - [Instrument Unavailability](#)
 - [Browse Visual Inspection](#)
 - [Module Stepping Results](#)
 - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
 - [Daily statistics](#)
 - [Cyclic statistics](#)
 - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
 - [raw data mean I and Q](#)
 - [raw data stdev I and Q](#)
 - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
 - [Unbiased Doppler Error for WVS](#)
 - [Absolute Doppler for WVS](#)
 - [Doppler evolution versus ANX for WVS](#)
 - [Unbiased Doppler Error for GM1](#)
 - [Absolute Doppler for GM1](#)
 - [Doppler evolution versus ANX for GM1](#)

1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA_WVS_1P), global monitoring products (ASA_GM1_1P), which are the available few hours after the acquisition, on the browse (BP) products and on the Module Stepping (MS) product.

2 - Summary

2.1 - Instrument Unavailability

No unavailabilities during the reported period.

2.2 - Browse Visual Inspection

2.3 - Data Analysis

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.

3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis. The purpose of this mode is to identify any malfunctioning modules and to identify modules for which calibration offsets are to be applied. No anomalies observed on available MS products:

Polarisation	Start Time
V	20041025 084159
H	20041023 030250

MSM in V/V polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>

MSM in H/H polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>

4 - Internal calibration Results

No anomalies observed.

4.1 - Daily statistics

4.1.1 - Evolution for WVS

Evolution of cal pulses for WVS

4.1.2 - Evolution for GM1

Evolution of cal pulses for GM1

4.2 - Cyclic statistics

4.2.1 - Evolution for WVS

Evolution of cal pulses for WVS

P1a Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

P1 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P1	-3.473003	0.006912	-0.034174
7	P1	-3.347039	0.012019	-0.049027
11	P1	-4.619897	0.019556	0.064441
15	P1	-5.703397	0.033681	0.089402
19	P1	-3.541099	0.006538	-0.122343
22	P1	-4.562144	0.013592	-0.079684
24	P1	-4.968742	0.009888	0.035746
30	P1	-7.046928	0.017083	-0.041747

3	P1	-16.100792	0.088795	0.140628
7	P1	-14.038879	0.063227	-0.016656
11	P1	-20.433485	0.214717	-0.397464
15	P1	-11.717125	0.035670	0.077194
19	P1	-14.005247	0.027510	-0.076373
22	P1	-16.147806	0.401319	-0.432814
24	P1	-14.568772	0.263933	-0.270321
30	P1	-18.031347	0.332263	-0.005266

P2 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P2	-22.340750	0.089611	-0.111542
7	P2	-22.598240	0.122937	-0.079762
11	P2	-15.123559	0.117192	0.053531
15	P2	-7.097436	0.106188	-0.126864
19	P2	-9.637543	0.126359	-0.205657
22	P2	-17.275864	0.107172	0.017390
24	P2	-20.790012	0.090513	-0.059024
30	P2	-19.089205	0.083207	0.093932

P3 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P3	-8.176767	0.005898	-0.061968
7	P3	-8.176764	0.005897	-0.061974
11	P3	-8.176763	0.005898	-0.061965
15	P3	-8.176760	0.005898	-0.061969
19	P3	-8.176757	0.005897	-0.061973
22	P3	-8.176755	0.005897	-0.061973
24	P3	-8.176754	0.005897	-0.061982
30	P3	-8.176698	0.005896	-0.062132

4.2.2 - Evolution for GM1

Evolution of cal pulses for GM1	
⊗	
⊗	

P1a Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

P1 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P1	-2.818343	0.014211	0.029313
7	P1	-2.981224	0.051768	0.086719
11	P1	-3.889415	0.021315	-0.024314
15	P1	-3.493275	0.022380	0.014008
19	P1	-3.545456	0.013697	-0.124736
22	P1	-5.662016	0.058800	0.100686
24	P1	-3.971103	0.022513	-0.007431
30	P1	-6.213751	0.048987	-0.107067
3	P1	-10.766801	0.095918	0.460083
7	P1	-10.082485	0.173868	0.069908
11	P1	-12.257143	0.124115	-0.199471
15	P1	-11.683908	0.075657	0.028853
19	P1	-15.593853	0.060690	-0.063020
22	P1	-23.646231	1.448514	-0.477252
24	P1	-18.141735	0.233074	-0.048715
30	P1	-20.361258	1.095309	0.307636

P2 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P2	-18.016363	0.049359	-0.127476
7	P2	-22.692137	0.065719	-0.000322
11	P2	-10.864961	0.050052	-0.051412
15	P2	-4.998764	0.030693	-0.108293
19	P2	-6.844955	0.045348	-0.253809
22	P2	-7.388121	0.041593	-0.011083
24	P2	-11.114494	0.055120	-0.147552
30	P2	-22.102379	0.038383	0.017378

P3 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

3	P3	-8.020628	0.003934	-0.051204
7	P3	-8.020587	0.003934	-0.051076
11	P3	-8.020735	0.003922	-0.051001
15	P3	-8.020633	0.003923	-0.050925
19	P3	-8.020636	0.003924	-0.050951
22	P3	-8.020614	0.003923	-0.050973
24	P3	-8.020742	0.003950	-0.051385
30	P3	-8.020694	0.003932	-0.051020

4.3 - cal pulses monitoring (all rows)

4.3.1 - Evolution for WVS



4.3.2 - Evolution for GM1



5 - RAW data statistics

No anomalies observed.

5.1 - Input mean I/Q

channel	stat	DSS-B
MEAN I	mean	0.000477662
	stdev	2.15301e-07
MEAN Q	mean	0.000553203
	stdev	2.32331e-07



5.2 - Input stdev I/Q

channel	stat	DSS-B
STDEV I	mean	0.127191
	stdev	0.000915326

STDEV Q	mean	0.127403
	stdev	0.000924084



5.3 - Gain imbalance I/Q



6 - Doppler Analysis

Preliminary report. The data is not yet controlled

6.1 - Unbiased Doppler Error for WVS

Evolution of unbiased Doppler error (Real - Expected)



Ascending



Descending

6.2 - Absolute Doppler for WVS

Evolution of Absolute Doppler



Ascending



Descending

6.3 - Doppler evolution versus ANX for WVS

Evolution Doppler error versus ANX



6.4 - Unbiased Doppler Error for GM1

Evolution of unbiased Doppler error (Real - Expected)	
<input type="checkbox"/>	
	Ascending
<input type="checkbox"/>	
	Descending





6.5 - Absolute Doppler for GM1

Evolution of Absolute Doppler	
<input type="checkbox"/>	
	Ascending
<input type="checkbox"/>	
	Descending

6.6 - Doppler evolution versus ANX for GM1


Evolution Doppler error versus ANX	
<input type="checkbox"/>	

Cal pulses for GM1 SS3

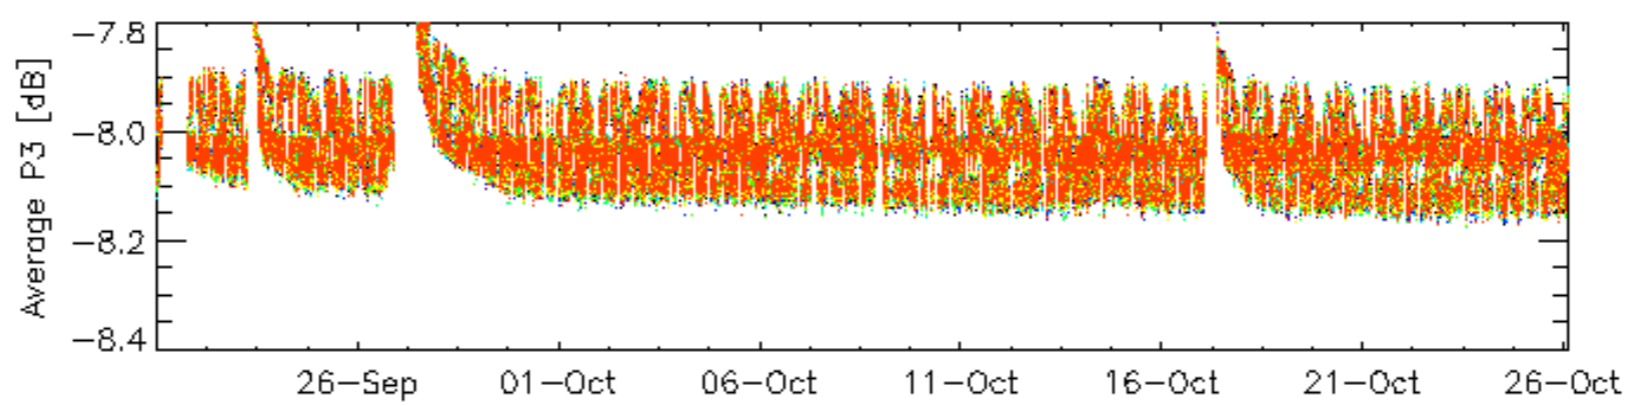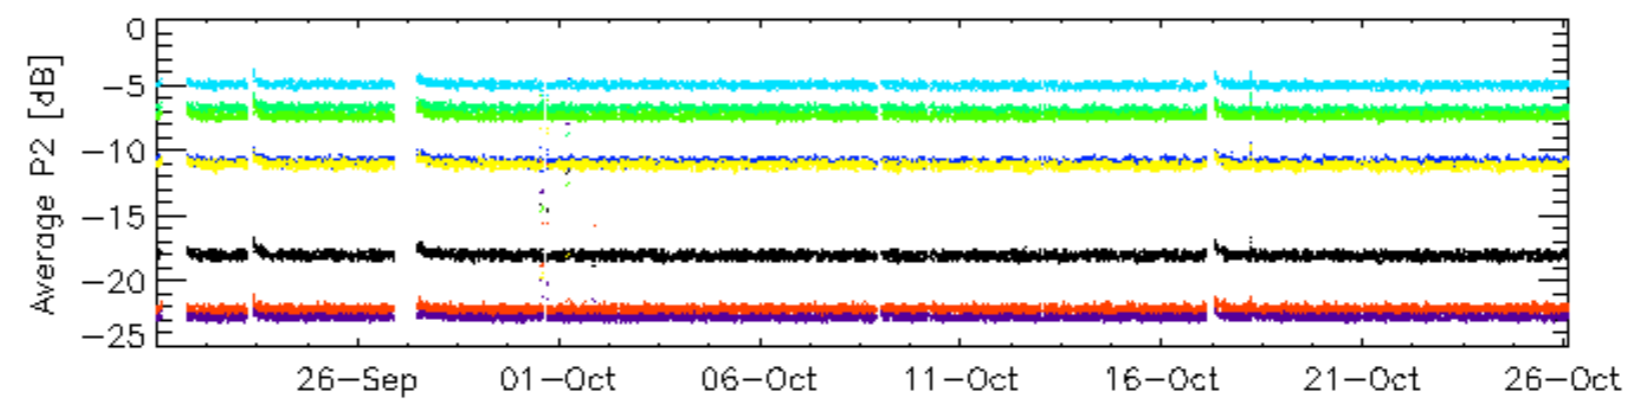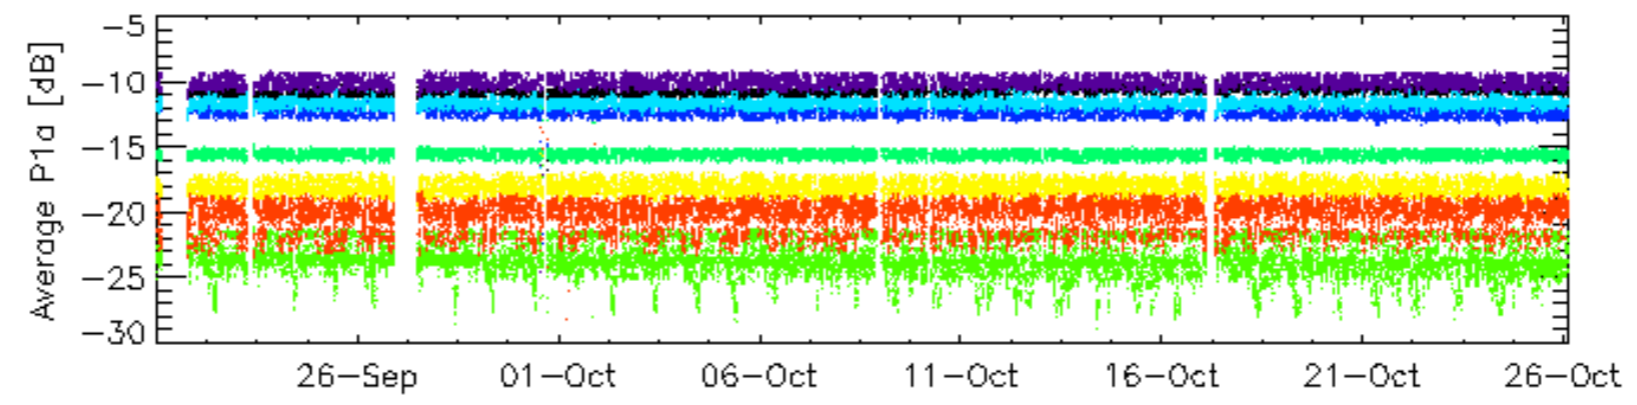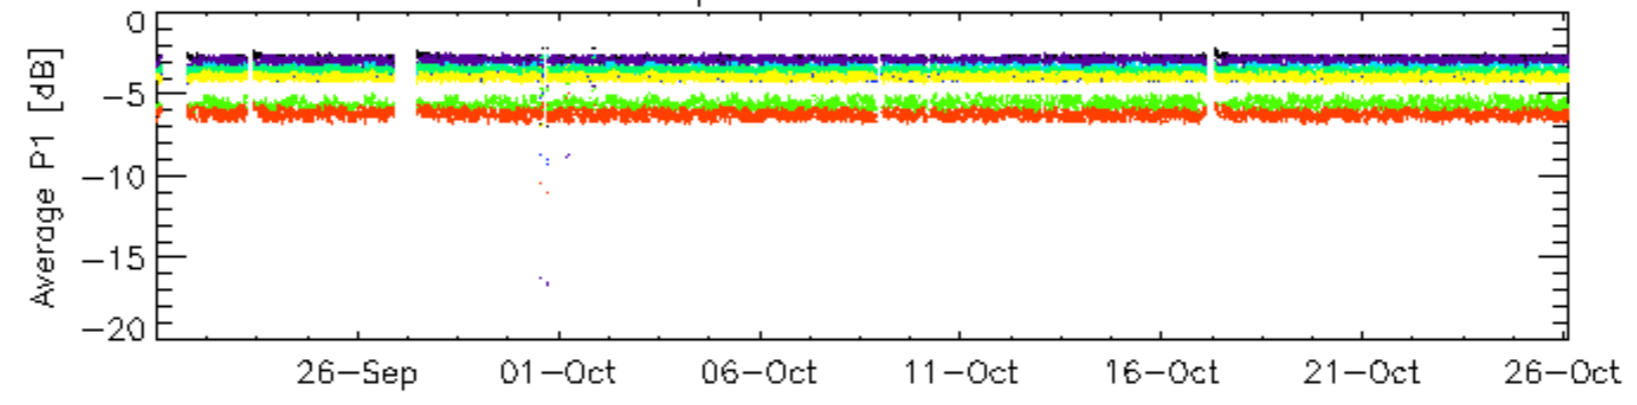





rows: [_ 3](#) [_ 7](#) [_ 11](#) [_ 15](#) [_ 19](#) [_ 22](#) [_ 24](#) [_ 30](#)

Cal pulses for GM1 SS3

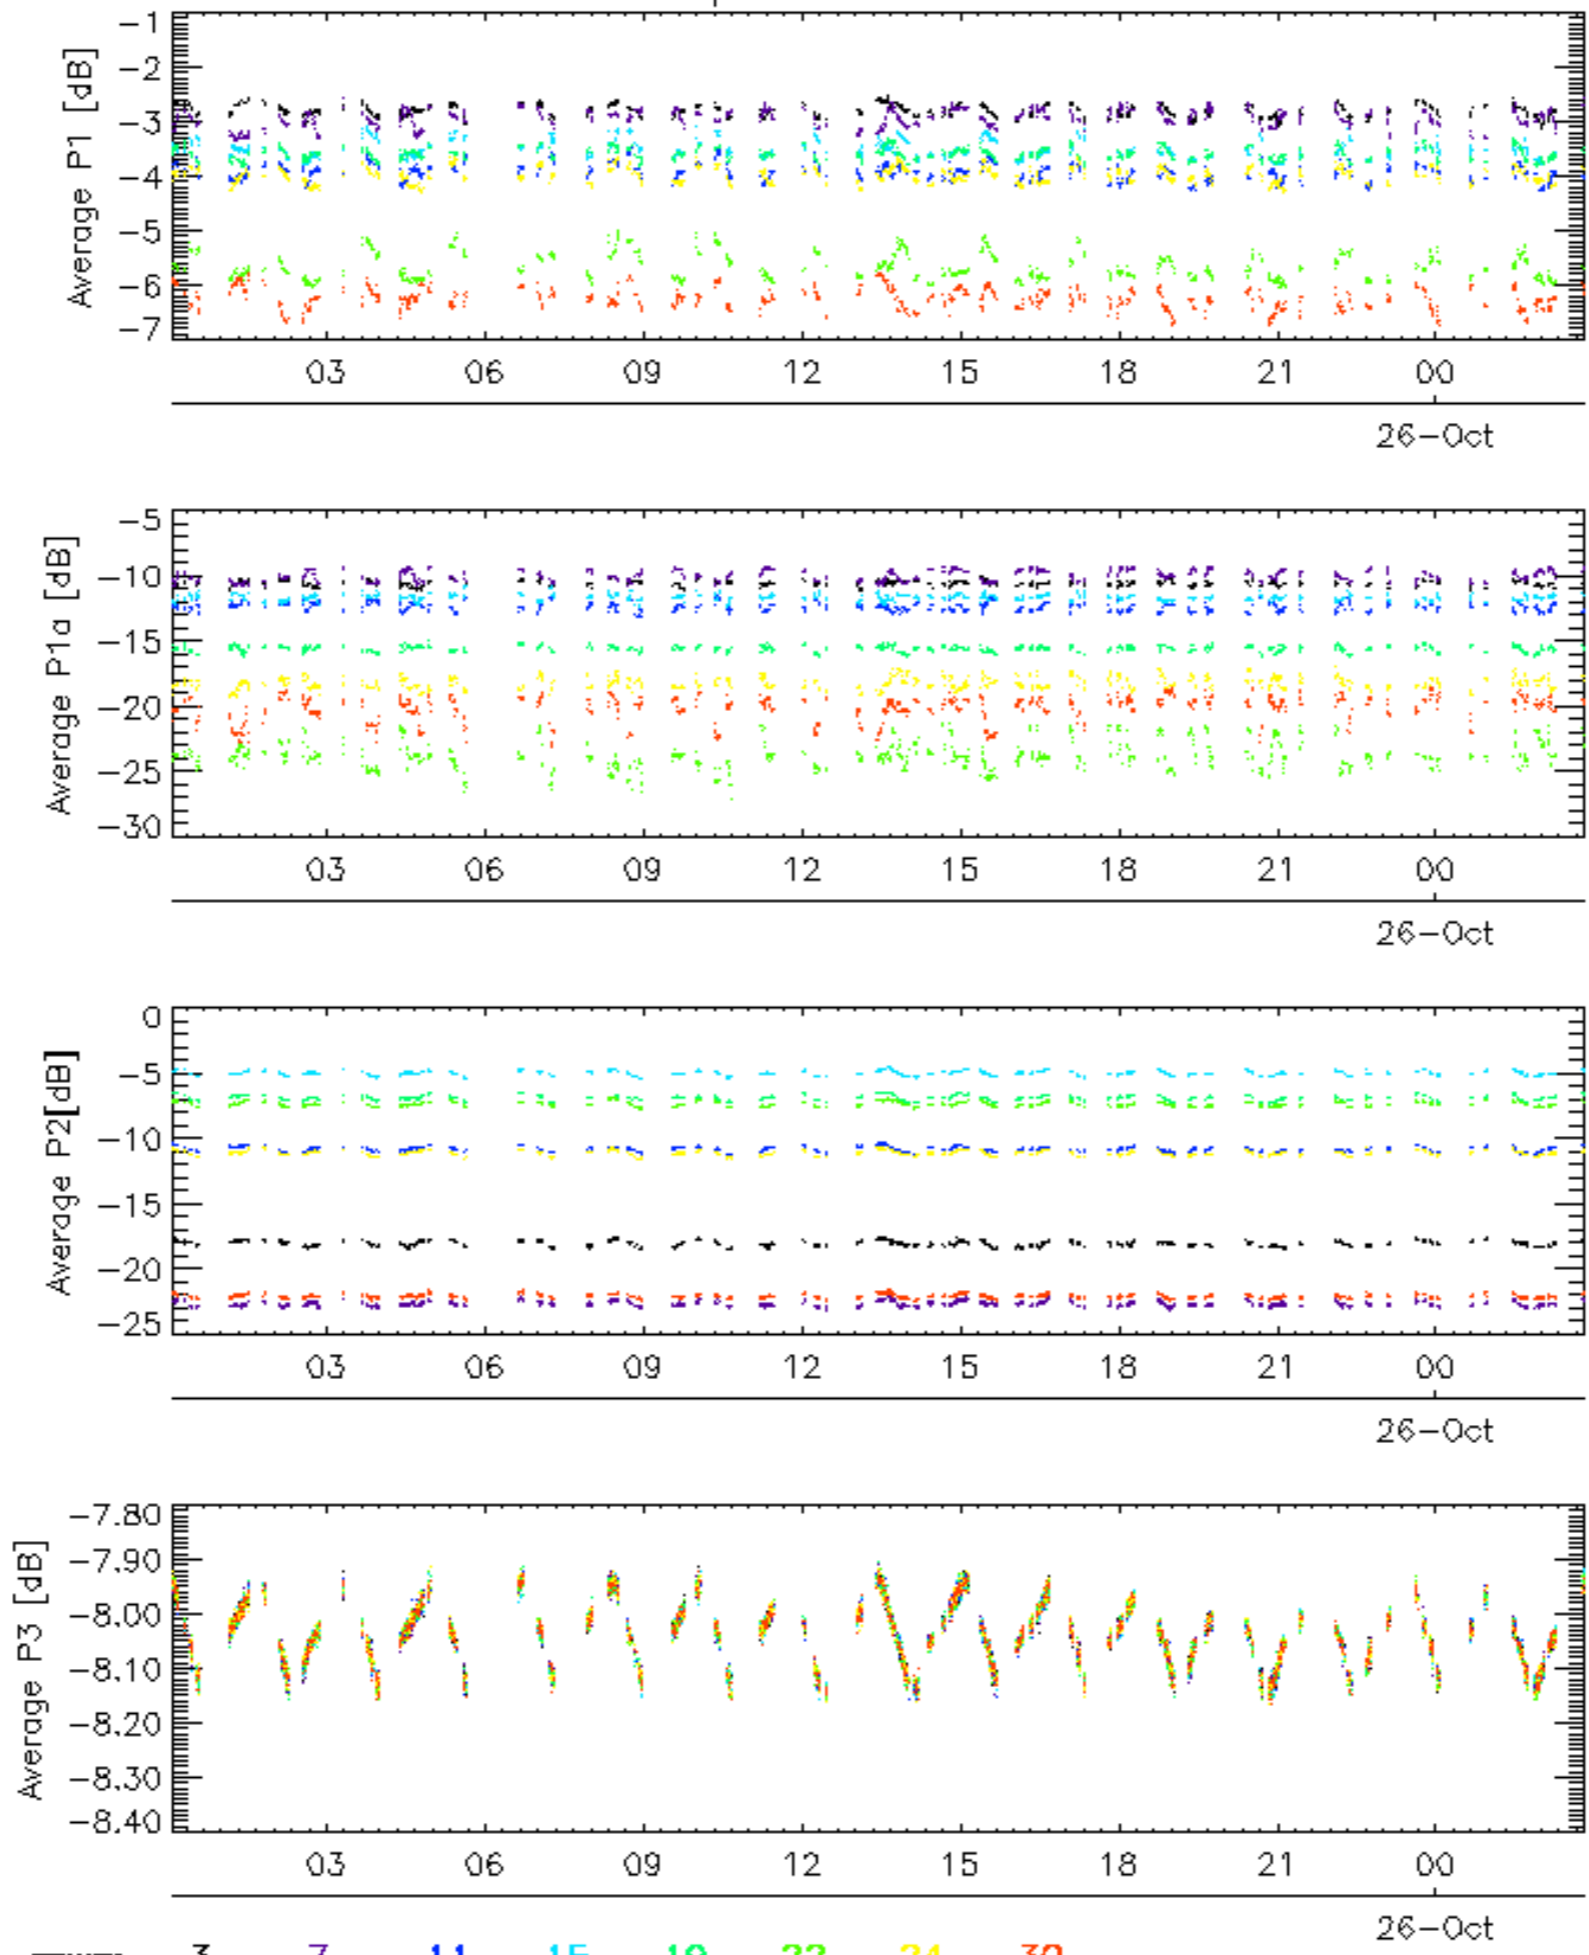


rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

Cal pulses for WVS IS2

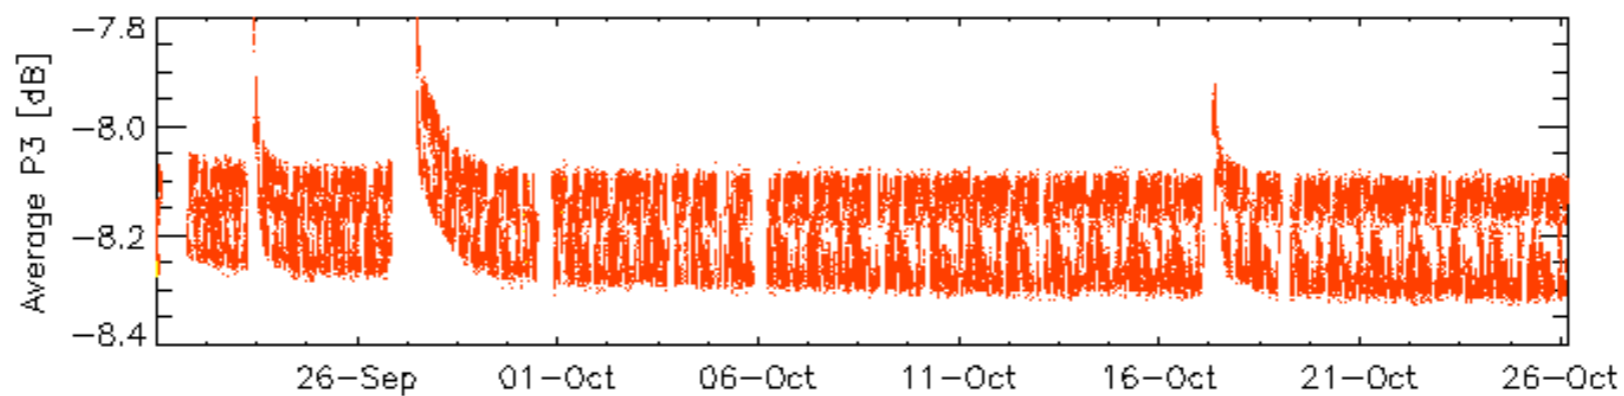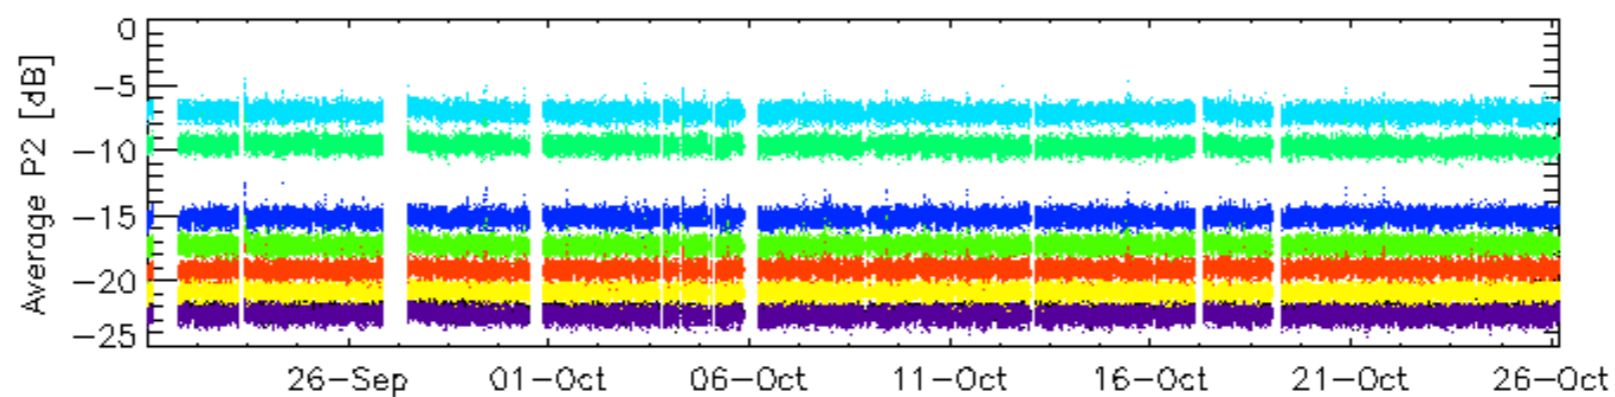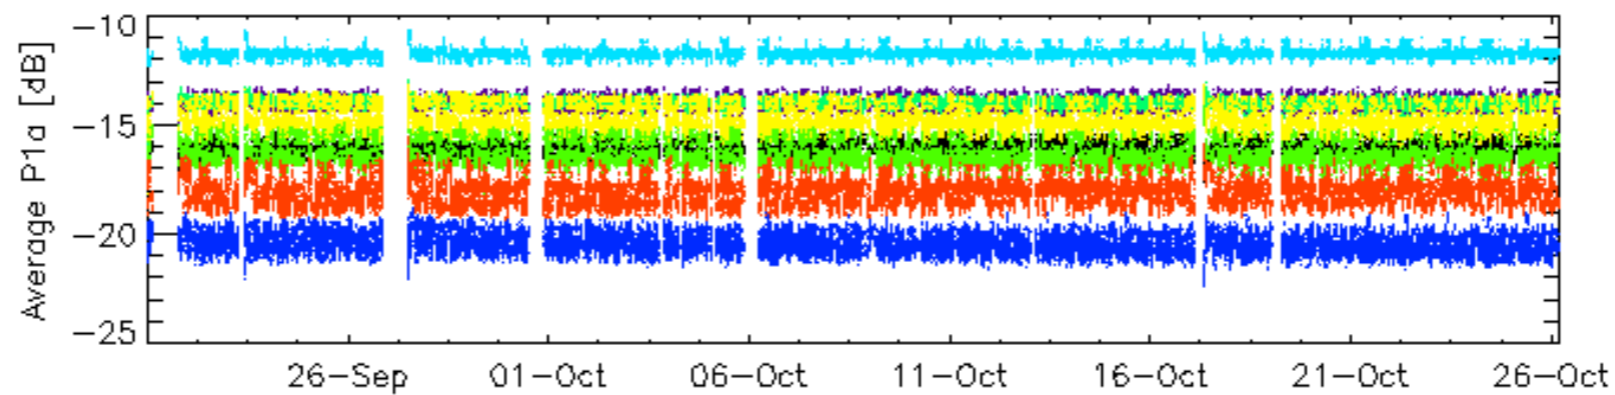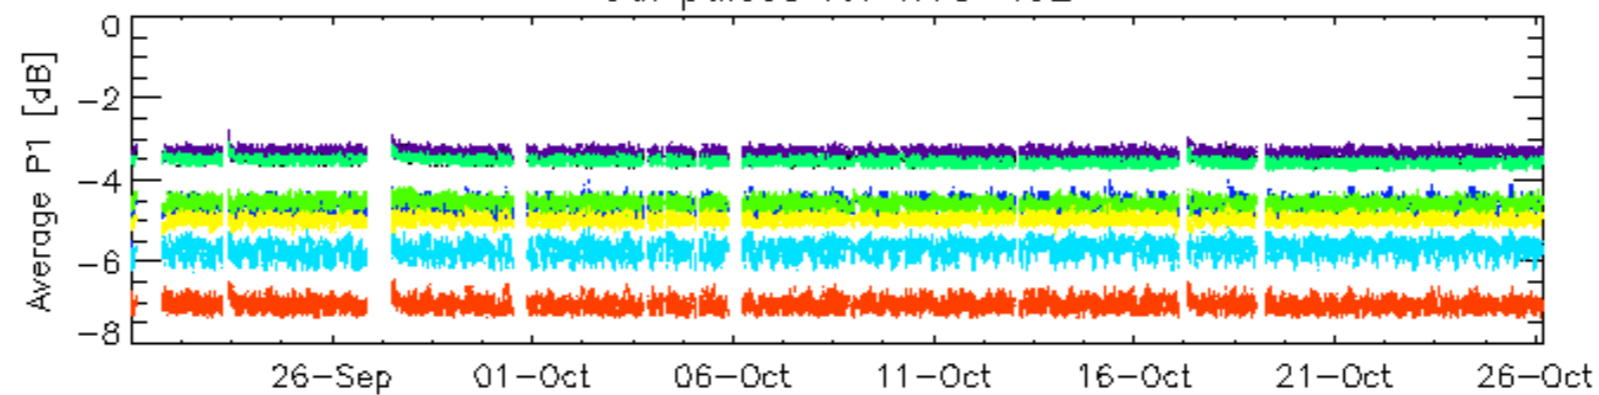



rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

Cal pulses for WVS IS2

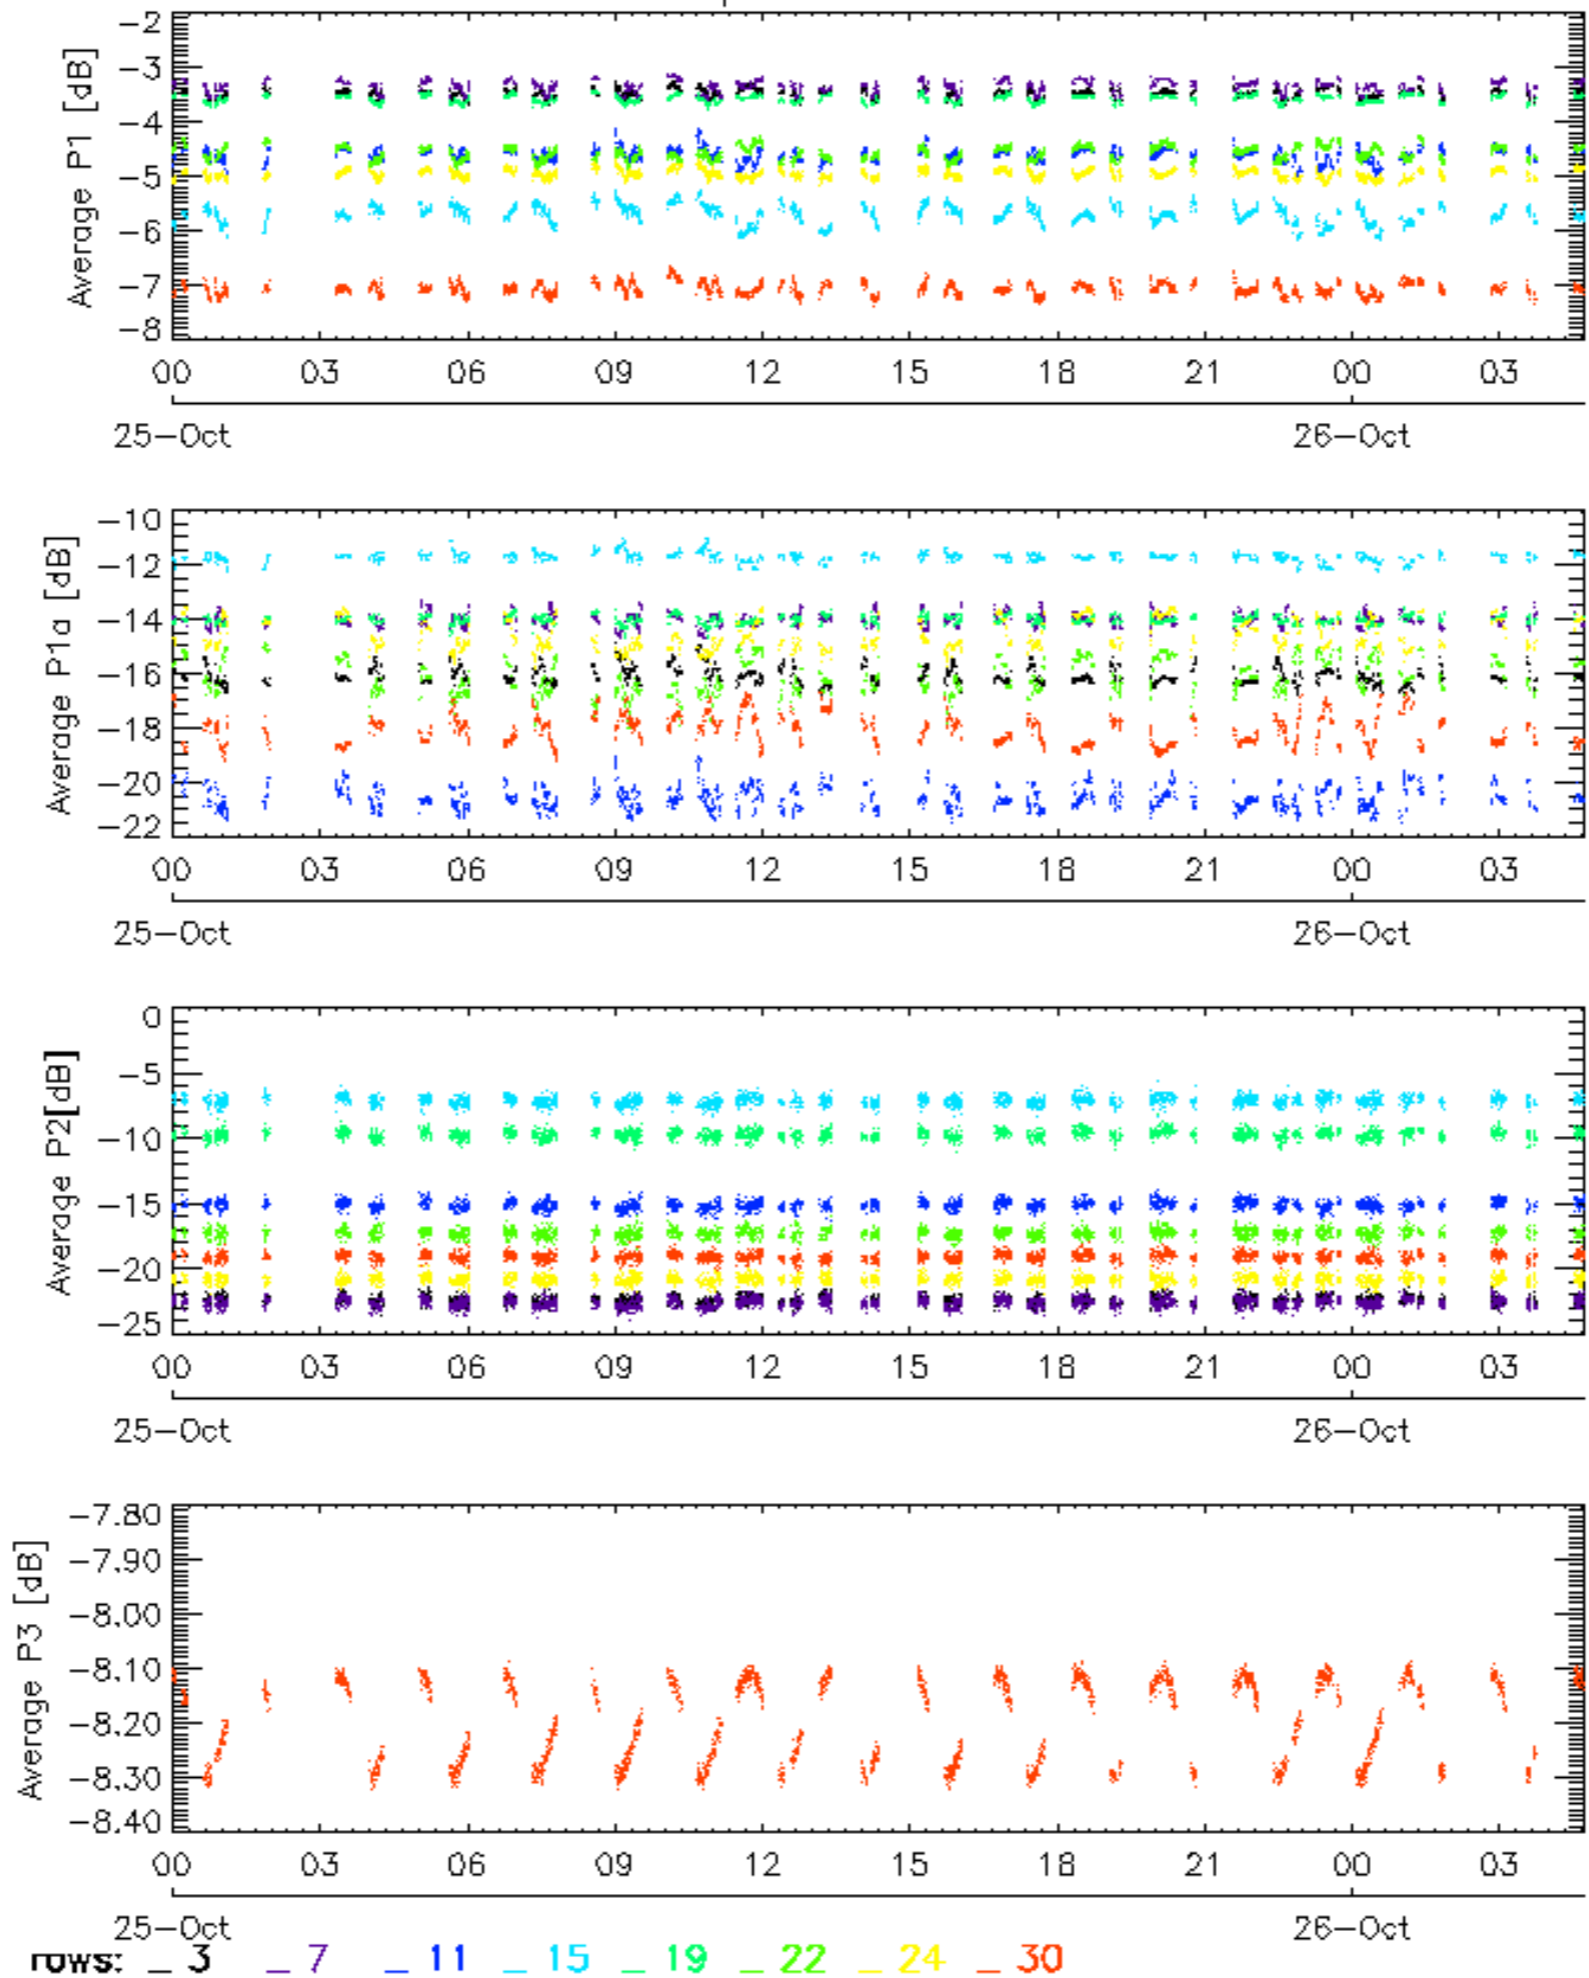


No anomalies observed.

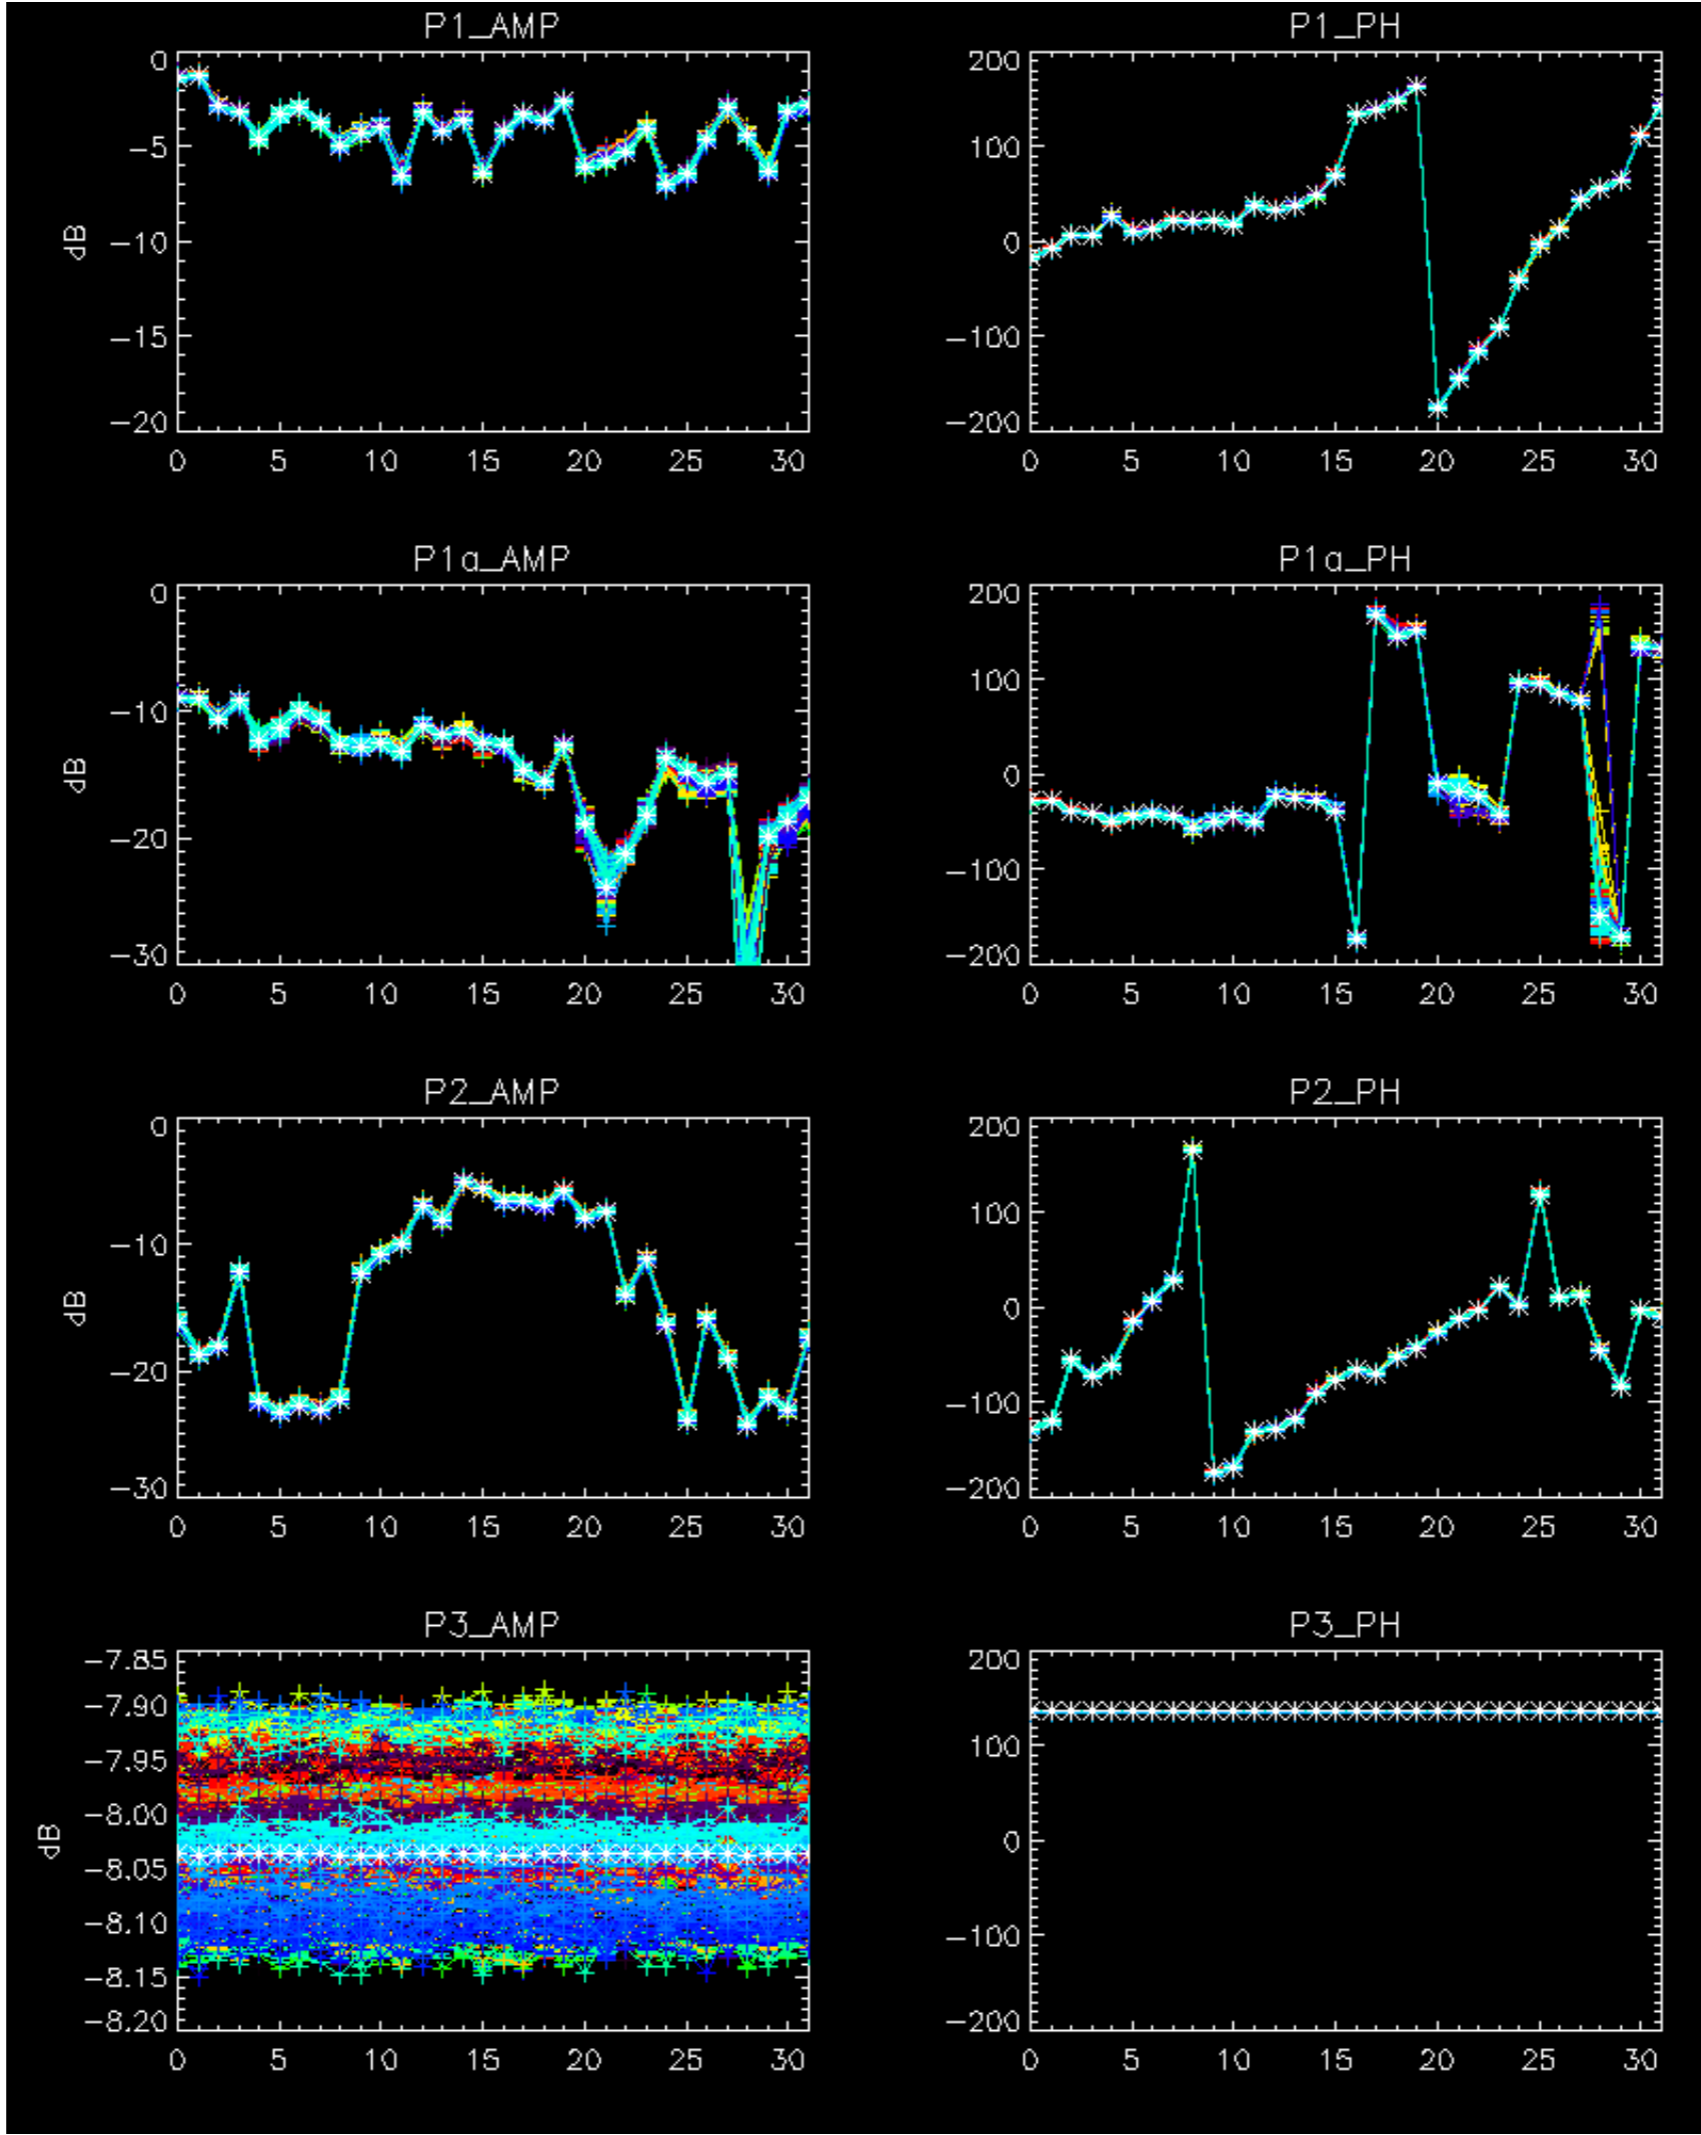

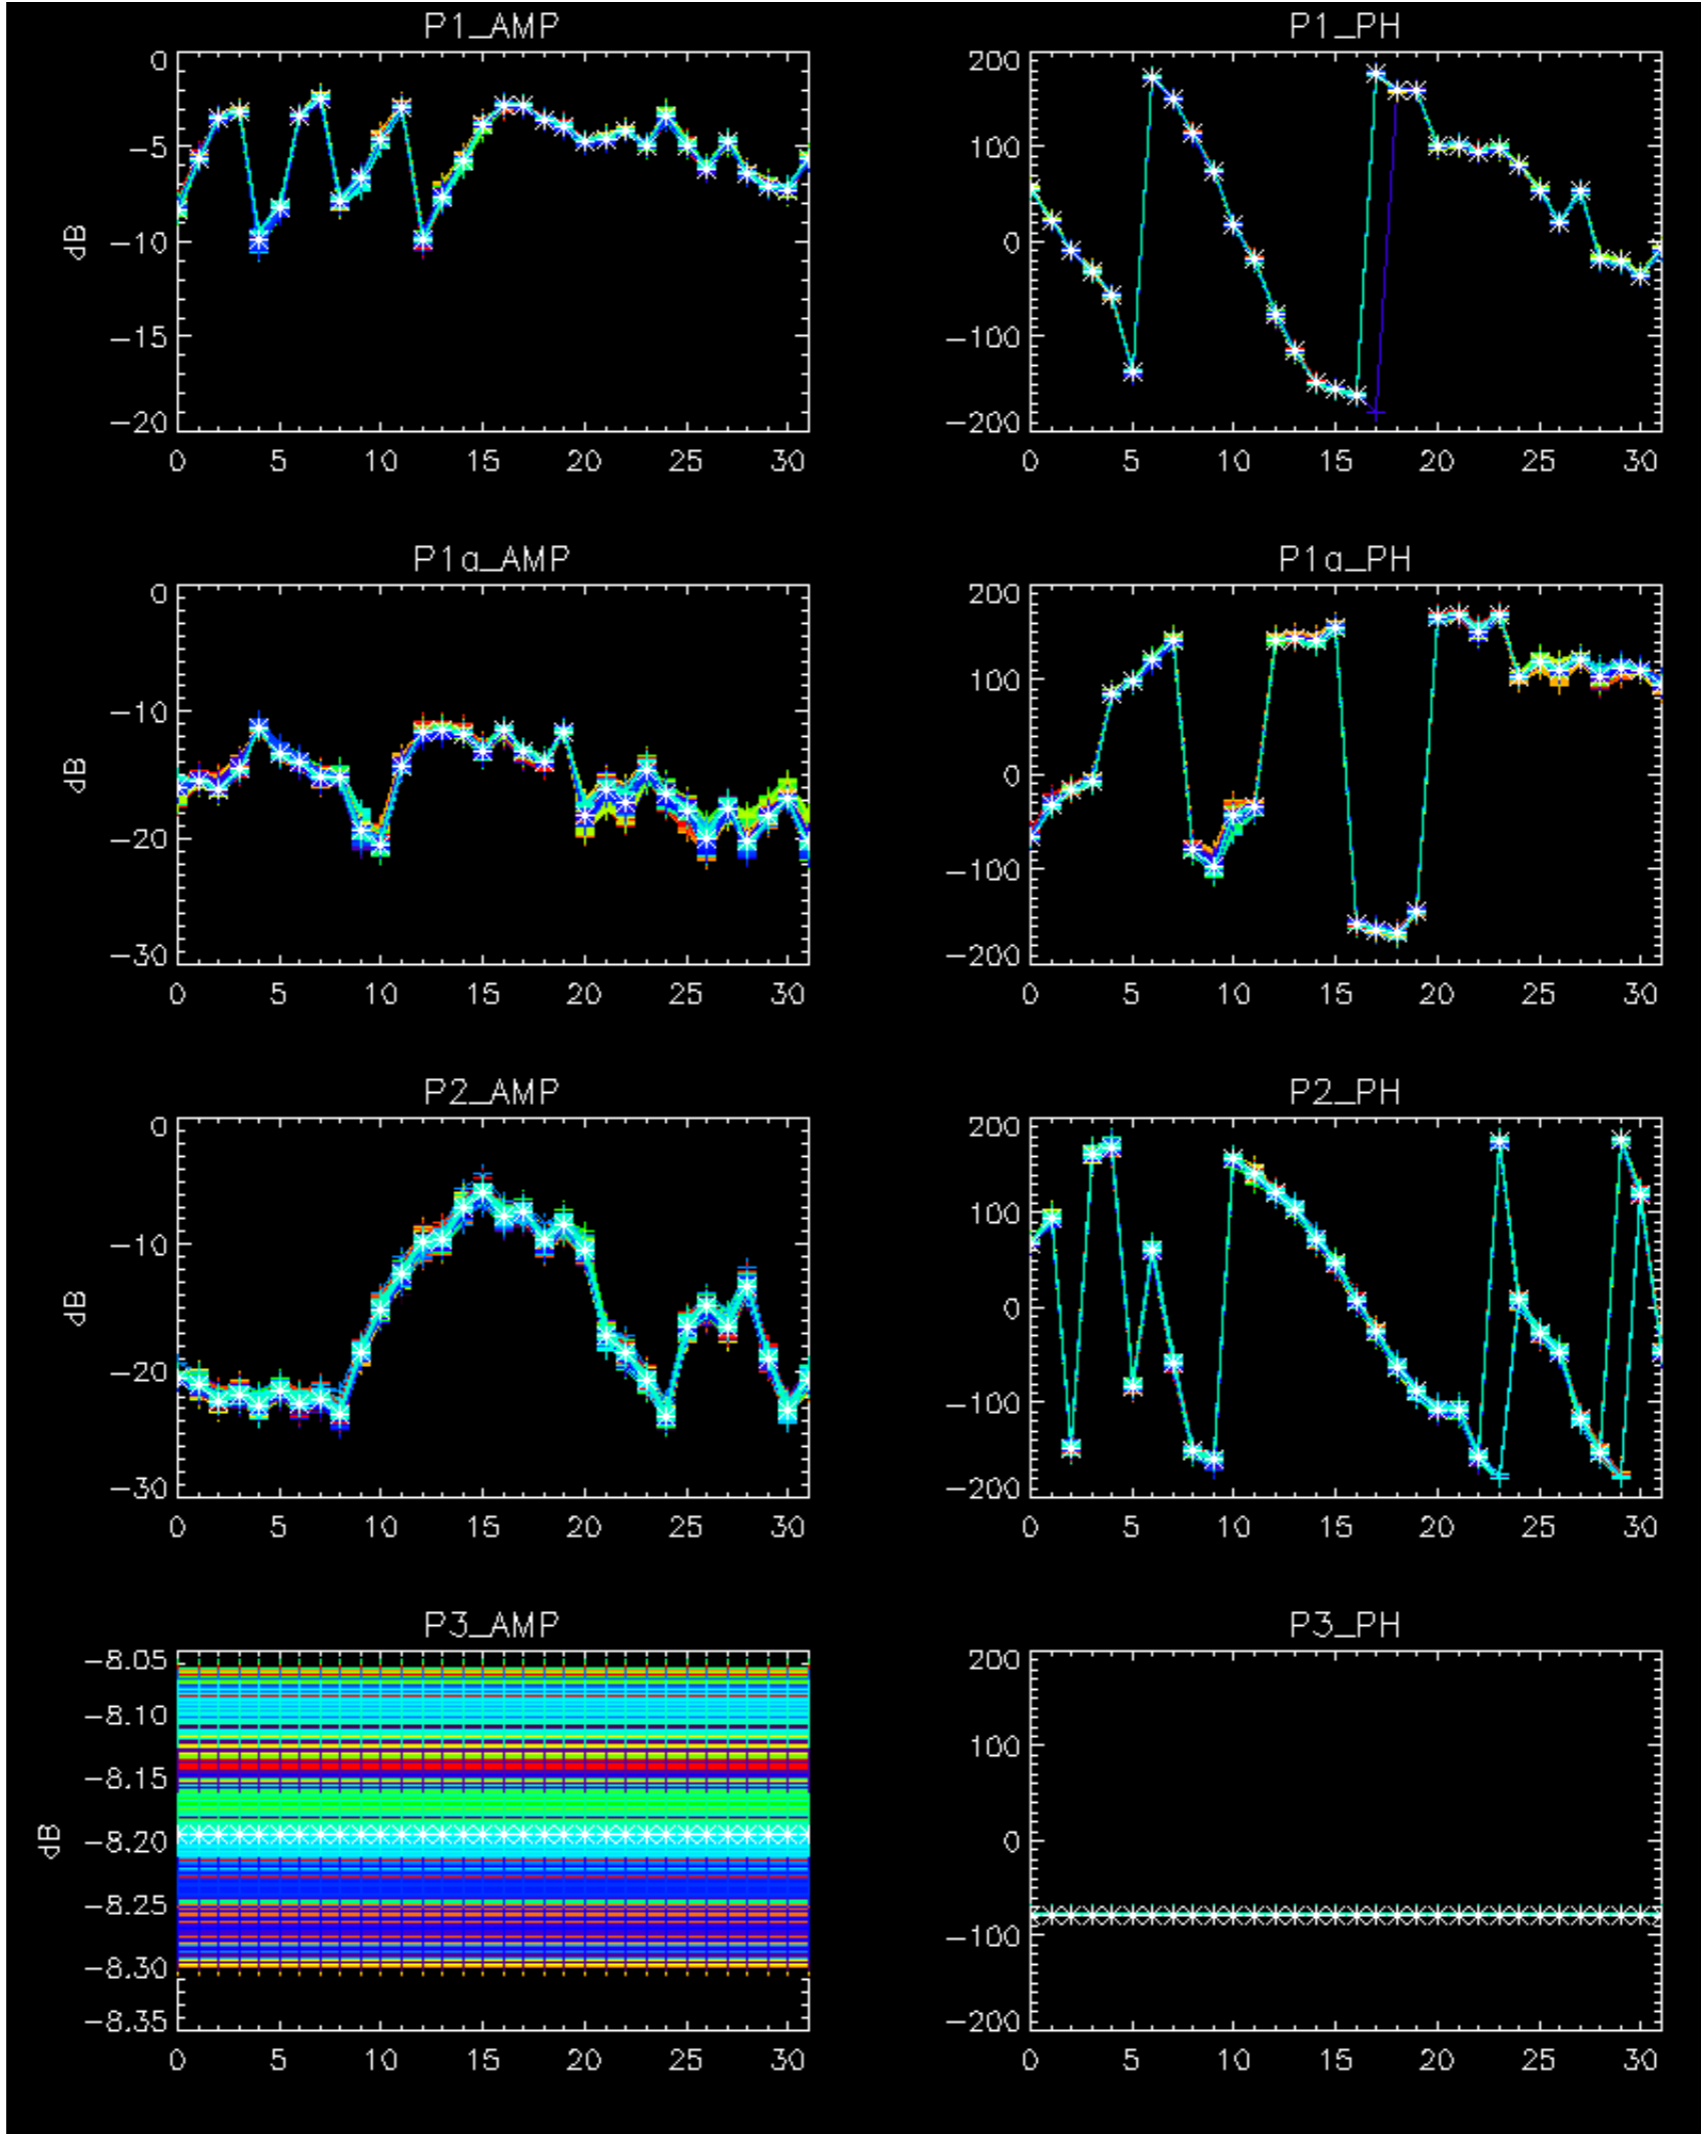


- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.


Doppler 'GM1' 'SS1' ascending

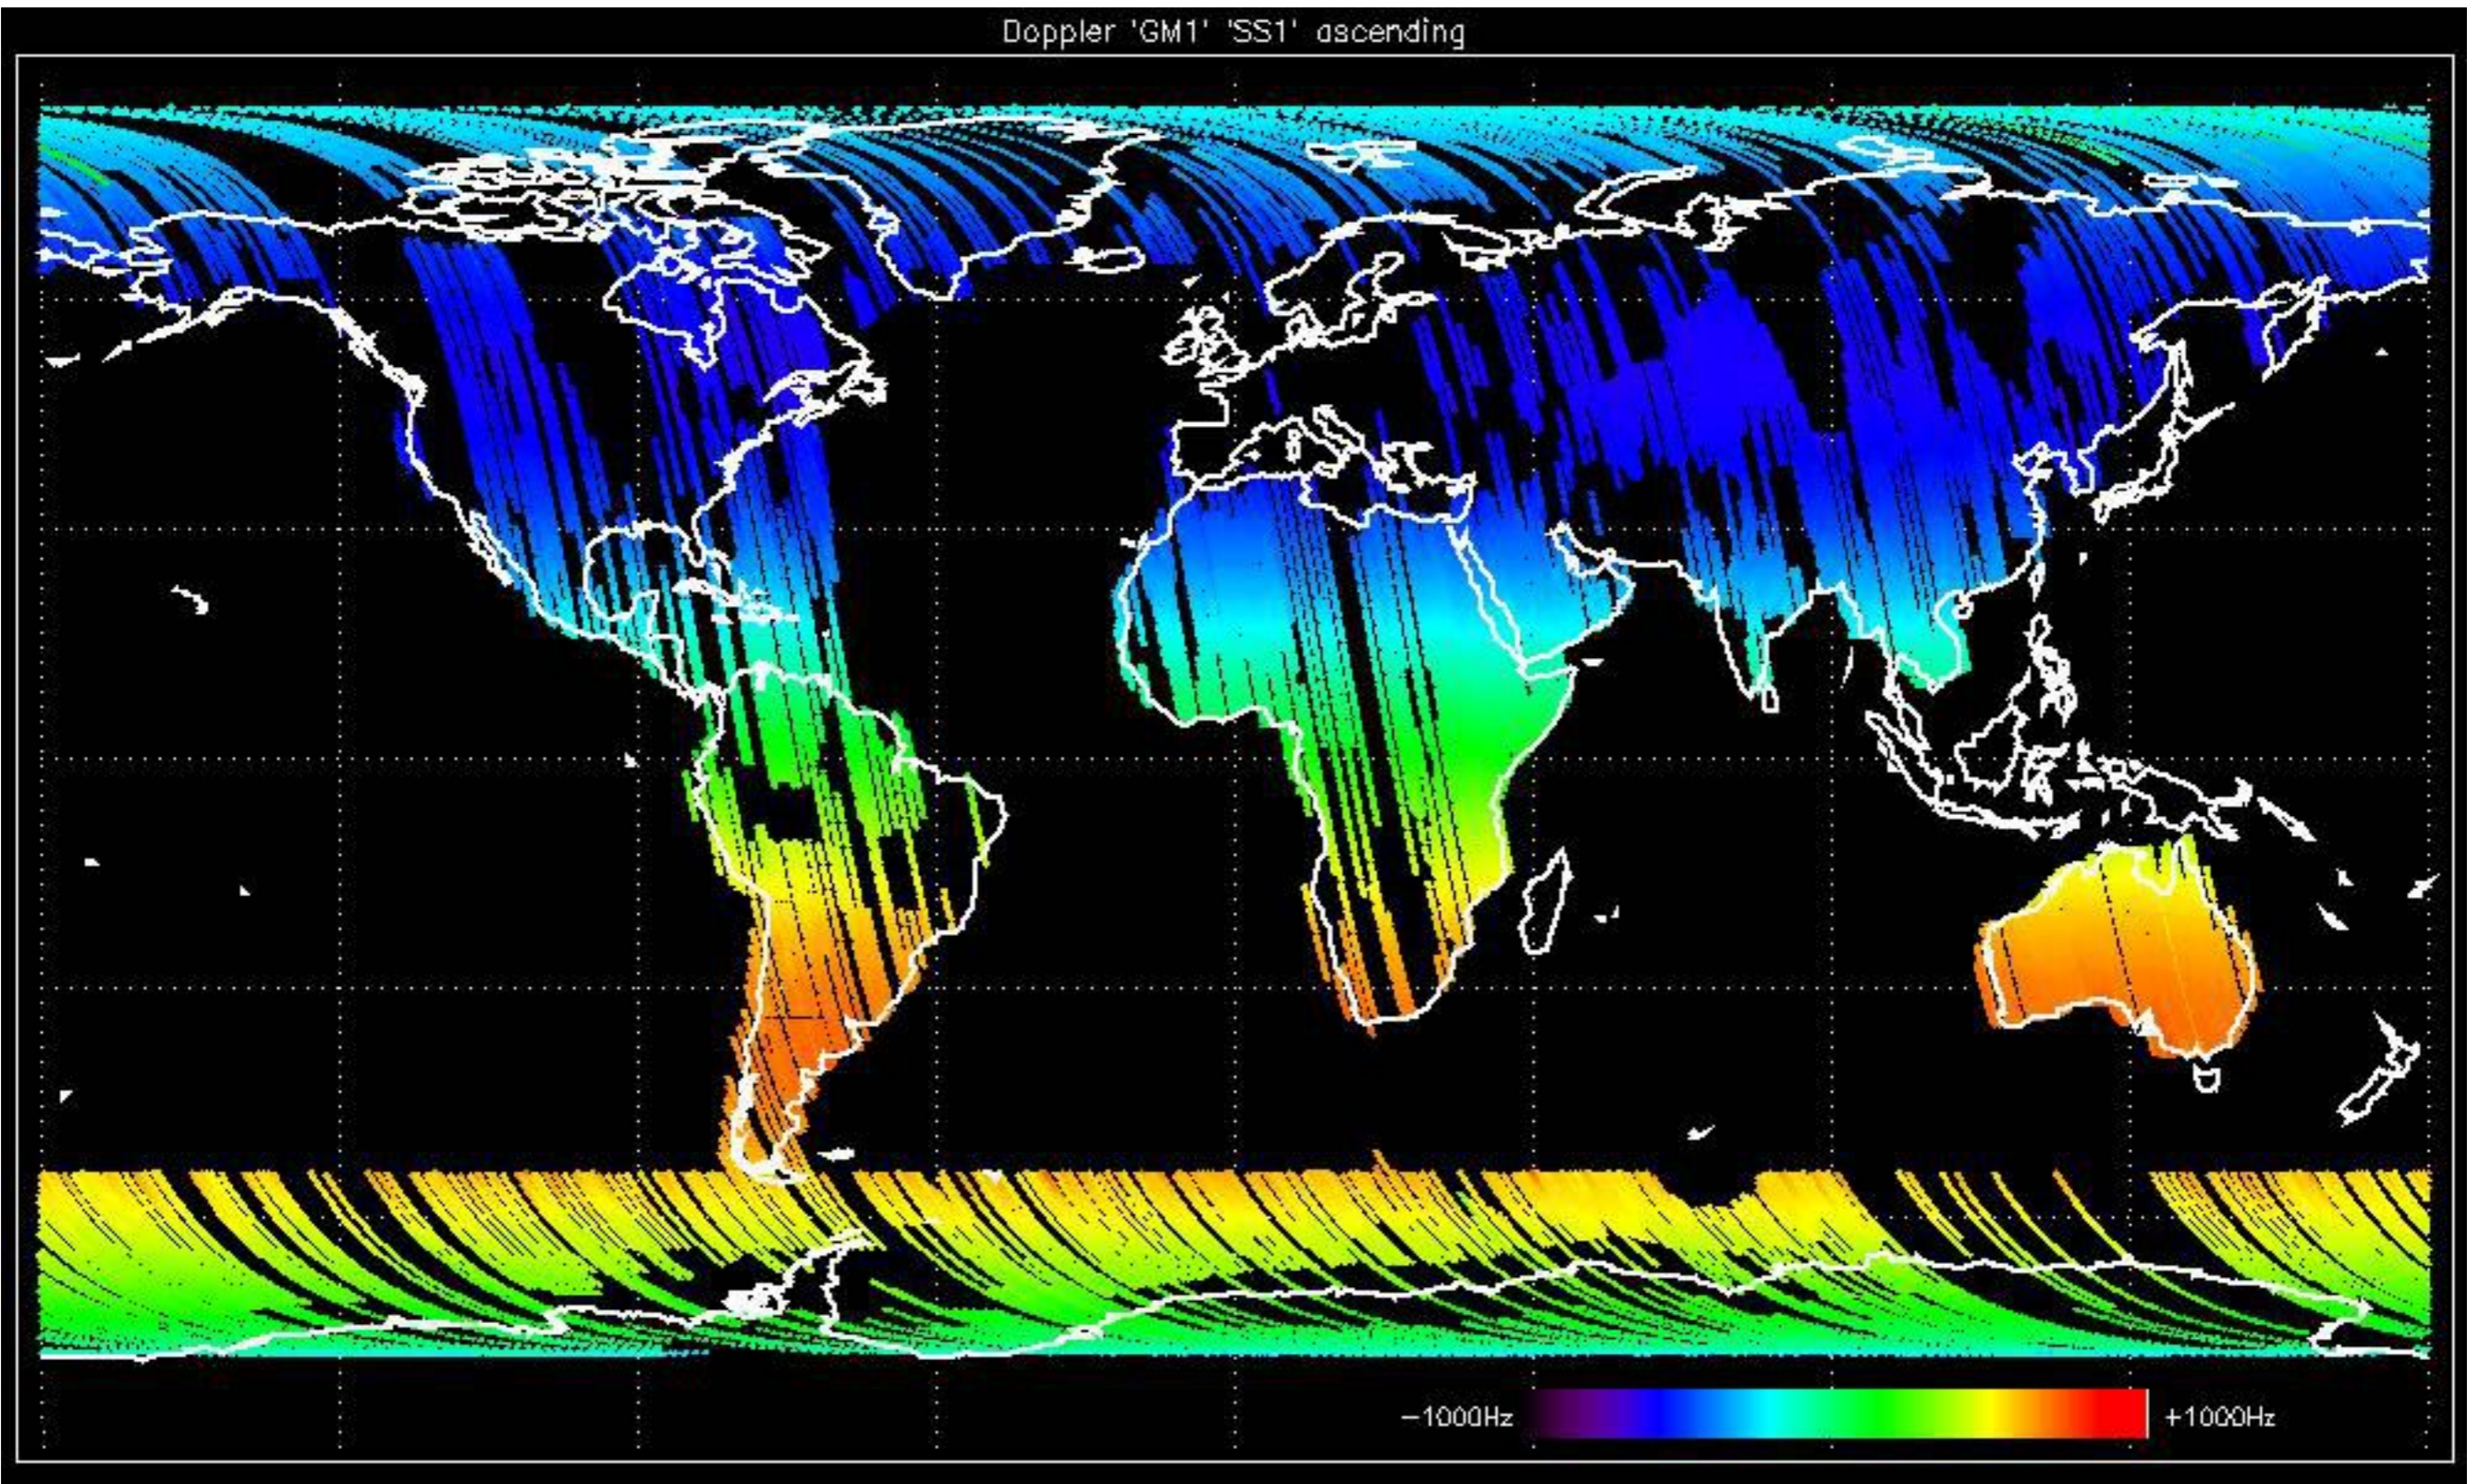


Doppler 'GM1' 'SS1' descending

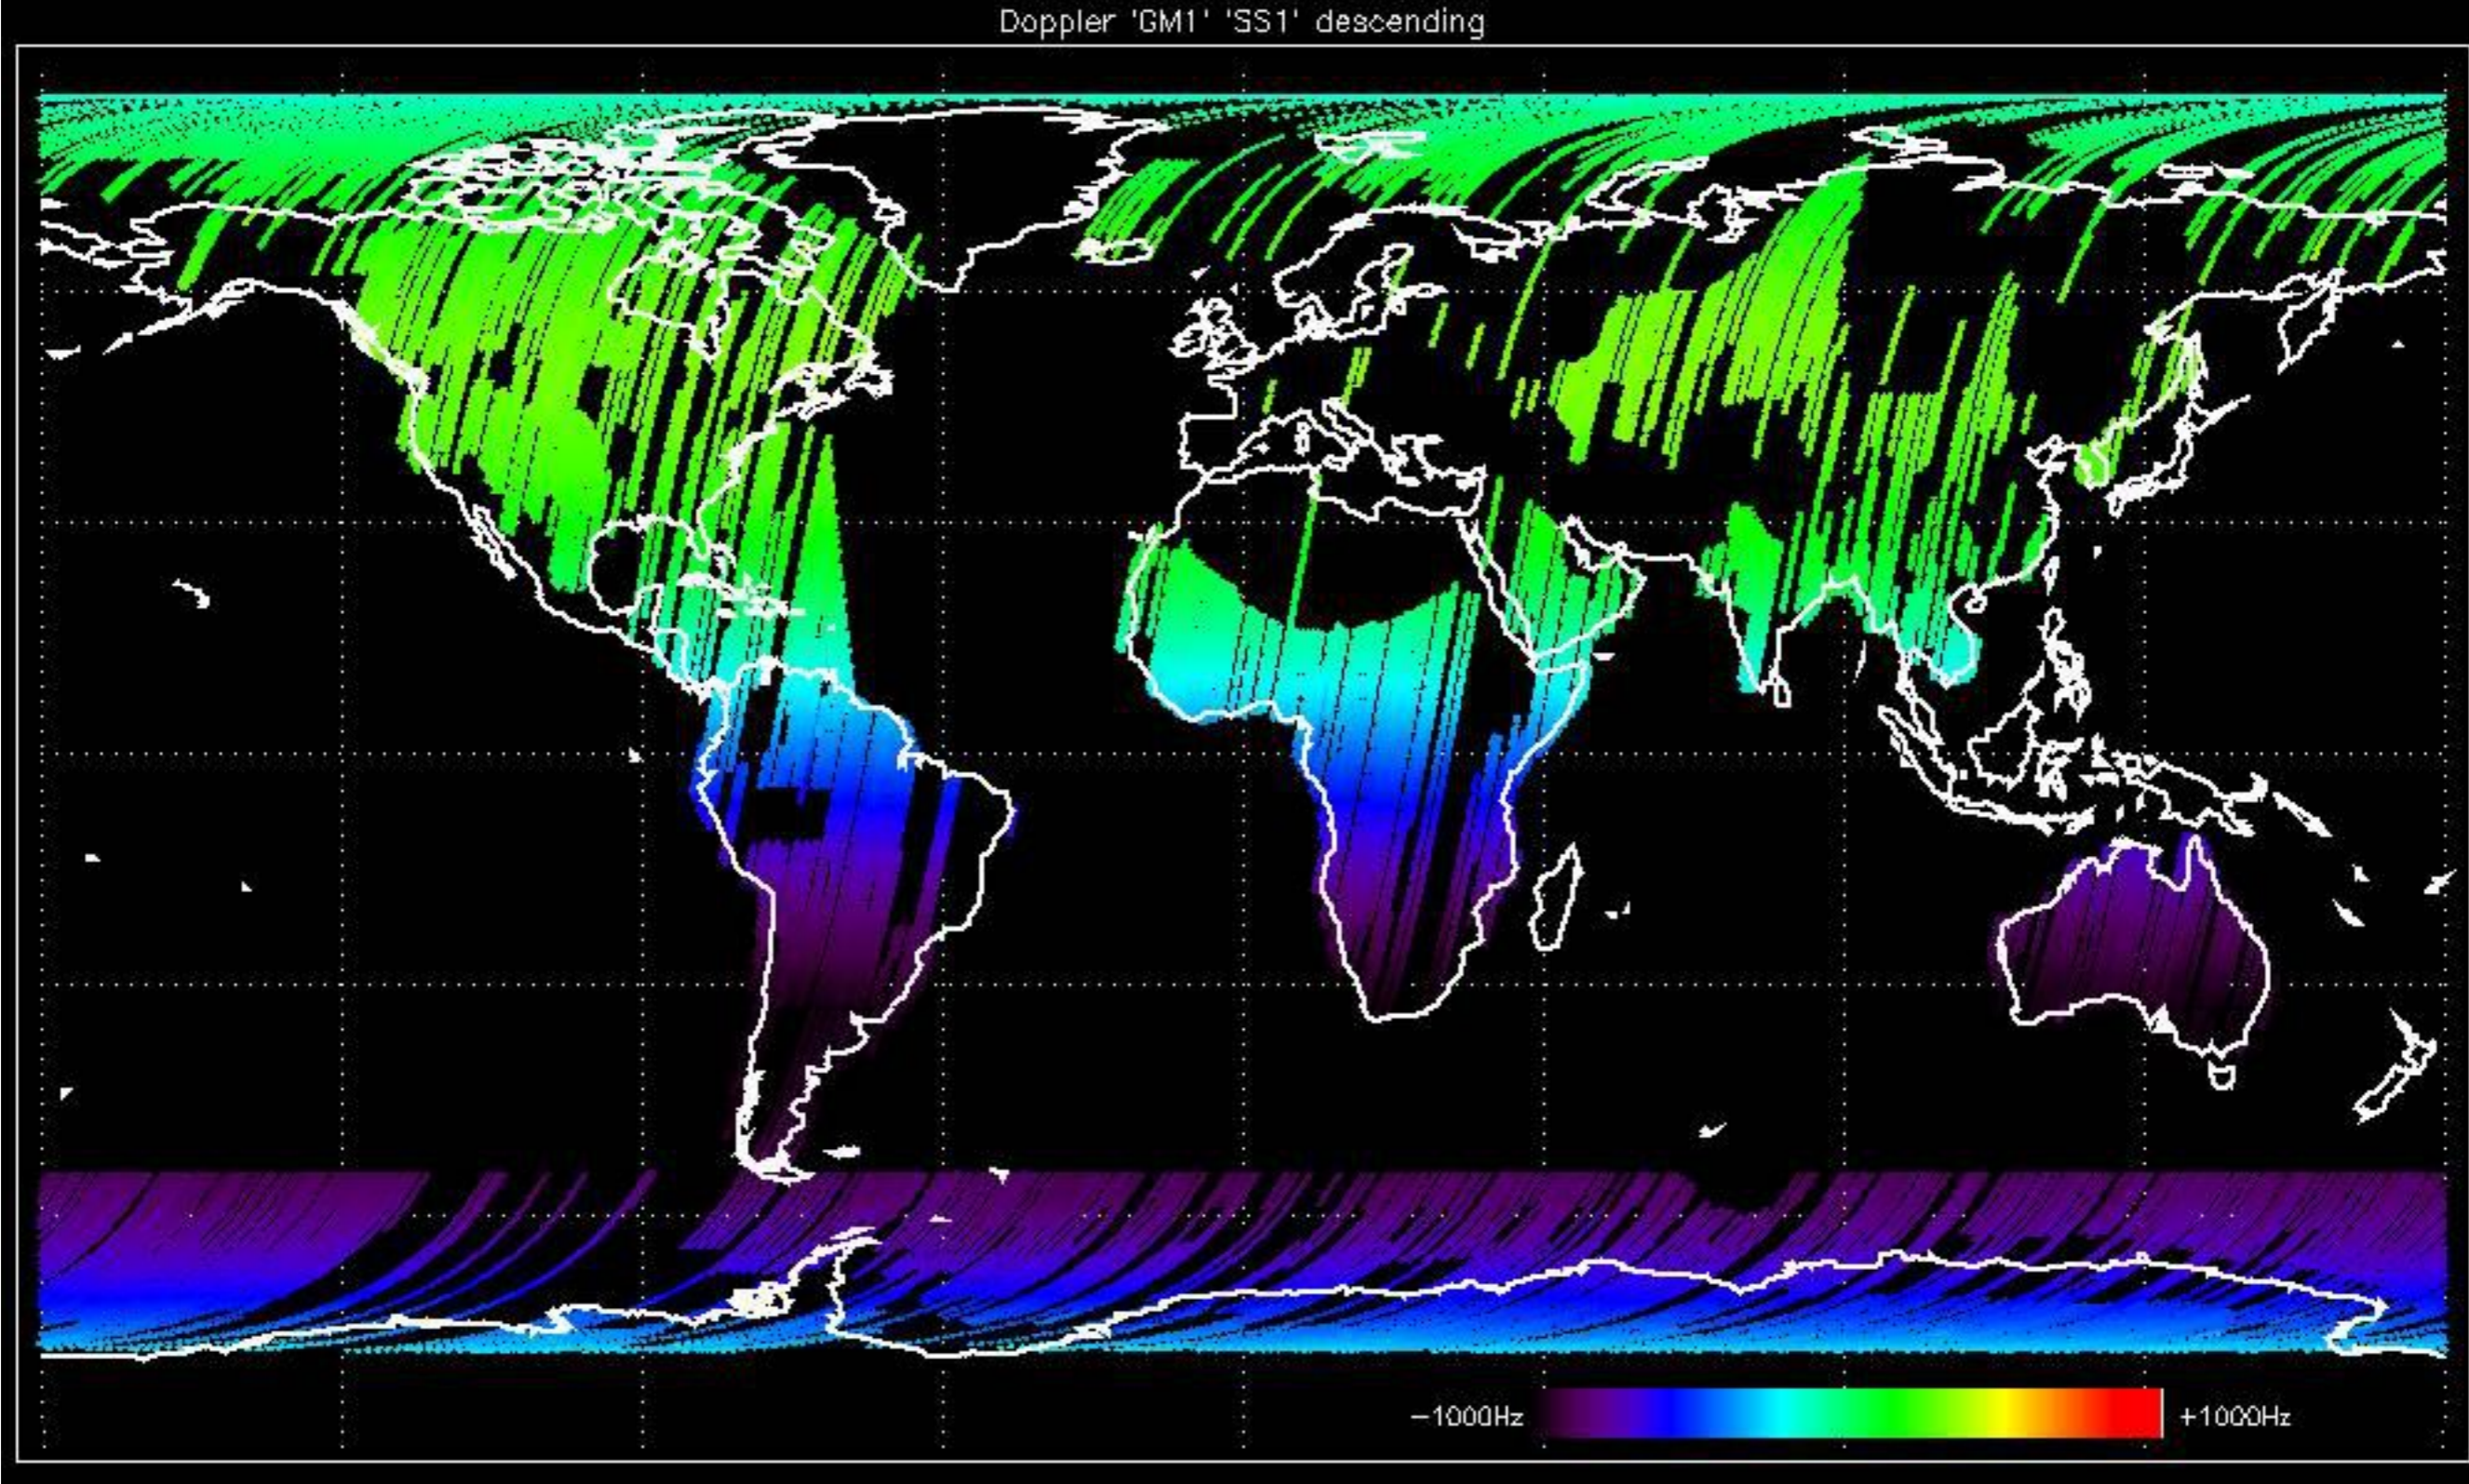




Doppler 'WVS' 'IS2' ascending



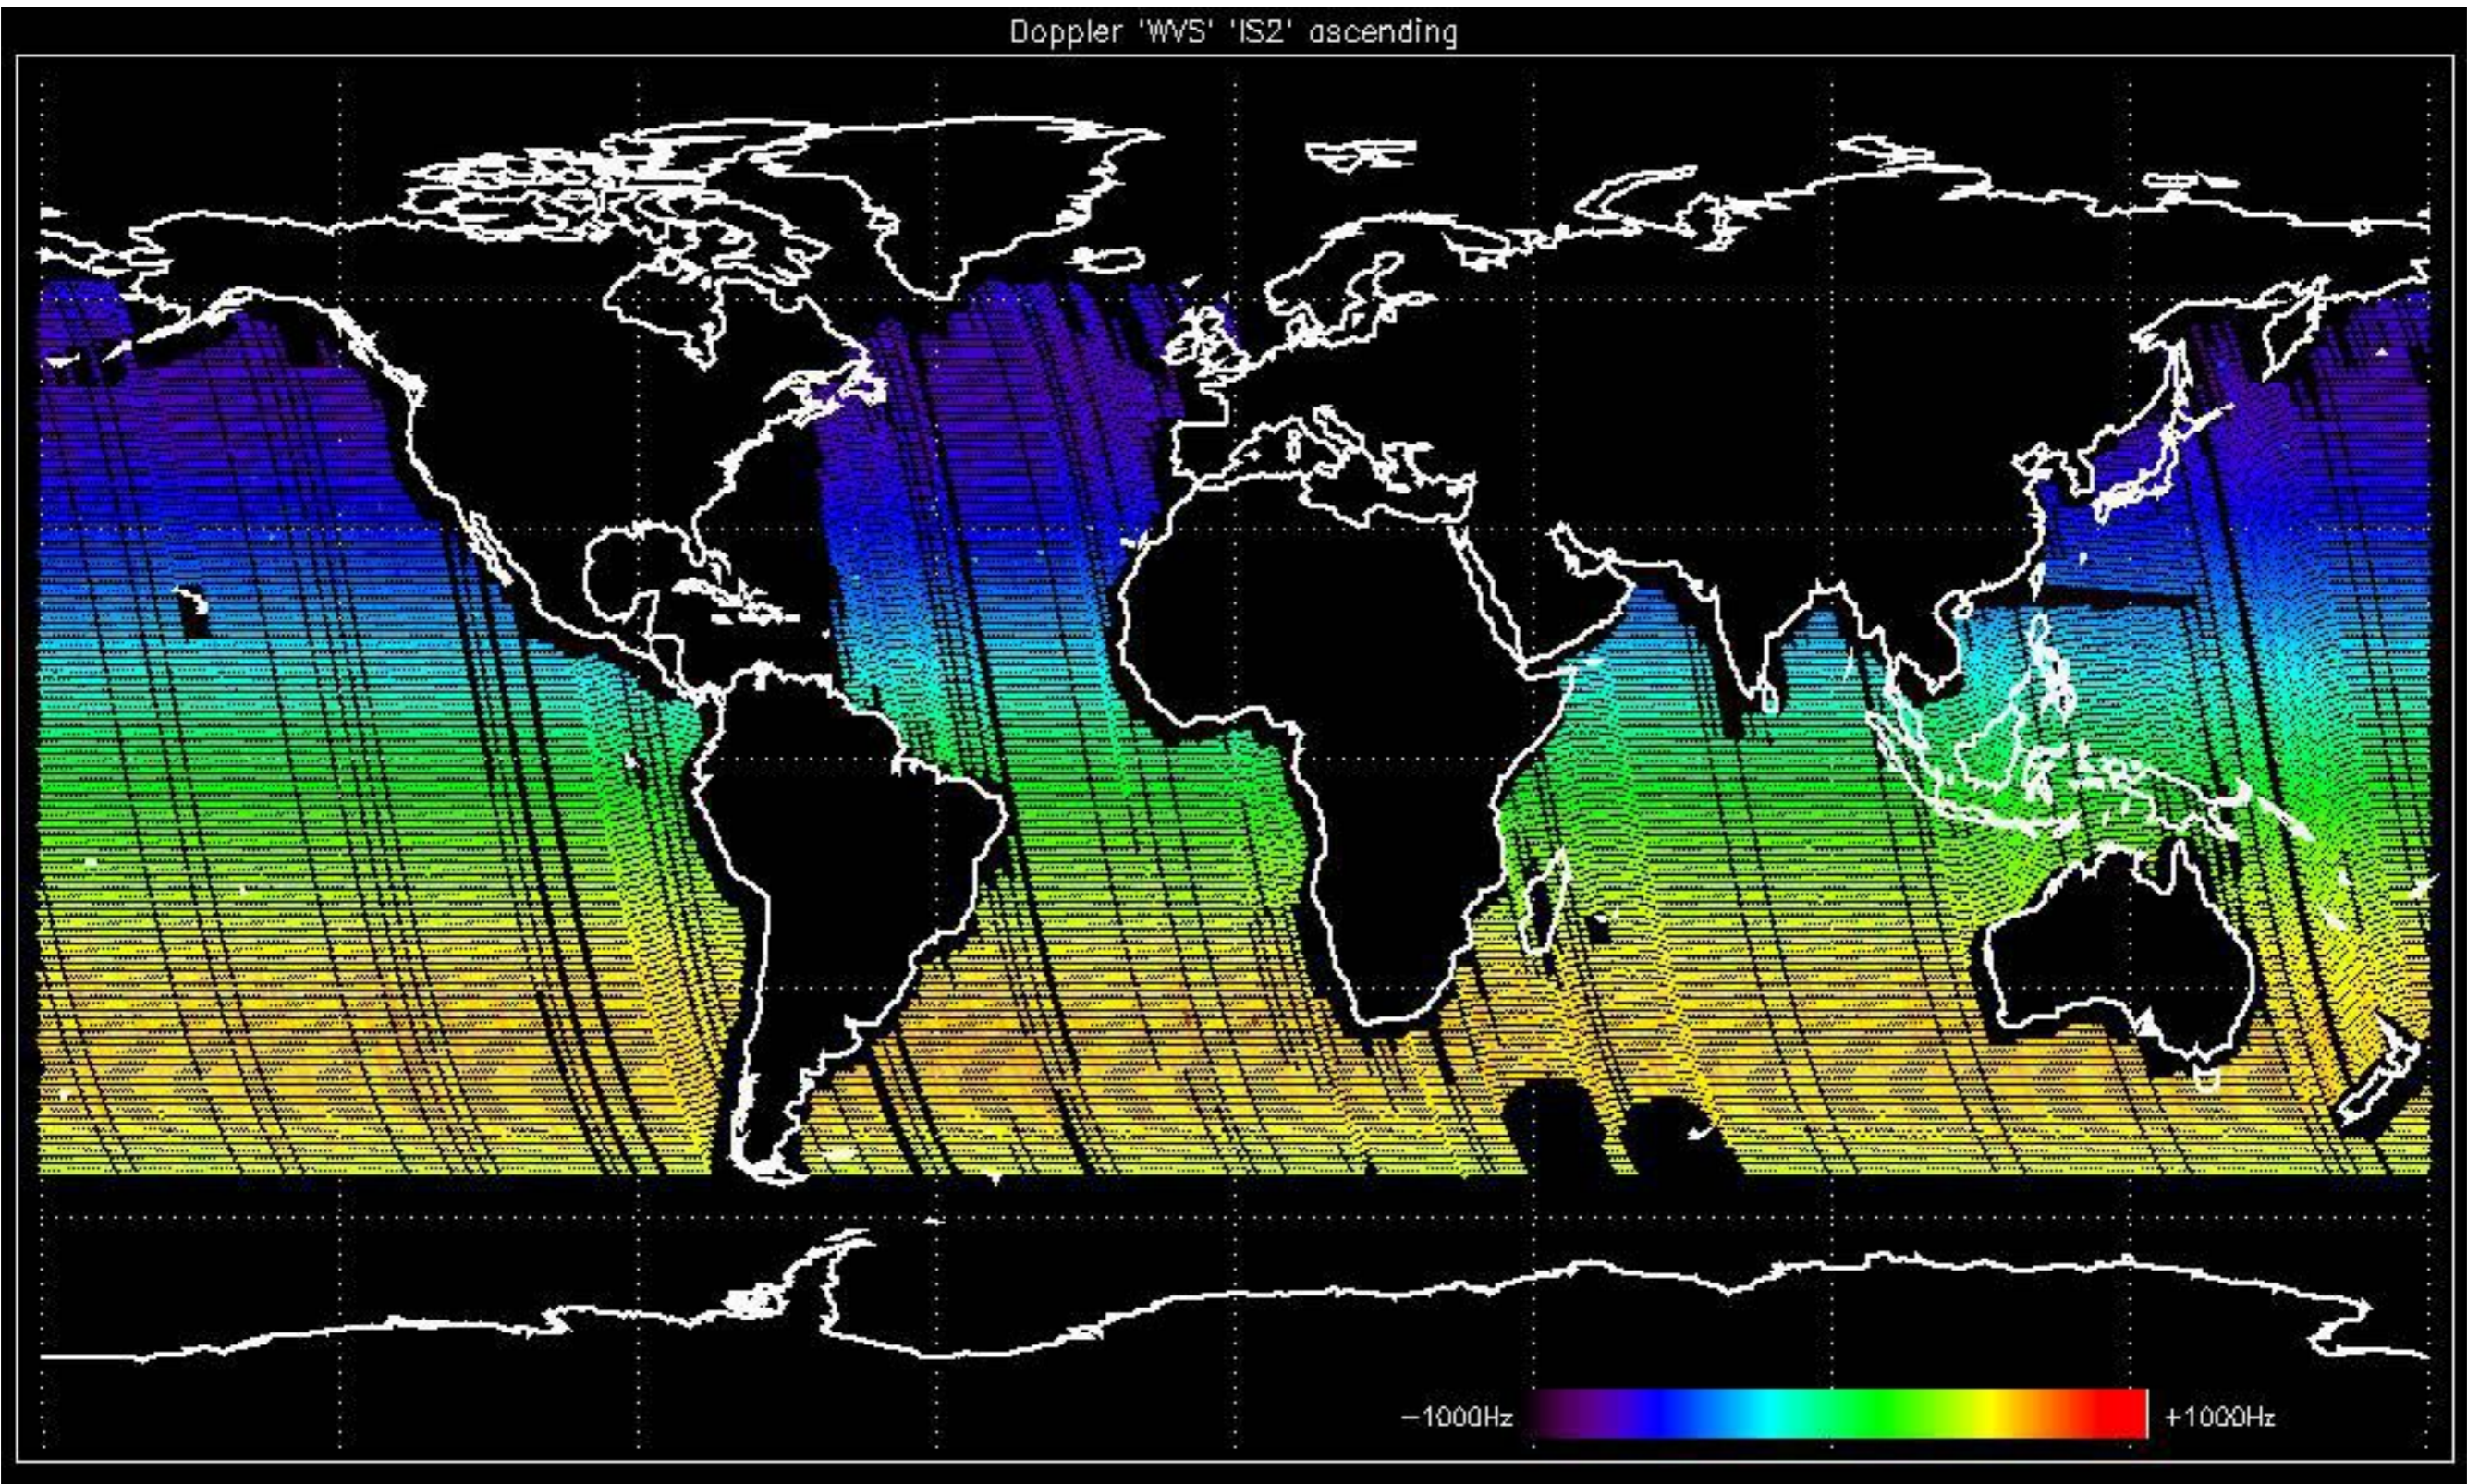


Doppler 'WVS' 'IS2' descending

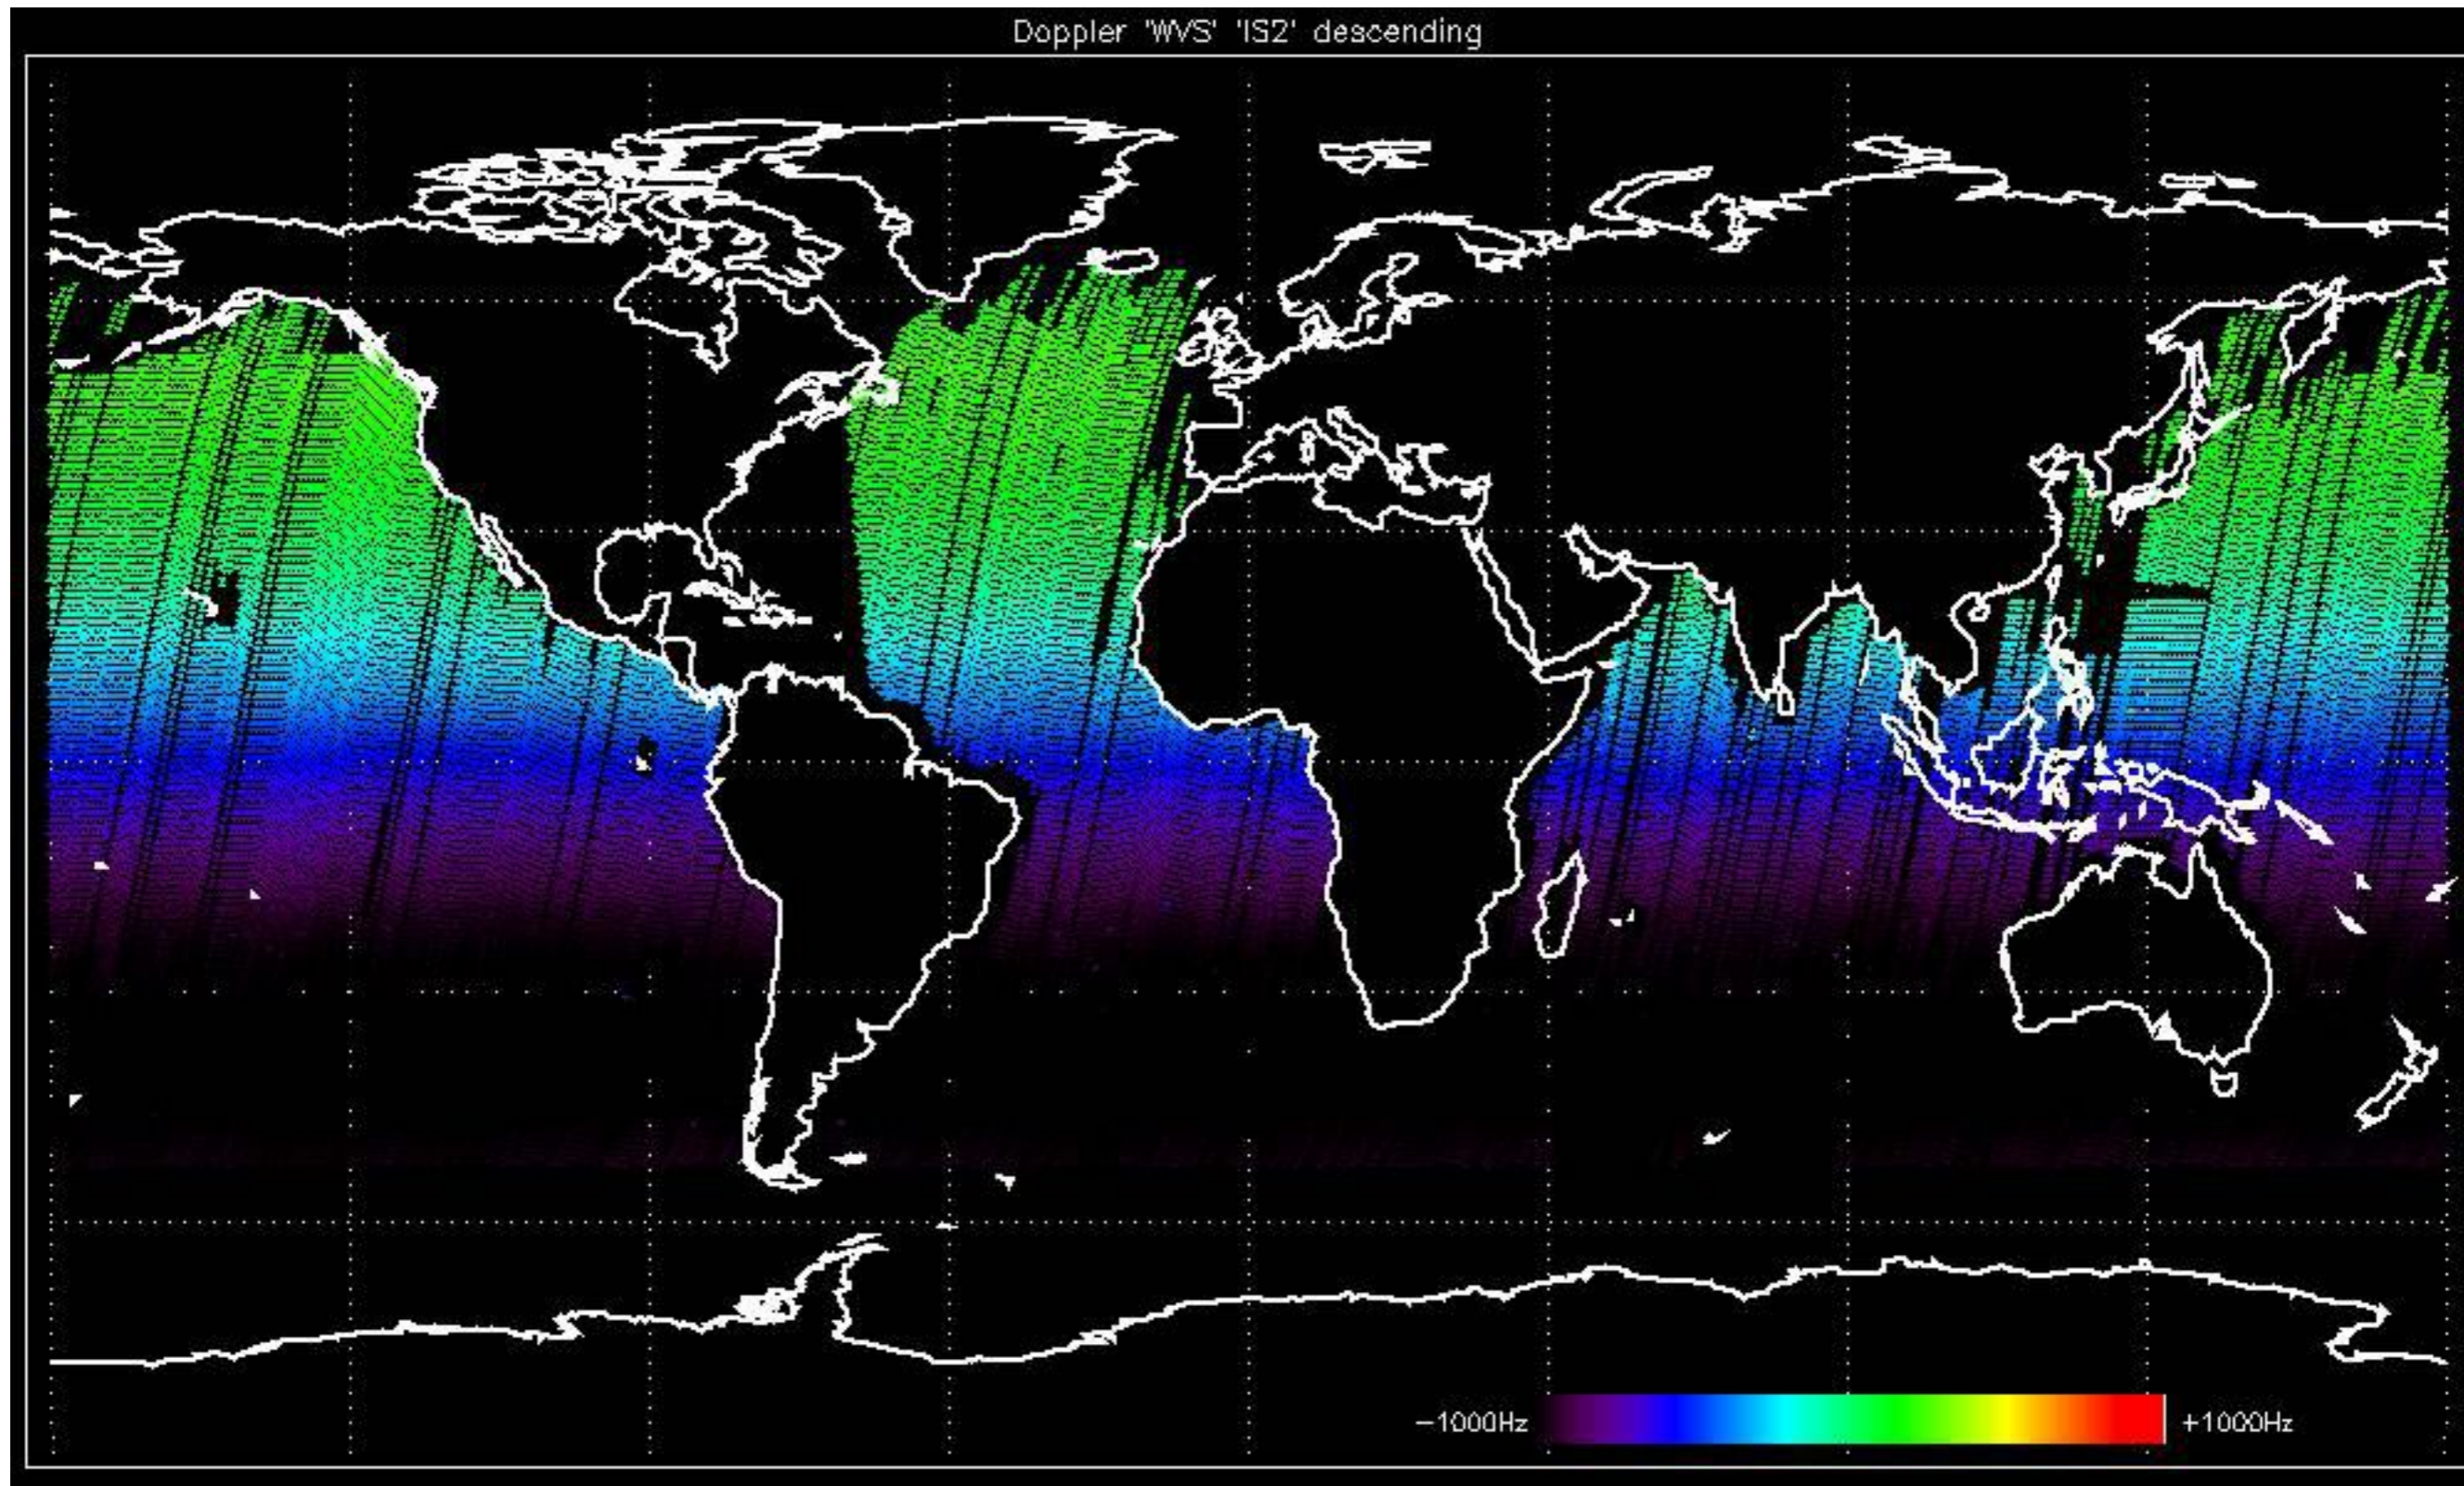


GM1 mode doppler

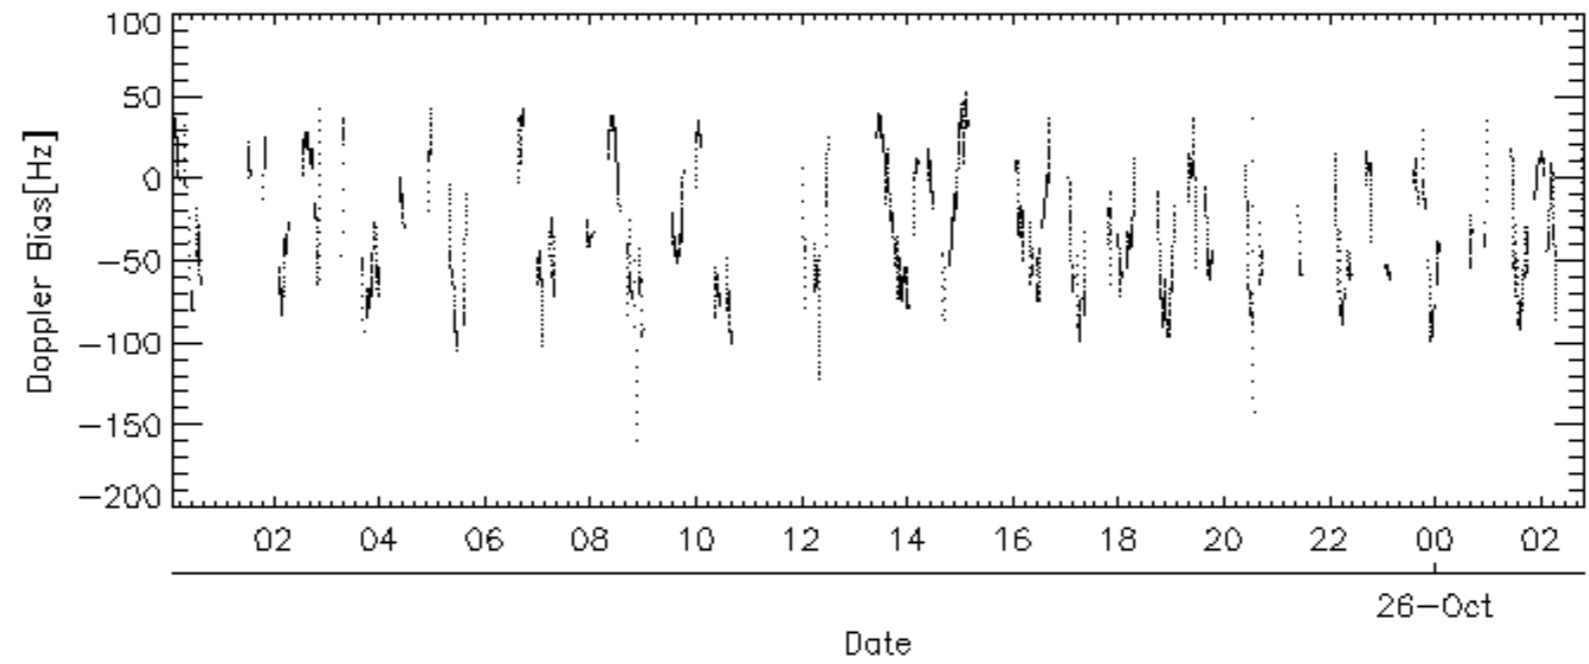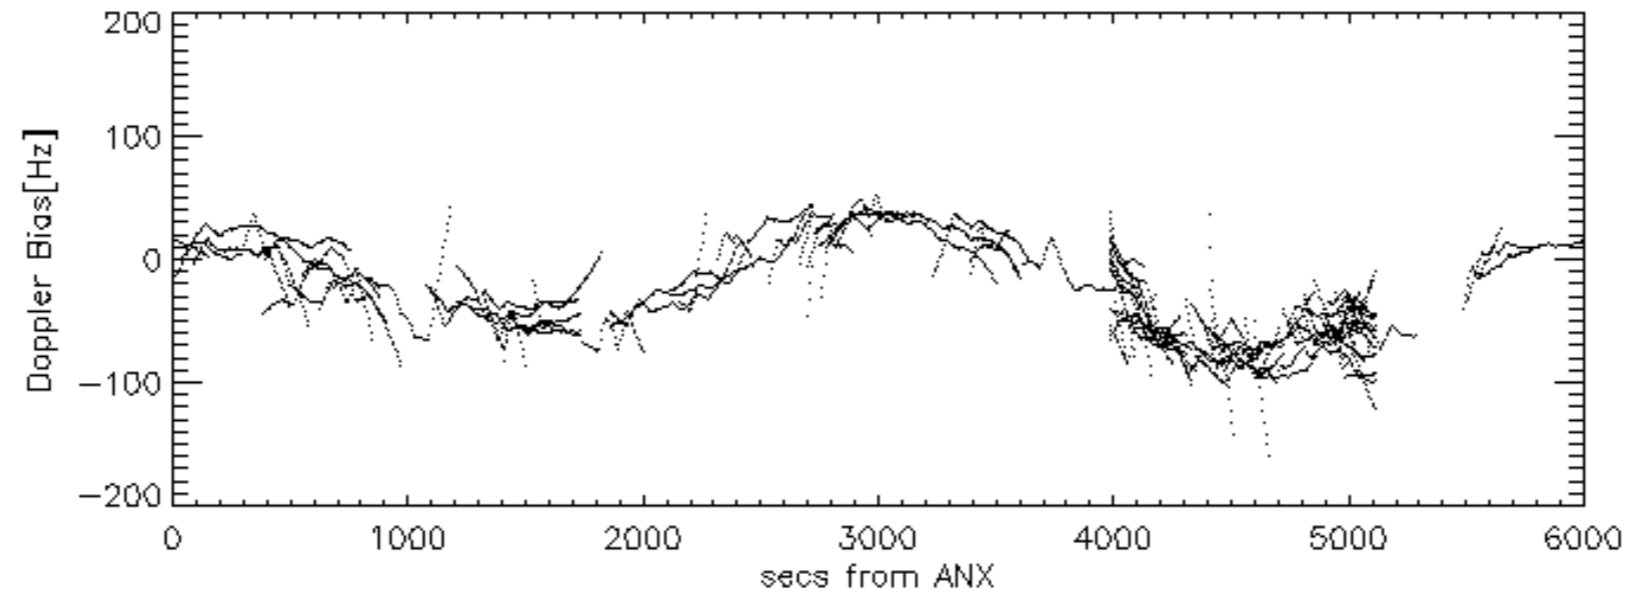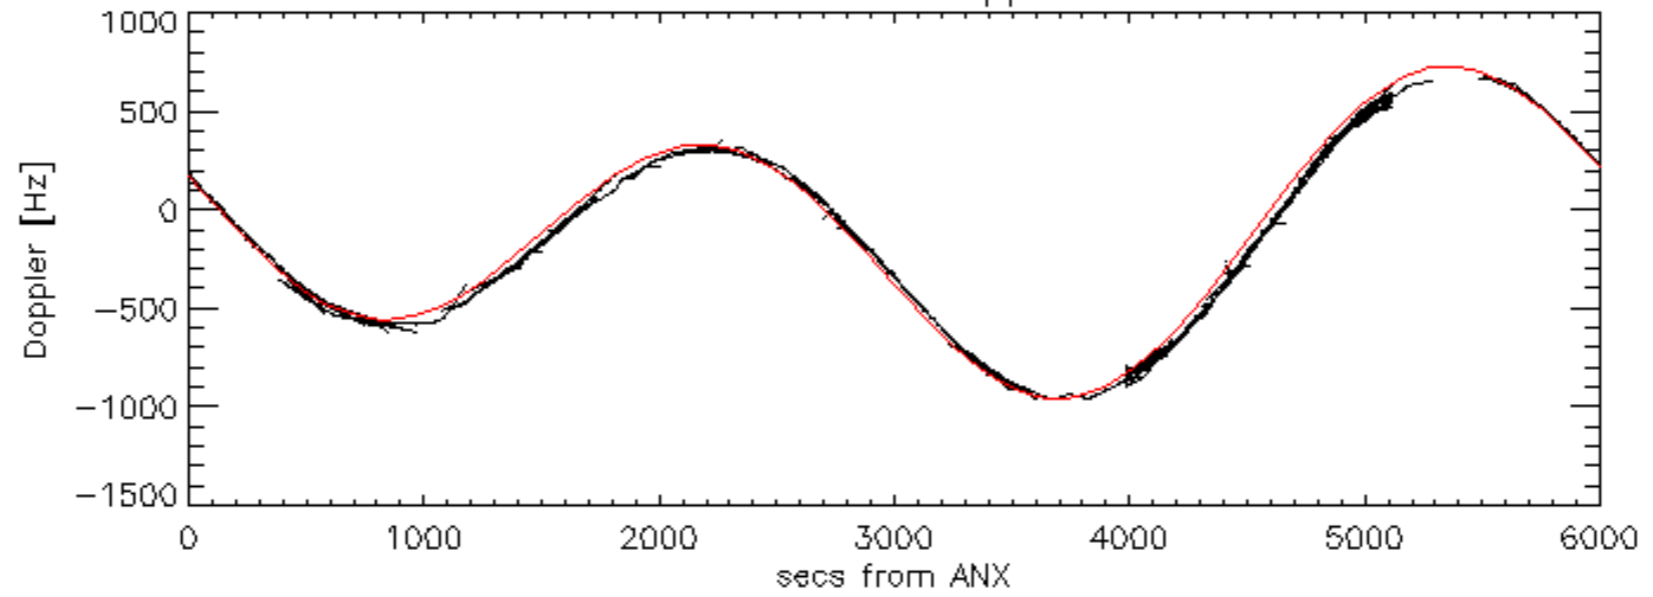


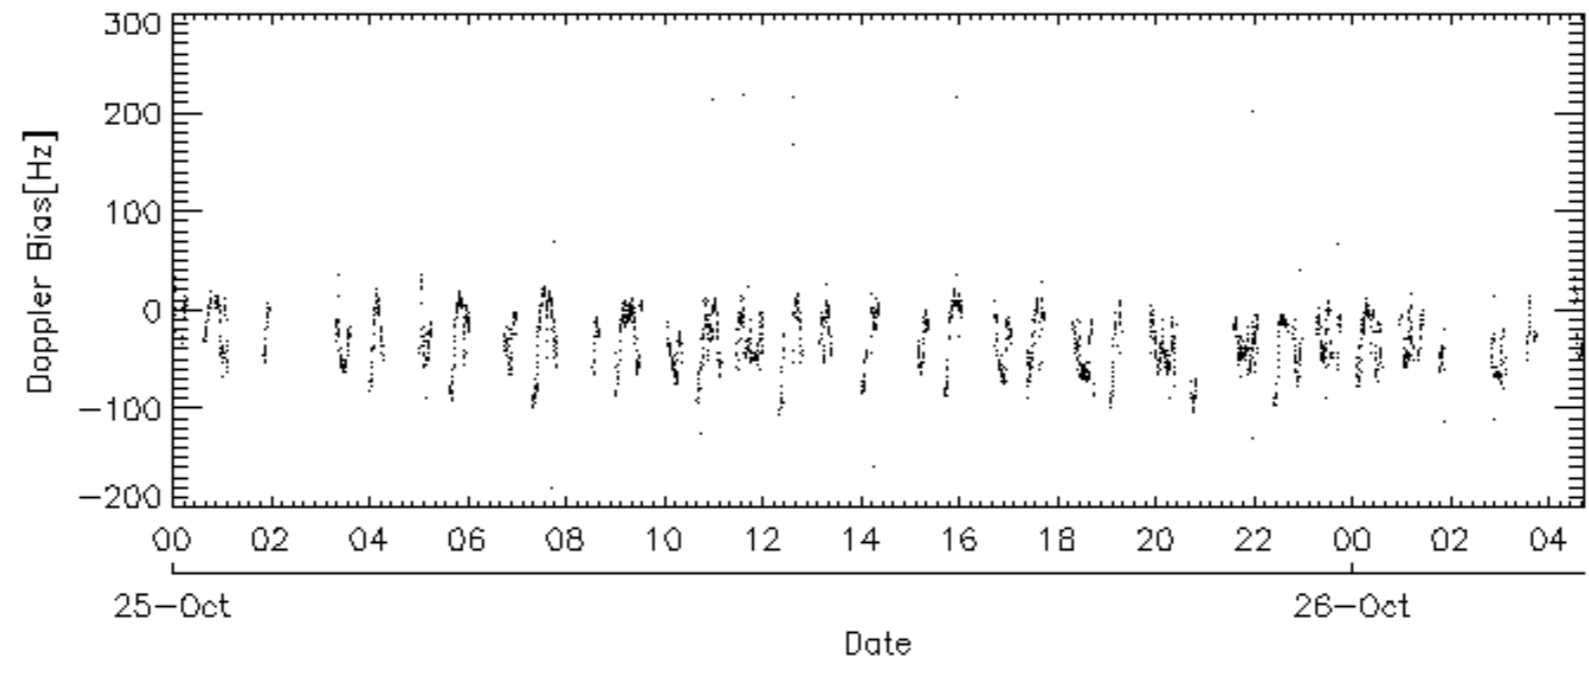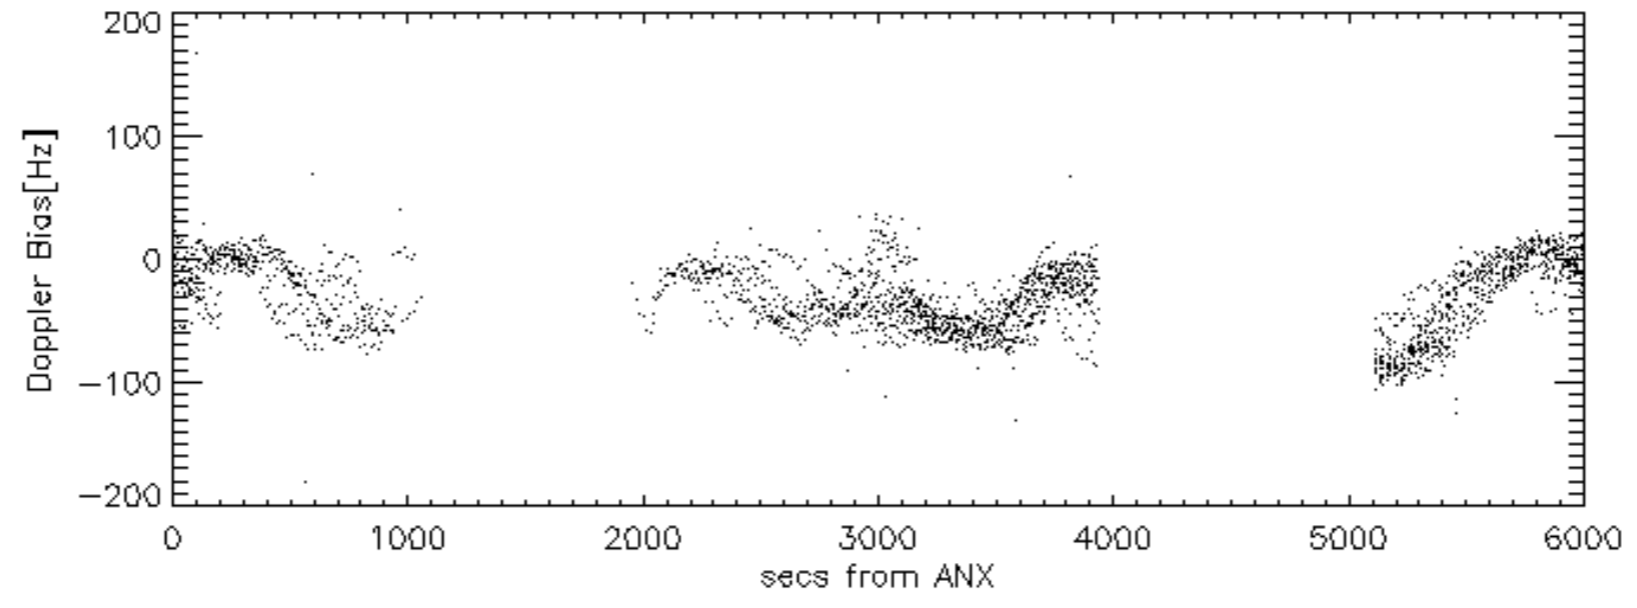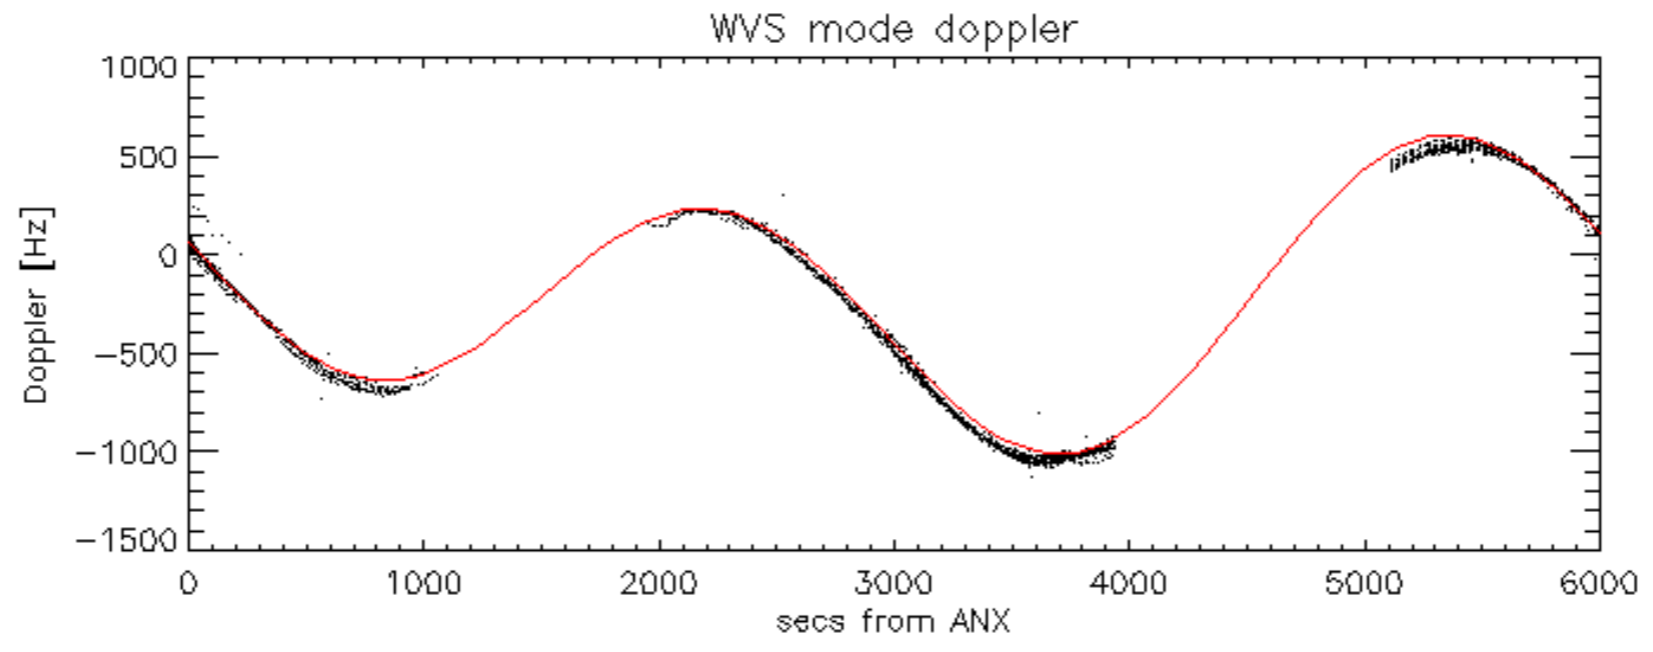


Doppler difference, estimated-predicted 'GM1' 'SS1' ascending -error mean of -31.823035 Hz

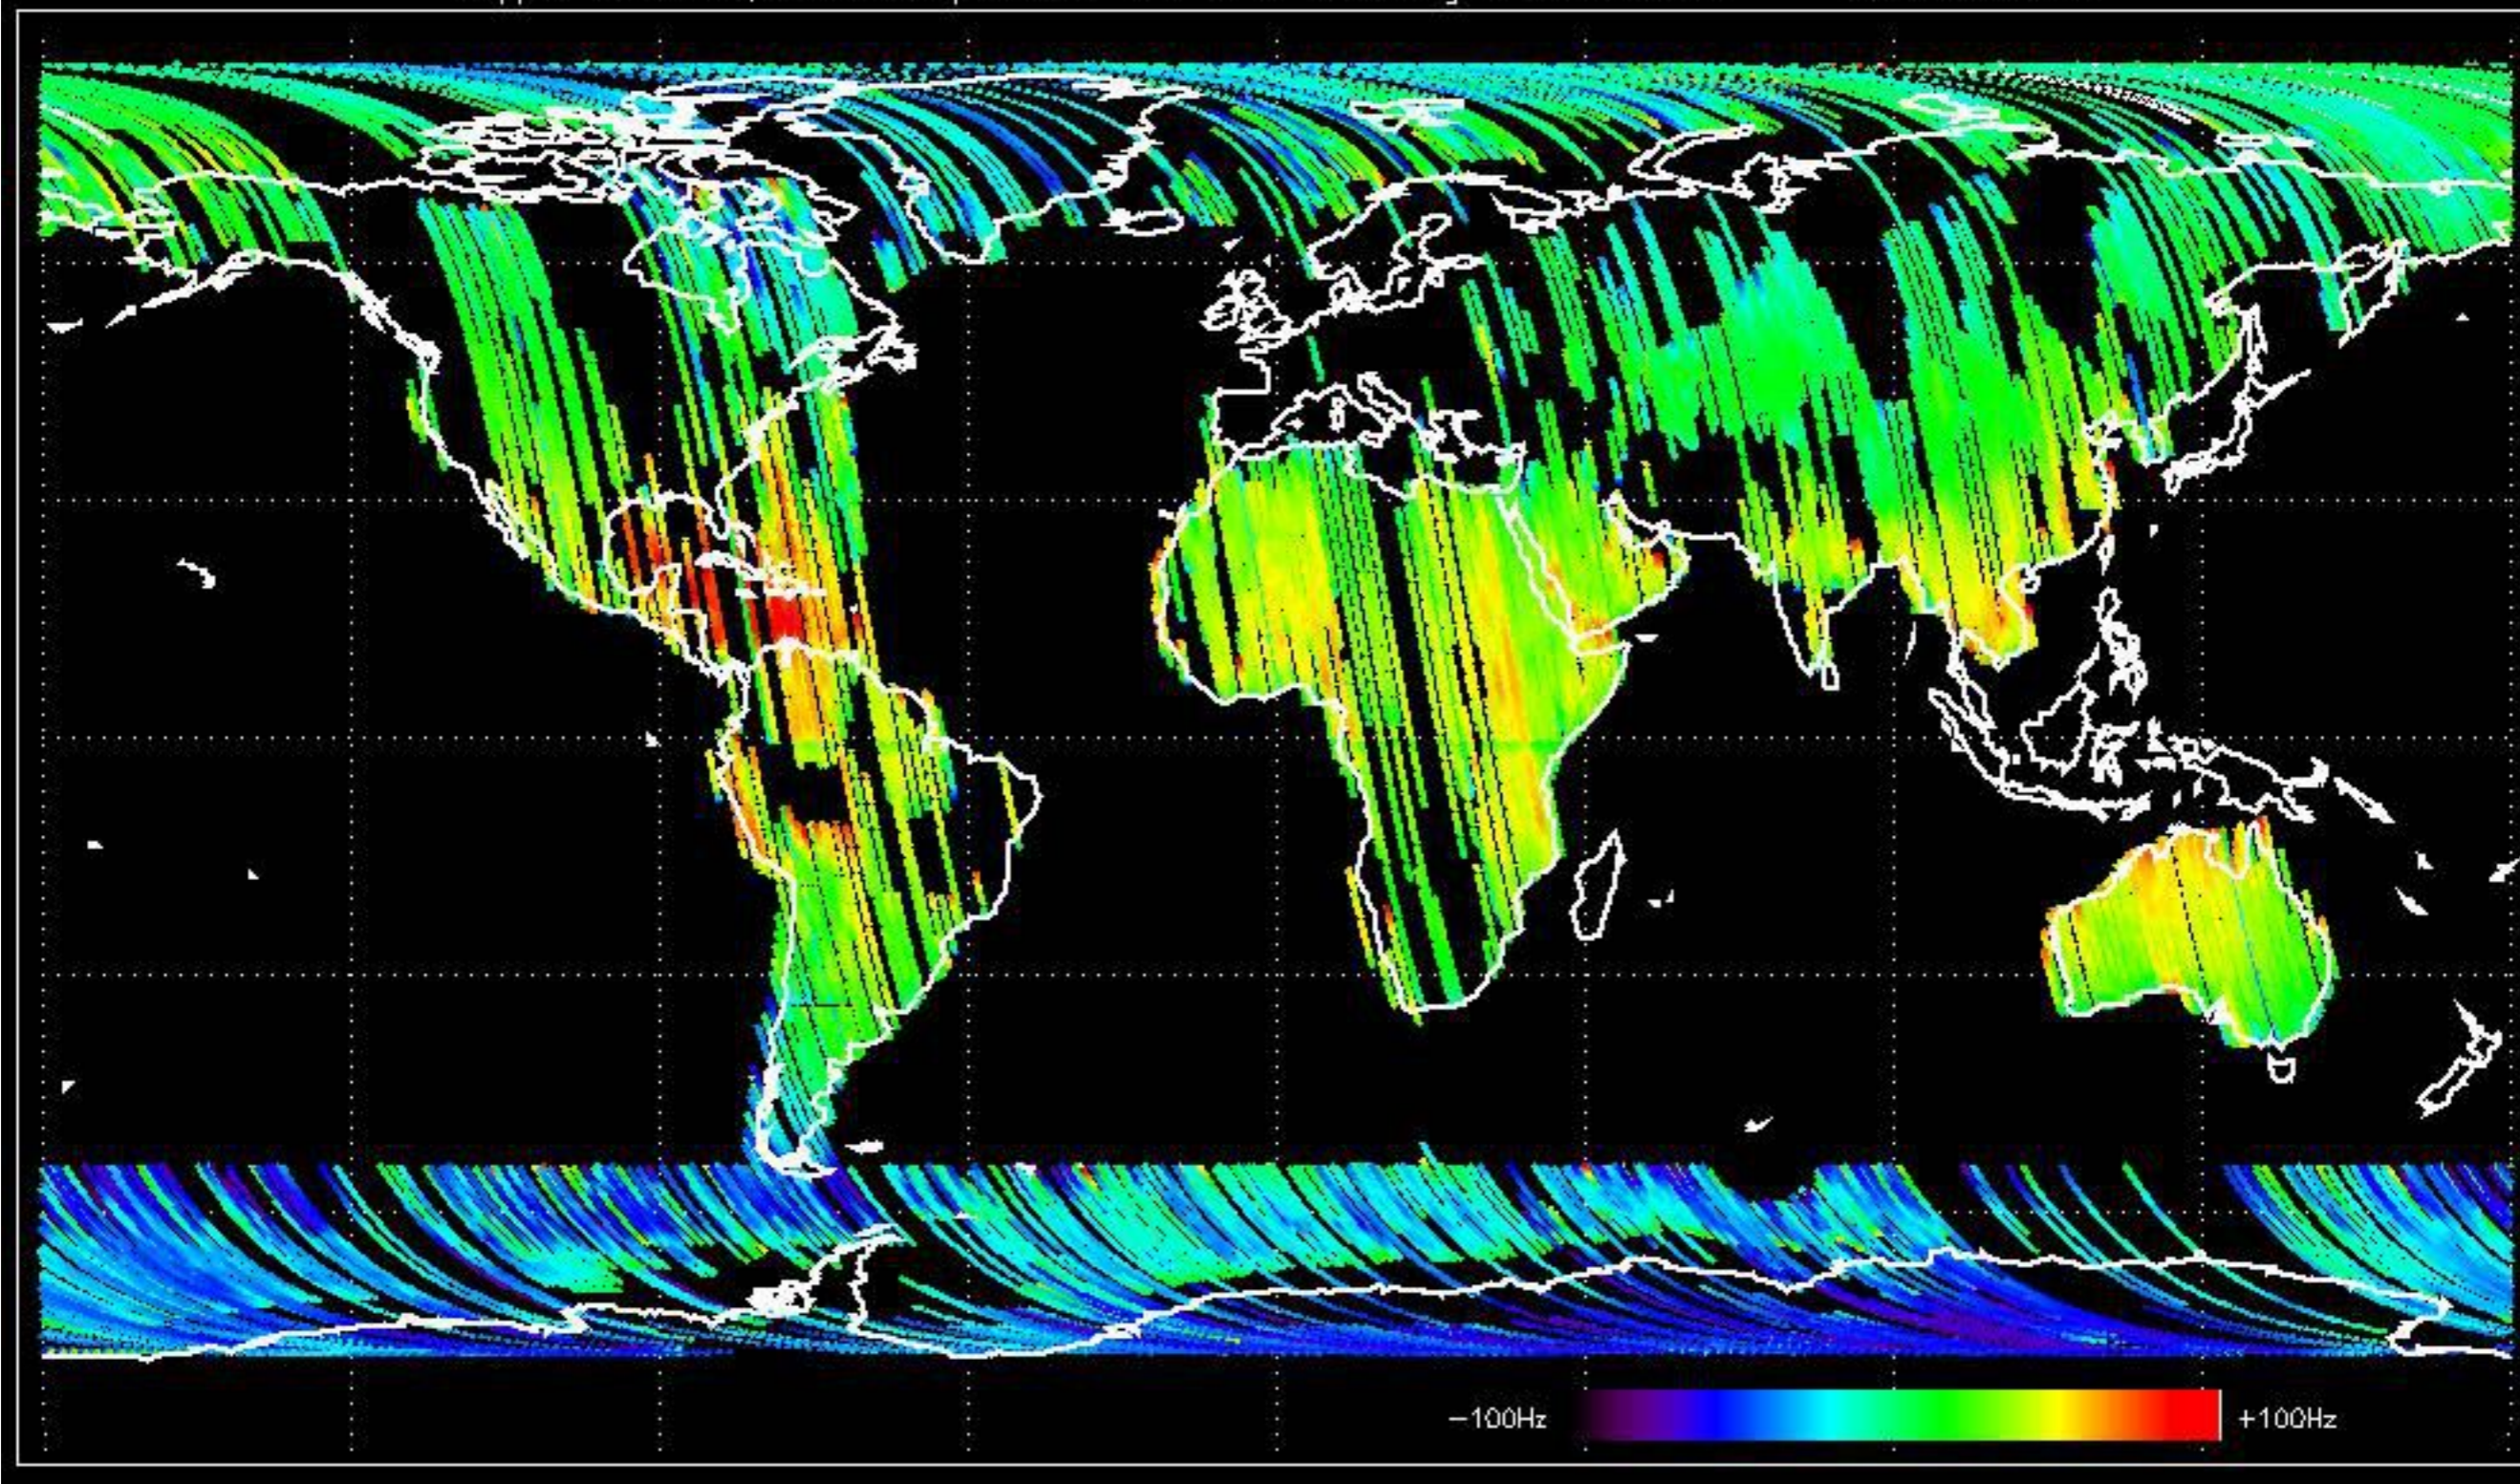


Doppler difference, estimated-predicted 'GM1' 'SS1' descending -error mean of -25.025767 Hz

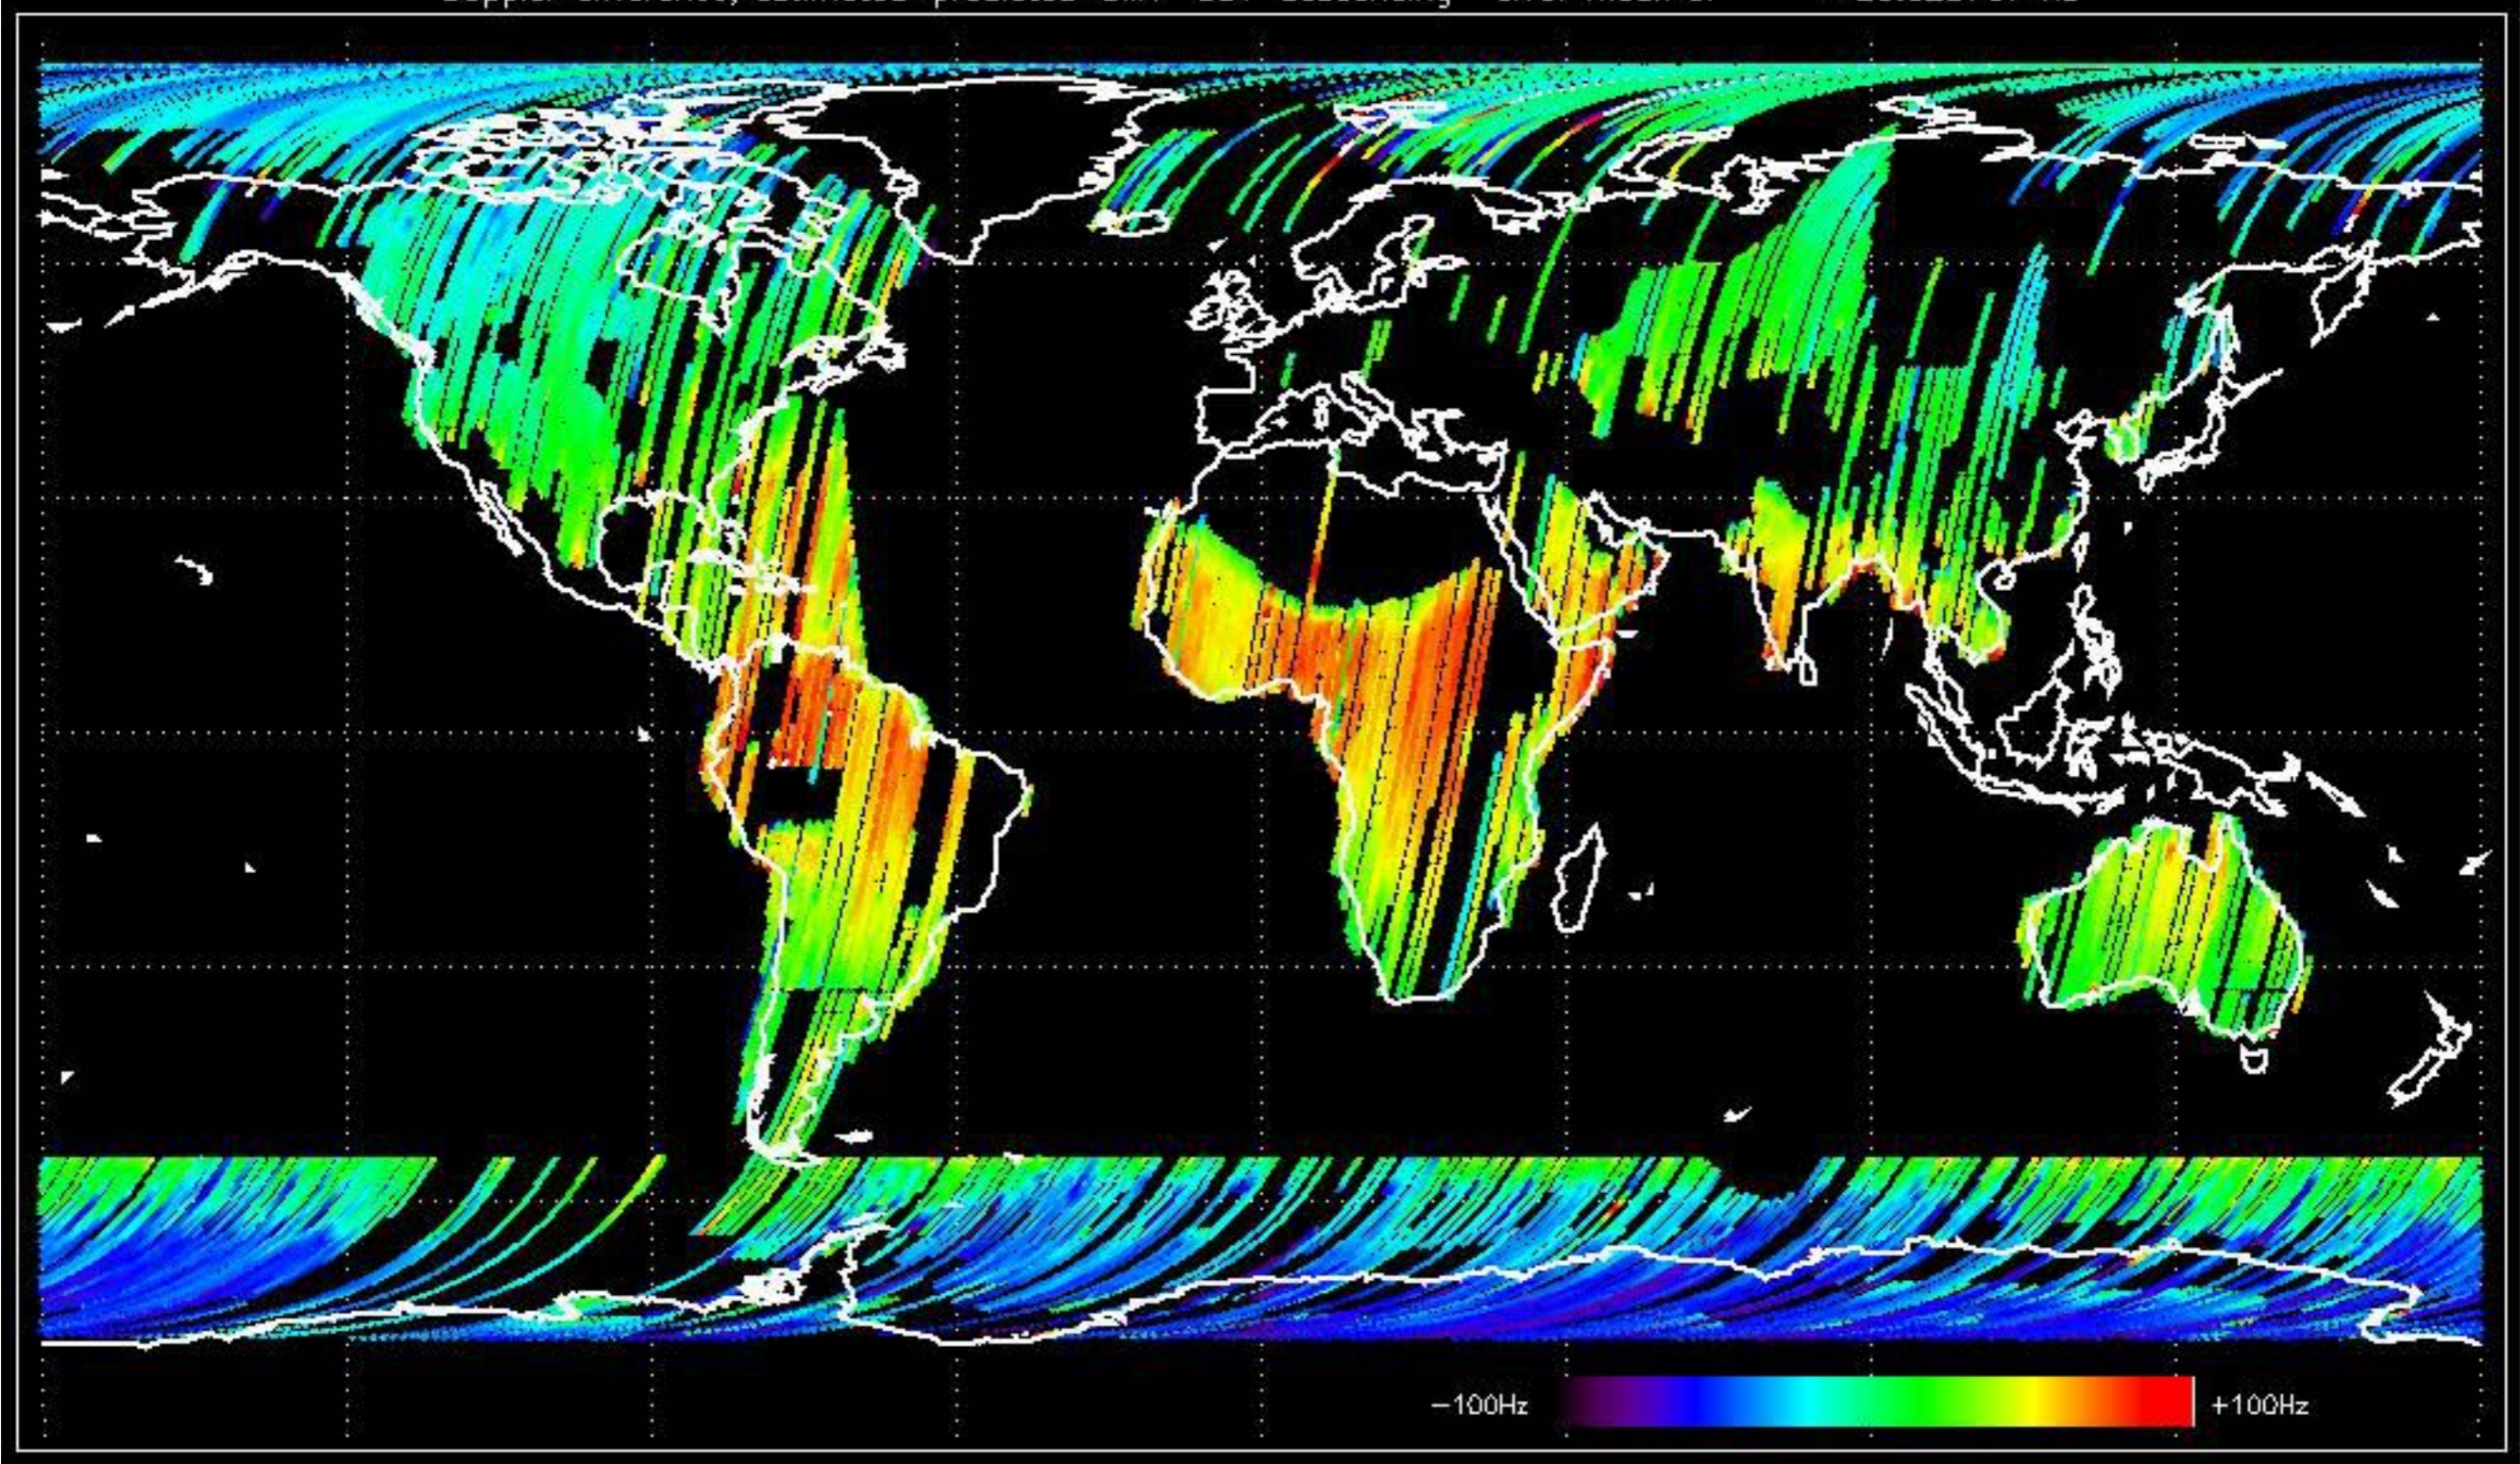

Doppler difference, estimated-predicted 'WVS' 'IS2' ascending -error mean of -29.400018 Hz

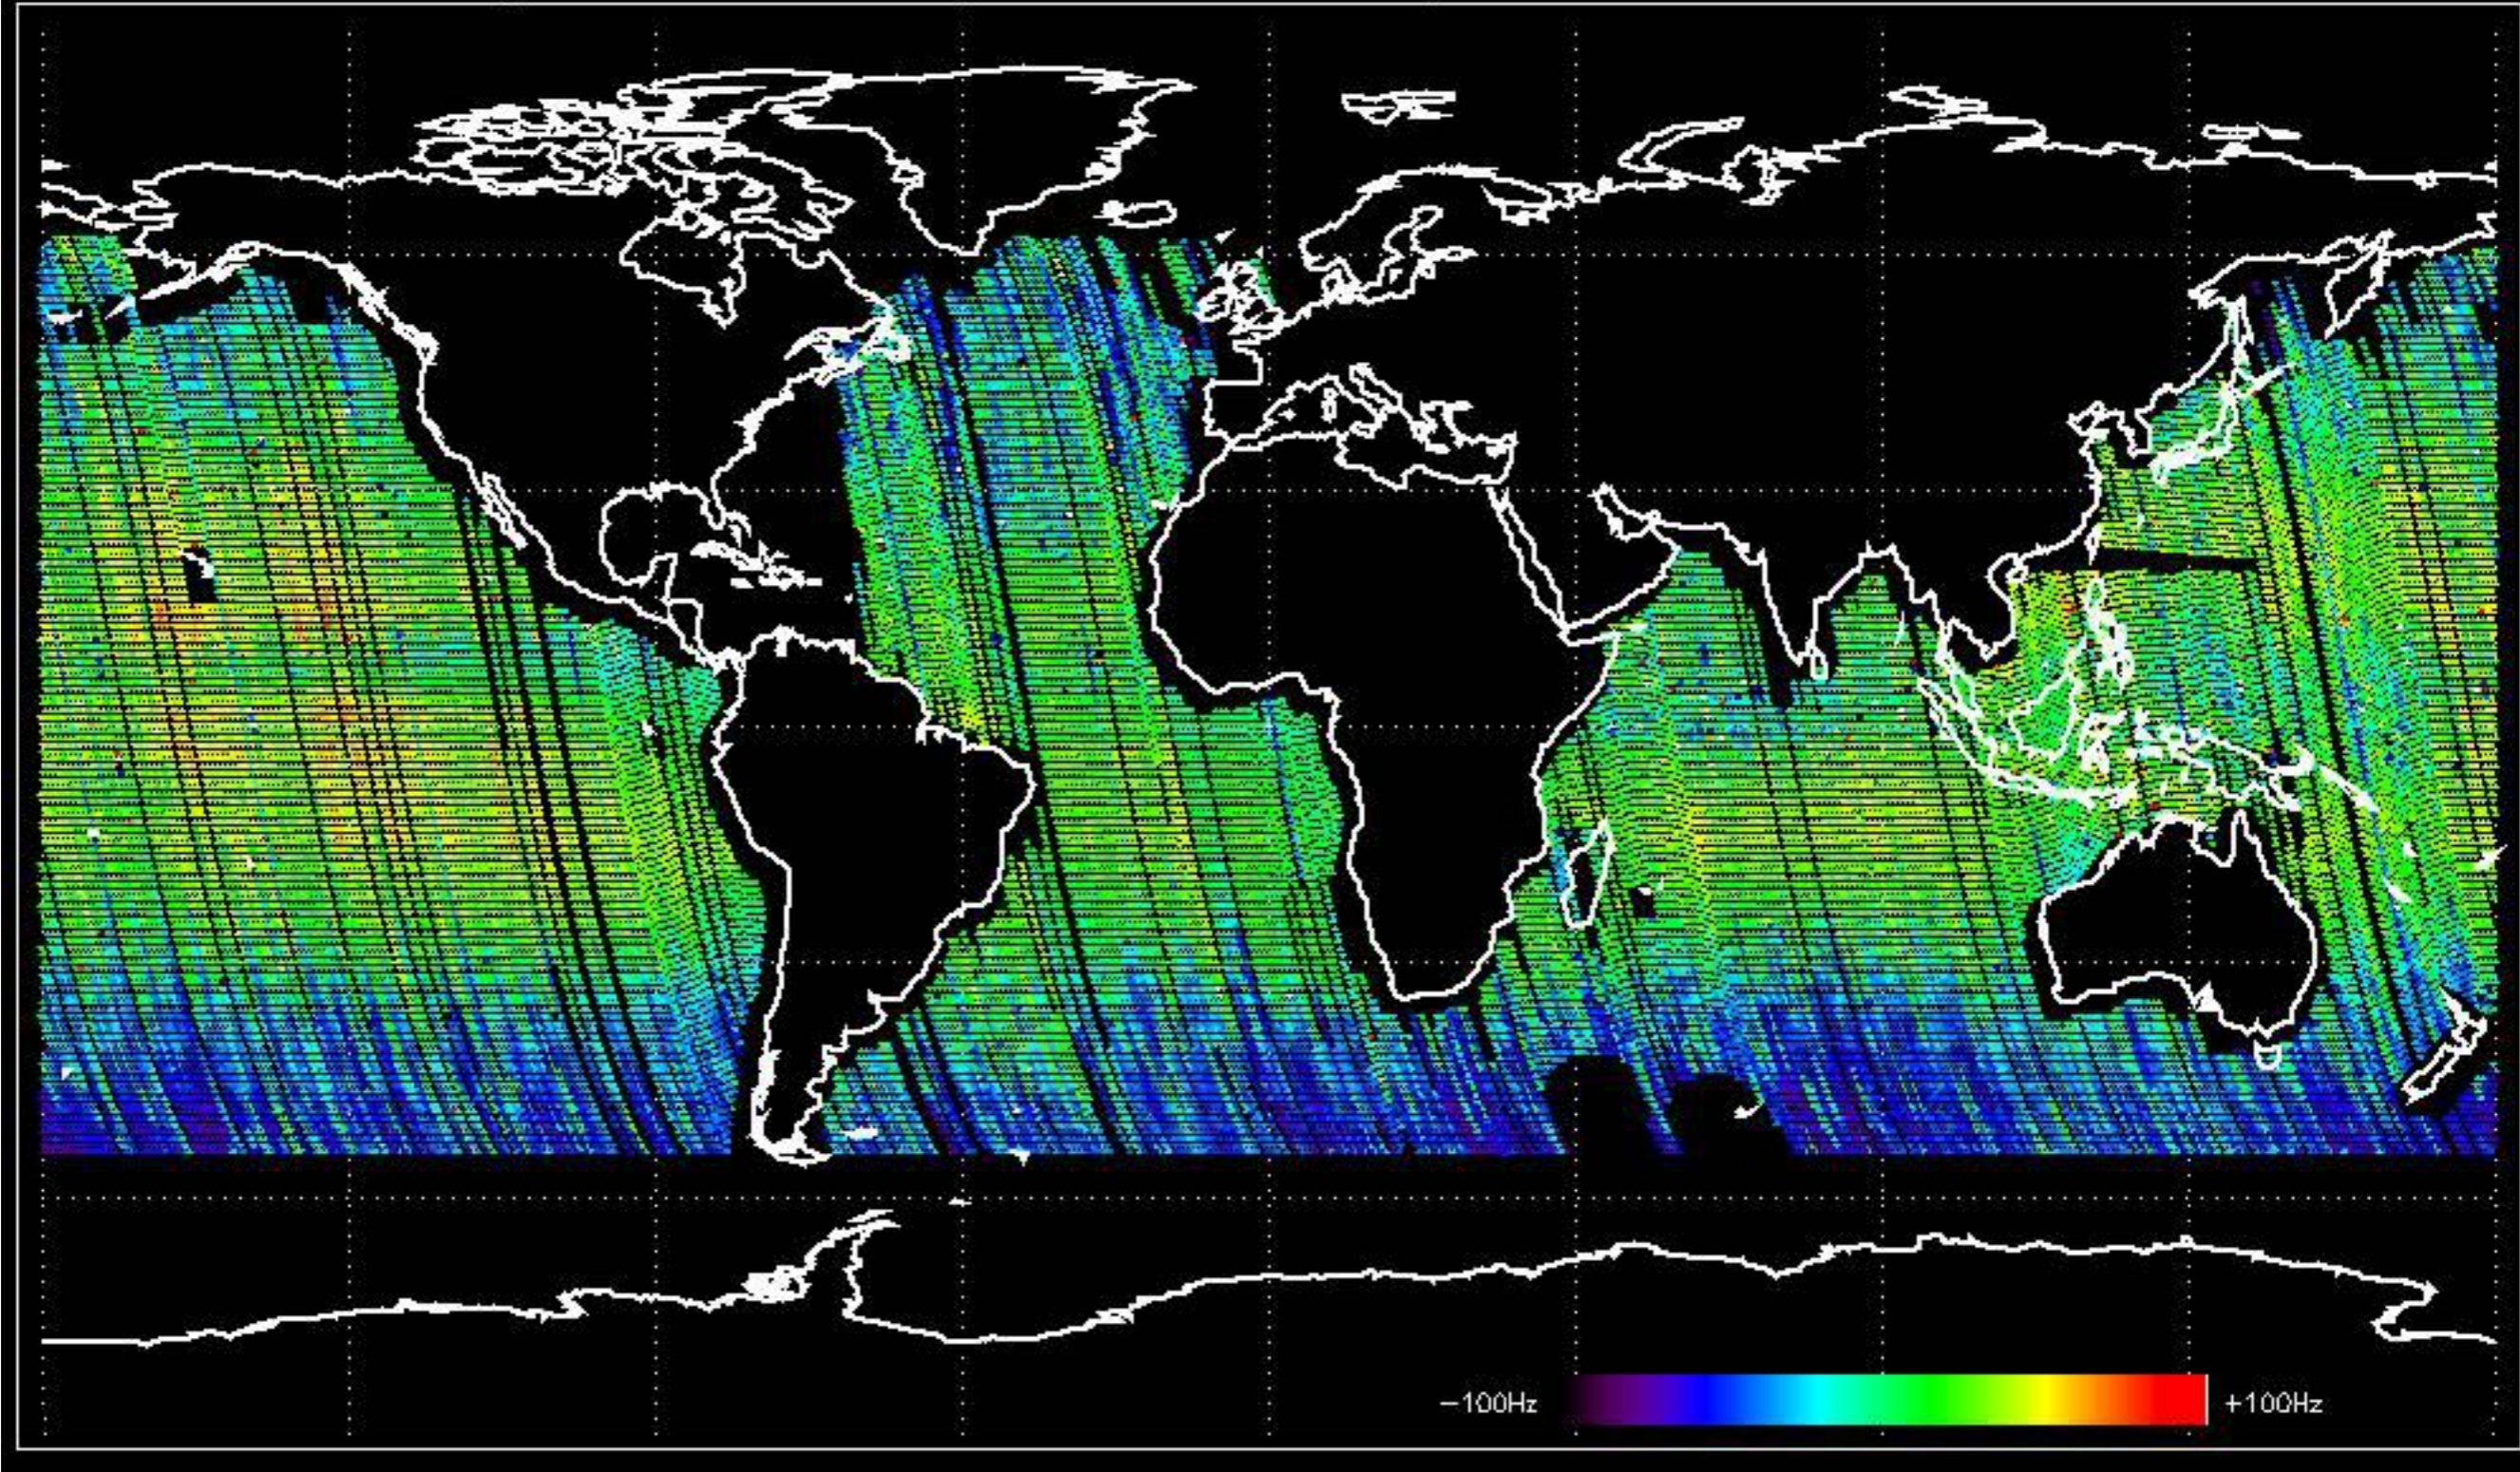





Doppler difference, estimated-predicted 'WVS' 'IS2' descending -error mean of -33.377226 Hz



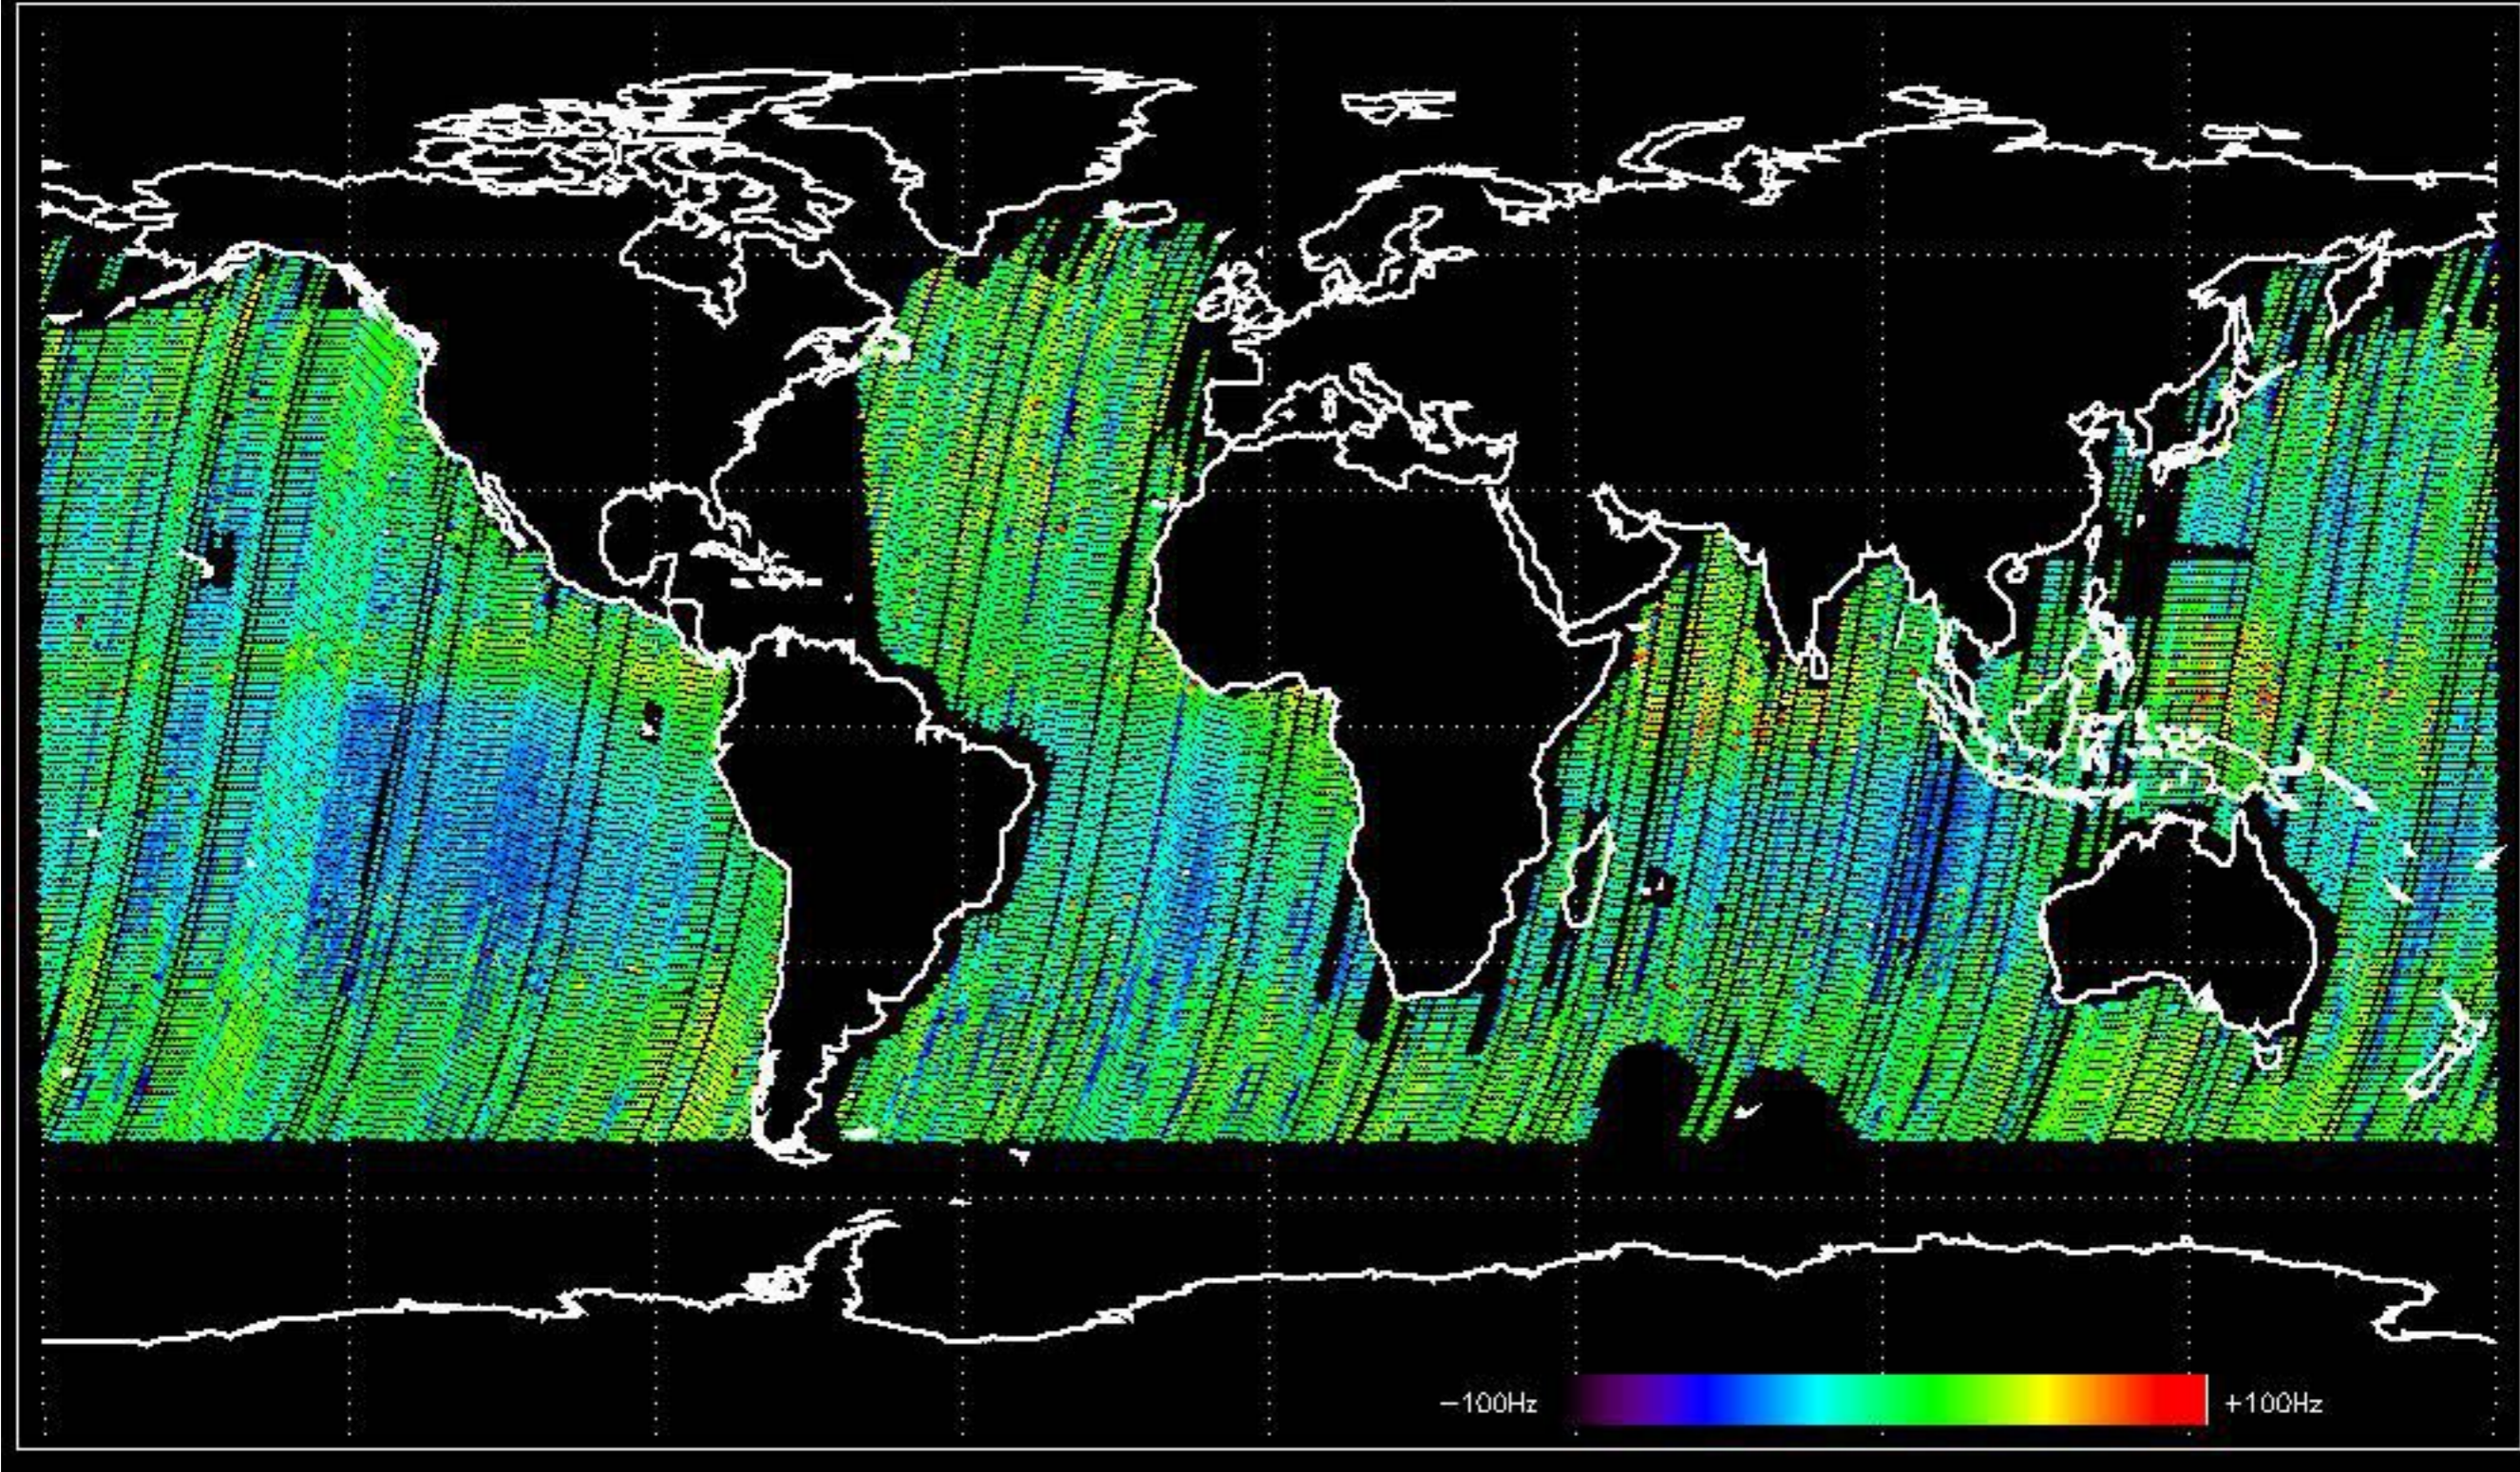



The MS mode provides an internal health check on an individual module basis.
The purpose of this mode is to identify to identify any malfunctioning modules and
to identify modules for which calibration offsets are to be applied.
No anomalies observed on available MS products:

No anomalies observed.

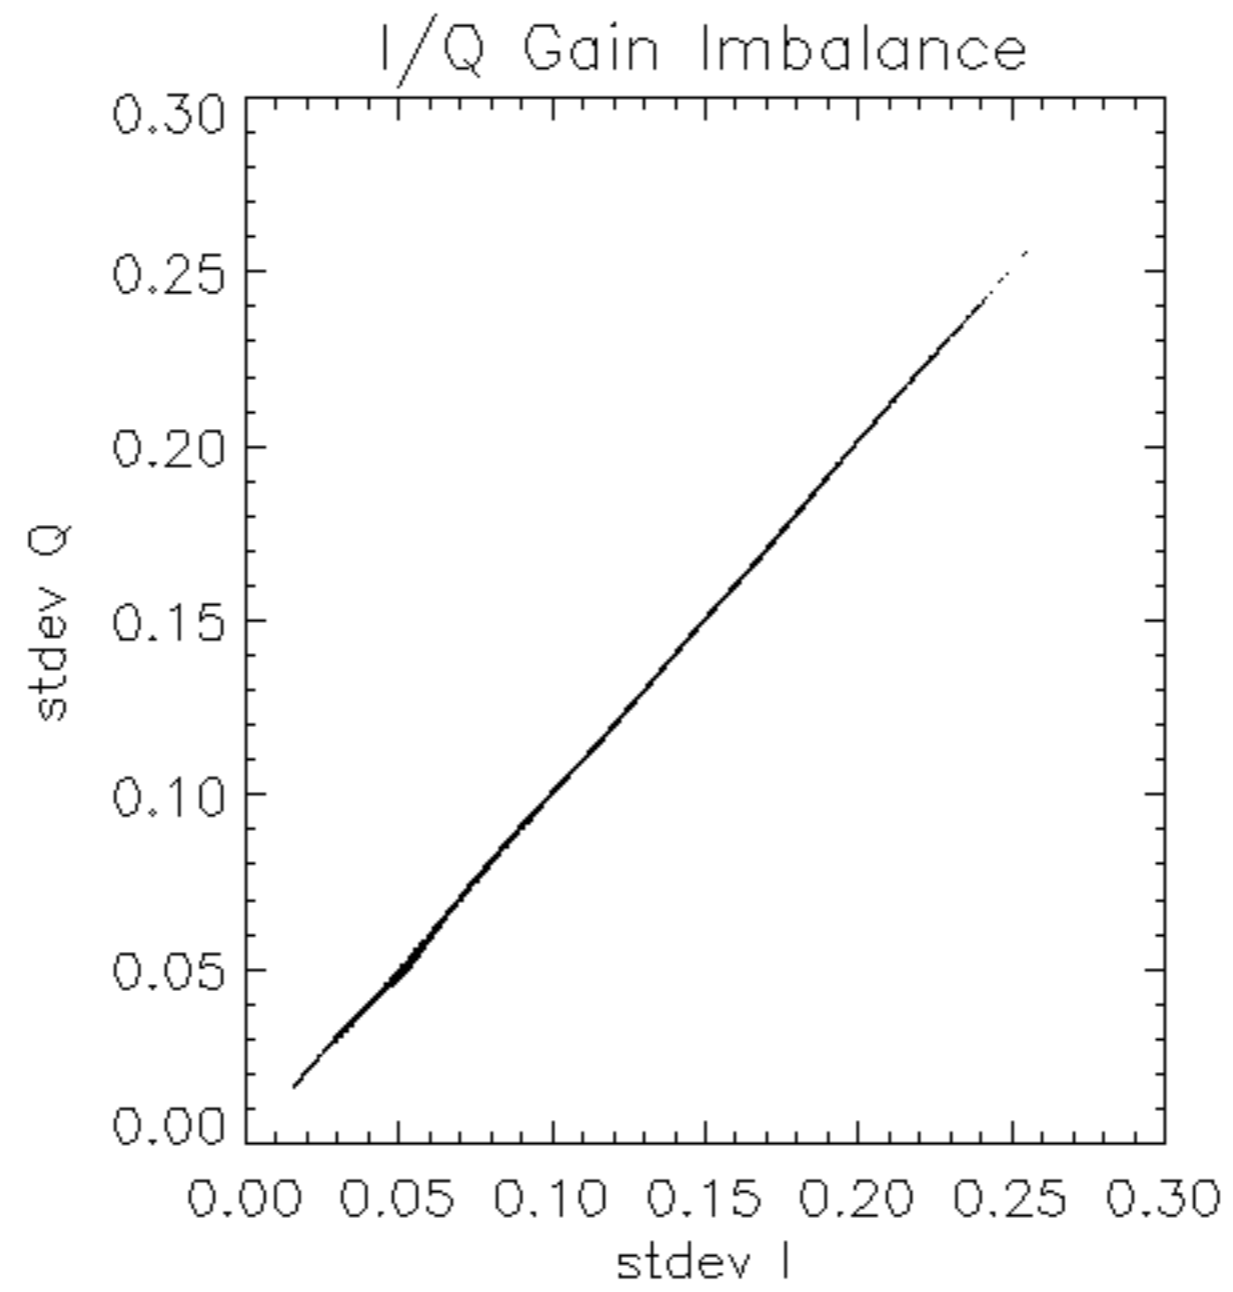


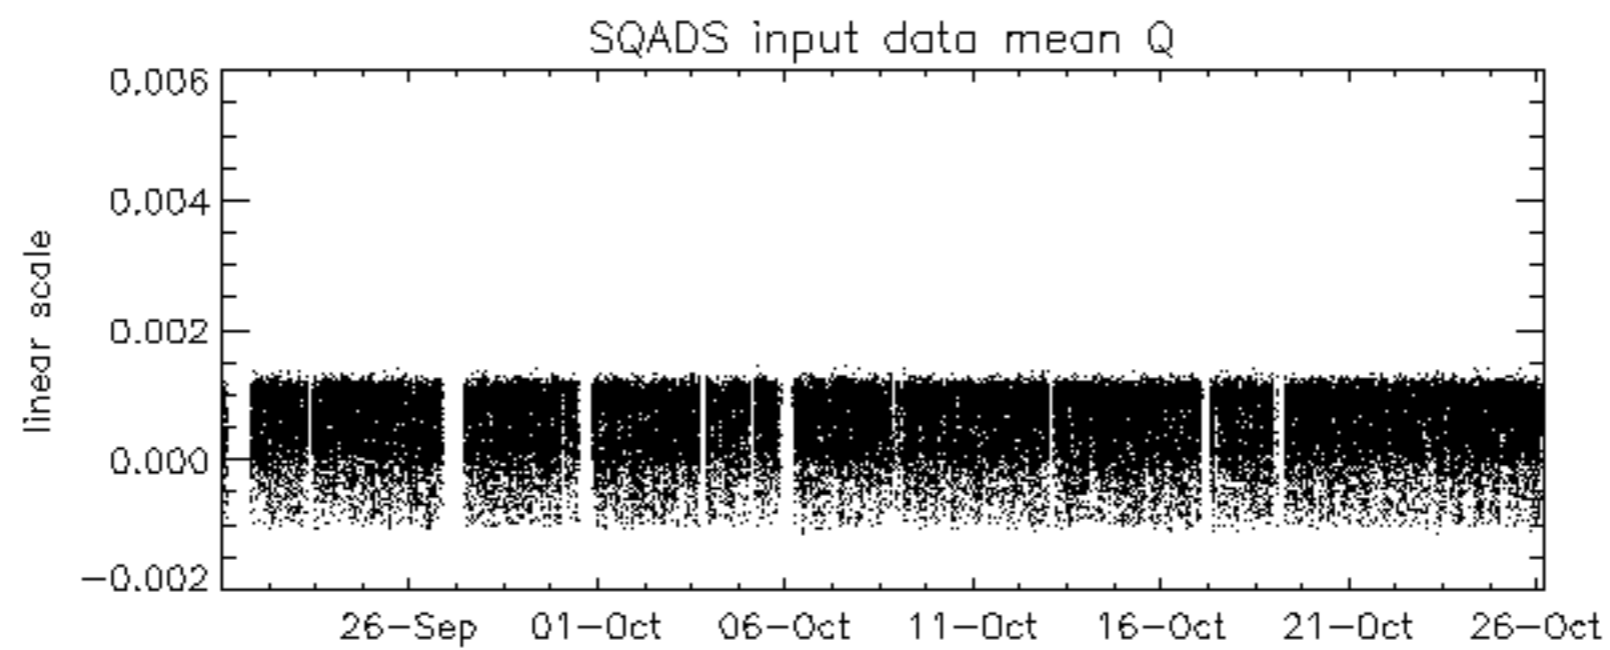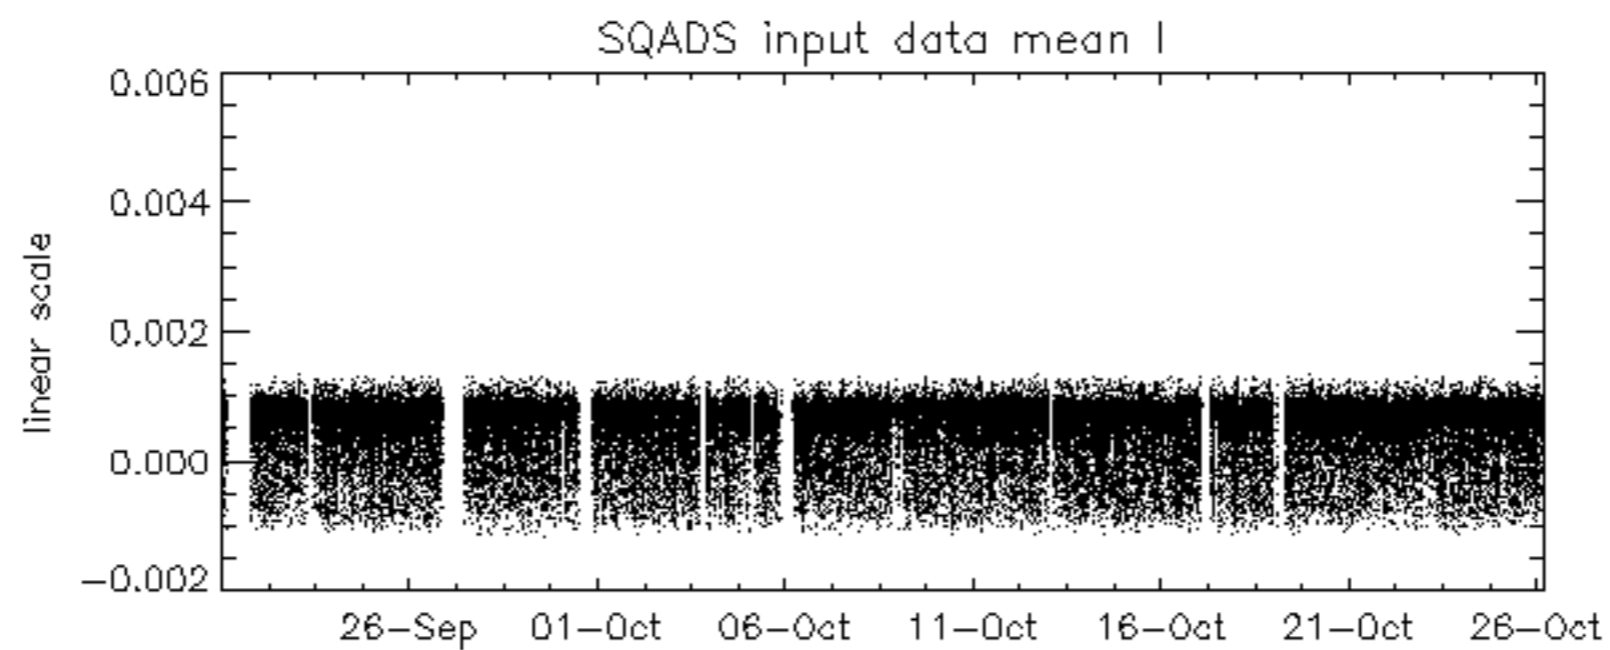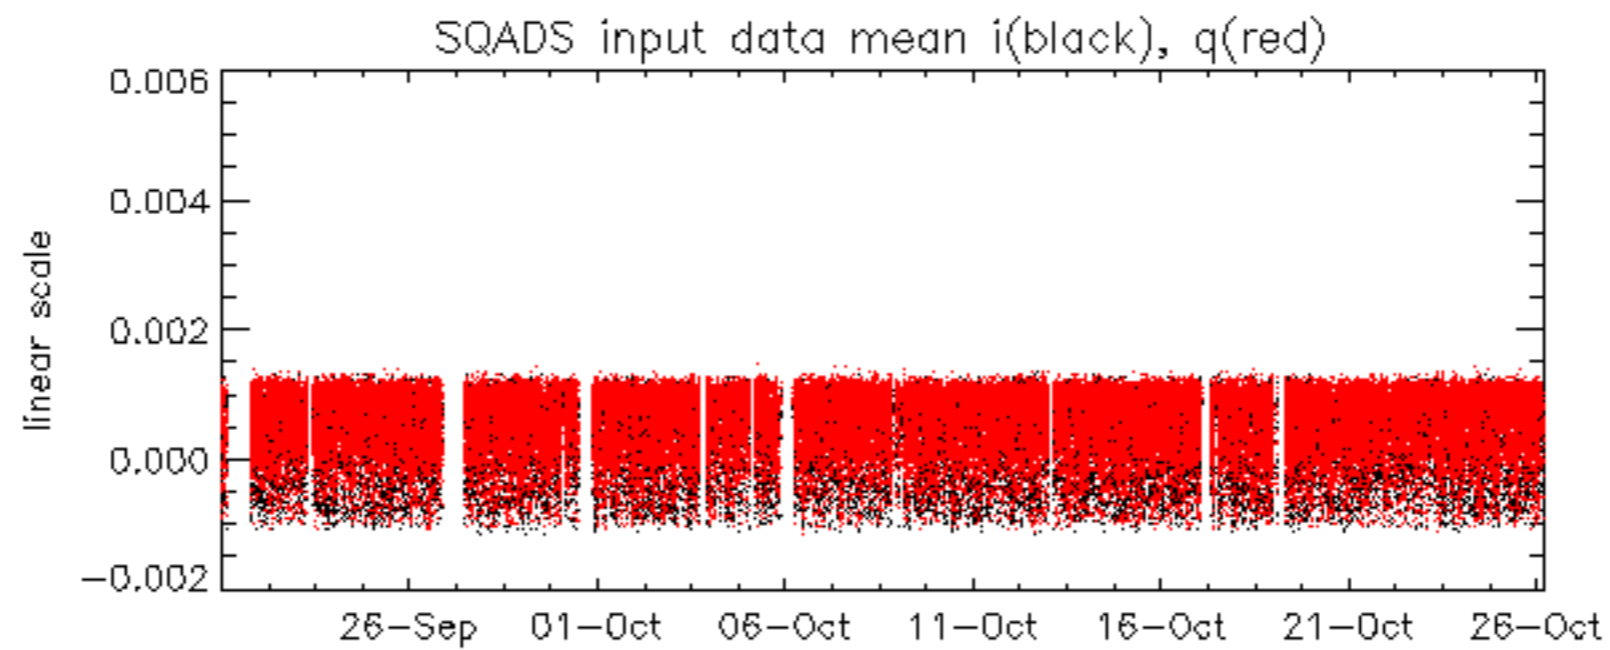

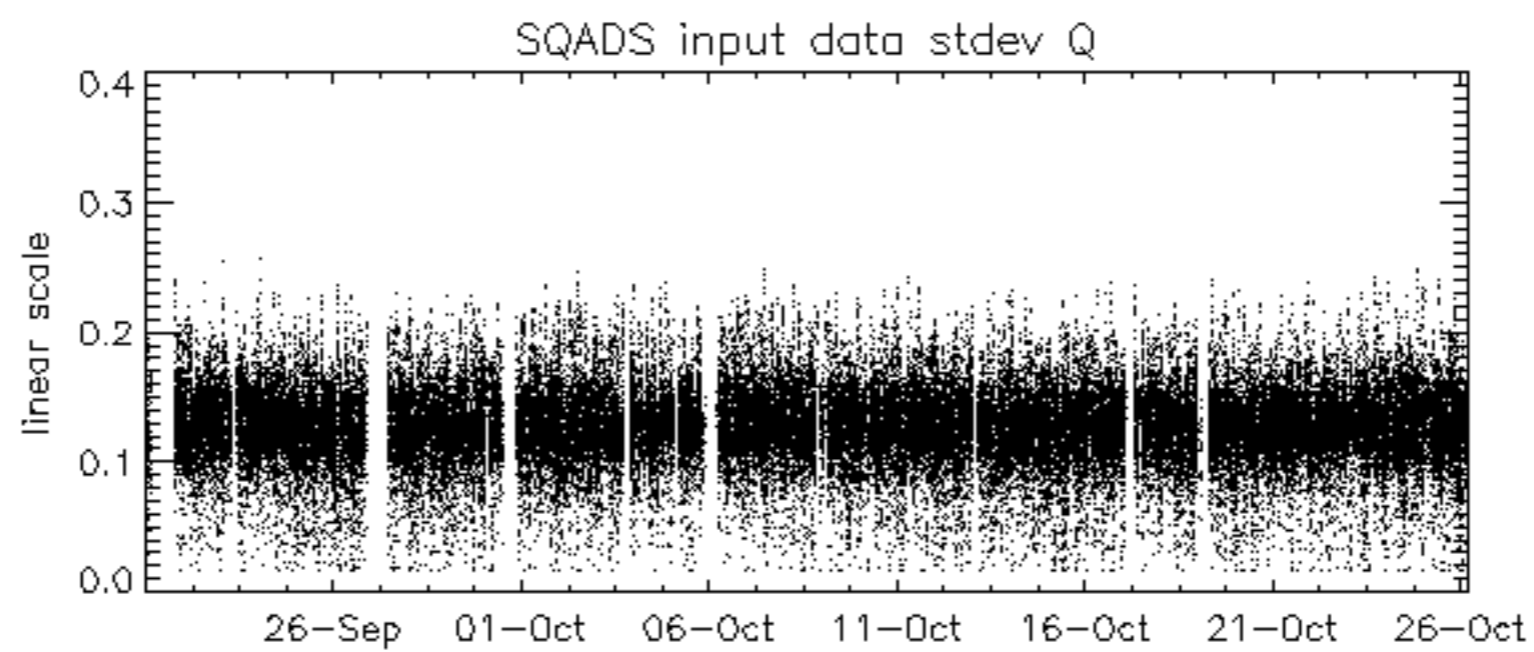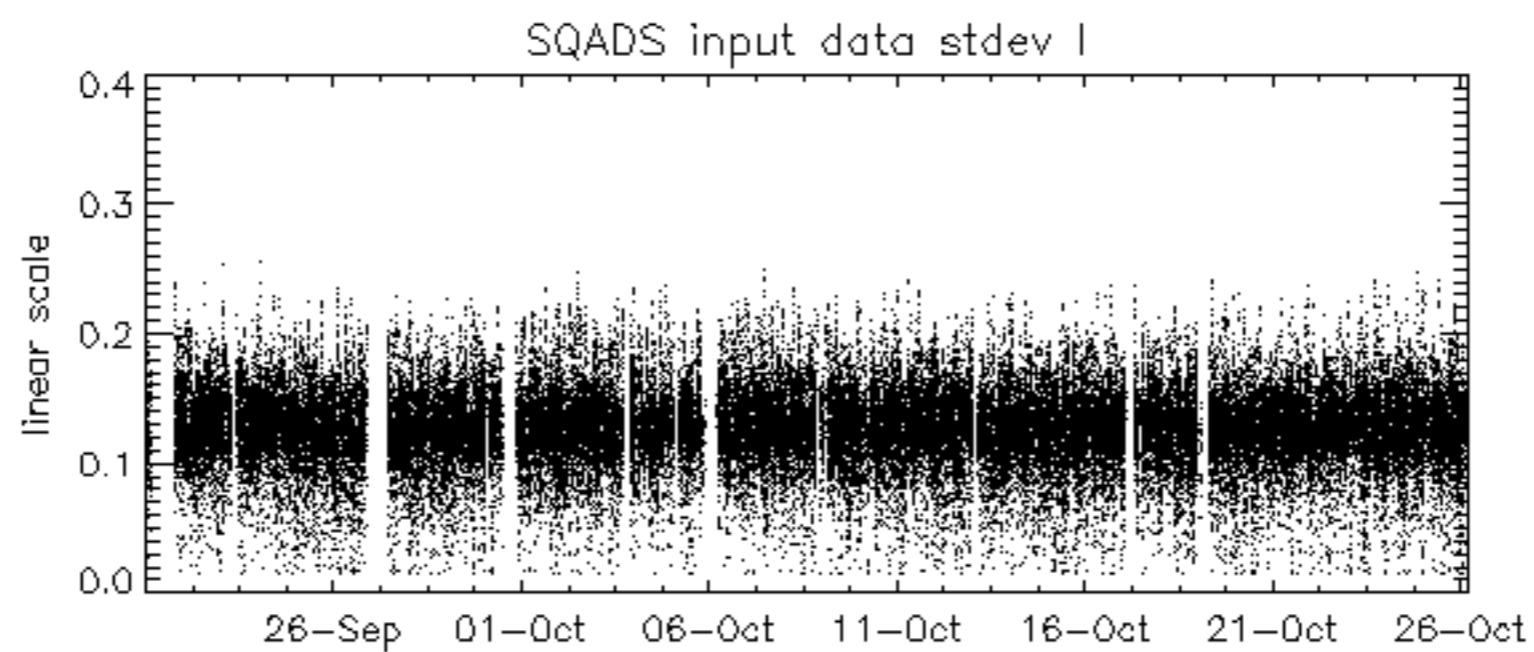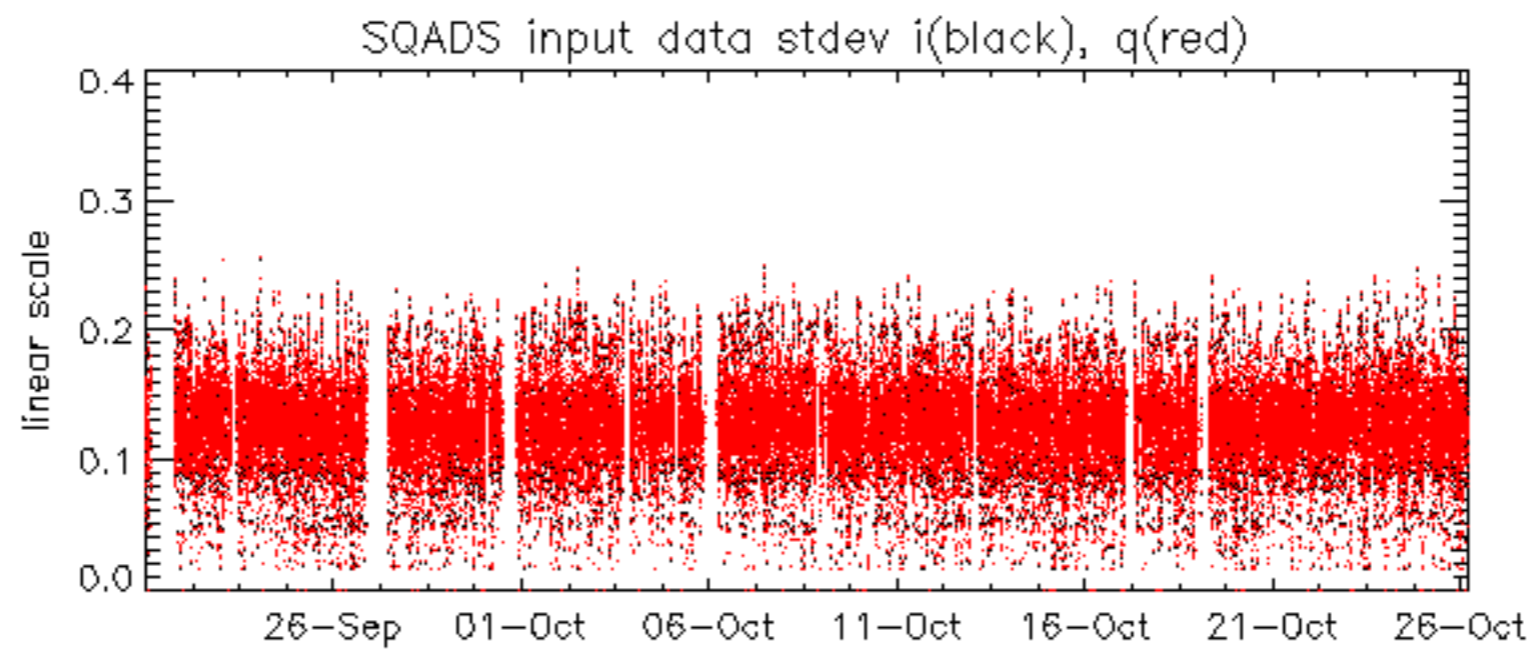


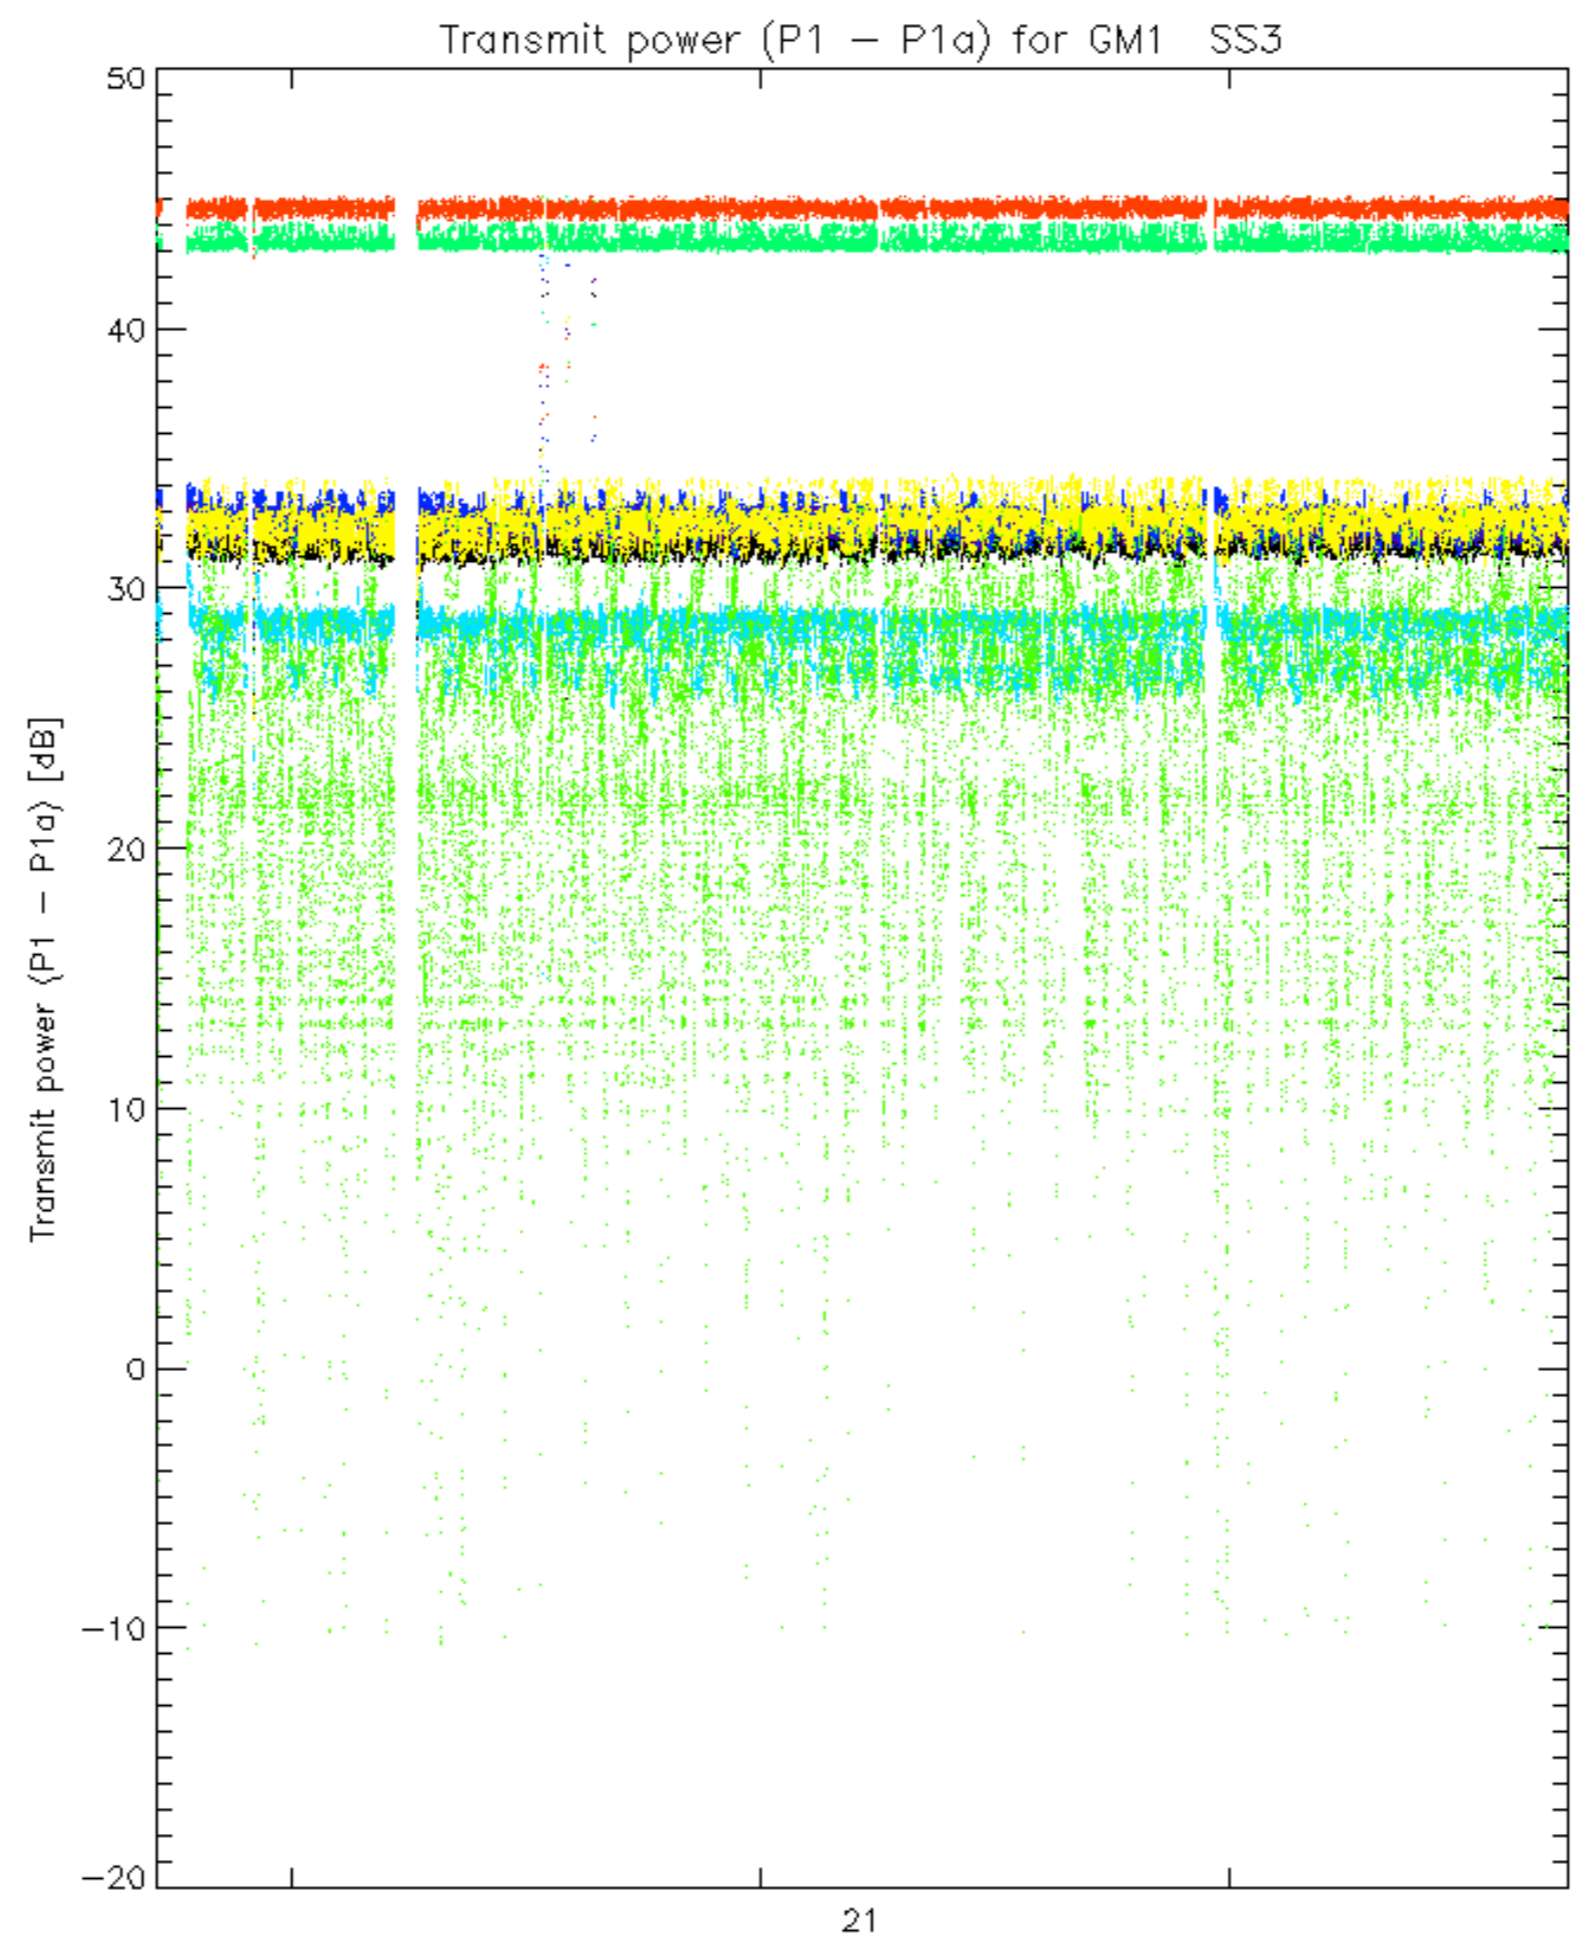


rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

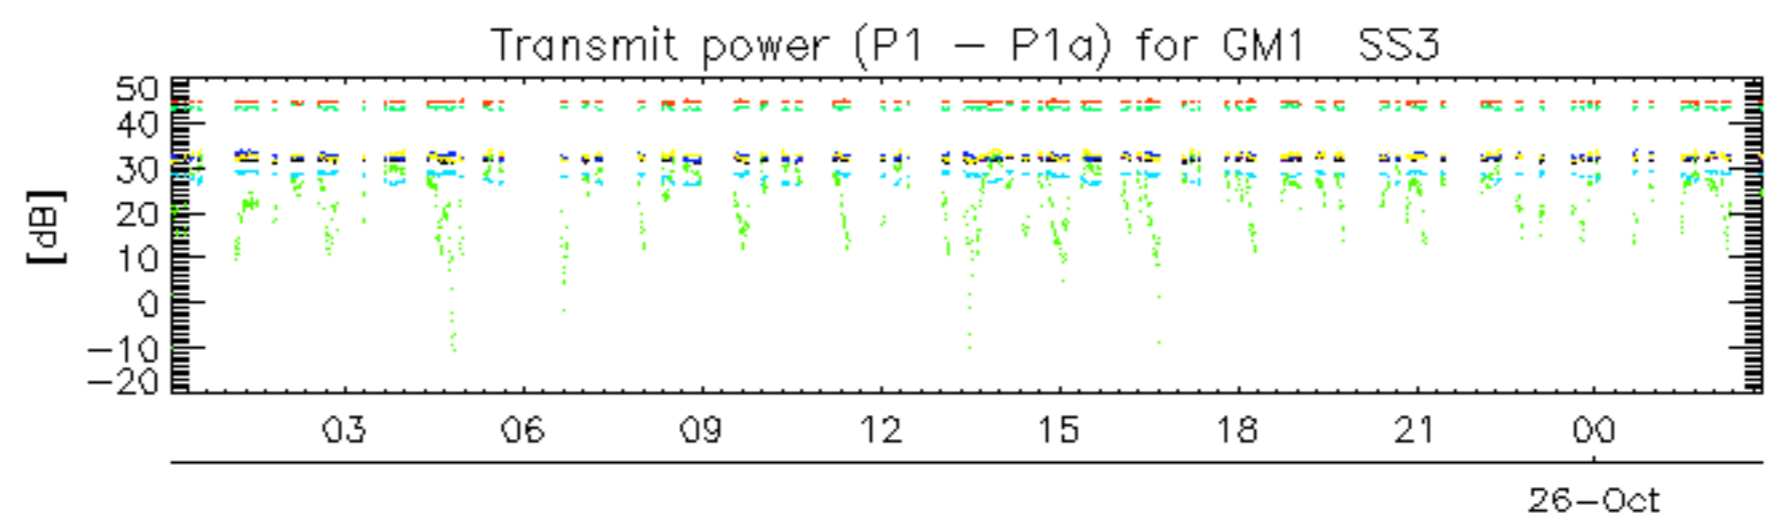

rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

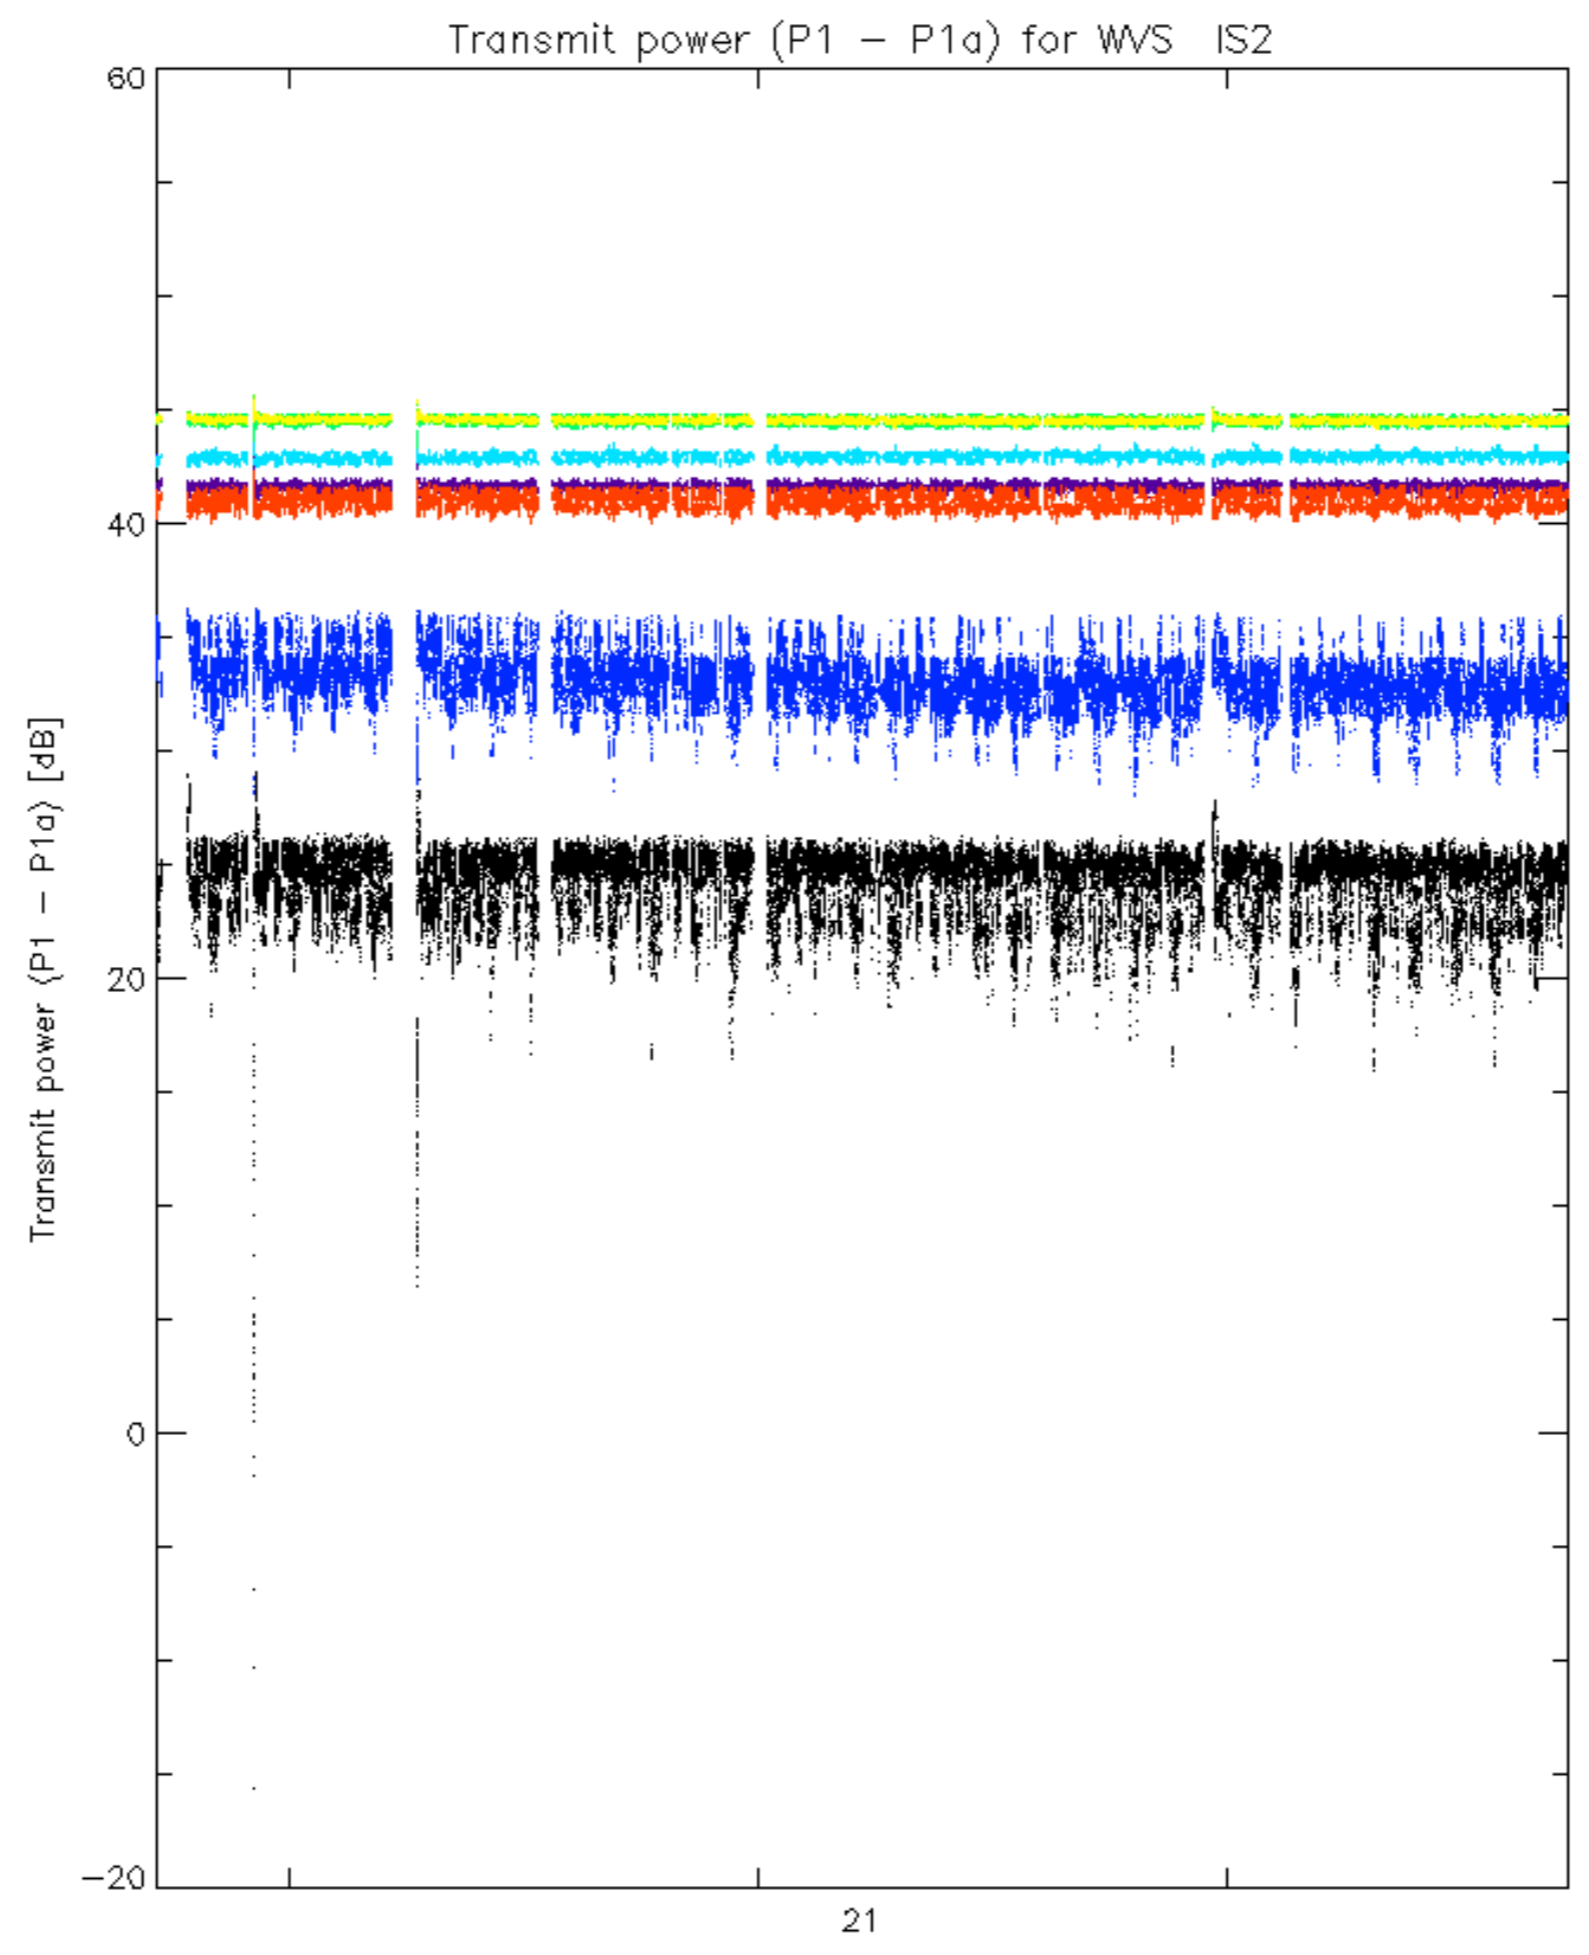

rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

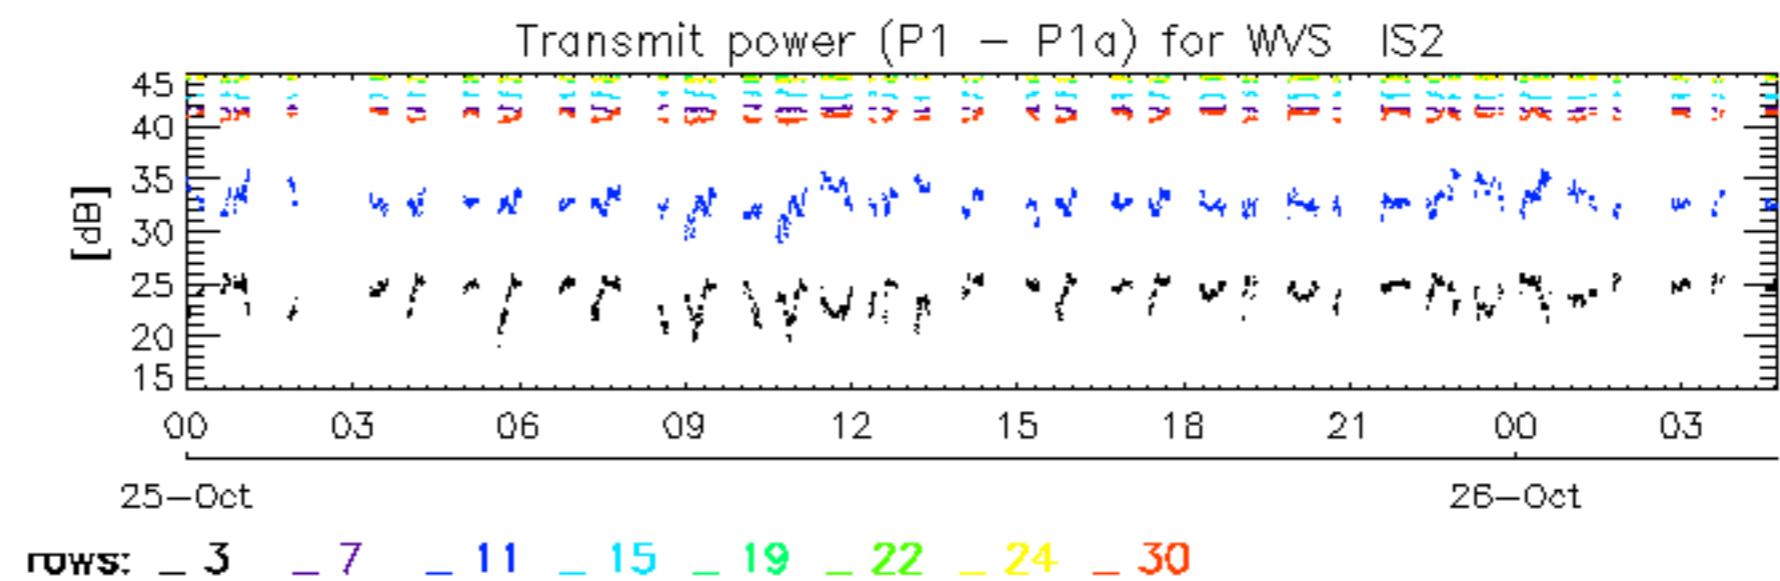

No unavailabilities during the reported period.