

PRELIMINARY REPORT OF 041027

ATTENTION: This report is automatically generated no comments are provided on data analysis

last update on Wed Oct 27 10:50:26 GMT 2004

1. [Introduction](#)
2. [Summary](#)
 - [Instrument Unavailability](#)
 - [Browse Visual Inspection](#)
 - [Module Stepping Results](#)
 - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
 - [Daily statistics](#)
 - [Cyclic statistics](#)
 - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
 - [raw data mean I and Q](#)
 - [raw data stdev I and Q](#)
 - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
 - [Unbiased Doppler Error for WVS](#)
 - [Absolute Doppler for WVS](#)
 - [Doppler evolution versus ANX for WVS](#)
 - [Unbiased Doppler Error for GM1](#)
 - [Absolute Doppler for GM1](#)
 - [Doppler evolution versus ANX for GM1](#)

1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA_WVS_1P), global monitoring products (ASA_GM1_1P), which are the available few hours after the acquisition, on the browse (BP) products and on the Module Stepping (MS) product.

2 - Summary

2.1 - Instrument Unavailability

No unavailabilities during the reported period.

2.2 - Browse Visual Inspection

2.3 - Data Analysis

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.

3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis. The purpose of this mode is to identify any malfunctioning modules and to identify modules for which calibration offsets are to be applied. No anomalies observed on available MS products:

Polarisation	Start Time
V	20041025 084159
H	20041023 030250

MSM in V/V polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>

MSM in H/H polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>

4 - Internal calibration Results

No anomalies observed.

4.1 - Daily statistics

4.1.1 - Evolution for WVS

Evolution of cal pulses for WVS

4.1.2 - Evolution for GM1

Evolution of cal pulses for GM1

4.2 - Cyclic statistics

4.2.1 - Evolution for WVS

Evolution of cal pulses for WVS

P1a Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

P1 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P1	-3.473443	0.006900	-0.031514
7	P1	-3.346976	0.012108	-0.045810
11	P1	-4.619277	0.019447	0.053977
15	P1	-5.702489	0.033608	0.078649
19	P1	-3.543225	0.006479	-0.116468
22	P1	-4.561852	0.013721	-0.076698
24	P1	-4.967391	0.009009	0.027083
30	P1	-7.048569	0.016886	-0.039737

3	P1	-16.097397	0.088204	0.113415
7	P1	-14.037529	0.063801	-0.011105
11	P1	-20.442036	0.212354	-0.379439
15	P1	-11.716862	0.034893	0.068530
19	P1	-14.007440	0.026826	-0.068032
22	P1	-16.147764	0.402933	-0.387392
24	P1	-14.568357	0.259946	-0.267799
30	P1	-18.039444	0.324129	0.031407

P2 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P2	-22.343023	0.089261	-0.100654
7	P2	-22.599346	0.122670	-0.065875
11	P2	-15.120228	0.117302	0.050389
15	P2	-7.099281	0.106250	-0.116780
19	P2	-9.640391	0.126066	-0.199316
22	P2	-17.275190	0.106962	0.022621
24	P2	-20.790005	0.090303	-0.053967
30	P2	-19.086985	0.083308	0.086131

P3 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P3	-8.177742	0.005916	-0.059864
7	P3	-8.177740	0.005917	-0.059865
11	P3	-8.177740	0.005917	-0.059866
15	P3	-8.177739	0.005917	-0.059871
19	P3	-8.177735	0.005917	-0.059885
22	P3	-8.177734	0.005917	-0.059885
24	P3	-8.177733	0.005917	-0.059885
30	P3	-8.177754	0.005917	-0.059524

4.2.2 - Evolution for GM1

Evolution of cal pulses for GM1	
<input type="checkbox"/>	
<input type="checkbox"/>	

P1a Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

P1 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P1	-2.818830	0.014135	0.033158
7	P1	-2.977762	0.050800	0.076781
11	P1	-3.890059	0.021363	-0.035302
15	P1	-3.493324	0.022411	0.001786
19	P1	-3.546694	0.013716	-0.127646
22	P1	-5.660886	0.058990	0.083206
24	P1	-3.971295	0.022571	-0.013729
30	P1	-6.216051	0.048755	-0.107306
3	P1	-10.760750	0.095078	0.446012
7	P1	-10.076718	0.172036	0.061714
11	P1	-12.263723	0.124686	-0.206590
15	P1	-11.682515	0.074229	0.009070
19	P1	-15.593185	0.060620	-0.064918
22	P1	-23.645226	1.460942	-0.397817
24	P1	-18.141415	0.233043	-0.053496
30	P1	-20.353886	1.087558	0.327550

P2 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P2	-18.019764	0.049126	-0.119391
7	P2	-22.691916	0.065071	0.000798
11	P2	-10.866622	0.049543	-0.040287
15	P2	-5.001358	0.030521	-0.100894
19	P2	-6.849351	0.045097	-0.244344
22	P2	-7.390016	0.040936	-0.005274
24	P2	-11.117703	0.054559	-0.138265
30	P2	-22.102400	0.038022	0.019390

P3 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

3	P3	-8.021334	0.003937	-0.051651
7	P3	-8.021317	0.003937	-0.051496
11	P3	-8.021436	0.003925	-0.051355
15	P3	-8.021352	0.003925	-0.051339
19	P3	-8.021348	0.003928	-0.051398
22	P3	-8.021348	0.003927	-0.051489
24	P3	-8.021489	0.003953	-0.051809
30	P3	-8.021427	0.003935	-0.051489

4.3 - cal pulses monitoring (all rows)

4.3.1 - Evolution for WVS



4.3.2 - Evolution for GM1



5 - RAW data statistics

No anomalies observed.

5.1 - Input mean I/Q

channel	stat	DSS-B
MEAN I	mean	0.000477816
	stdev	2.14818e-07
MEAN Q	mean	0.000553683
	stdev	2.32262e-07



5.2 - Input stdev I/Q

channel	stat	DSS-B
STDEV I	mean	0.127163
	stdev	0.000916358

STDEV Q	mean	0.127376
	stdev	0.000925121





5.3 - Gain imbalance I/Q





6 - Doppler Analysis

Preliminary report. The data is not yet controlled

6.1 - Unbiased Doppler Error for WVS

Evolution of unbiased Doppler error (Real - Expected)	
	
	Acsending
	
	Descending

6.2 - Absolute Doppler for WVS

Evolution of Absolute Doppler	
	
	Acsending
	
	Descending

6.3 - Doppler evolution versus ANX for WVS

Evolution Doppler error versus ANX	
	

6.4 - Unbiased Doppler Error for GM1

Evolution of unbiased Doppler error (Real - Expected)	
<input type="checkbox"/>	
	Ascending
<input type="checkbox"/>	
	Descending





6.5 - Absolute Doppler for GM1

Evolution of Absolute Doppler	
<input type="checkbox"/>	
	Ascending
<input type="checkbox"/>	
	Descending

6.6 - Doppler evolution versus ANX for GM1


Evolution Doppler error versus ANX	
<input type="checkbox"/>	

Cal pulses for GM1 SS3

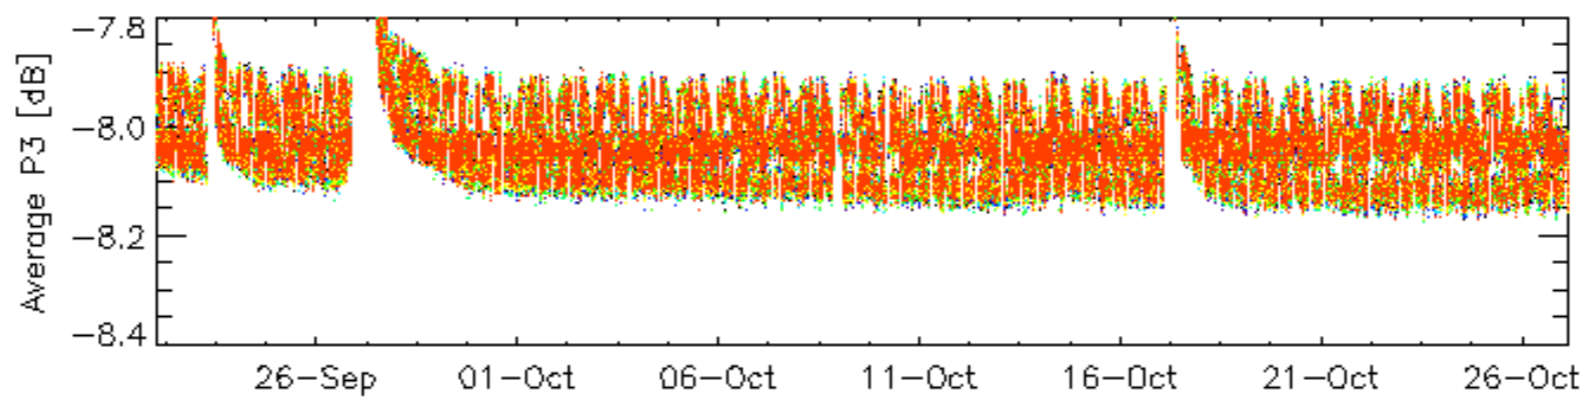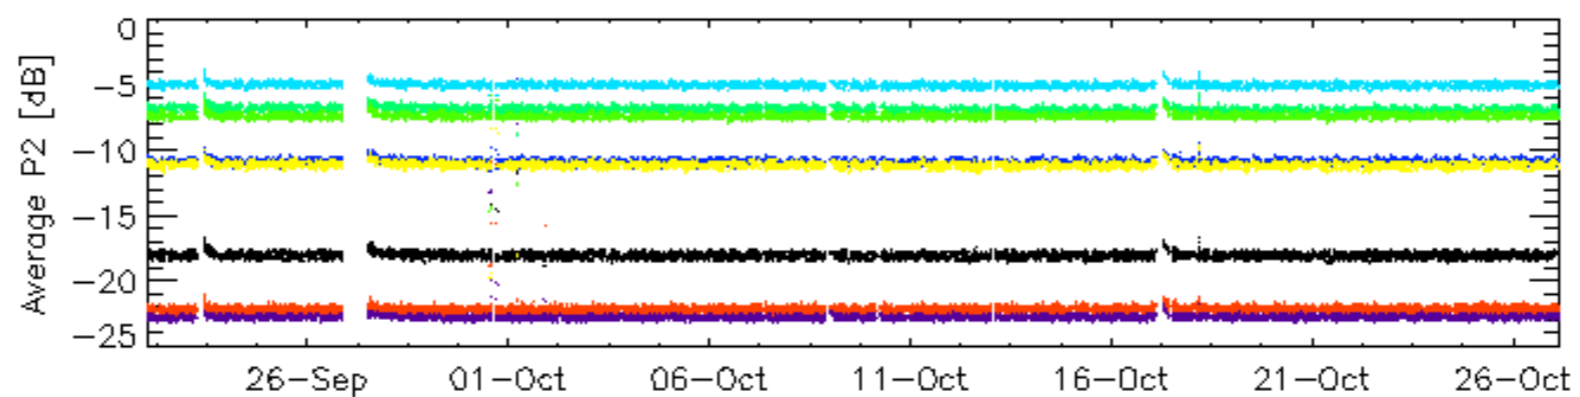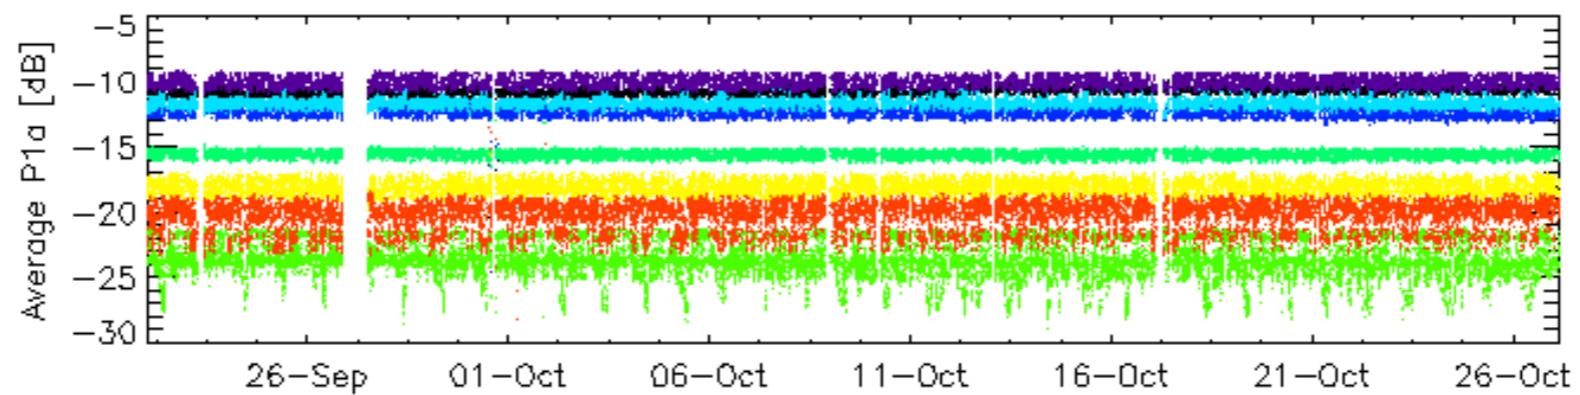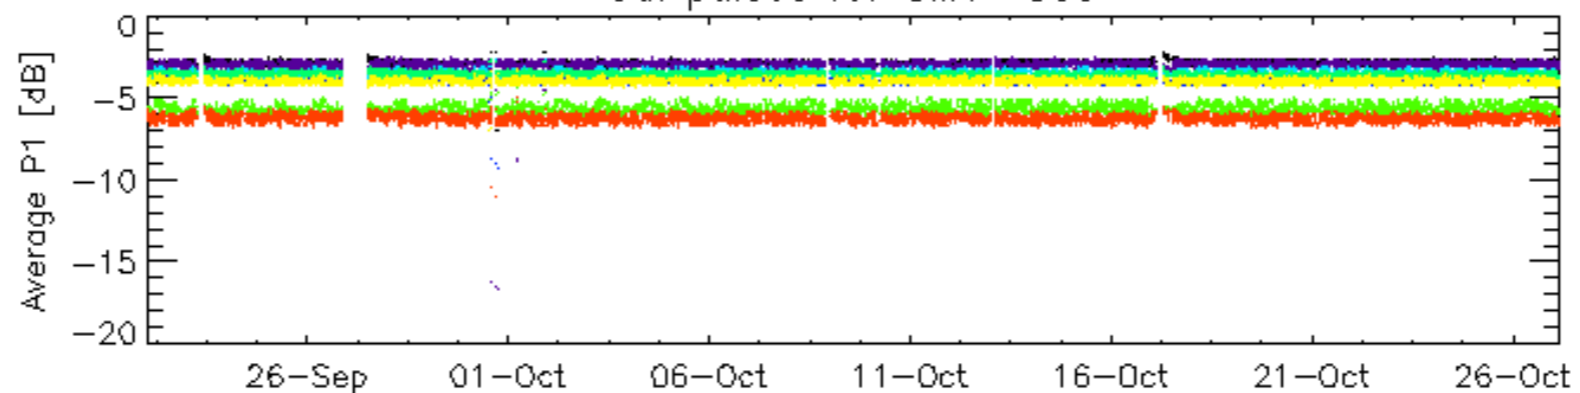


rows: [_ 3](#) [_ 7](#) [_ 11](#) [_ 15](#) [_ 19](#) [_ 22](#) [_ 24](#) [_ 30](#)

Cal pulses for GM1 SS3

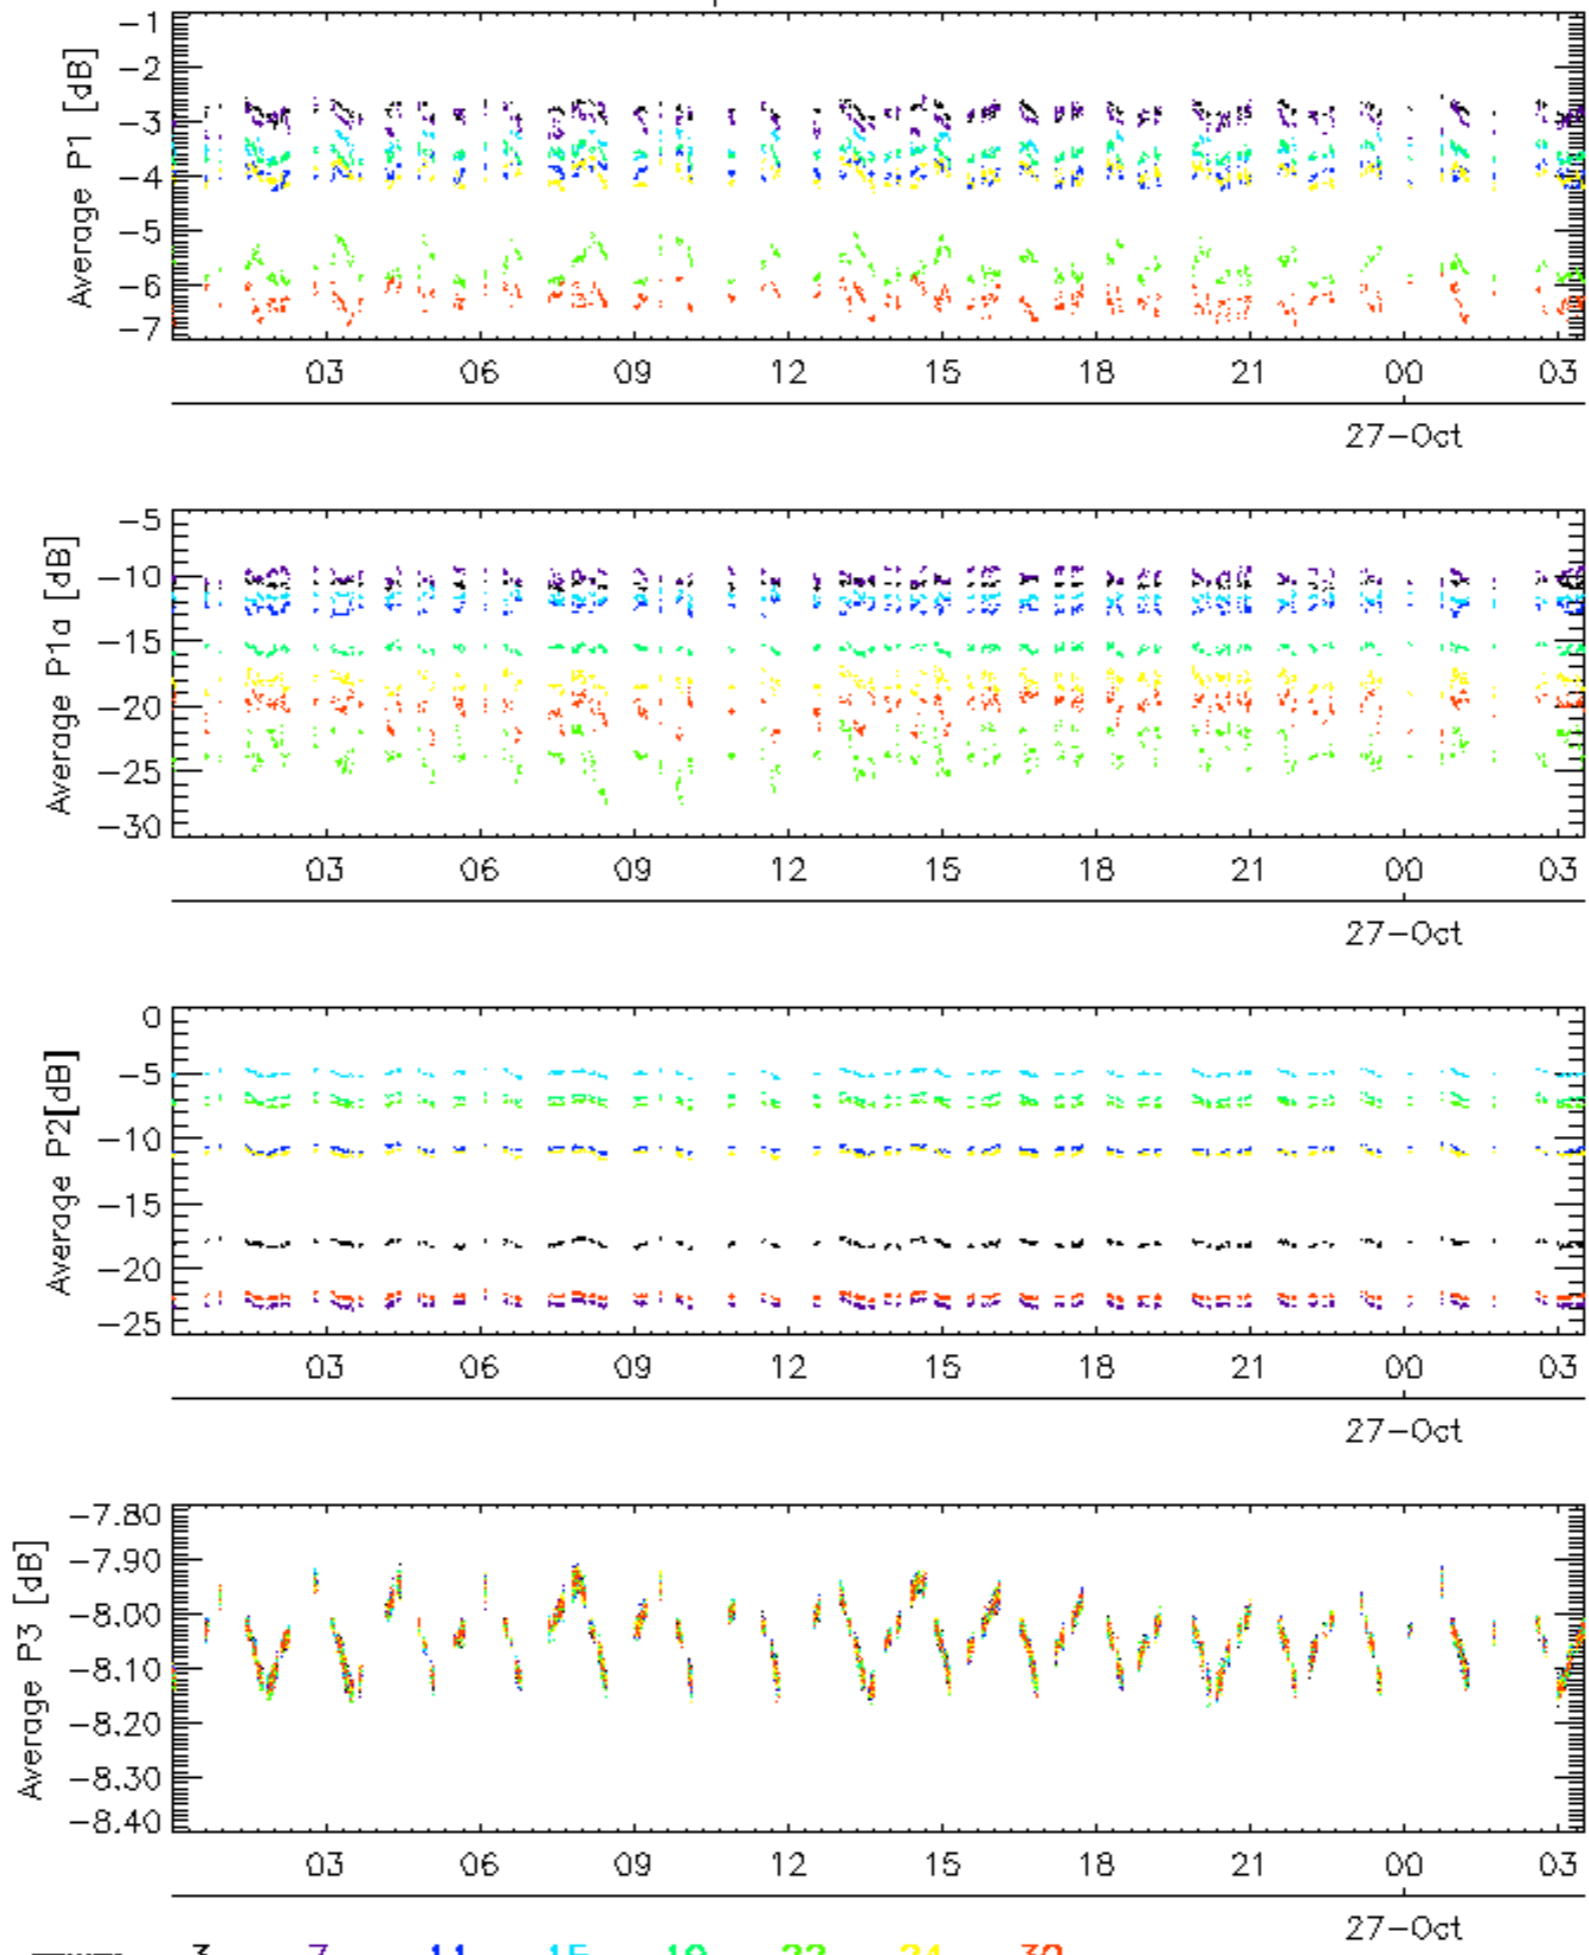


rows: **3** **7** **11** **15** **19** **22** **24** **30**

Cal pulses for WVS IS2

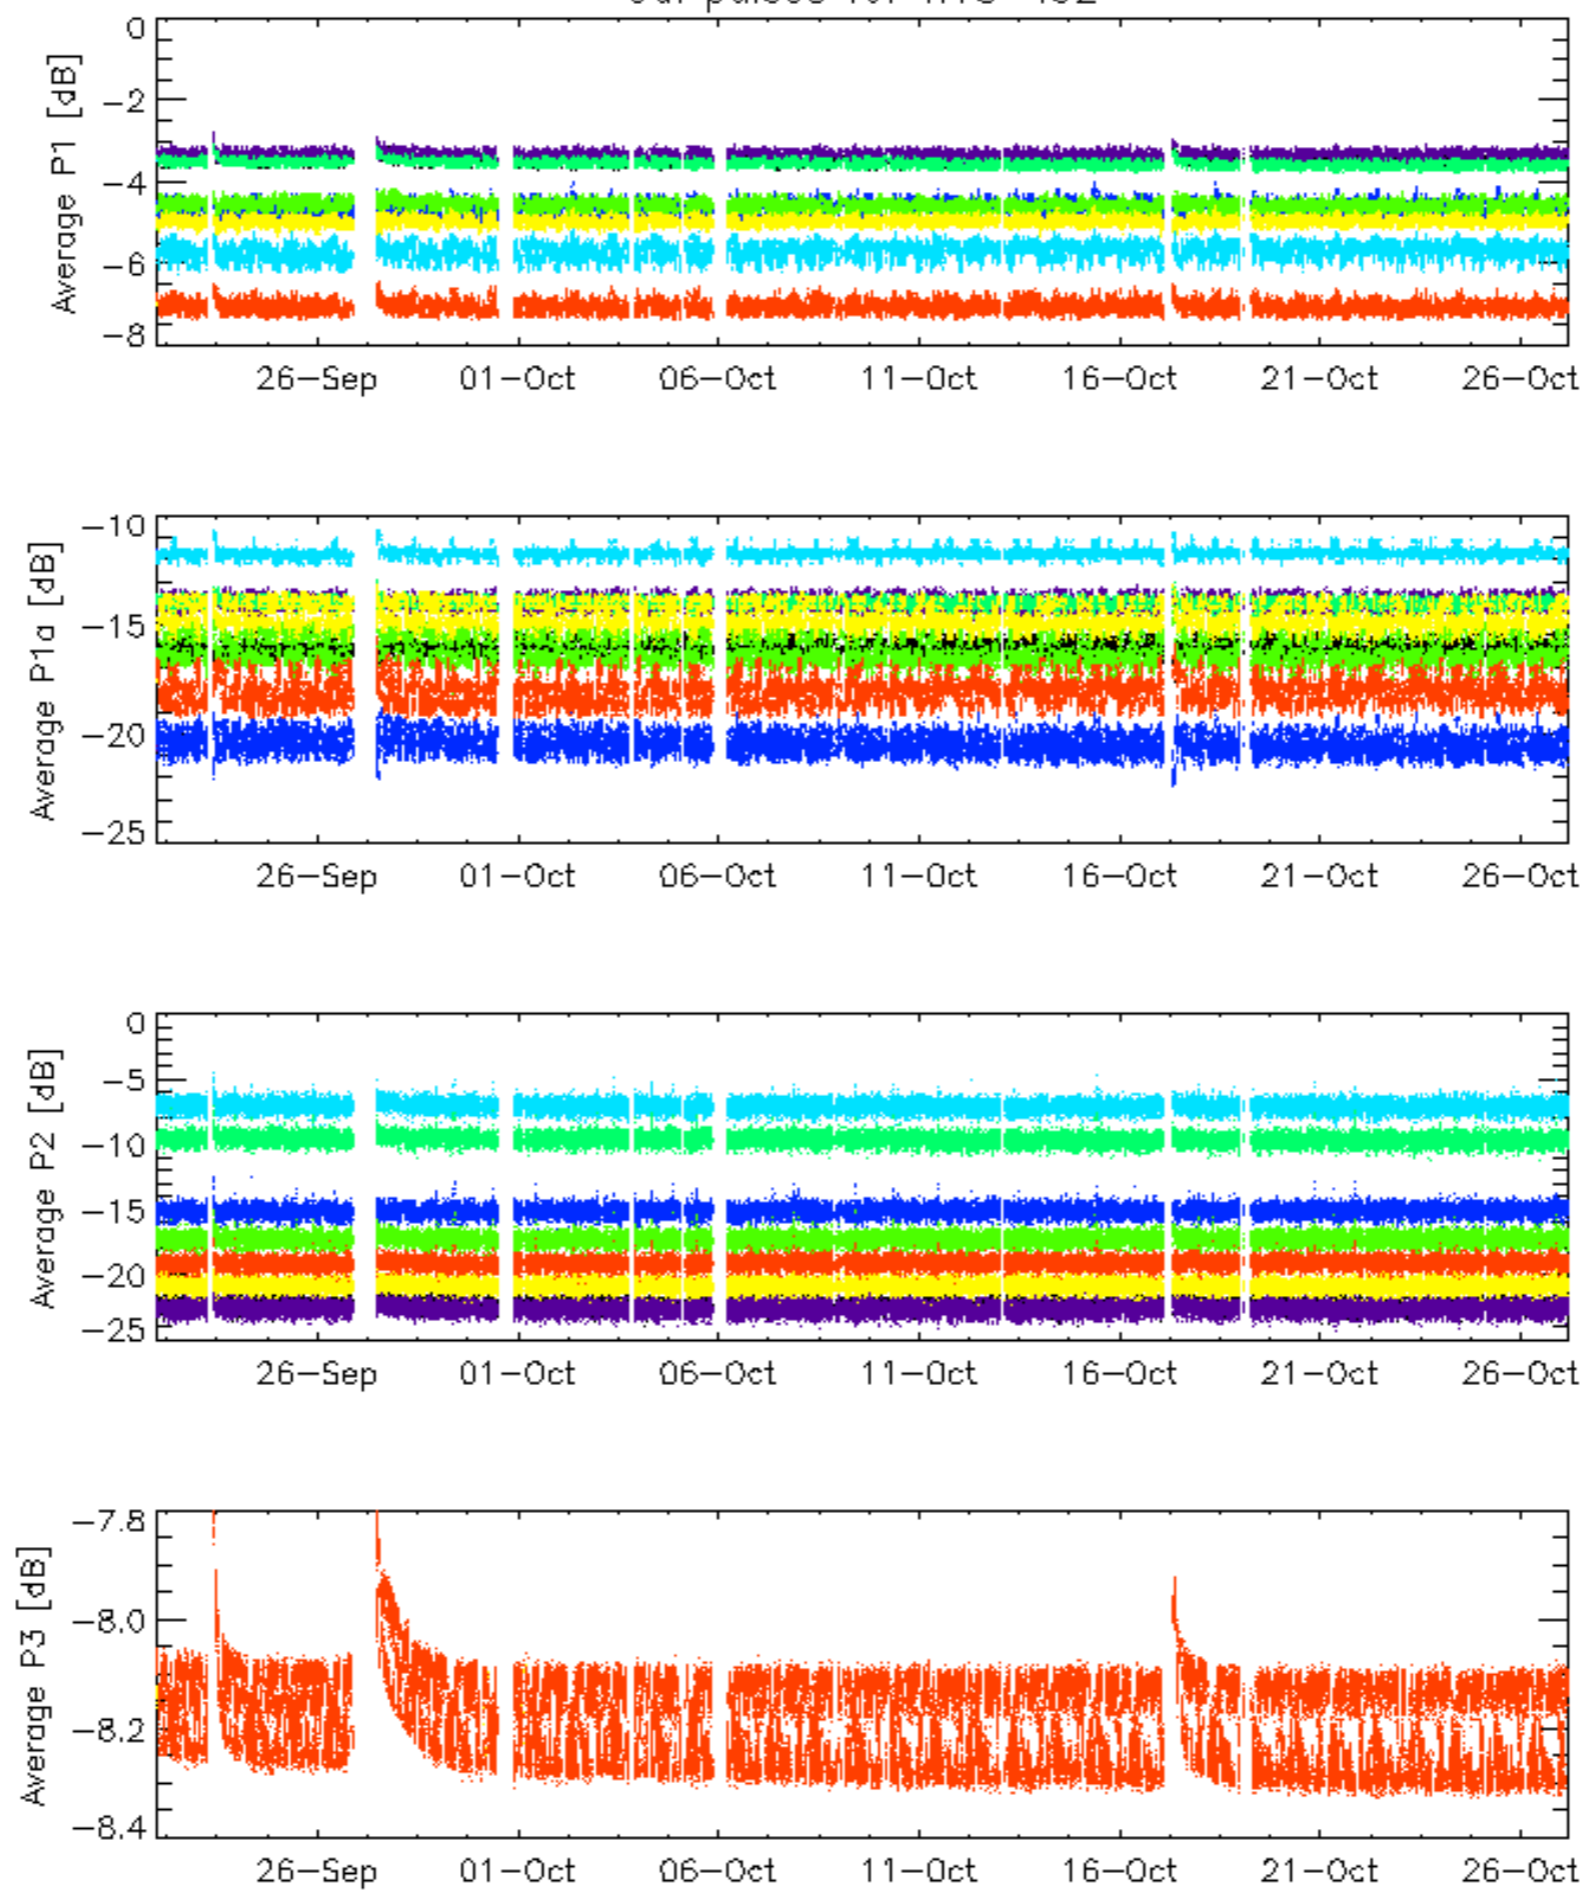


rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30


Cal pulses for WVS IS2

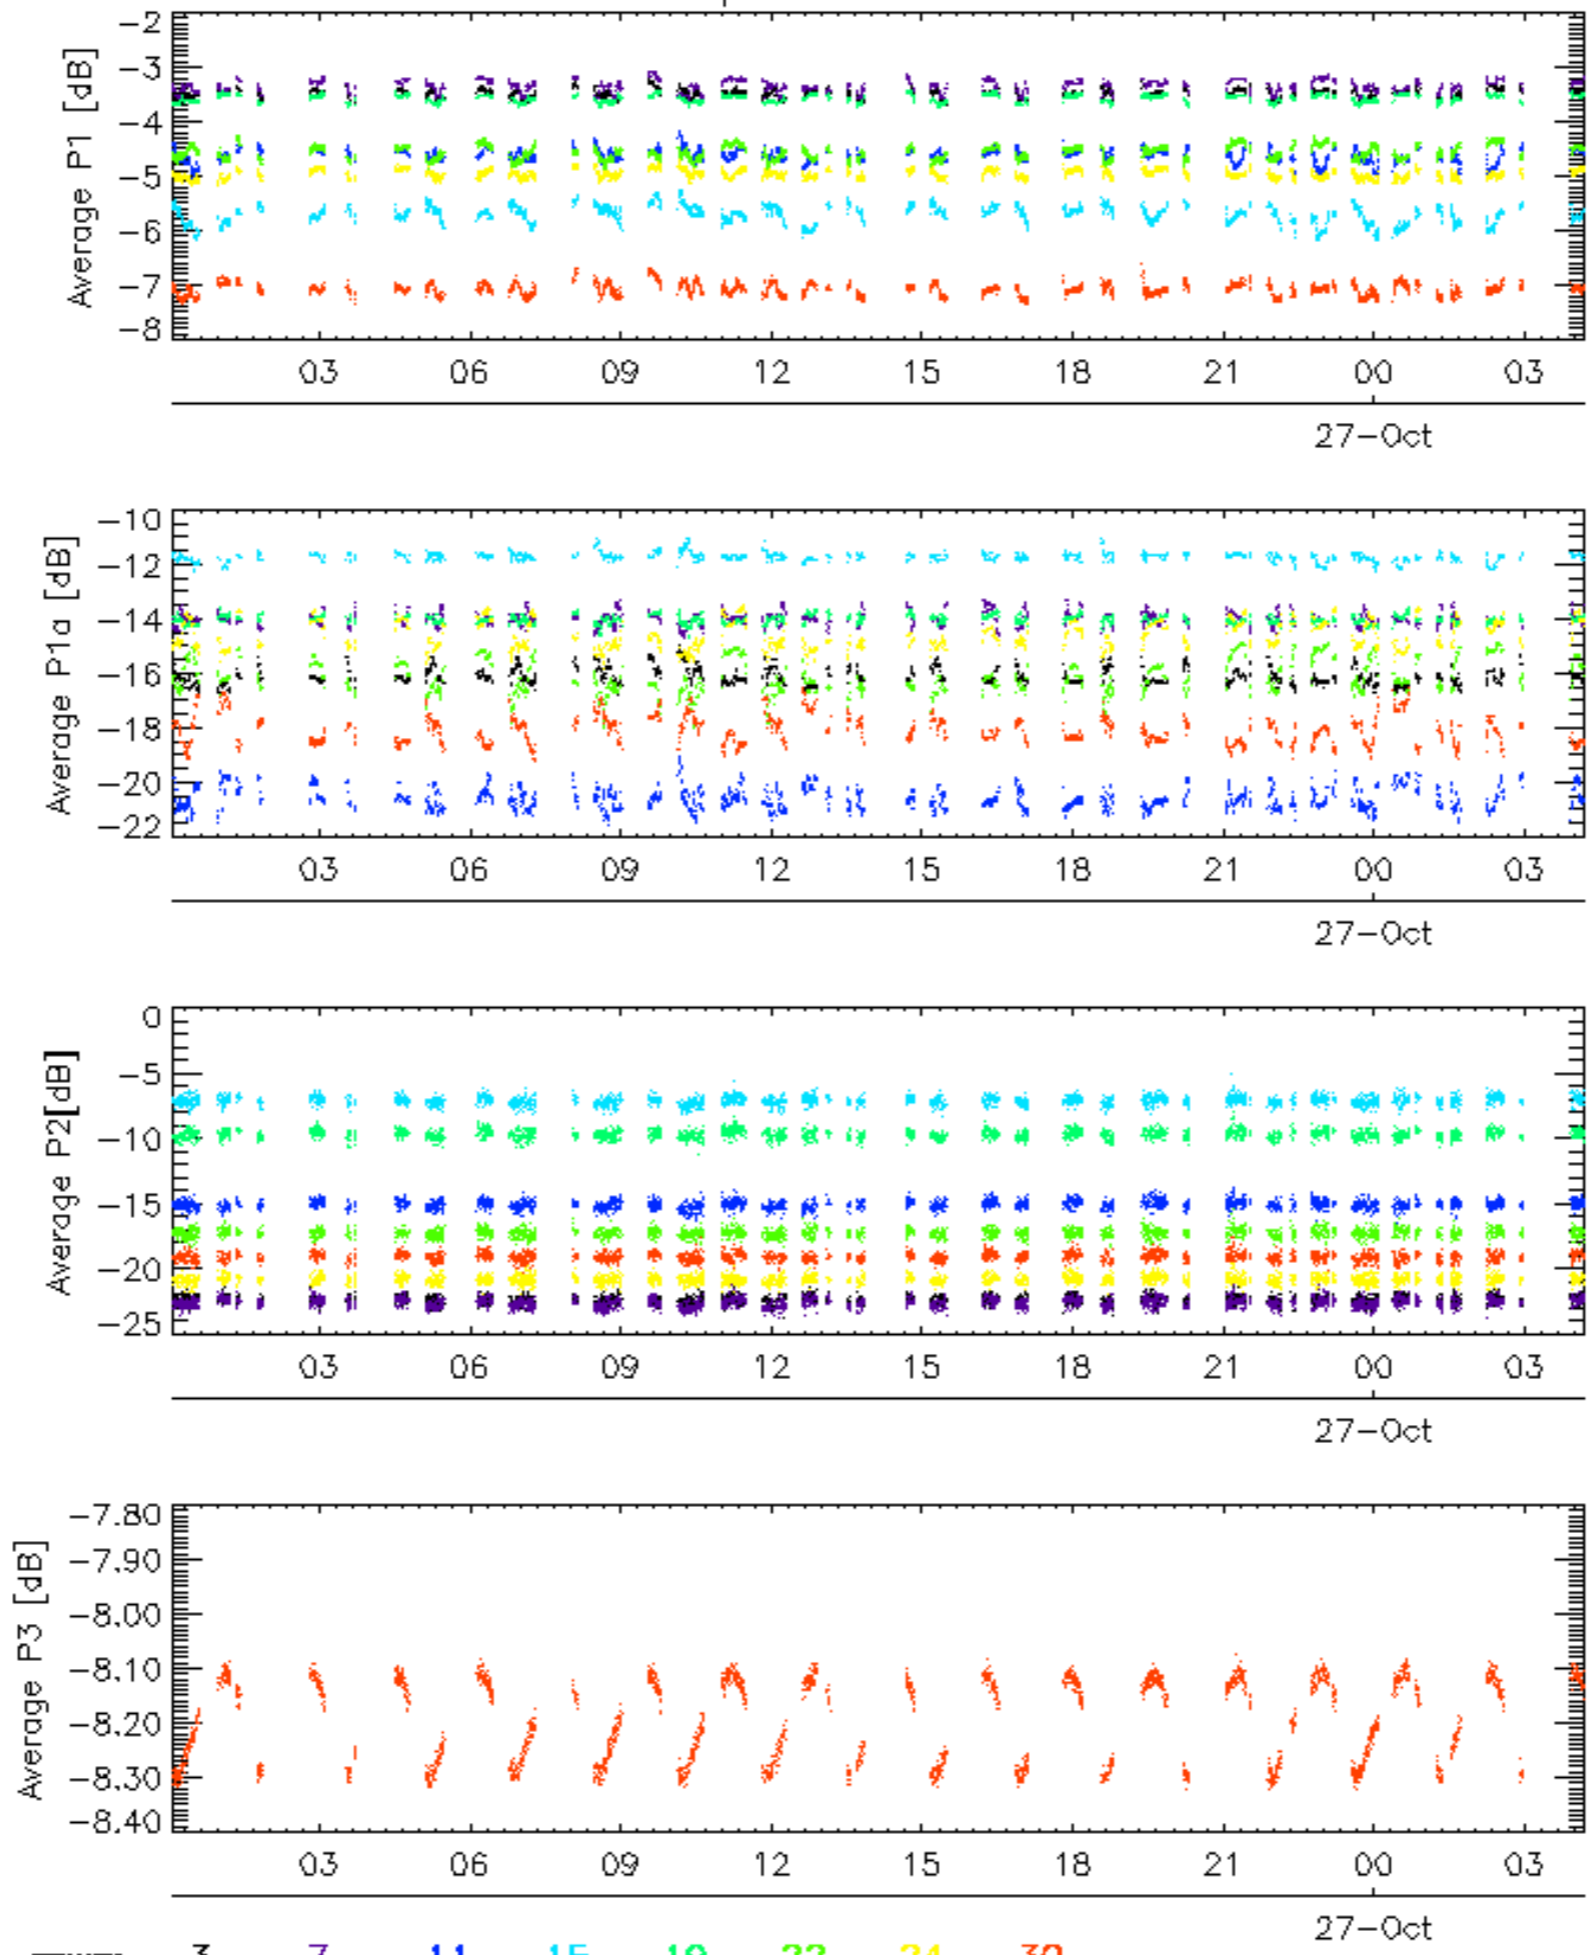

rows: **3** **7** **11** **15** **19** **22** **24** **30**


No anomalies observed.

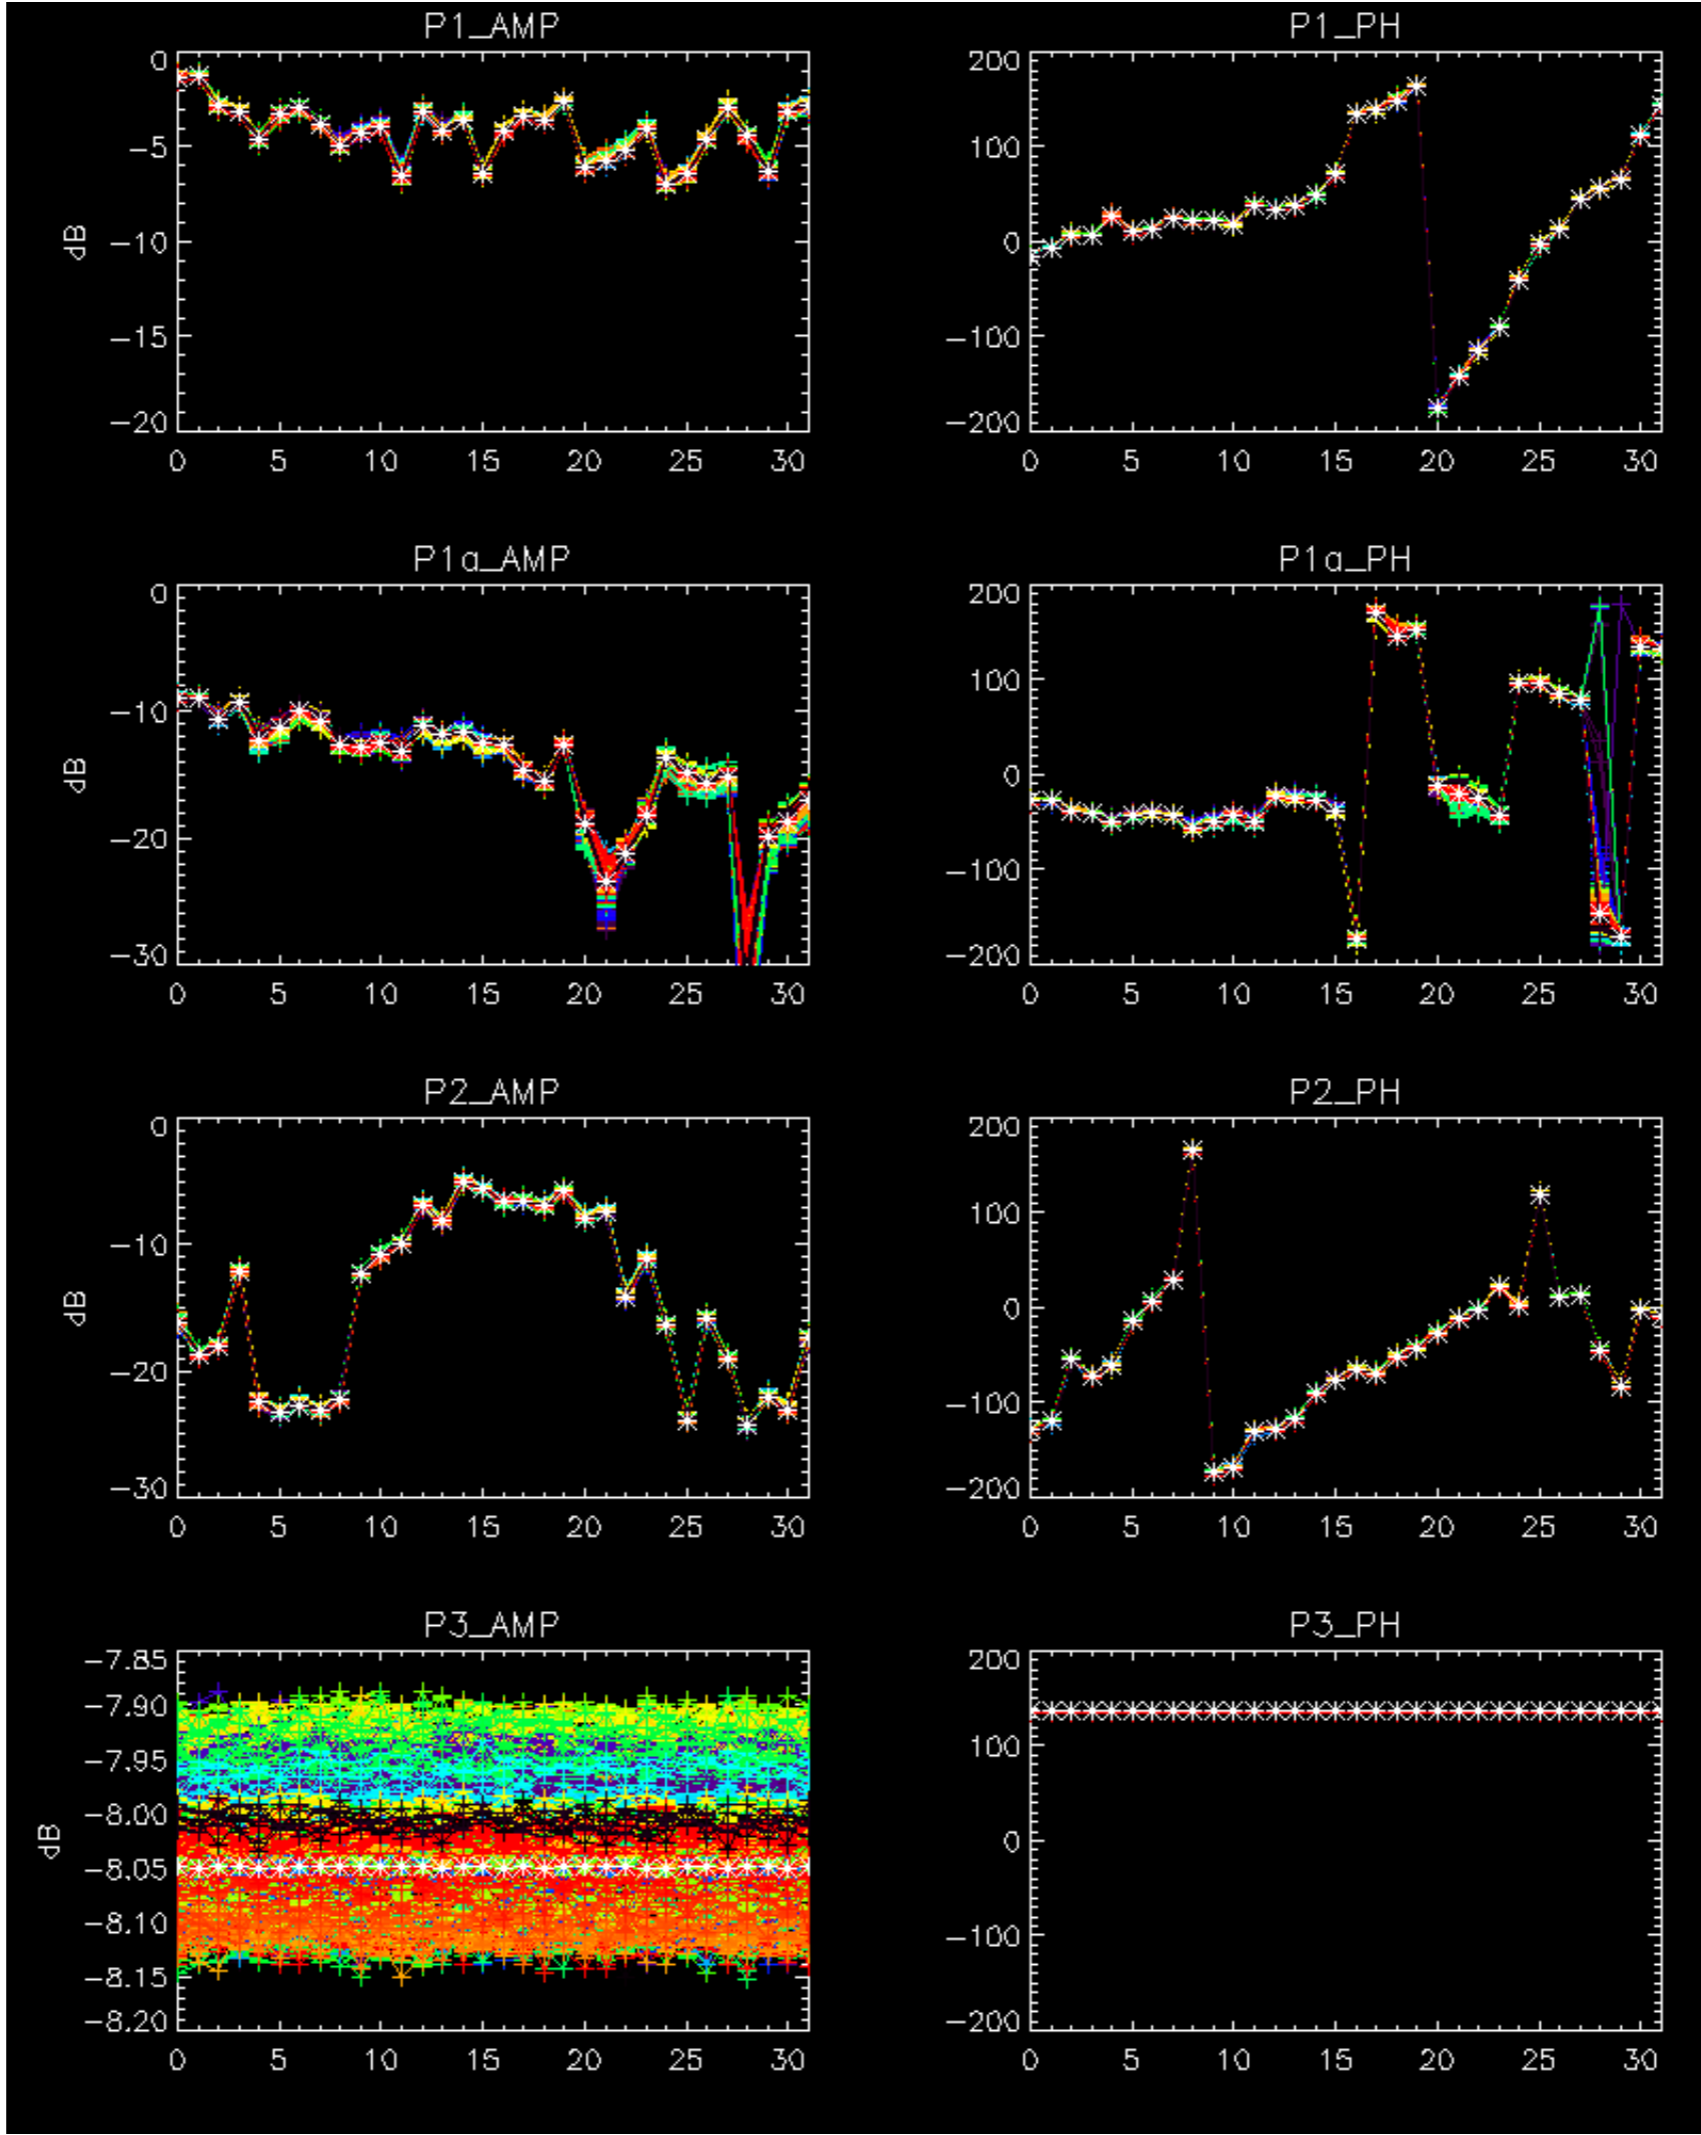

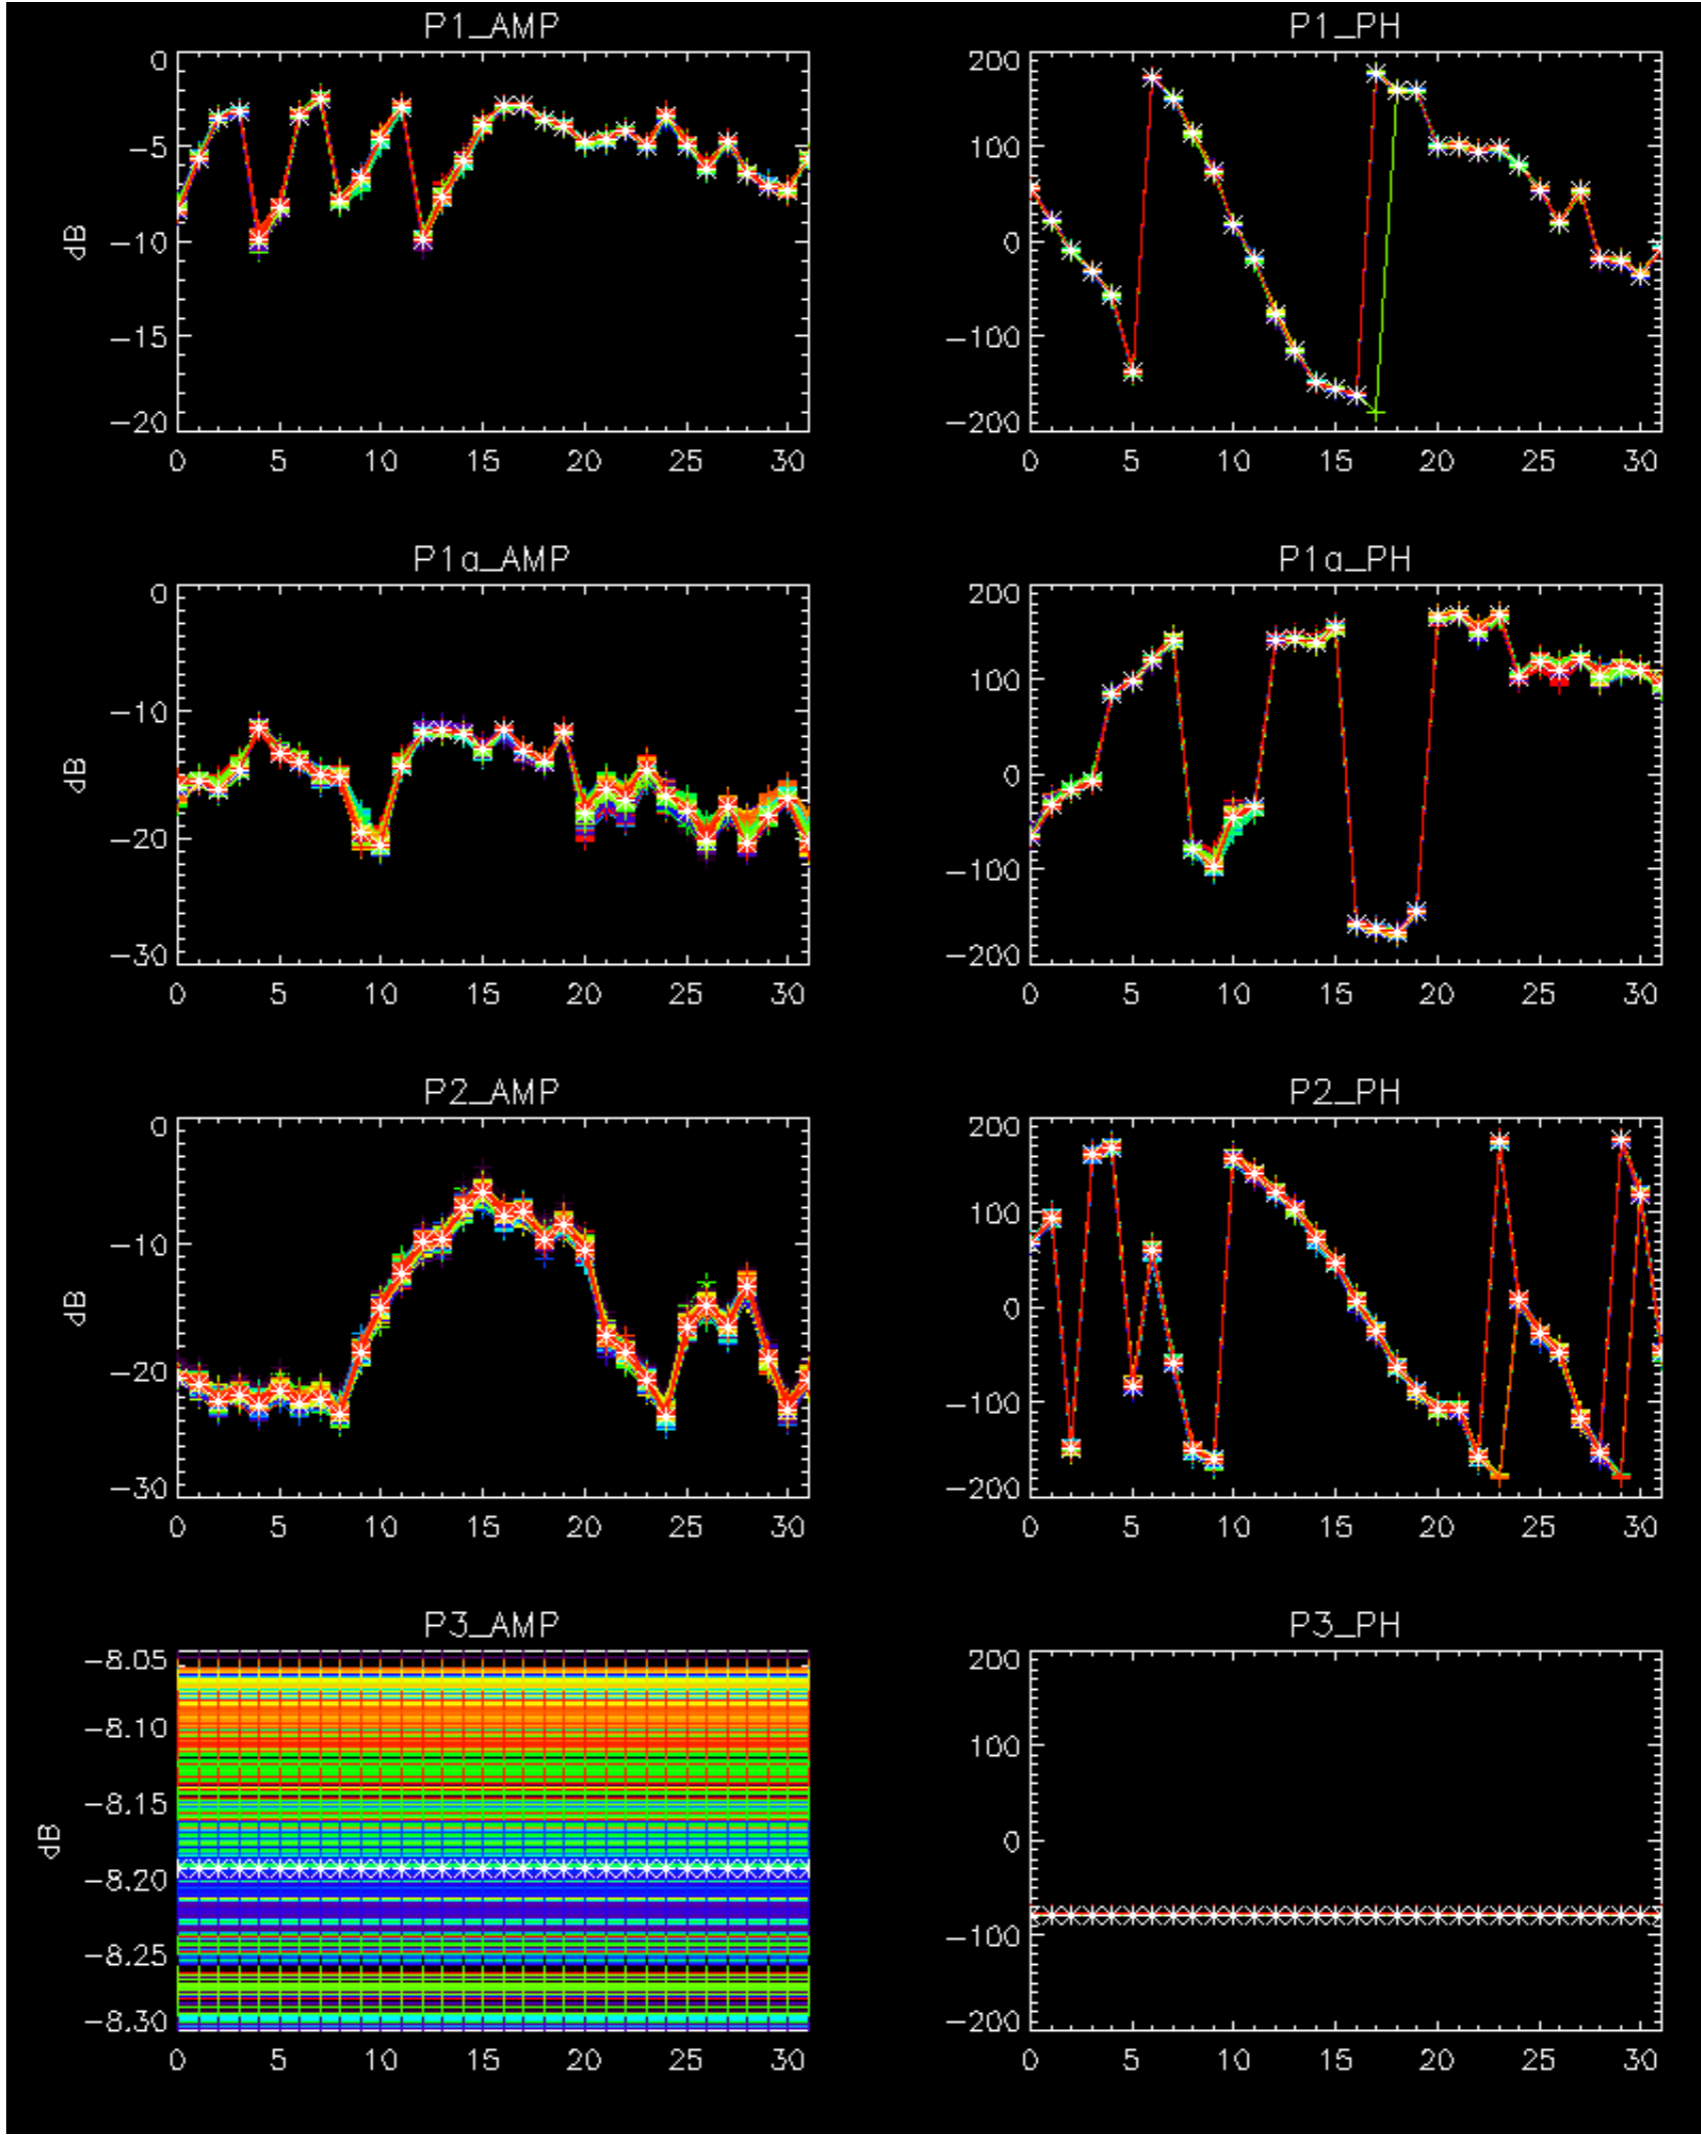


- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.


Doppler 'GM1' 'SS1' ascending

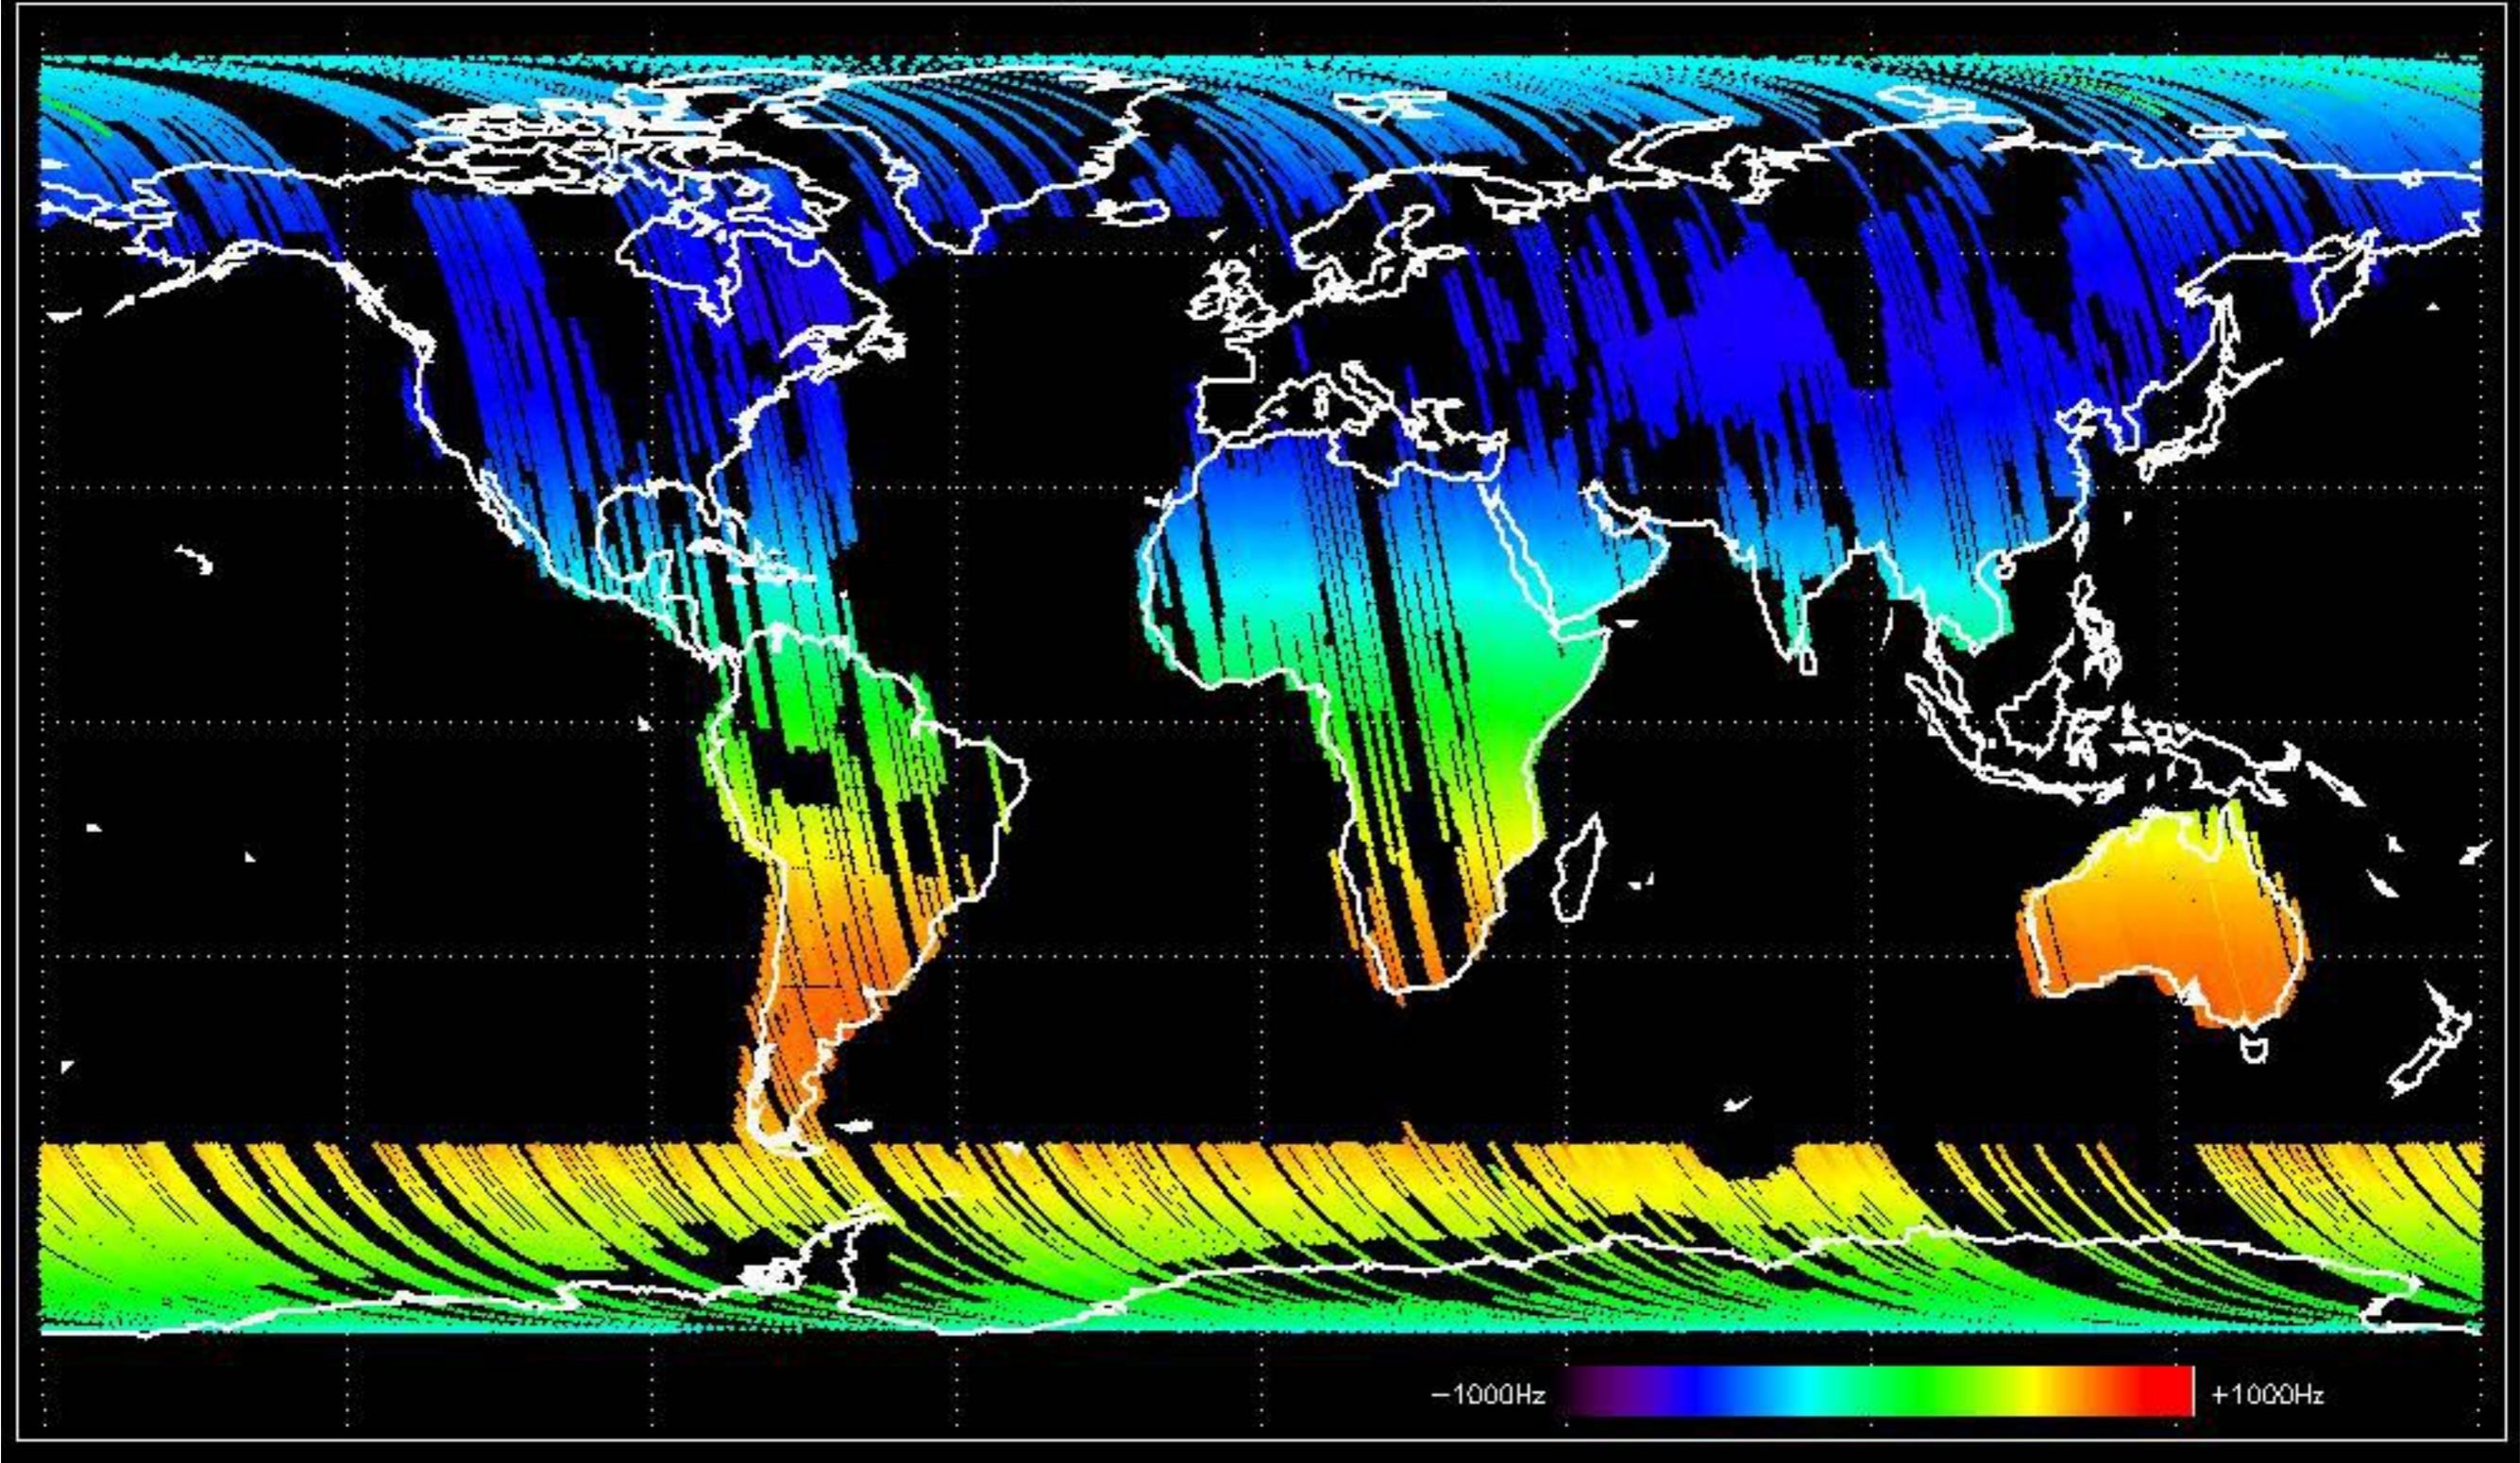


Doppler 'GM1' 'SS1' descending

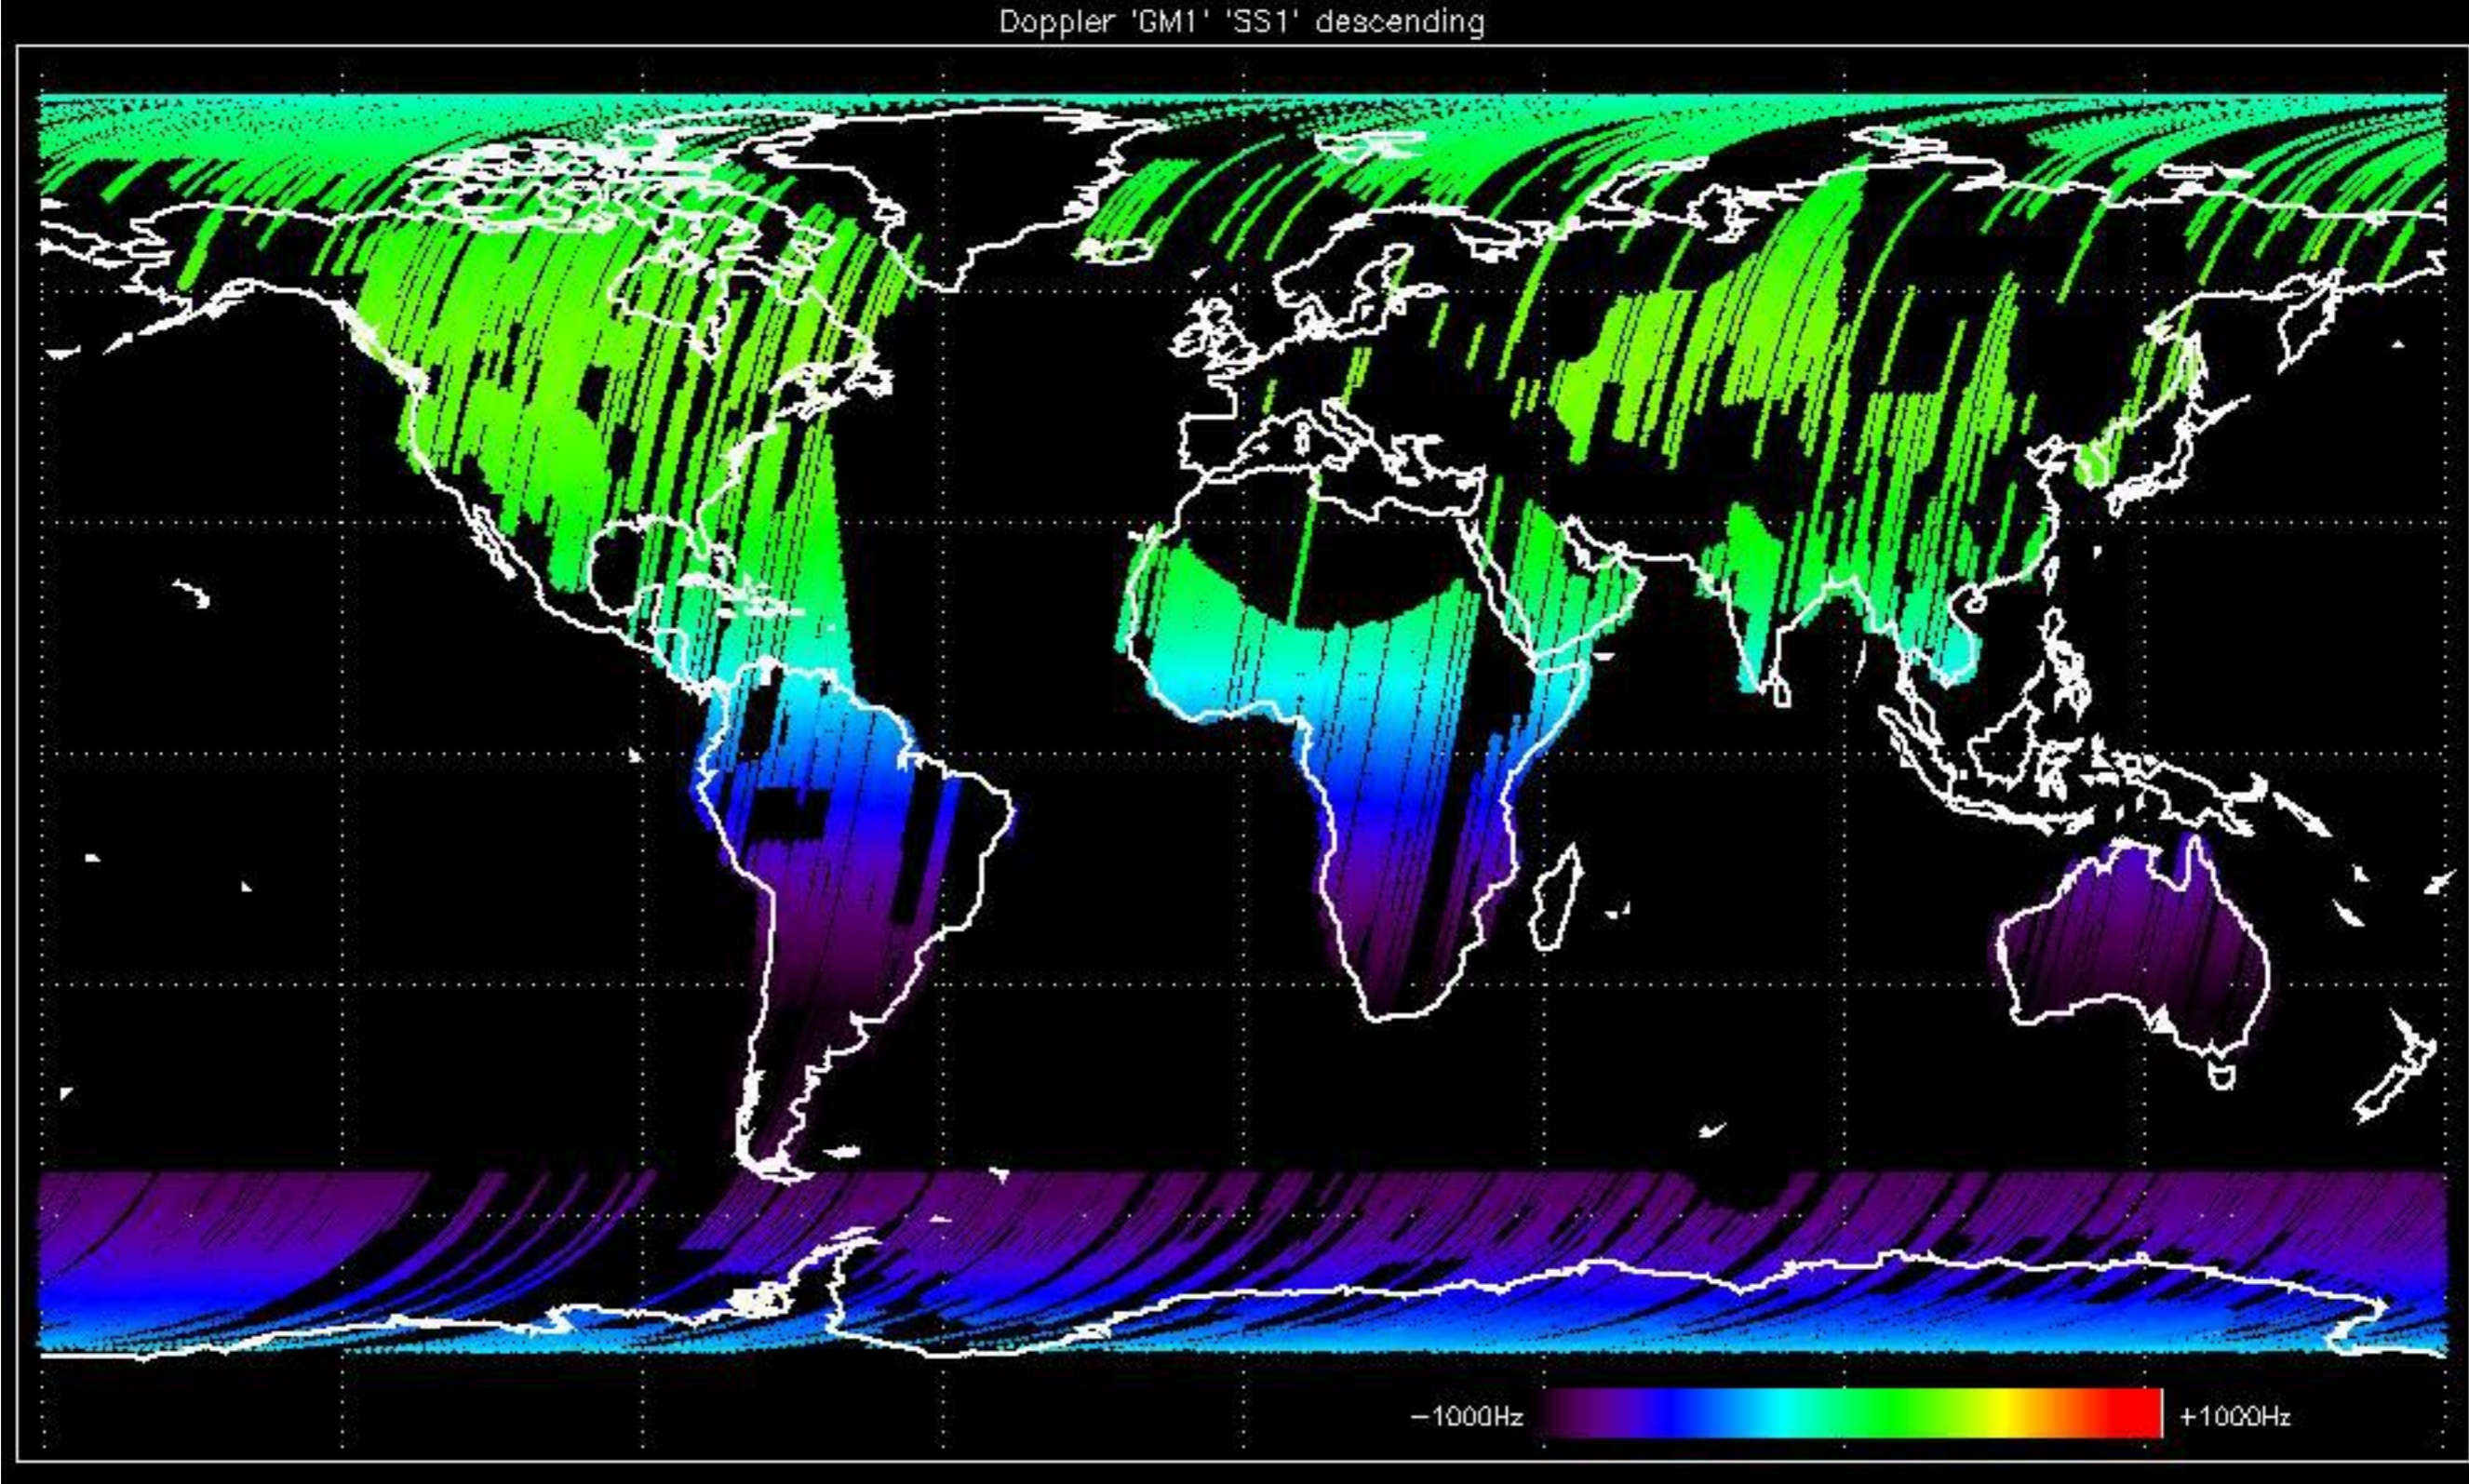




Doppler 'WVS' 'IS2' ascending



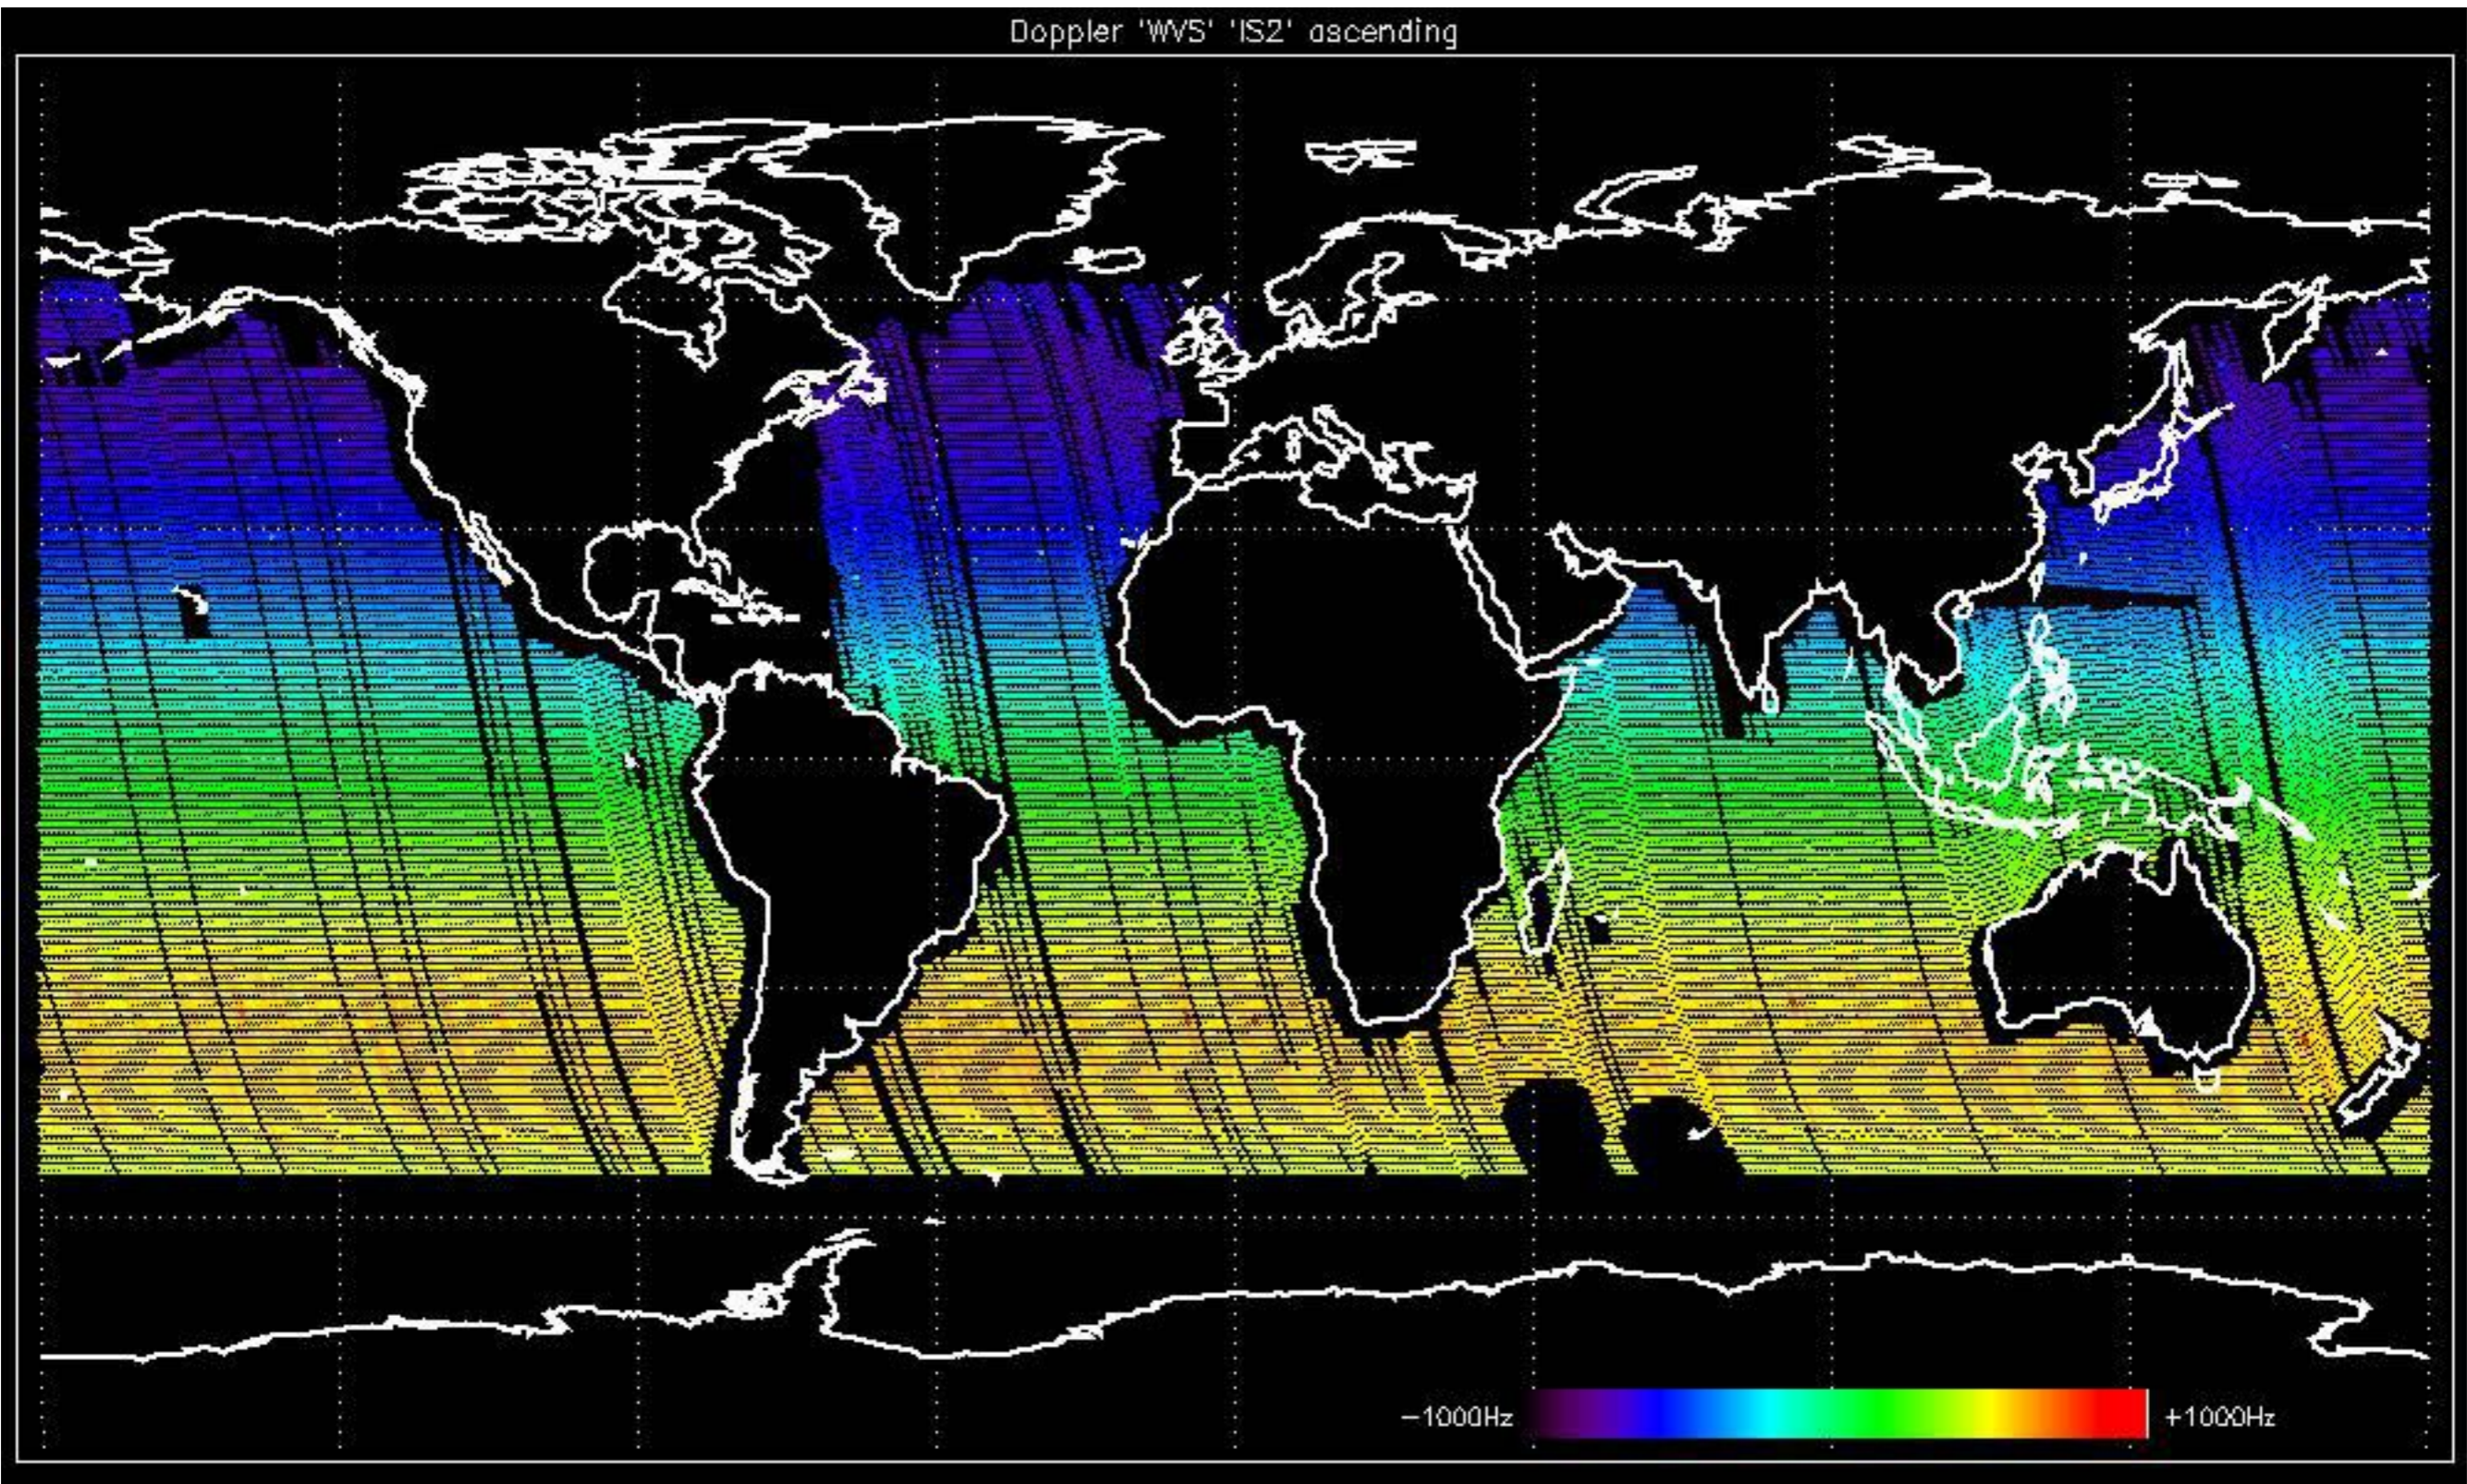


Doppler 'WVS' 'IS2' descending

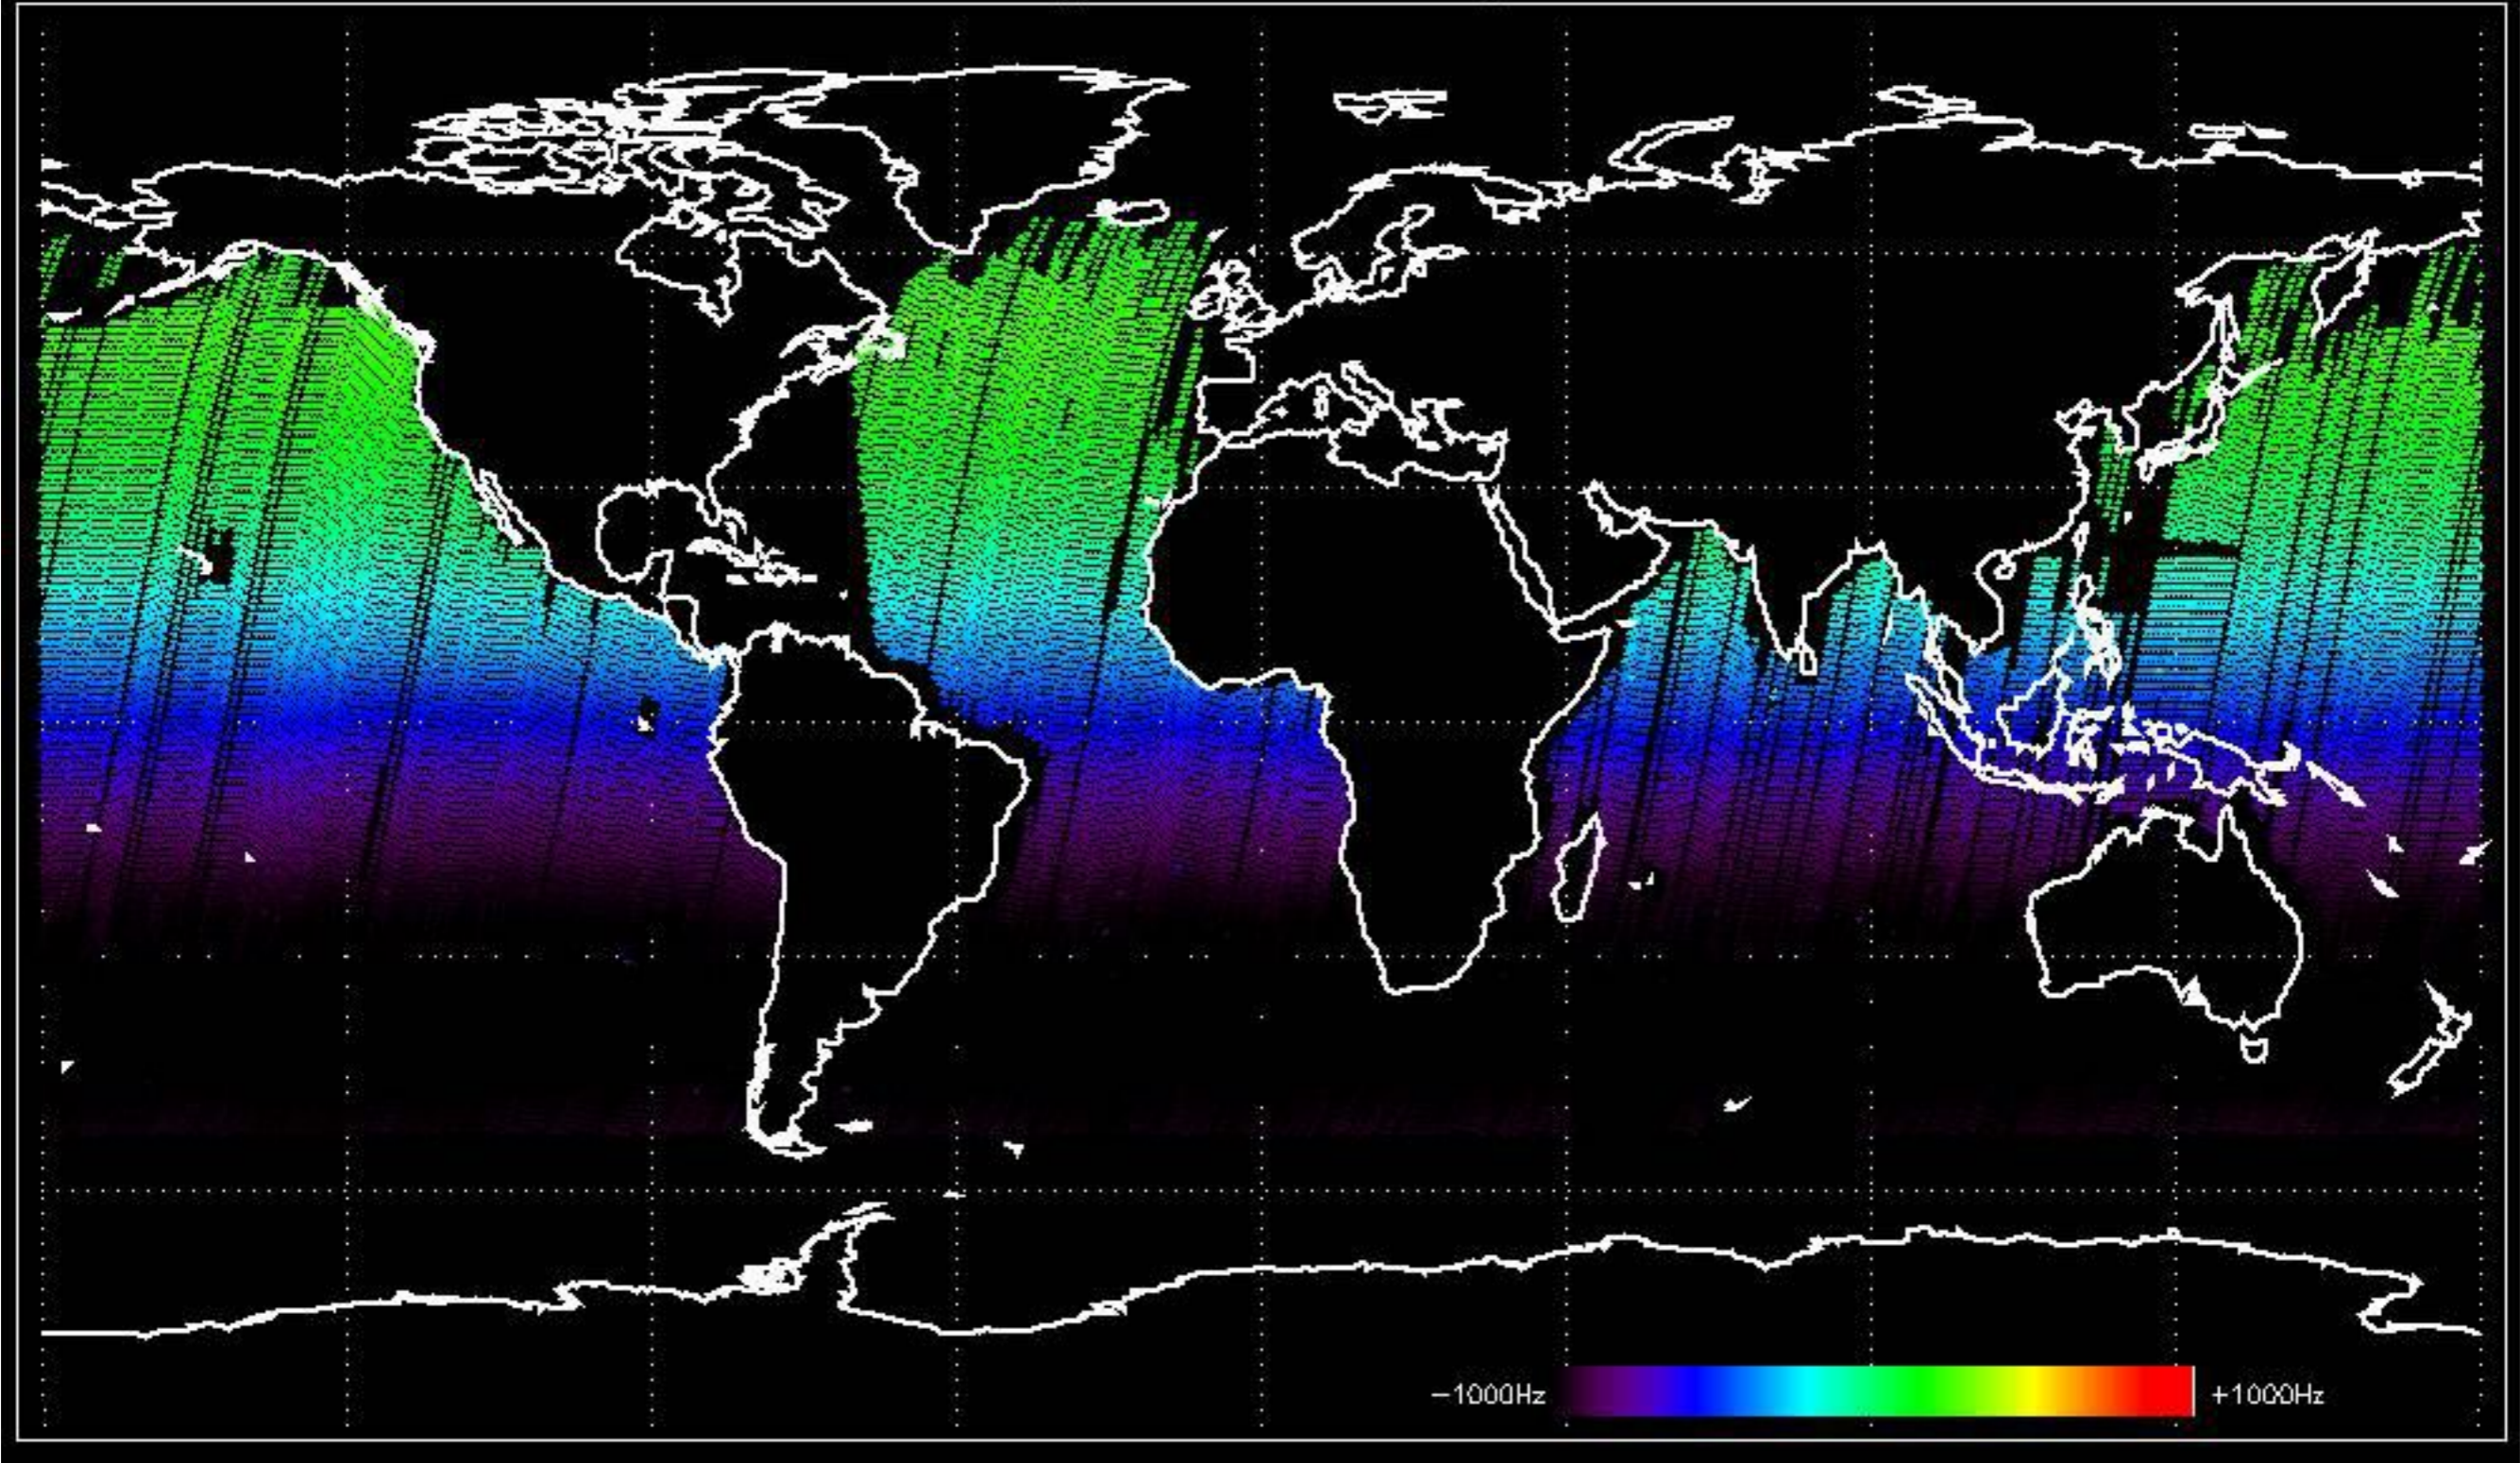


GM1 mode doppler

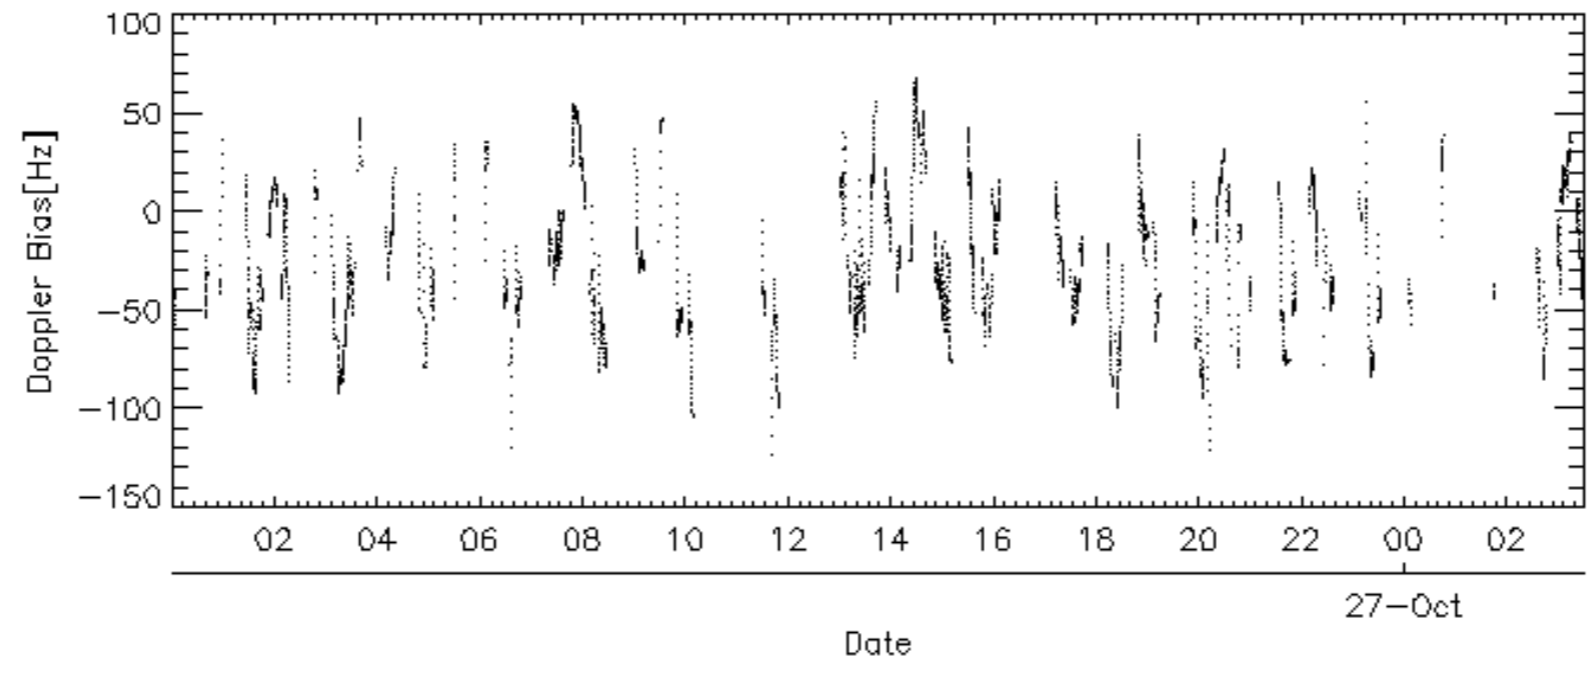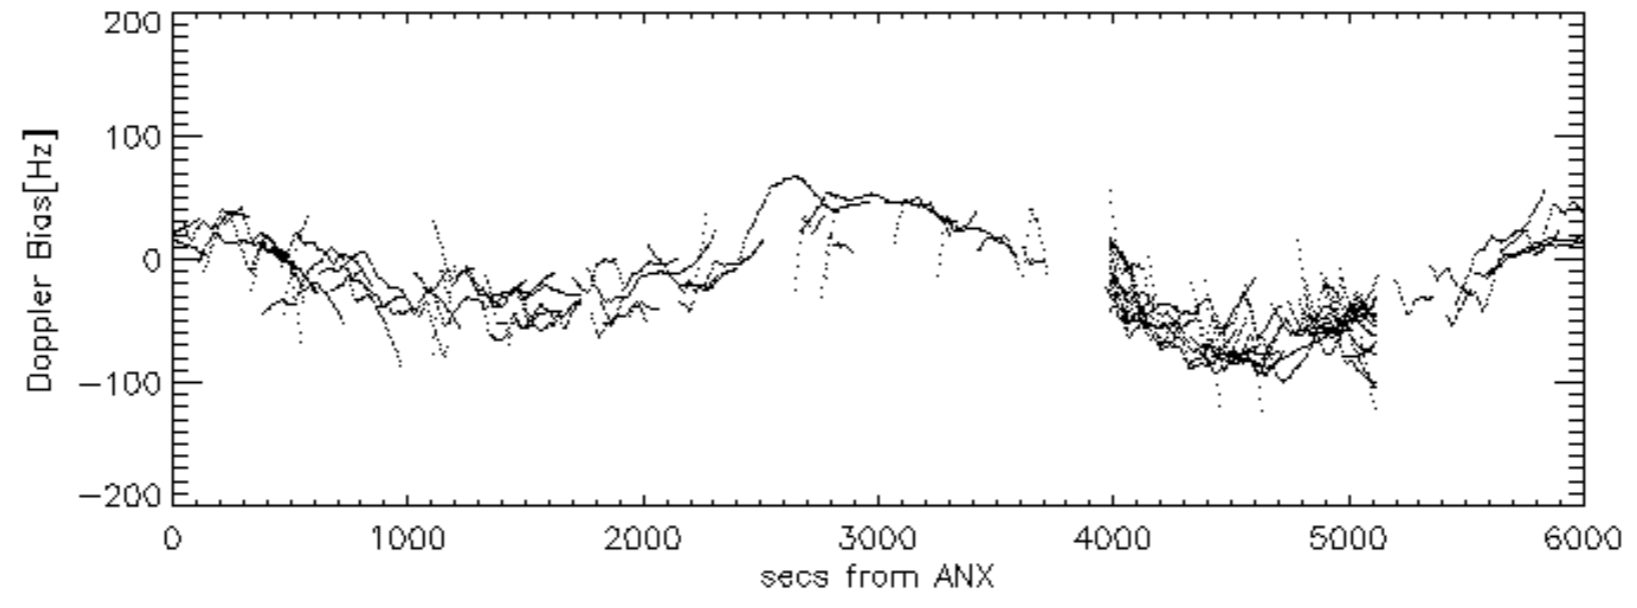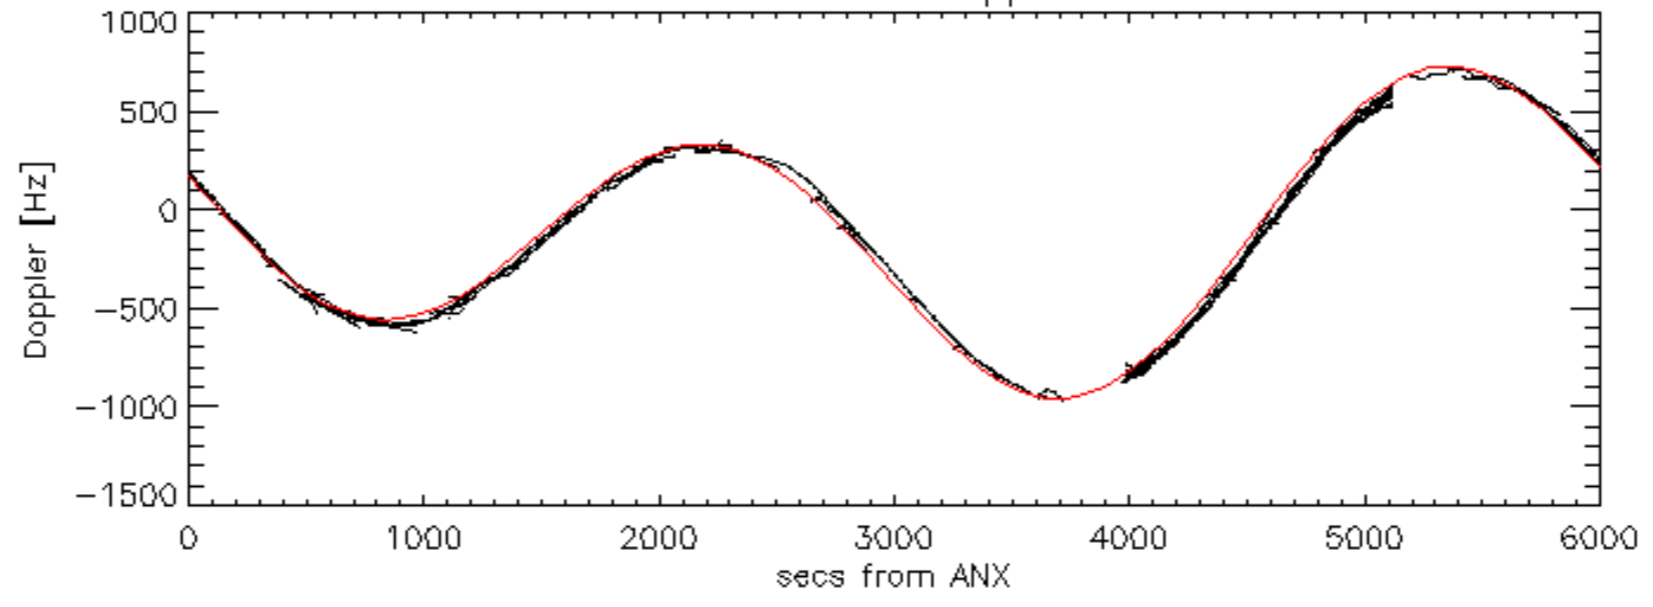


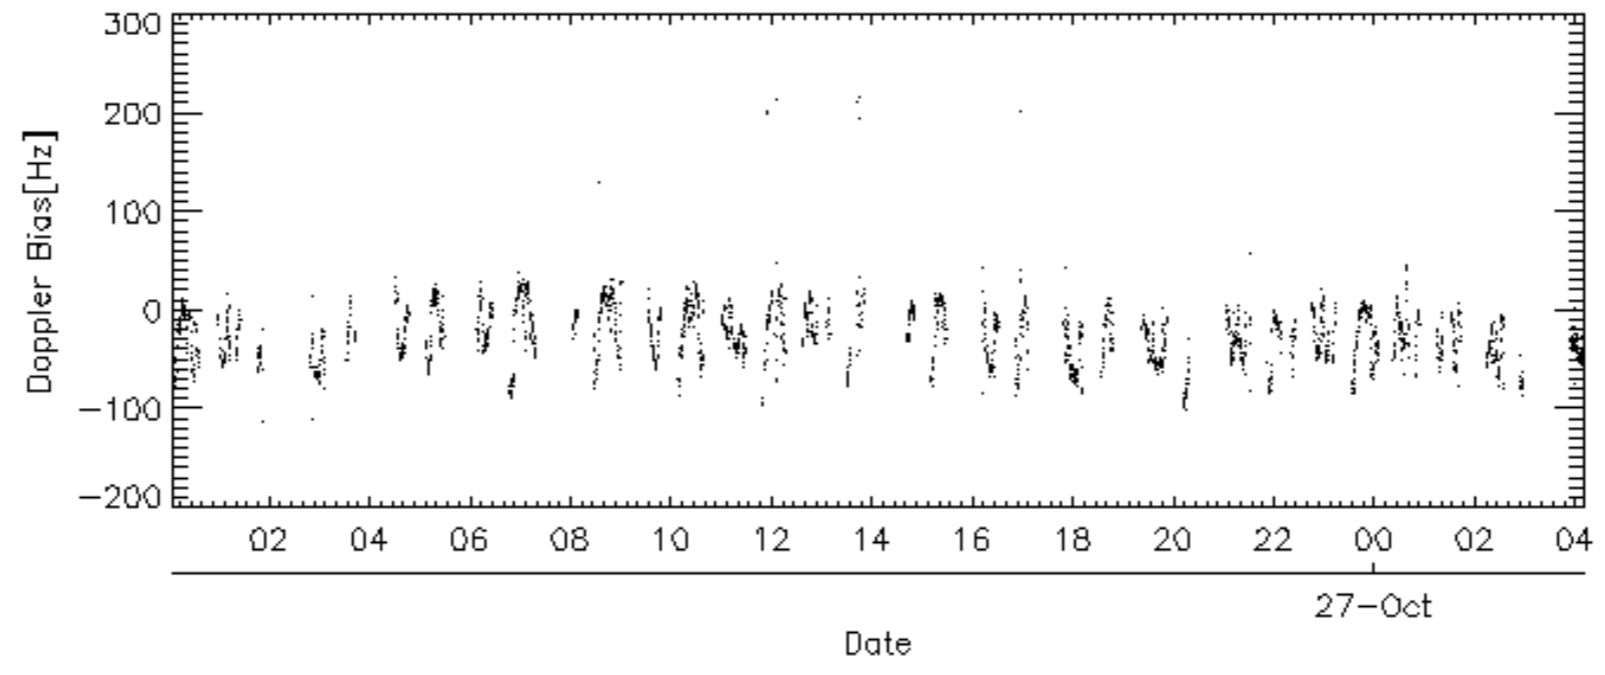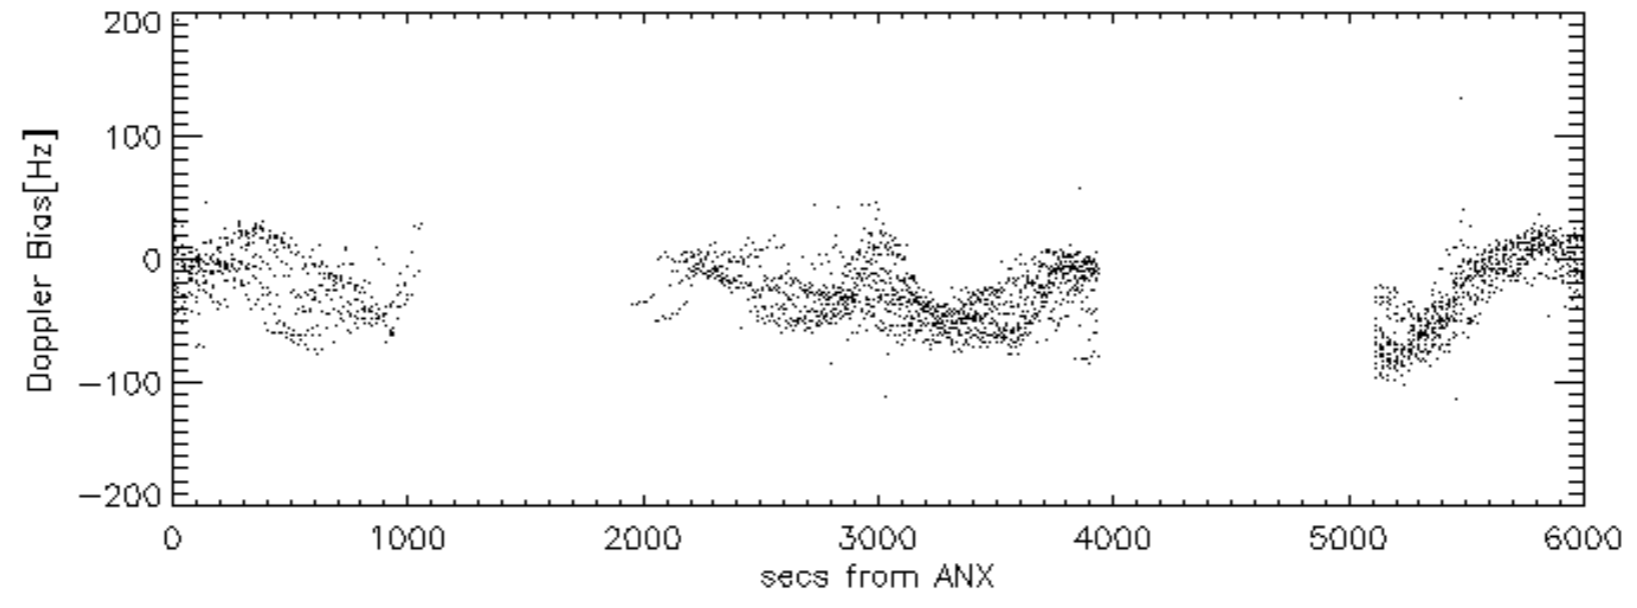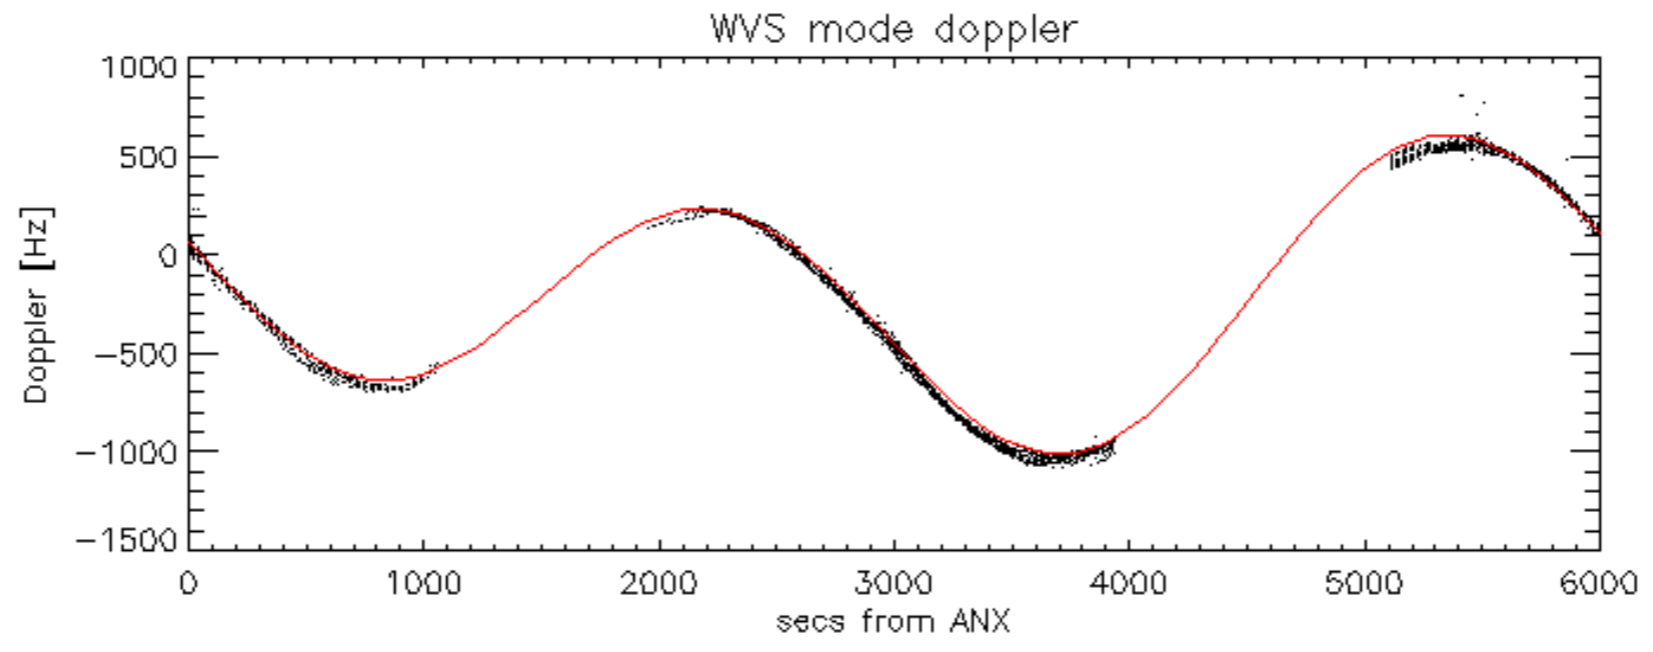


Doppler difference, estimated-predicted 'GM1' 'SS1' ascending -error mean of -31.611826 Hz

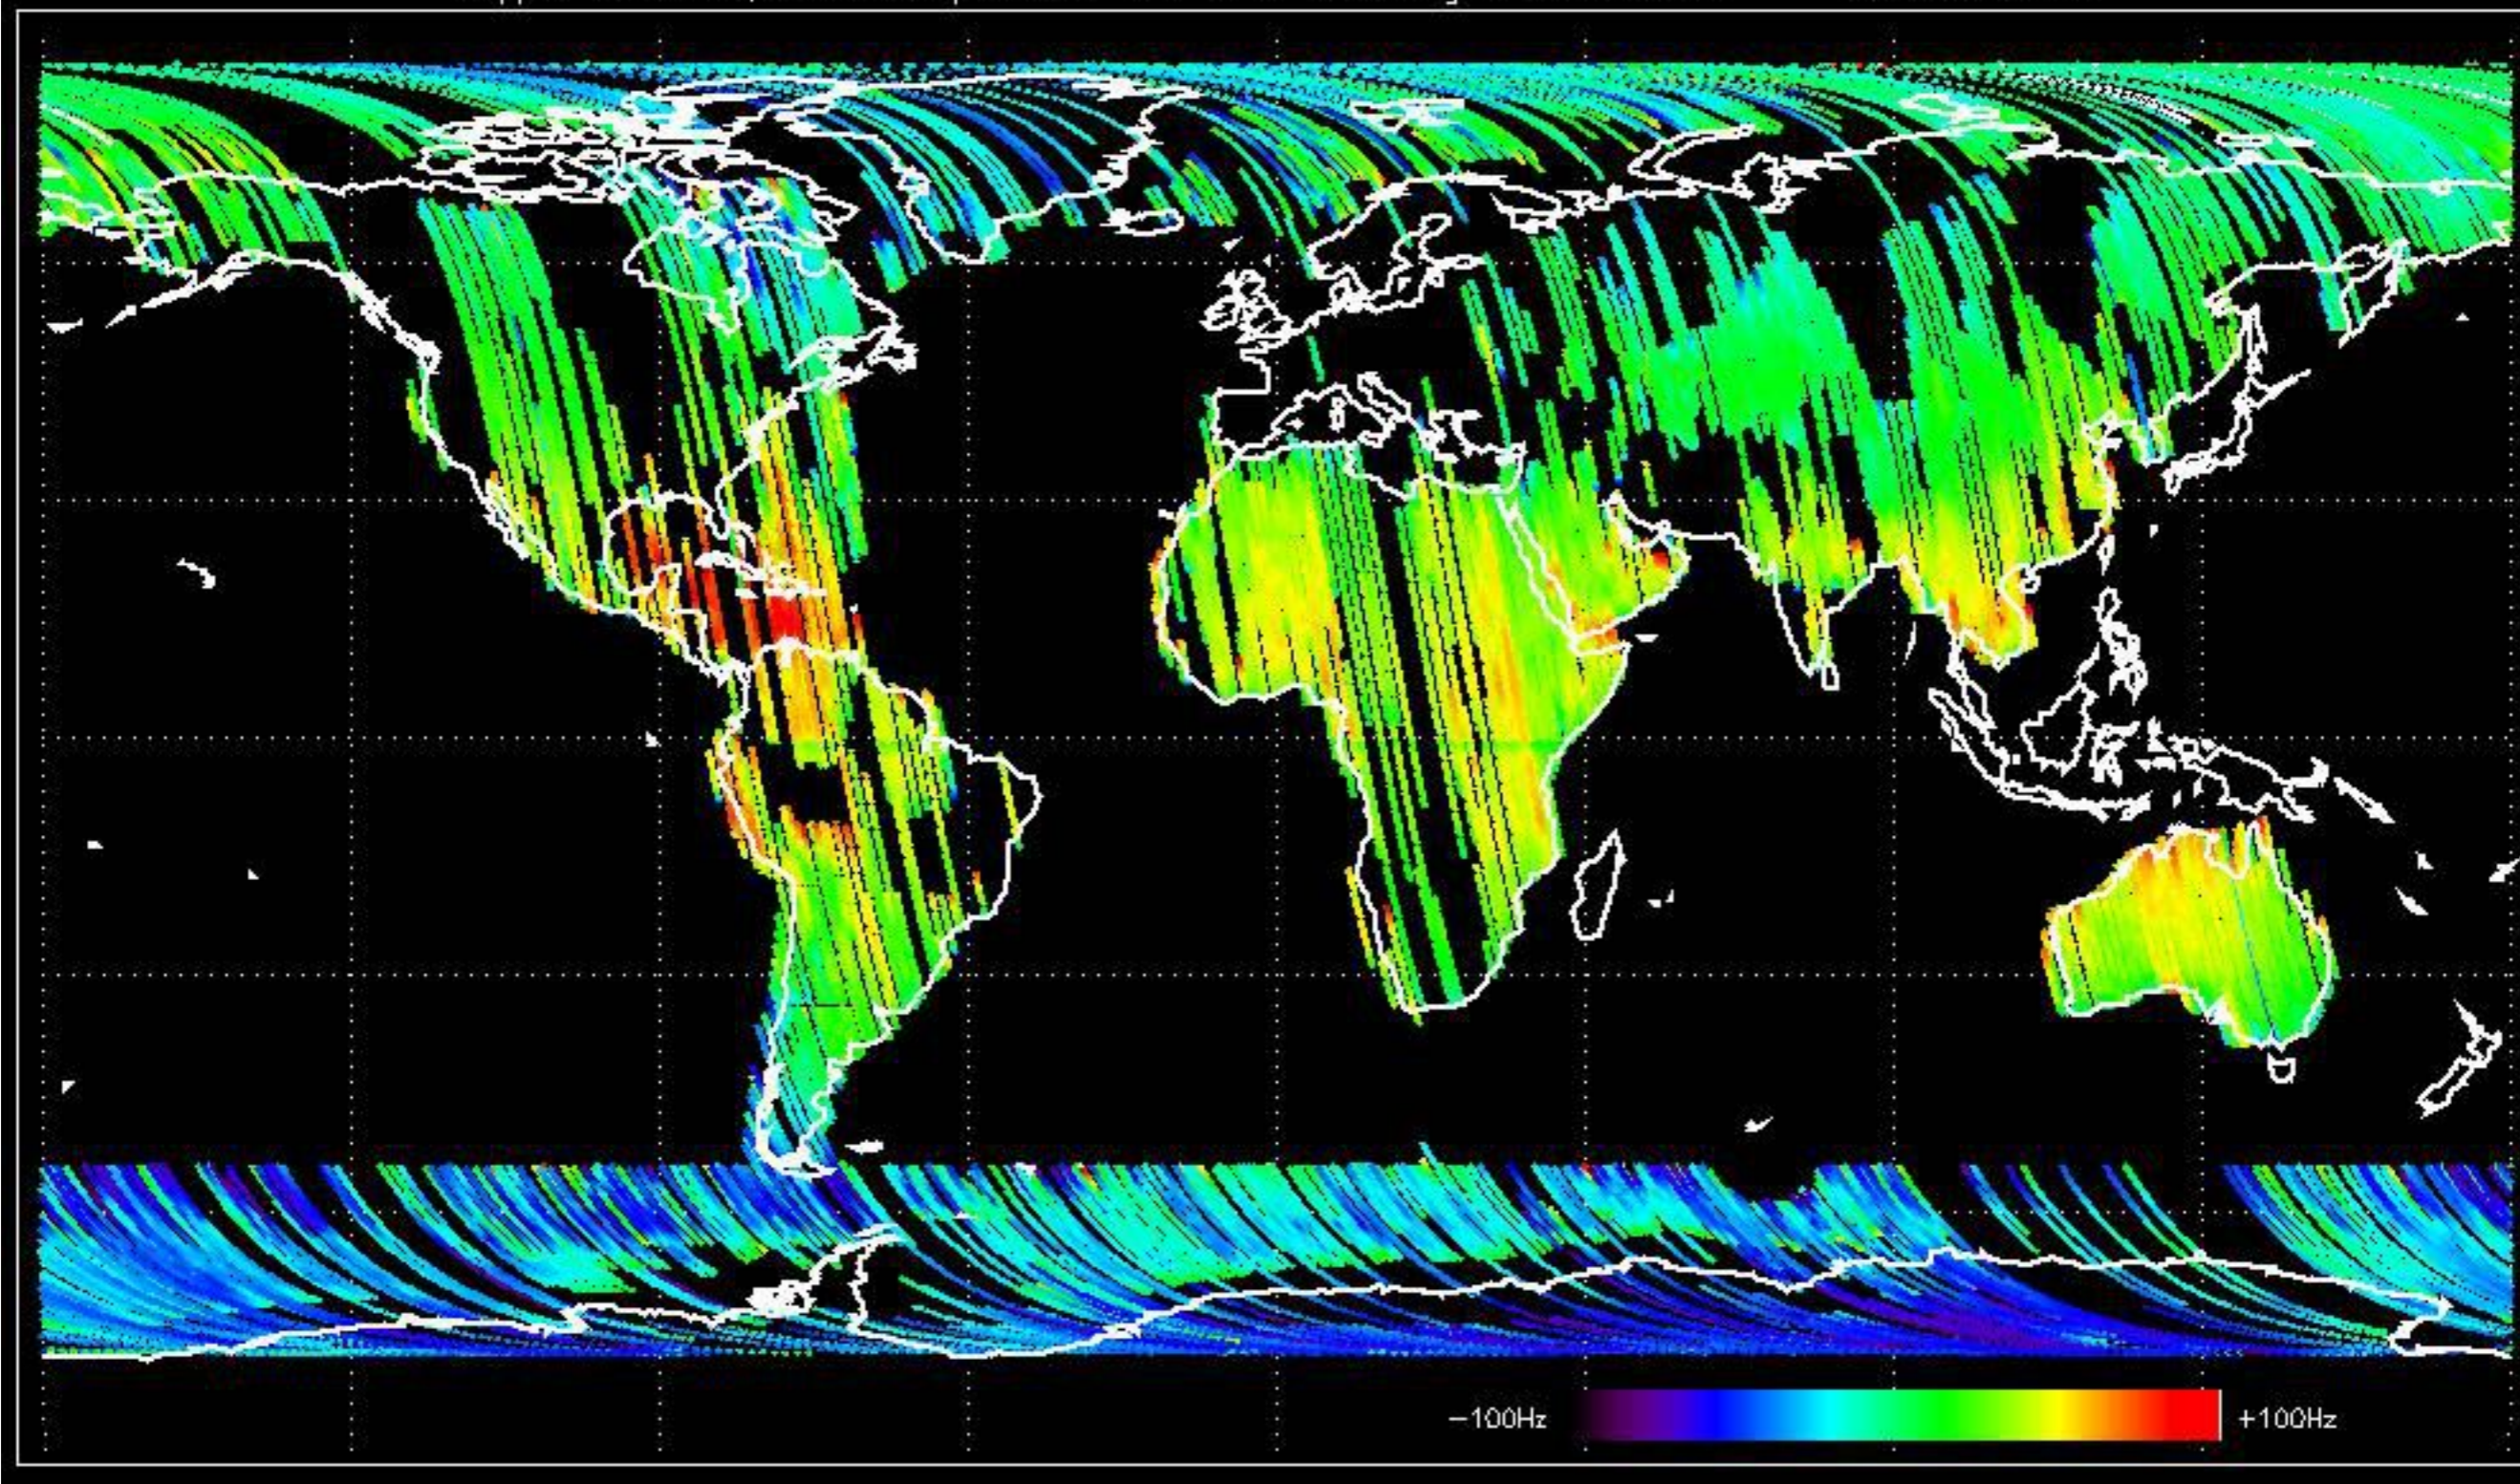


Doppler difference, estimated-predicted 'GM1' 'SS1' descending -error mean of -24.648548 Hz

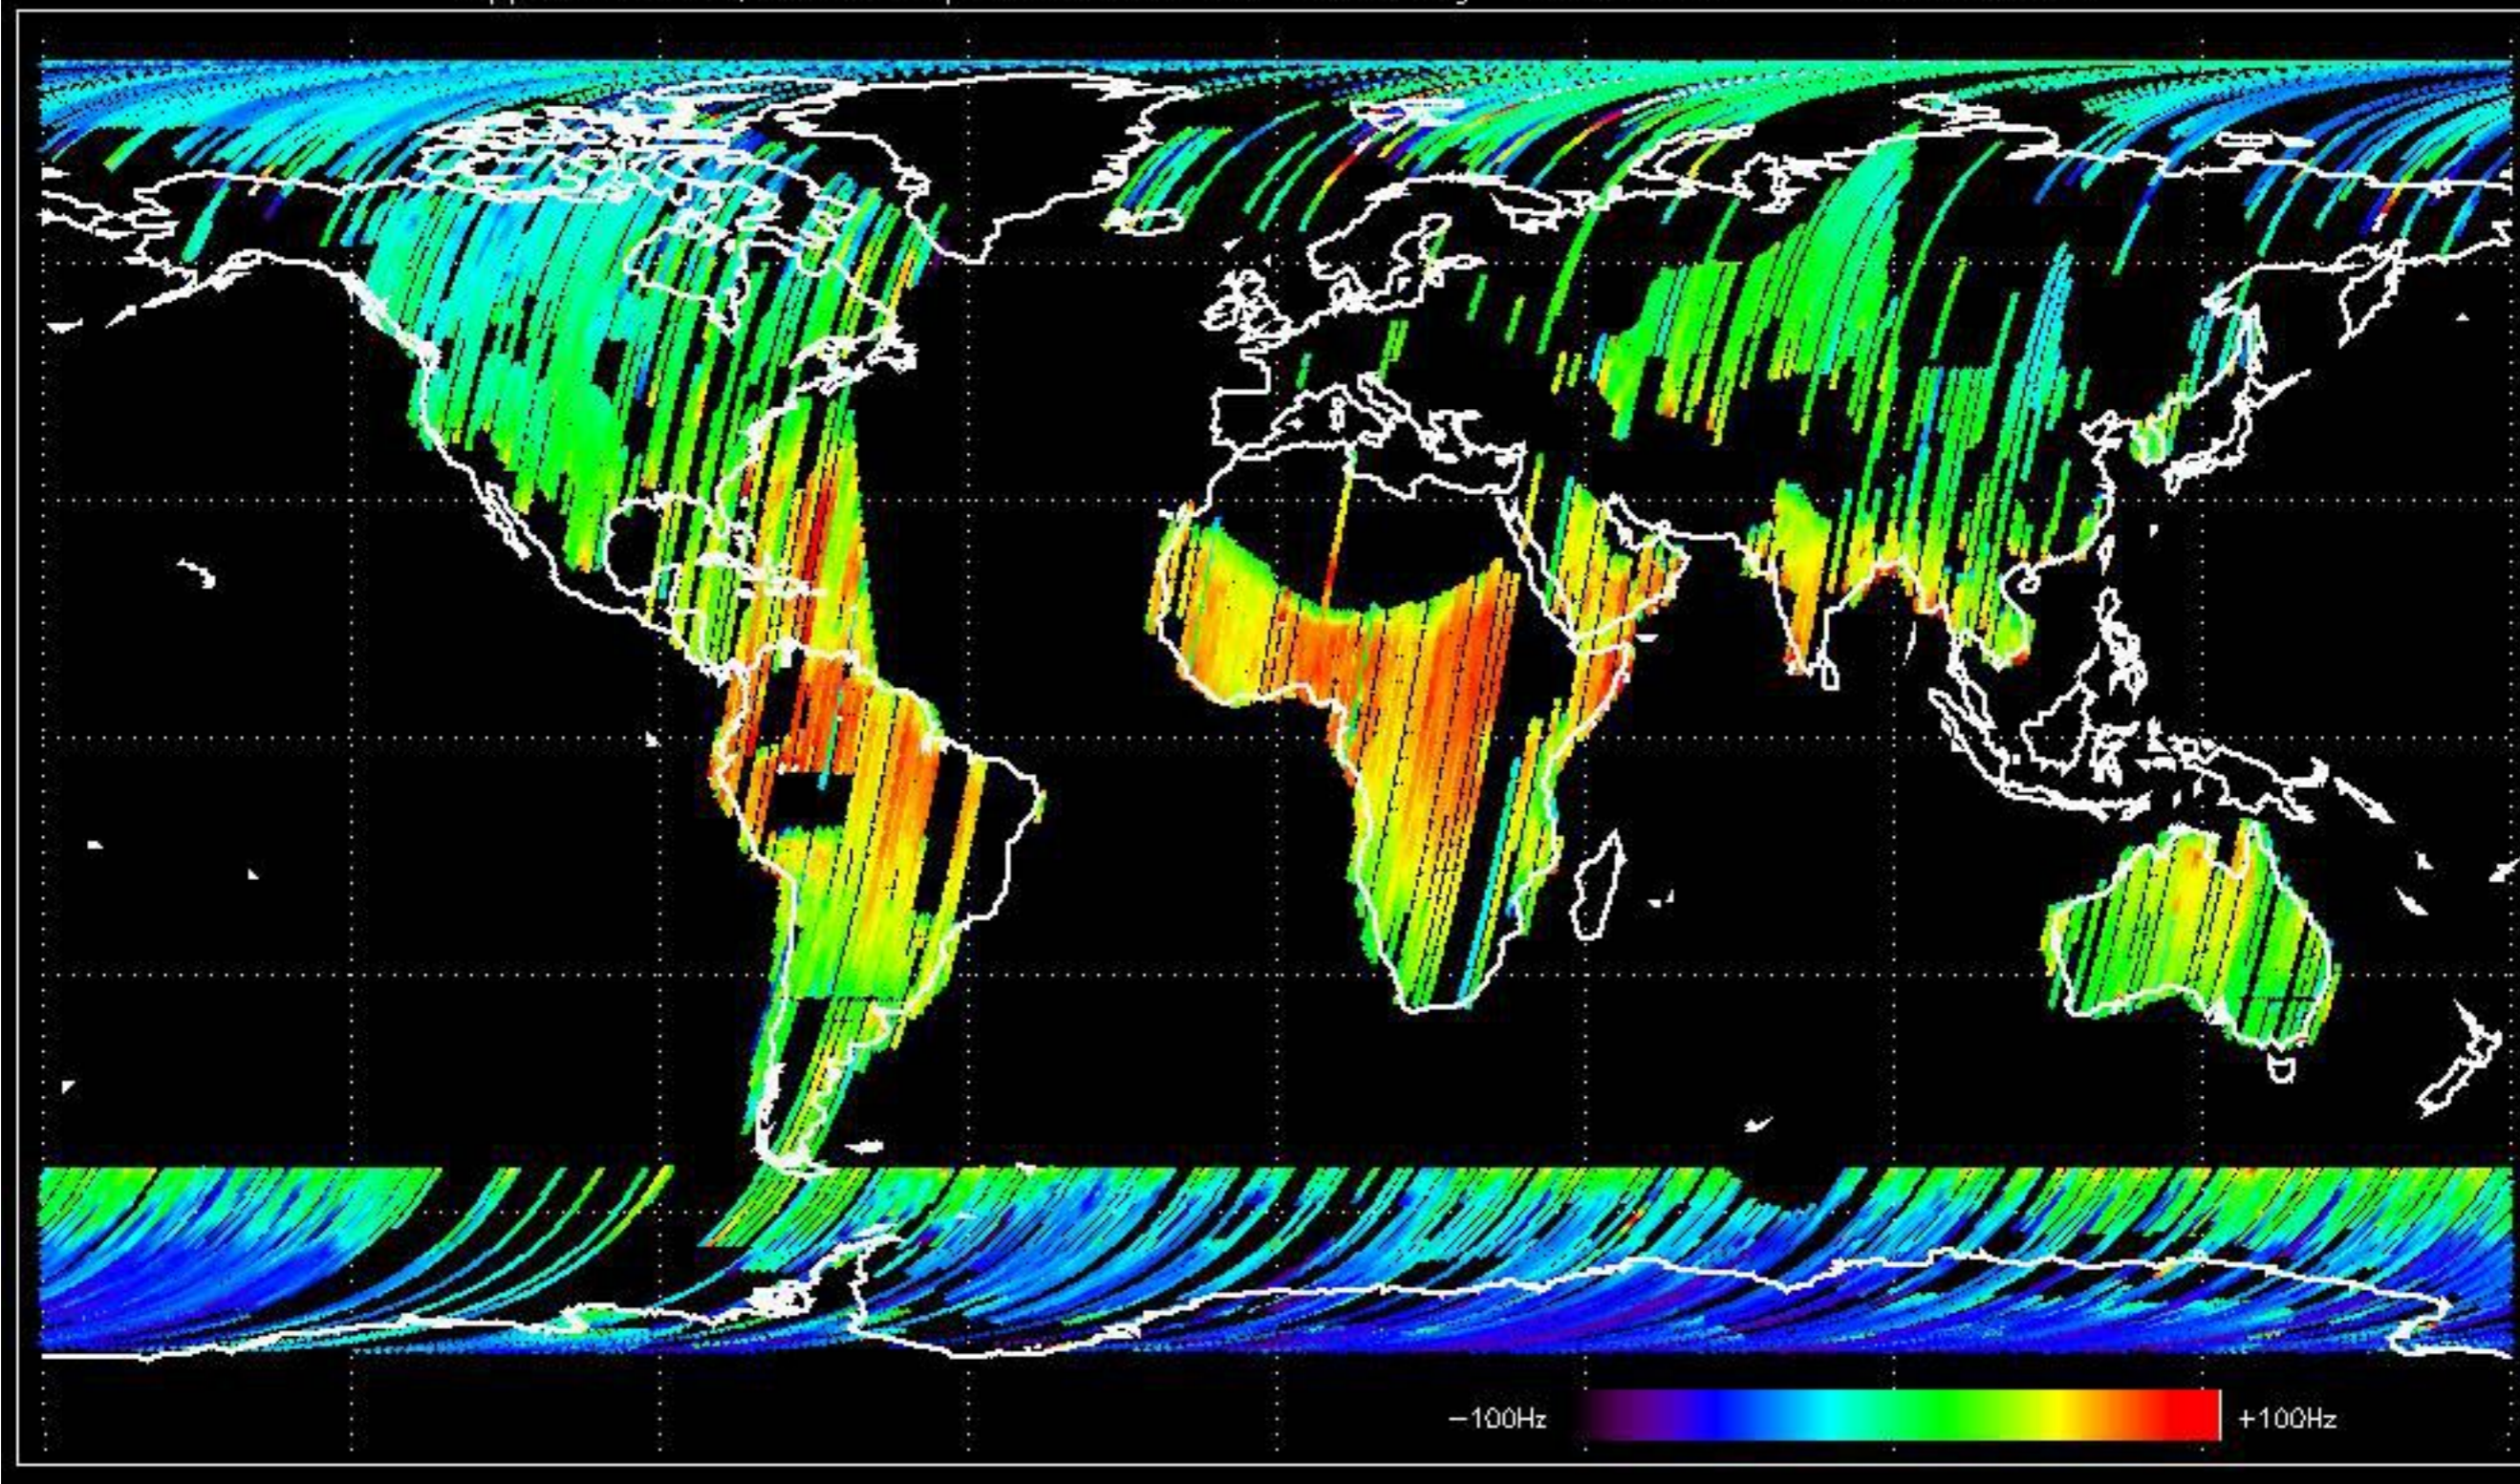

Doppler difference, estimated-predicted 'WVS' 'IS2' ascending -error mean of -28.823856 Hz

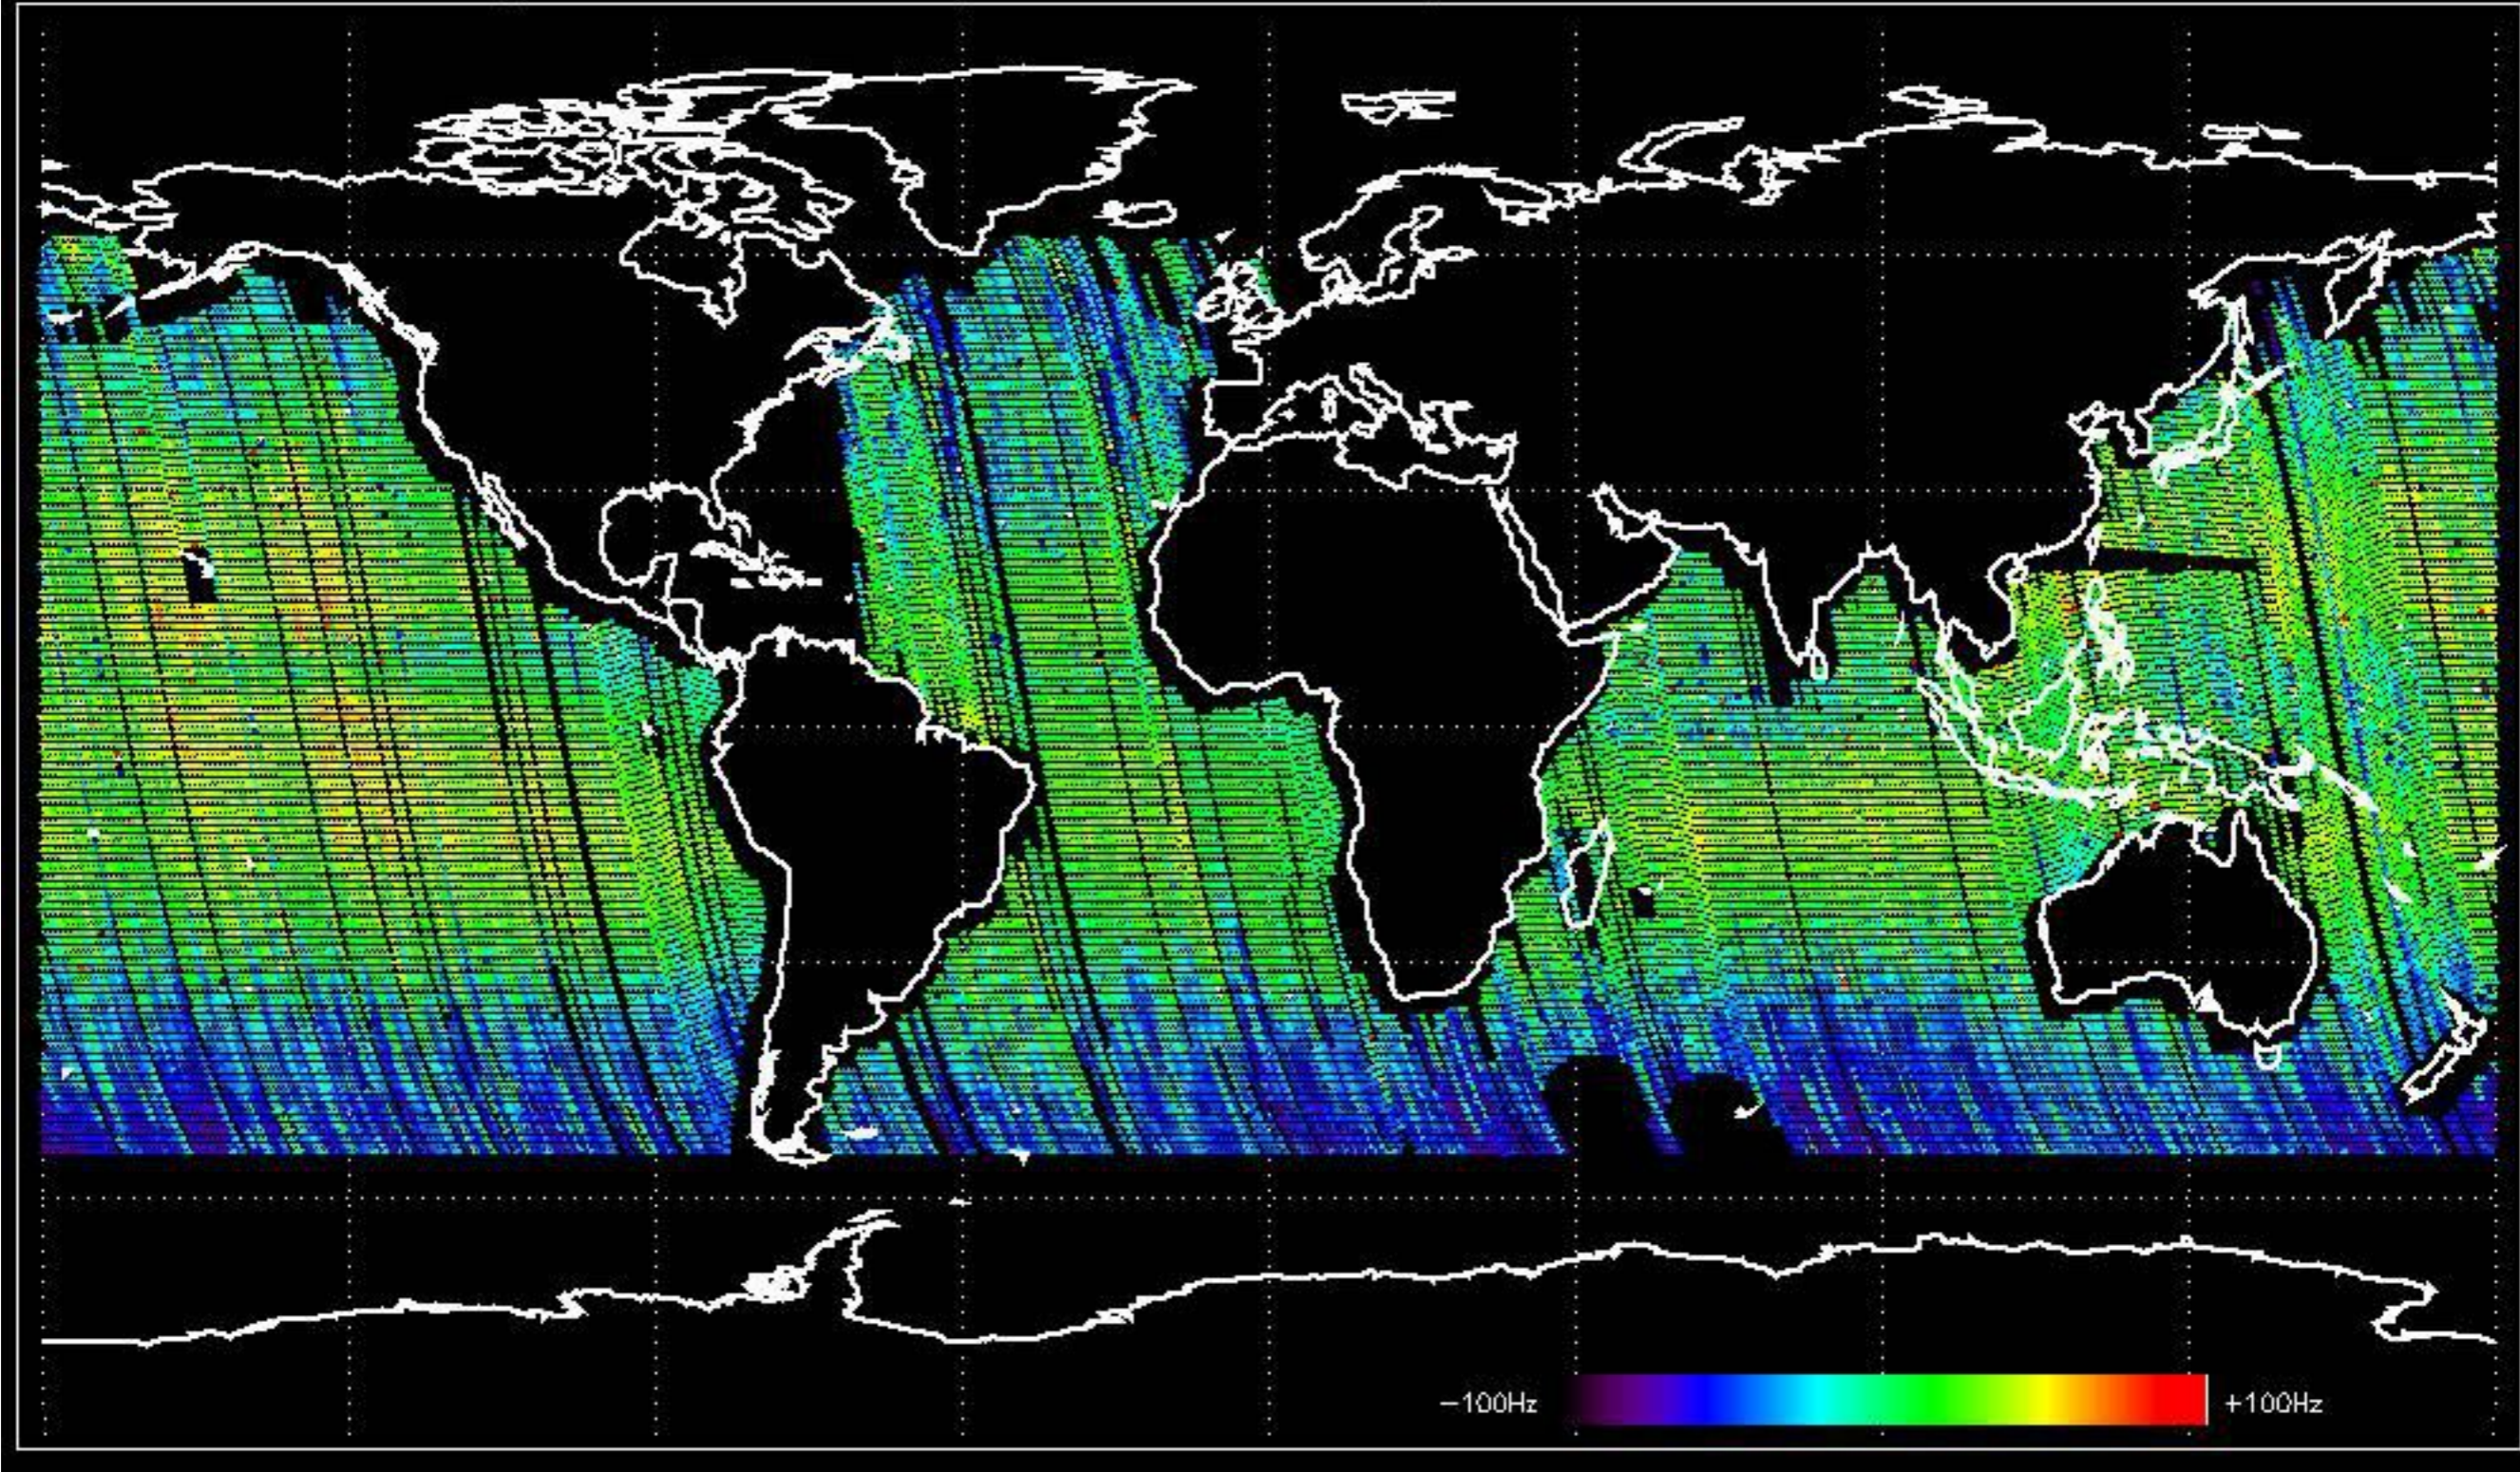





Doppler difference, estimated-predicted 'WVS' 'IS2' descending -error mean of -32.909924 Hz



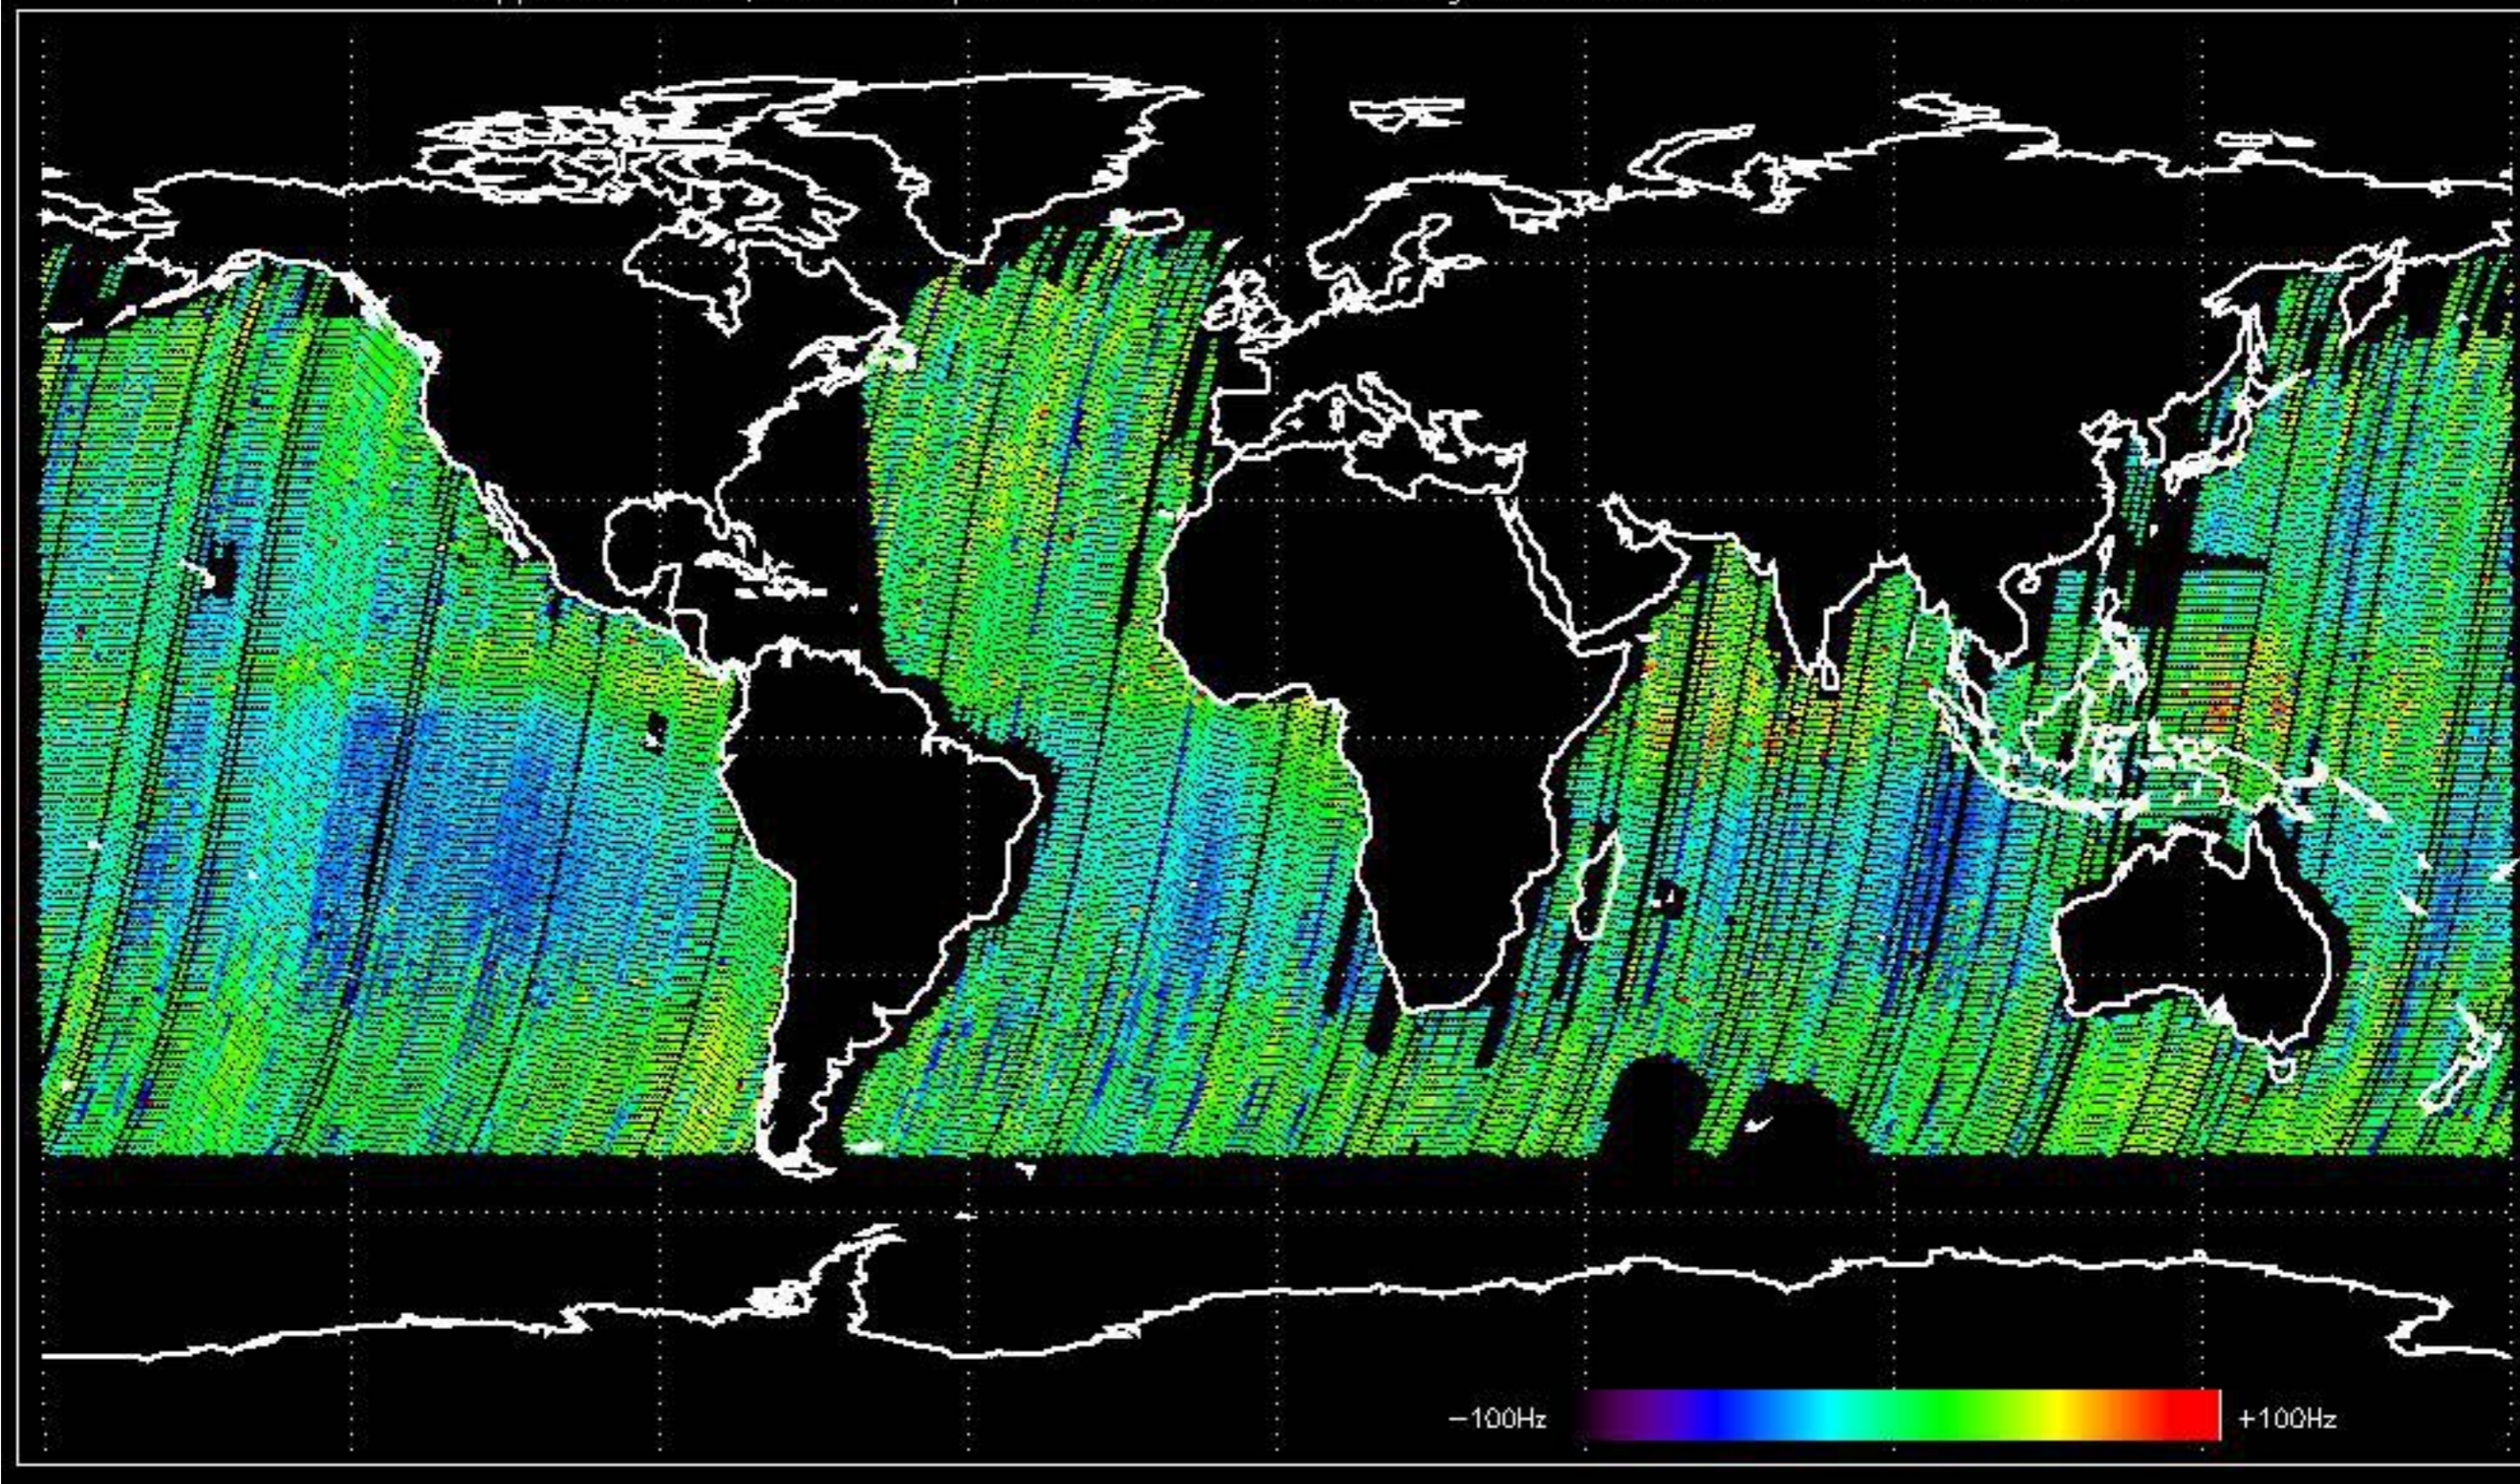



The MS mode provides an internal health check on an individual module basis.
The purpose of this mode is to identify to identify any malfunctioning modules and
to identify modules for which calibration offsets are to be applied.
No anomalies observed on available MS products:

No anomalies observed.

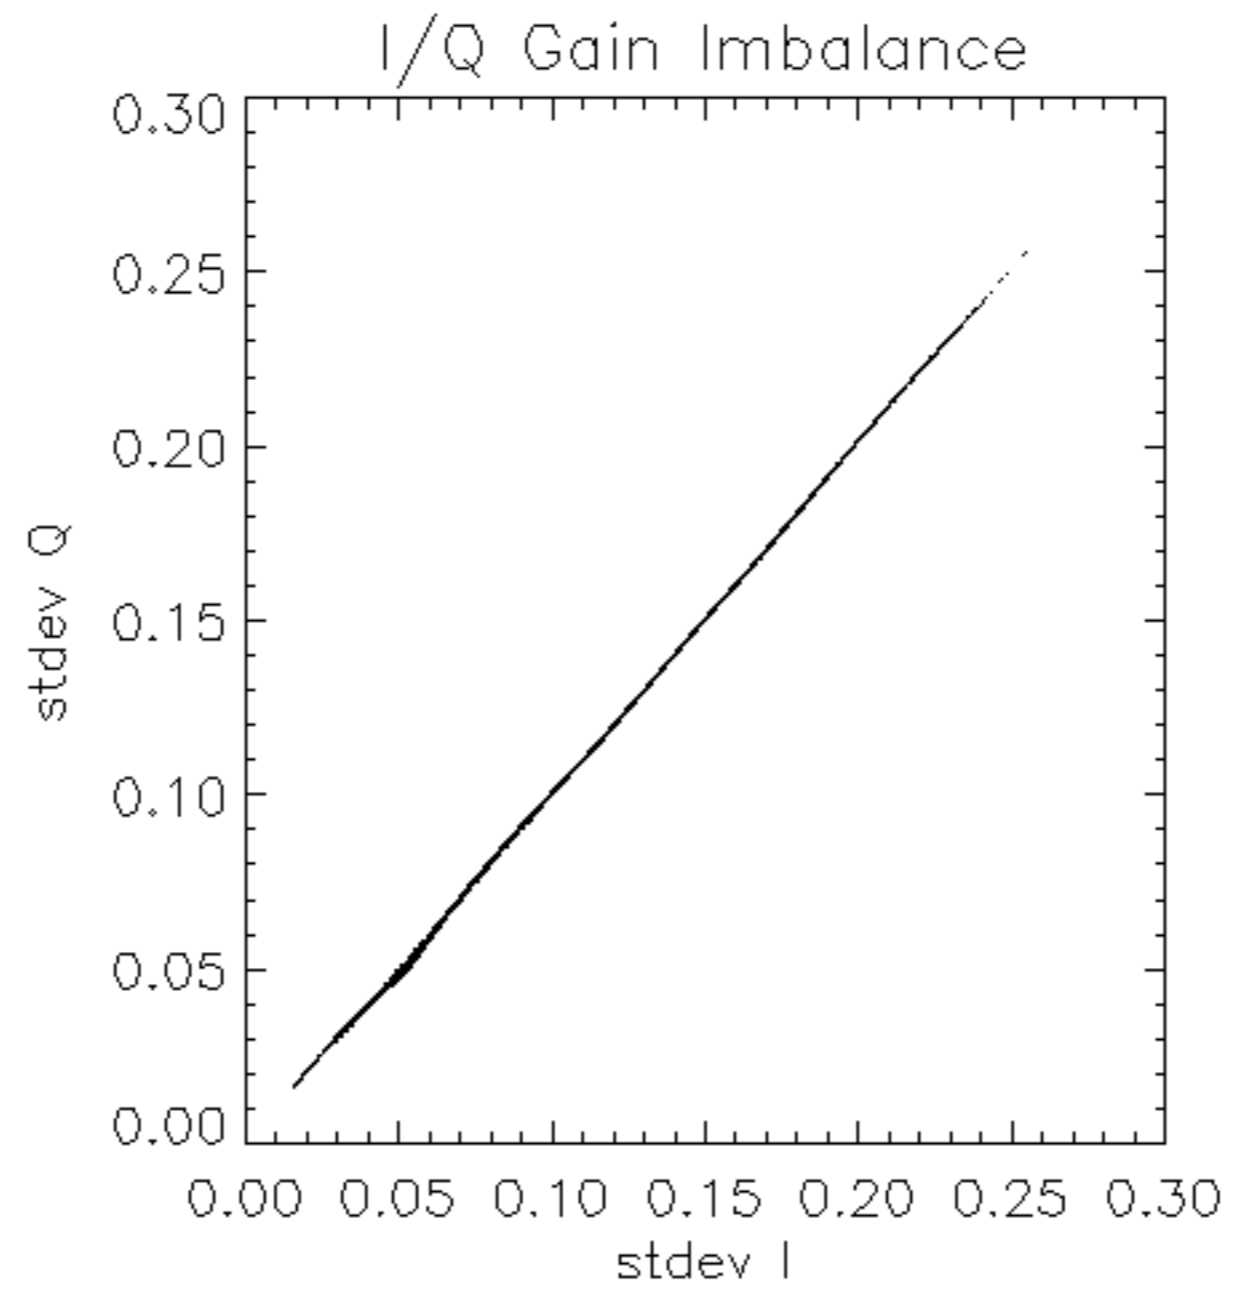


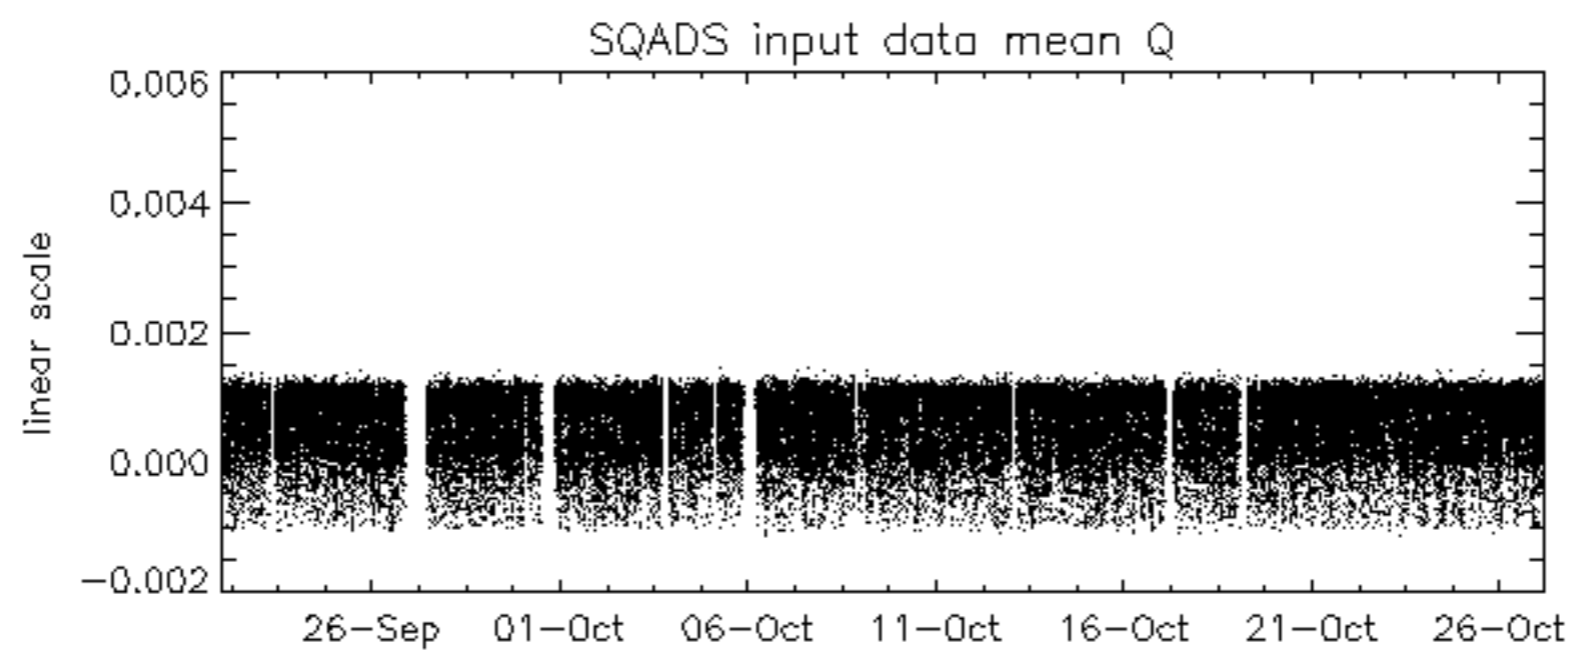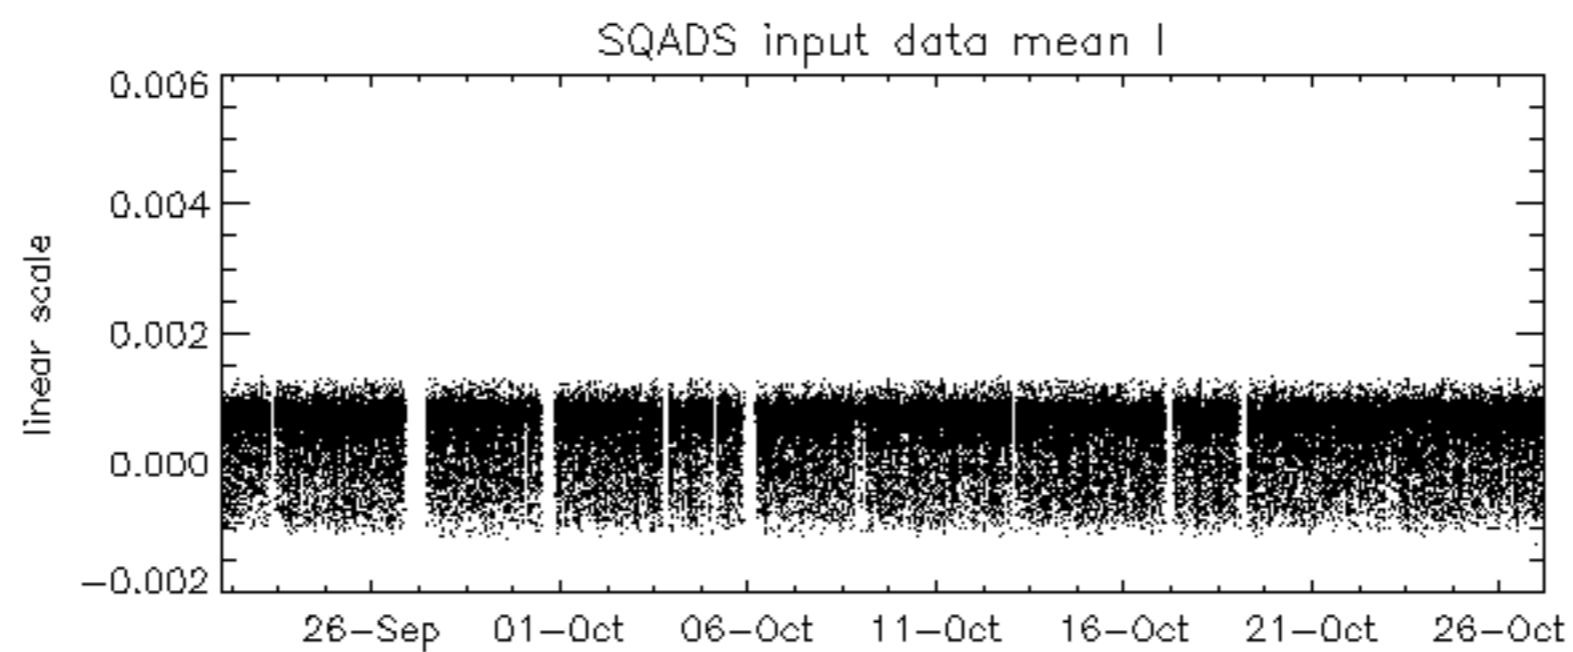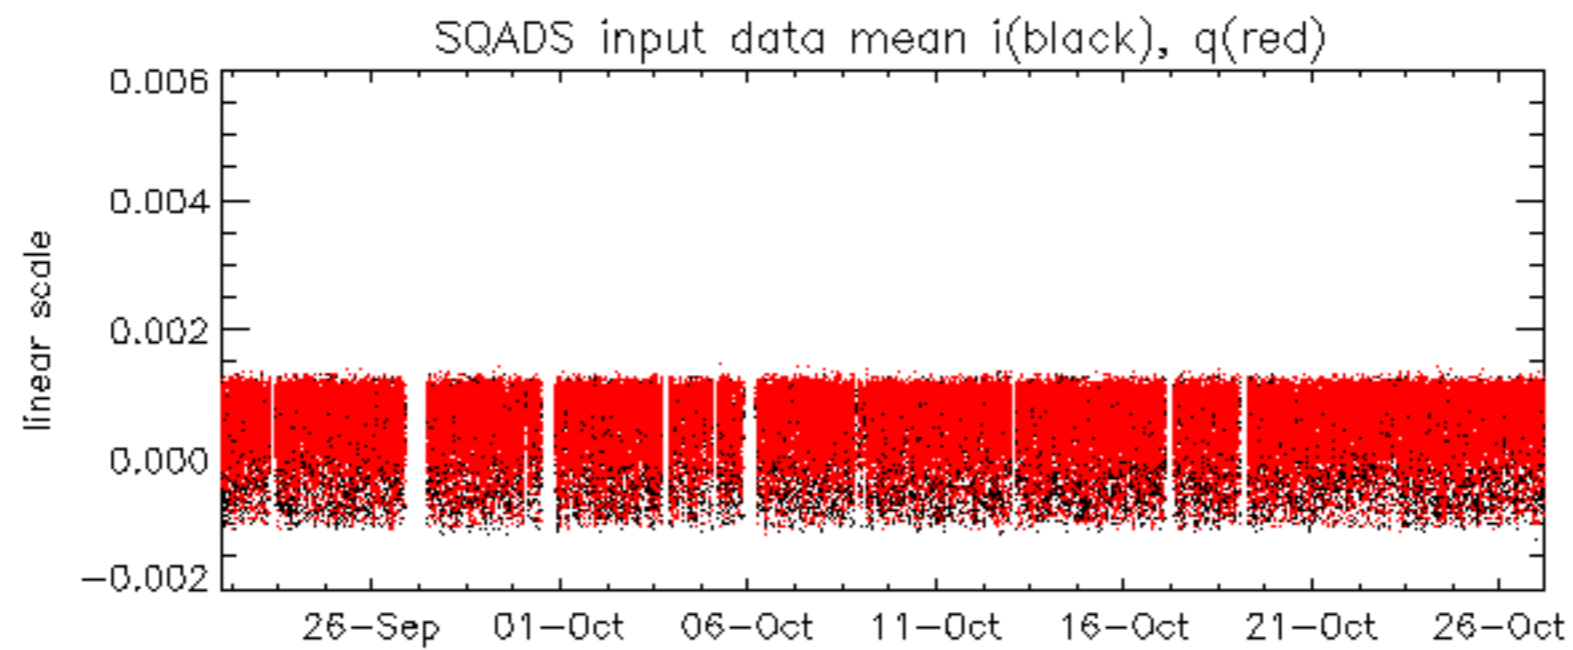

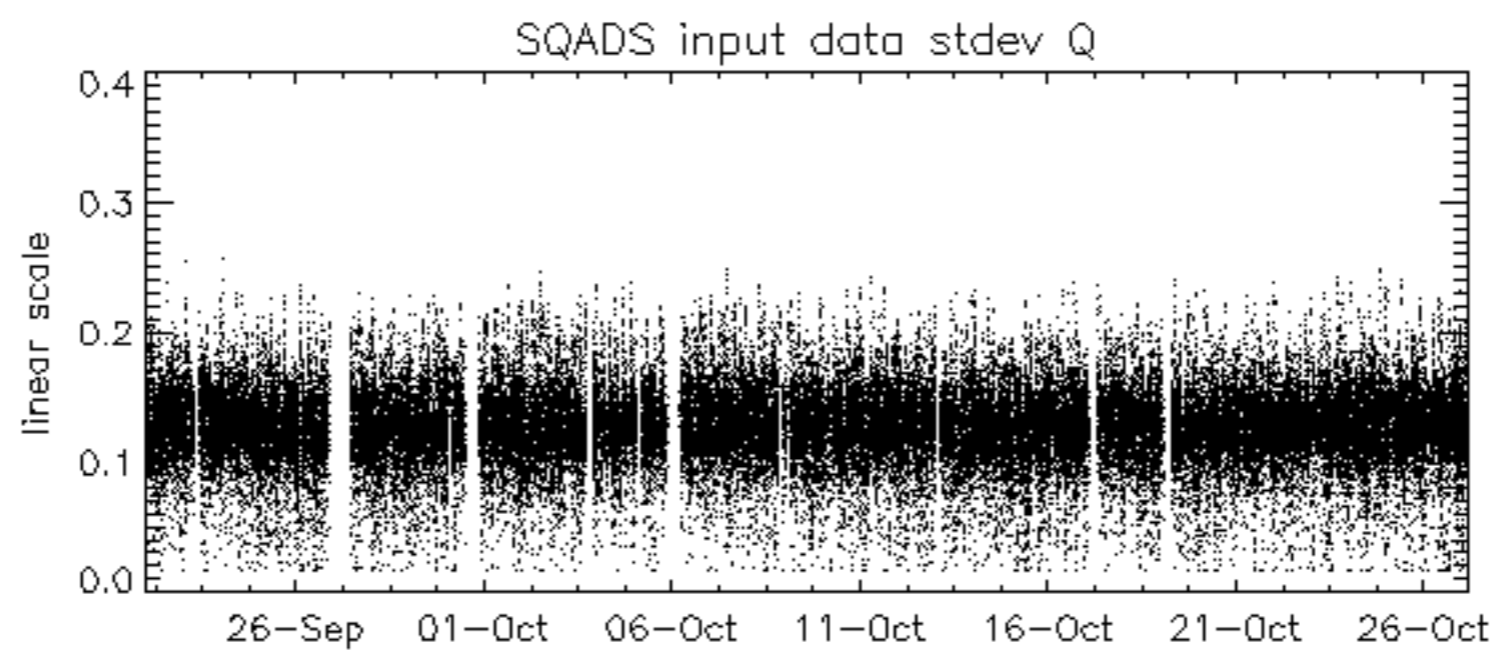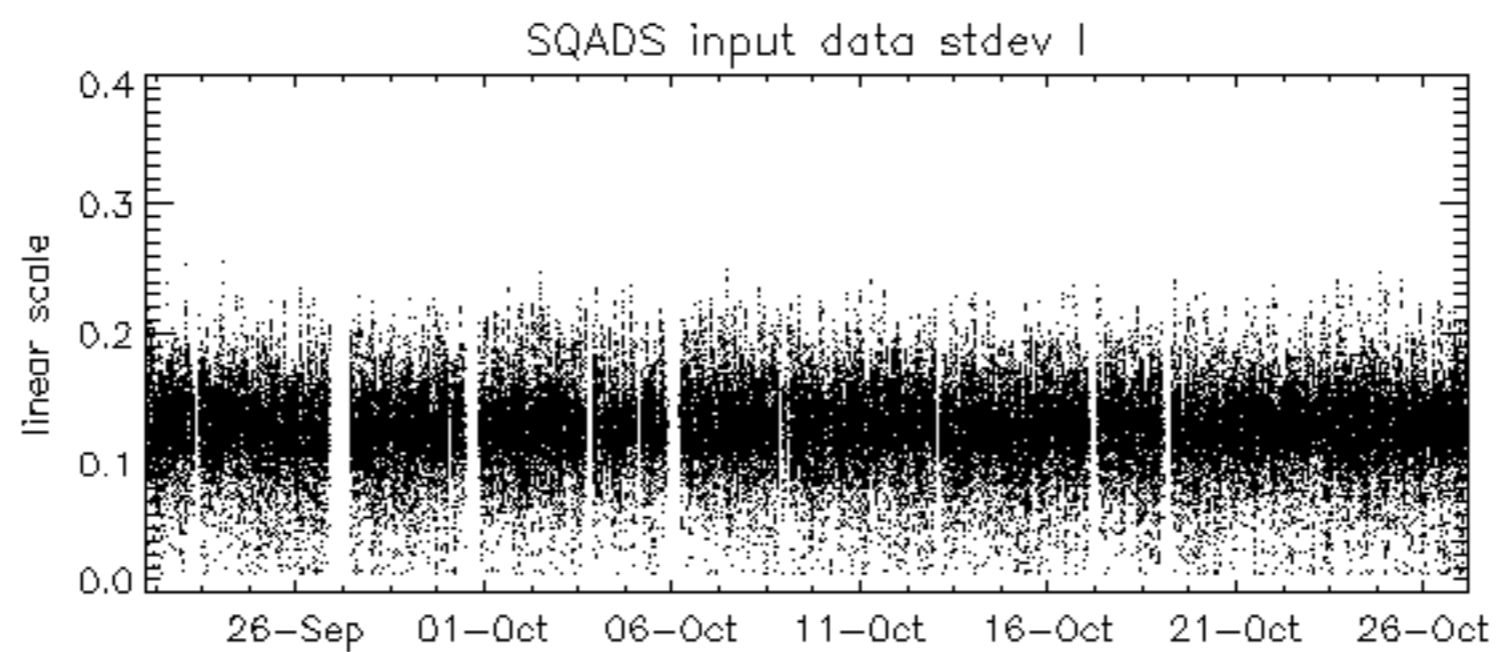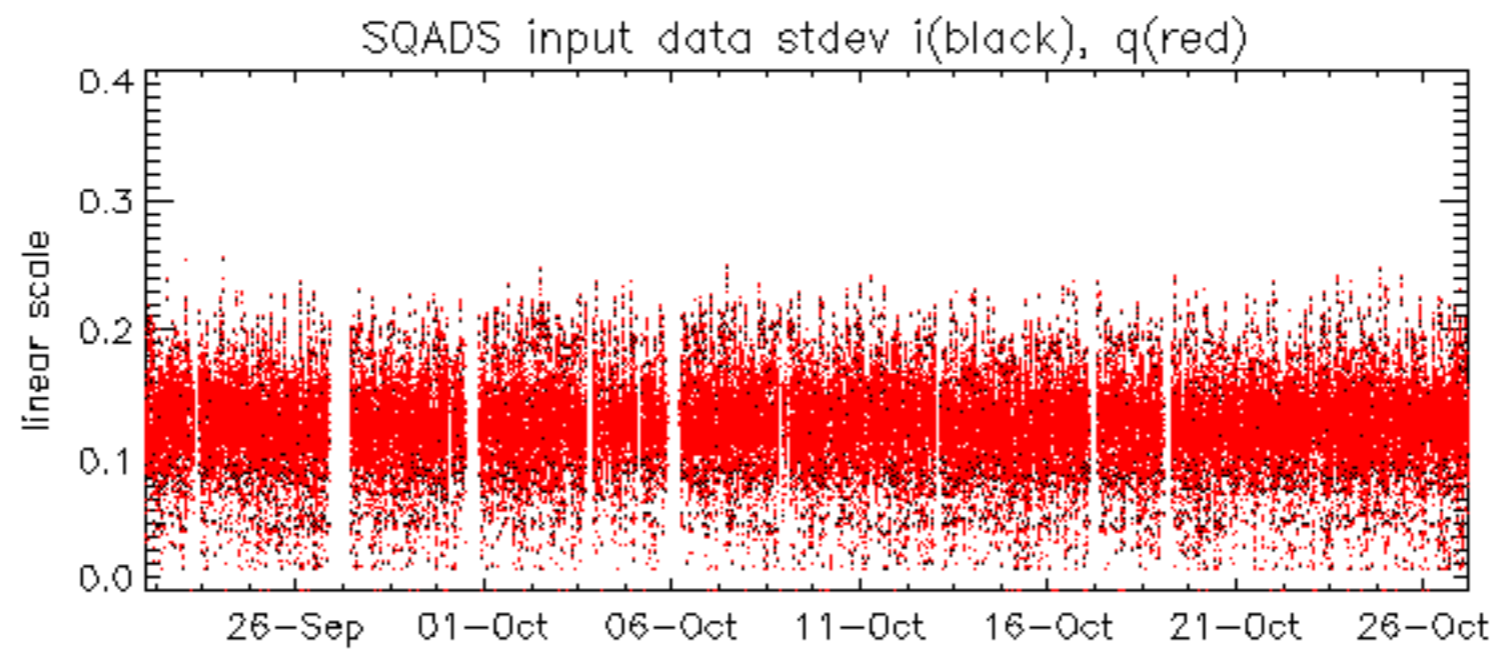


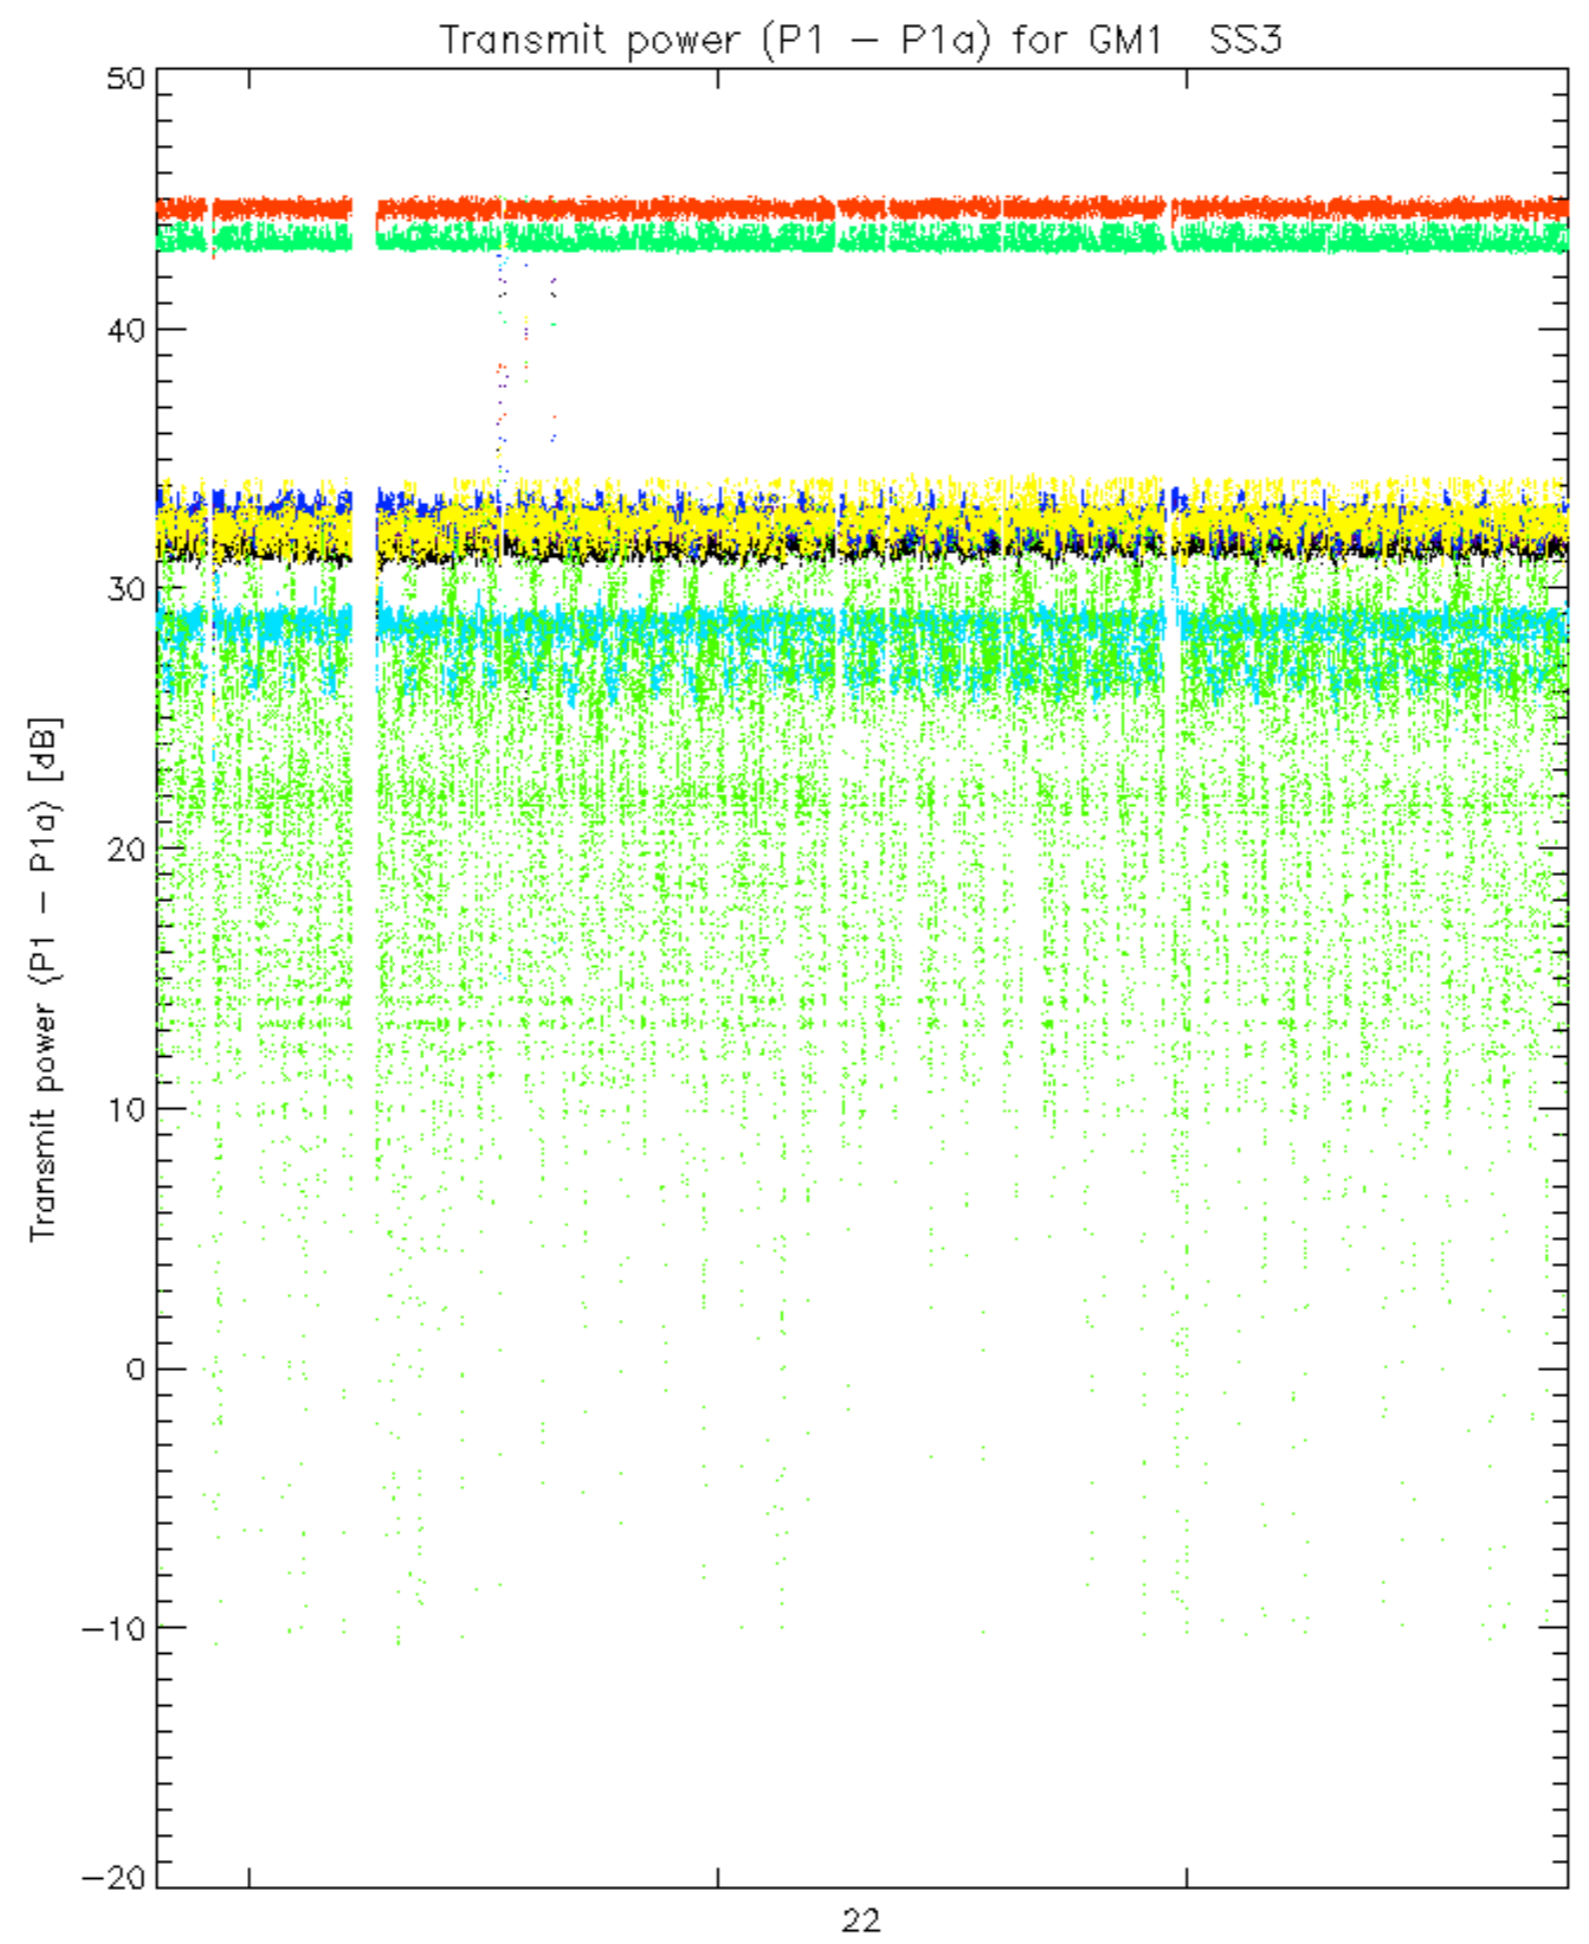


rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

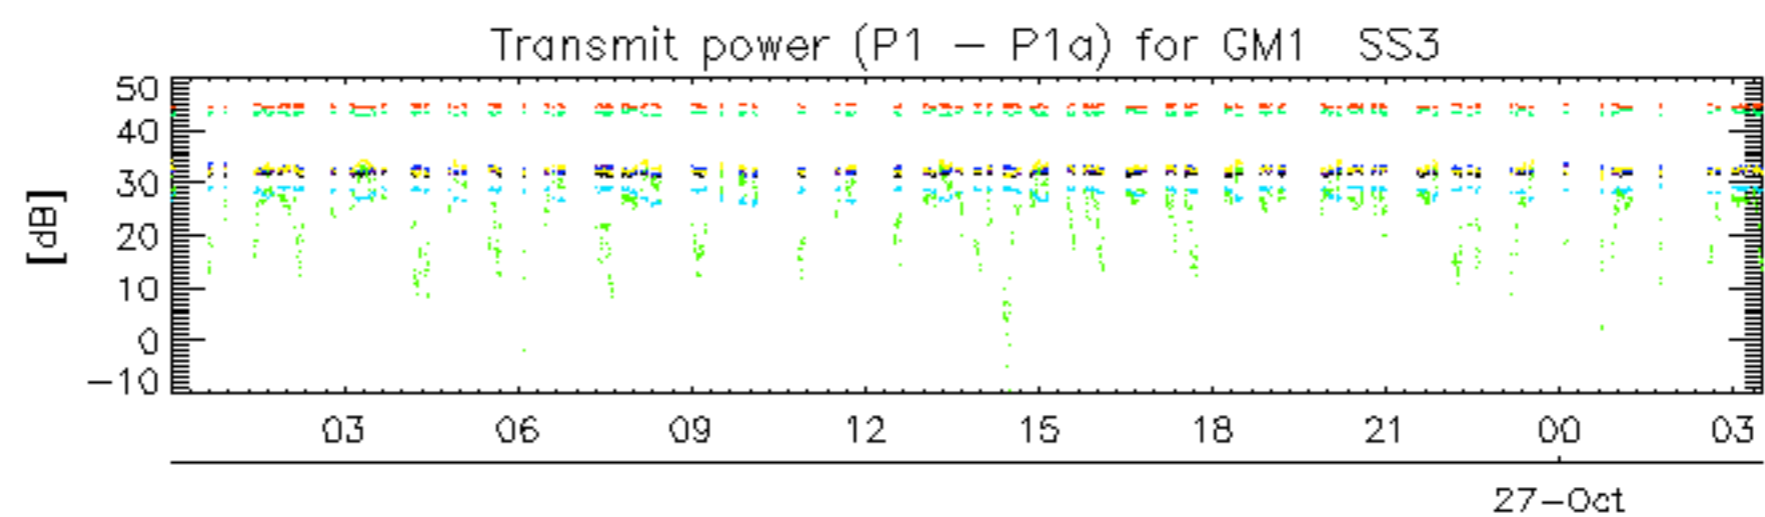

rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

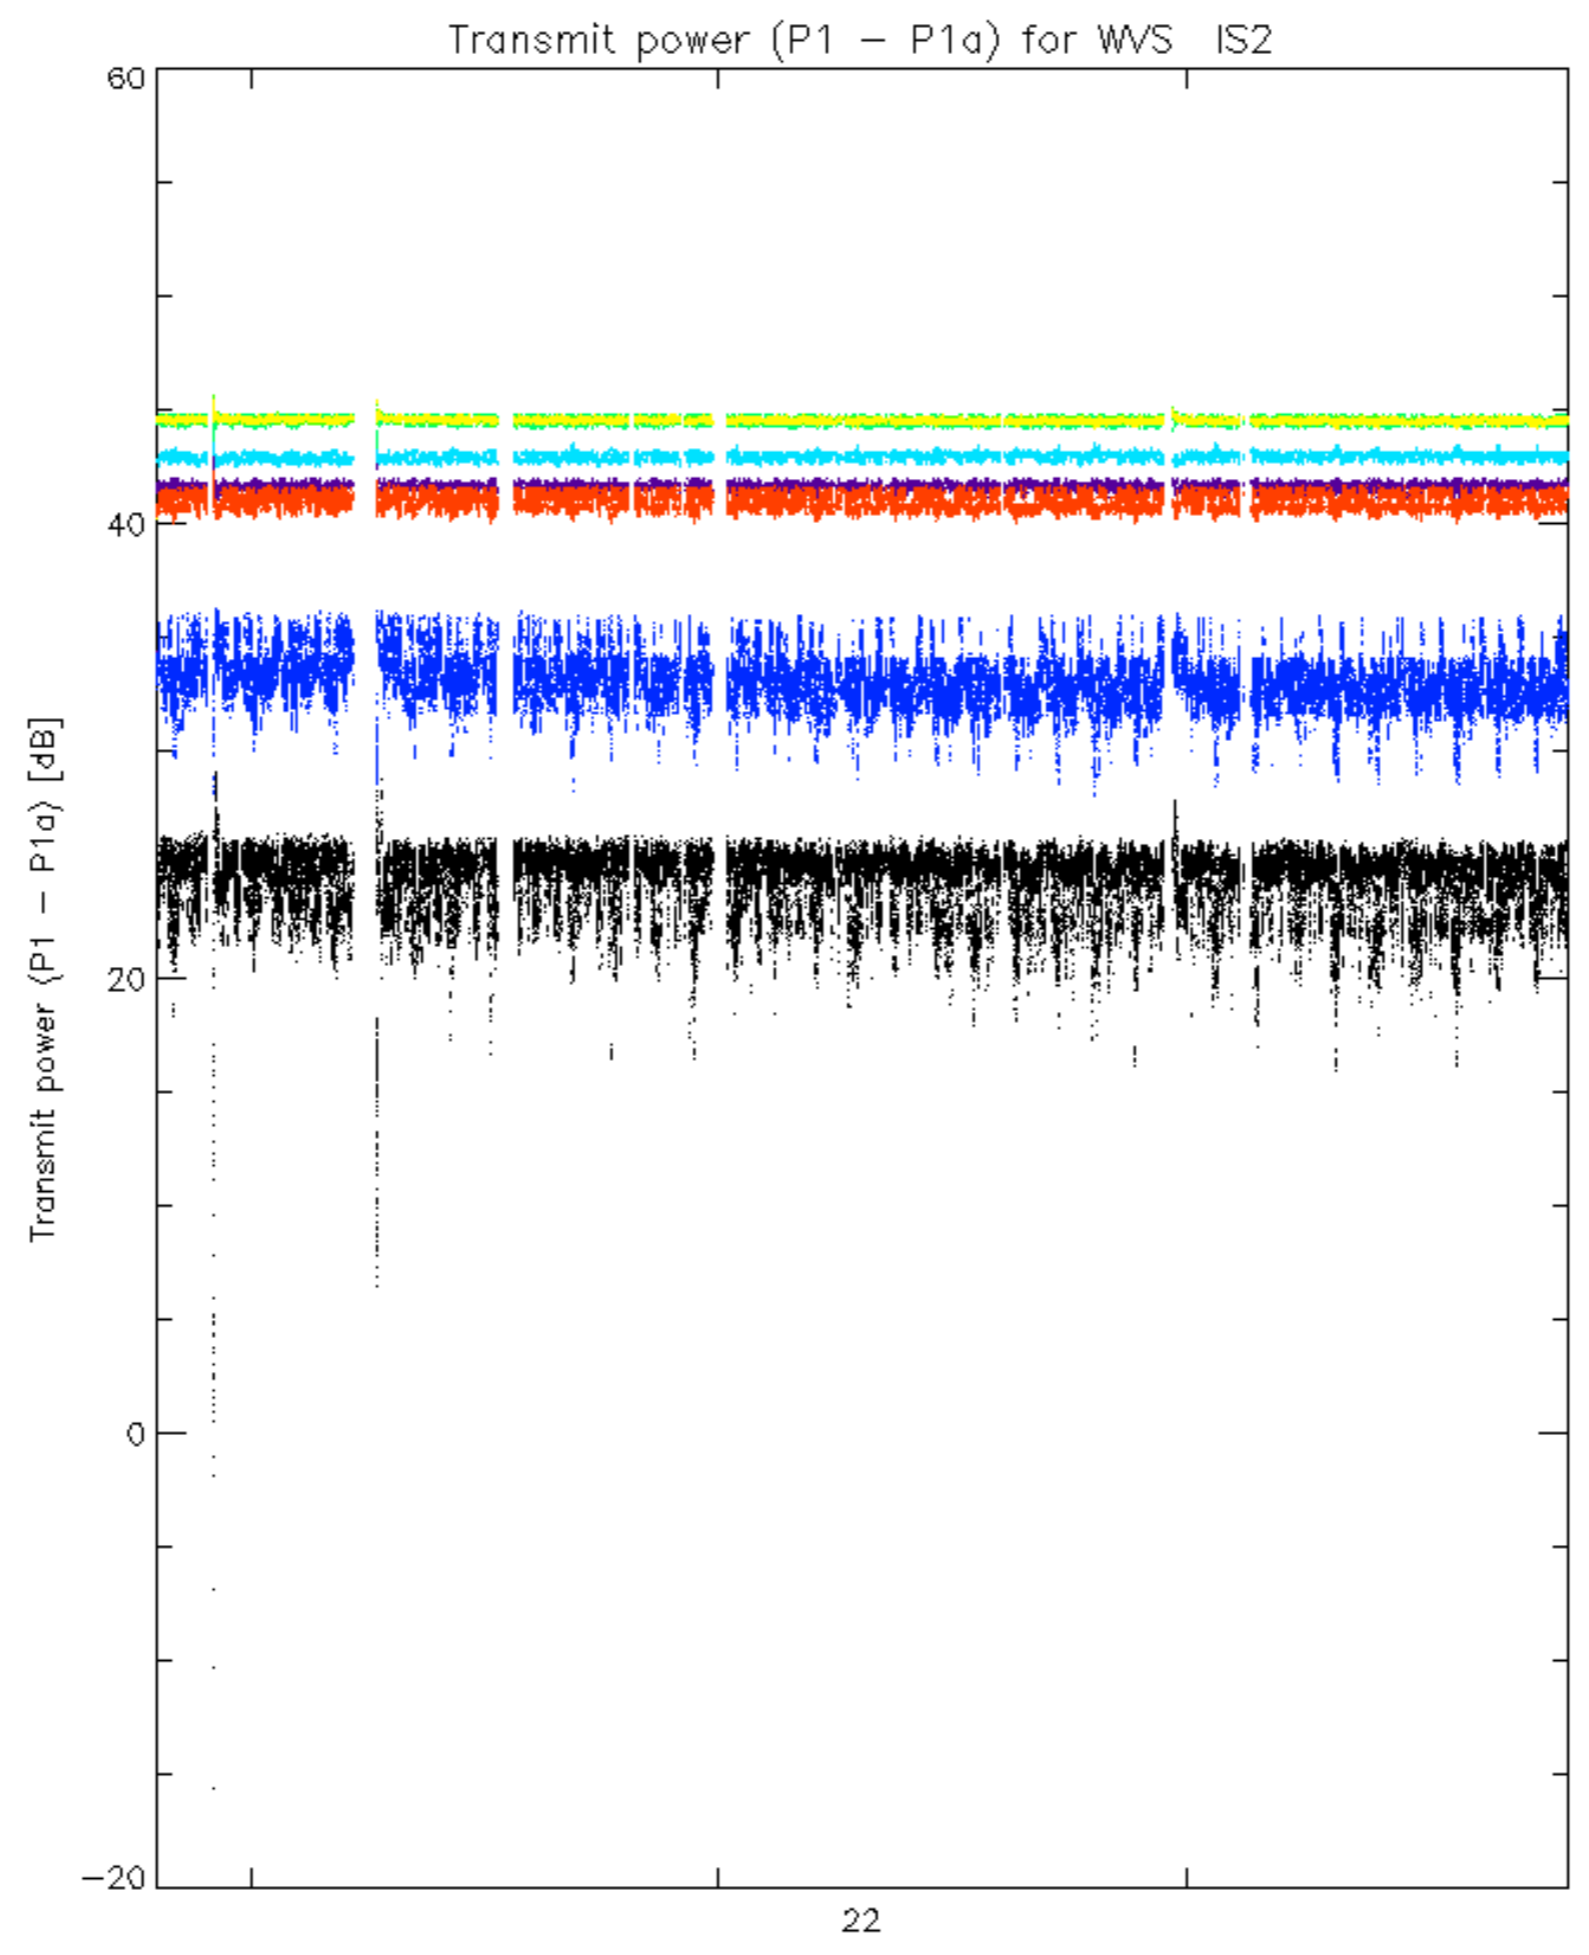

rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

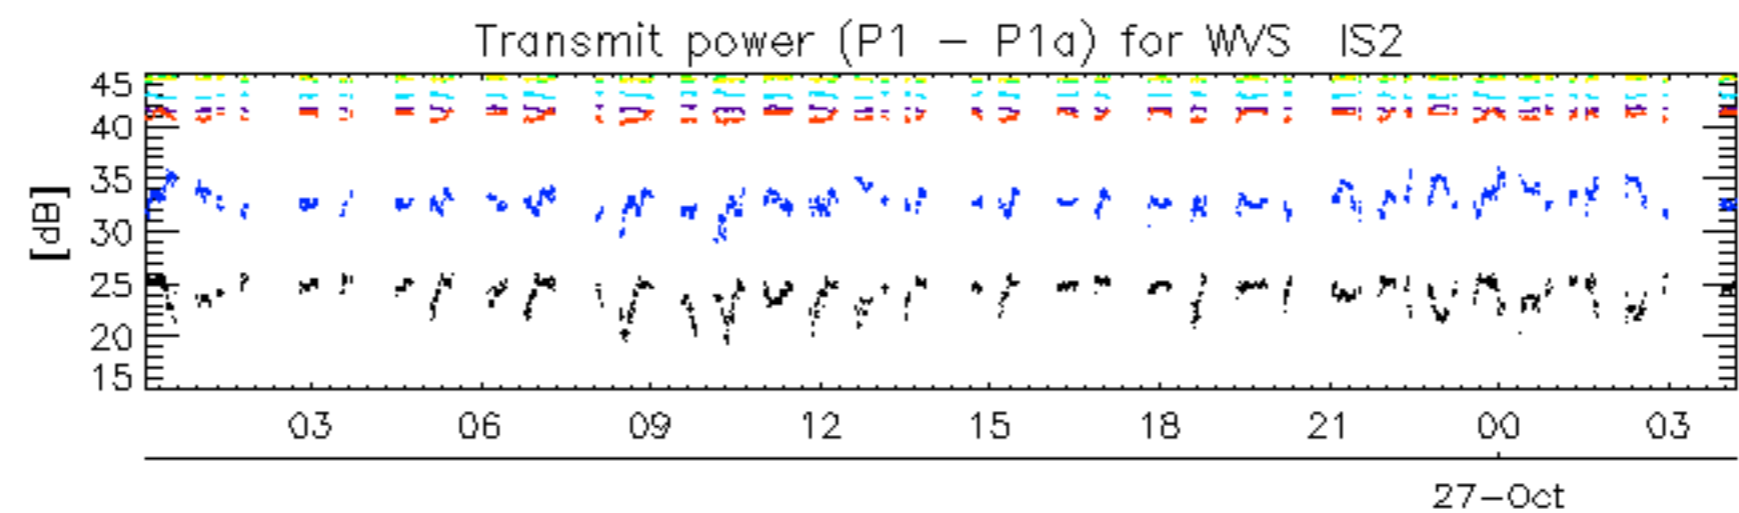

rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

No unavailabilities during the reported period.