

PRELIMINARY REPORT OF 041106

ATTENTION: This report is automatically generated no comments are provided on data analysis

last update on Sat Nov 6 10:50:35 GMT 2004

1. [Introduction](#)
2. [Summary](#)
 - [Instrument Unavailability](#)
 - [Browse Visual Inspection](#)
 - [Module Stepping Results](#)
 - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
 - [Daily statistics](#)
 - [Cyclic statistics](#)
 - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
 - [raw data mean I and Q](#)
 - [raw data stdev I and Q](#)
 - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
 - [Unbiased Doppler Error for WVS](#)
 - [Absolute Doppler for WVS](#)
 - [Doppler evolution versus ANX for WVS](#)
 - [Unbiased Doppler Error for GM1](#)
 - [Absolute Doppler for GM1](#)
 - [Doppler evolution versus ANX for GM1](#)

1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA_WVS_1P), global monitoring products (ASA_GM1_1P), which are the available few hours after the acquisition, on the browse (BP) products and on the Module Stepping (MS) product.

2 - Summary

2.1 - Instrument Unavailability

No unavailabilities during the reported period.

2.2 - Browse Visual Inspection

2.3 - Data Analysis

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.

3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis. The purpose of this mode is to identify any malfunctioning modules and to identify modules for which calibration offsets are to be applied. No anomalies observed on available MS products:

Polarisation	Start Time
V	20041104 100812
H	20041103 071837

MSM in V/V polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>

MSM in H/H polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>

4 - Internal calibration Results

No anomalies observed.

4.1 - Daily statistics

4.1.1 - Evolution for WVS

Evolution of cal pulses for WVS

4.1.2 - Evolution for GM1

Evolution of cal pulses for GM1

4.2 - Cyclic statistics

4.2.1 - Evolution for WVS

Evolution of cal pulses for WVS

P1a Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

P1 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P1	-3.480319	0.006356	0.005830
7	P1	-3.358919	0.012293	-0.009124
11	P1	-4.607404	0.017799	0.023918
15	P1	-5.681917	0.031392	0.048756
19	P1	-3.572647	0.005439	-0.073662
22	P1	-4.579244	0.013492	-0.015464
24	P1	-4.961294	0.008704	0.025726
30	P1	-7.059538	0.015884	-0.031279

3	P1	-16.062979	0.094399	0.078990
7	P1	-14.042583	0.064954	0.018807
11	P1	-20.547806	0.198600	-0.329329
15	P1	-11.700727	0.032212	0.054625
19	P1	-14.031485	0.026764	-0.051227
22	P1	-16.230289	0.380216	-0.039020
24	P1	-14.636932	0.249553	-0.133594
30	P1	-18.020466	0.279234	0.120511

P2 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P2	-22.368210	0.089054	-0.034730
7	P2	-22.612059	0.128213	0.018534
11	P2	-15.102718	0.122336	0.074051
15	P2	-7.128985	0.107077	-0.035935
19	P2	-9.683188	0.125866	-0.096703
22	P2	-17.269007	0.108680	0.059439
24	P2	-20.799786	0.092877	-0.006246
30	P2	-19.068432	0.085009	0.058292

P3 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P3	-8.193295	0.005477	-0.023673
7	P3	-8.193297	0.005477	-0.023673
11	P3	-8.193296	0.005477	-0.023678
15	P3	-8.193297	0.005477	-0.023678
19	P3	-8.193298	0.005477	-0.023678
22	P3	-8.193301	0.005477	-0.023677
24	P3	-8.193302	0.005477	-0.023677
30	P3	-8.193406	0.005478	-0.023706

4.2.2 - Evolution for GM1

Evolution of cal pulses for GM1	
<input type="checkbox"/>	
<input type="checkbox"/>	

P1a Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

P1 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P1	-2.814713	0.011221	0.055914
7	P1	-2.959249	0.026561	0.048845
11	P1	-3.893021	0.020804	-0.007791
15	P1	-3.489750	0.024578	0.004181
19	P1	-3.570622	0.012603	-0.076352
22	P1	-5.636538	0.064662	0.060792
24	P1	-3.975665	0.021781	-0.027744
30	P1	-6.242220	0.042783	-0.064269
3	P1	-10.679382	0.070893	0.356736
7	P1	-10.063870	0.139604	0.022387
11	P1	-12.305353	0.114652	-0.156910
15	P1	-11.686394	0.064310	-0.028191
19	P1	-15.610924	0.055120	-0.025133
22	P1	-23.784134	1.724251	-0.373369
24	P1	-18.156702	0.228856	-0.108402
30	P1	-20.302185	1.012393	0.180869

P2 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P2	-18.047573	0.041238	-0.039218
7	P2	-22.691187	0.033803	0.065965
11	P2	-10.877389	0.040797	0.025348
15	P2	-5.026950	0.028806	-0.045142
19	P2	-6.903734	0.039589	-0.166203
22	P2	-7.386602	0.028761	0.054999
24	P2	-11.150303	0.037266	-0.064938
30	P2	-22.100382	0.019946	0.037361

P3 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

3	P3	-8.034737	0.003182	-0.023502
7	P3	-8.034621	0.003183	-0.023185
11	P3	-8.034680	0.003174	-0.023176
15	P3	-8.034614	0.003172	-0.023255
19	P3	-8.034654	0.003175	-0.023252
22	P3	-8.034723	0.003179	-0.023475
24	P3	-8.034896	0.003192	-0.023241
30	P3	-8.034709	0.003181	-0.023204

4.3 - cal pulses monitoring (all rows)

4.3.1 - Evolution for WVS



4.3.2 - Evolution for GM1



5 - RAW data statistics

No anomalies observed.

5.1 - Input mean I/Q

channel	stat	DSS-B
MEAN I	mean	0.000474799
	stdev	2.14844e-07
MEAN Q	mean	0.000550878
	stdev	2.32418e-07



5.2 - Input stdev I/Q

channel	stat	DSS-B
STDEV I	mean	0.127262
	stdev	0.000915202

STDEV Q	mean	0.127480
	stdev	0.000923928



5.3 - Gain imbalance I/Q



6 - Doppler Analysis

Preliminary report. The data is not yet controlled

6.1 - Unbiased Doppler Error for WVS

Evolution of unbiased Doppler error (Real - Expected)	
<input type="checkbox"/>	
	Acsending
<input type="checkbox"/>	
	Descending

6.2 - Absolute Doppler for WVS

Evolution of Absolute Doppler	
<input type="checkbox"/>	
	Acsending
<input type="checkbox"/>	
	Descending

6.3 - Doppler evolution versus ANX for WVS

Evolution Doppler error versus ANX	
<input type="checkbox"/>	

6.4 - Unbiased Doppler Error for GM1

Evolution of unbiased Doppler error (Real - Expected)	
<input type="checkbox"/>	
	Ascending
<input type="checkbox"/>	
	Descending





6.5 - Absolute Doppler for GM1

Evolution of Absolute Doppler	
<input type="checkbox"/>	
	Ascending
<input type="checkbox"/>	
	Descending

6.6 - Doppler evolution versus ANX for GM1


Evolution Doppler error versus ANX	
<input type="checkbox"/>	

Cal pulses for GM1 SS3

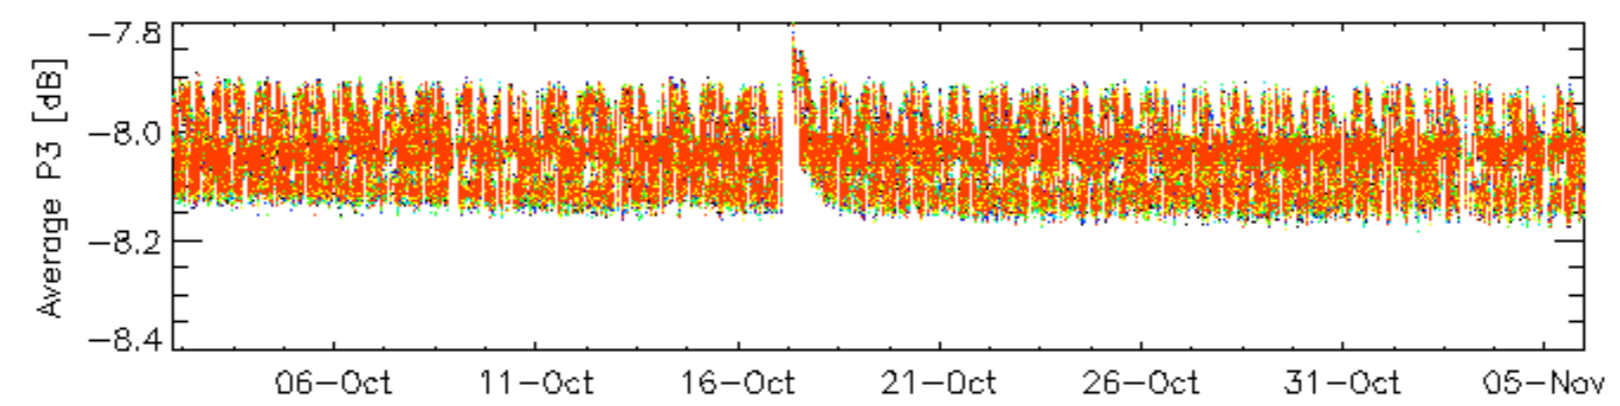
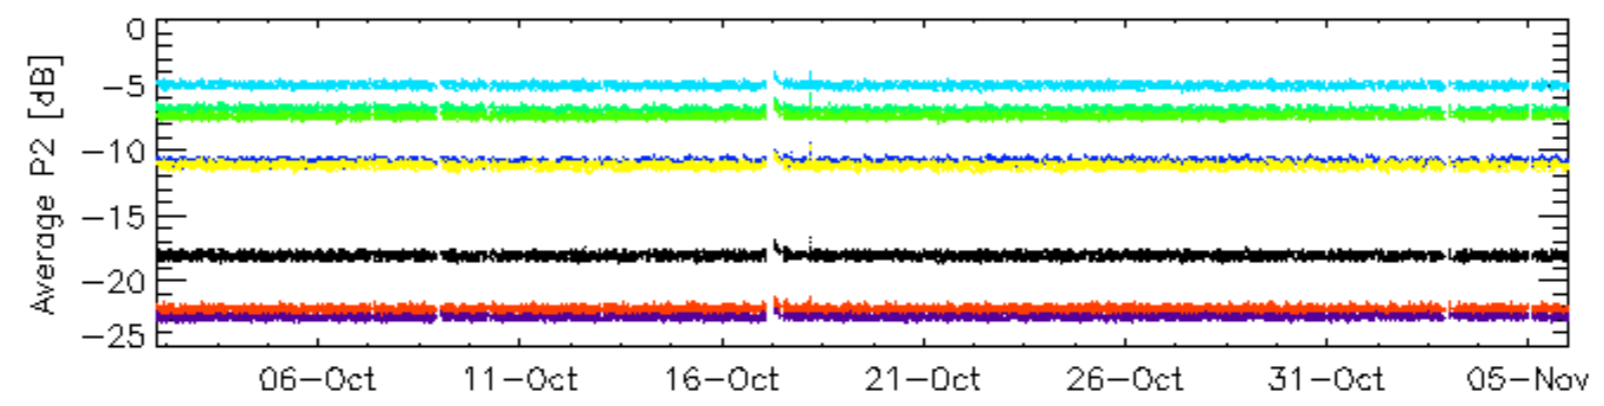
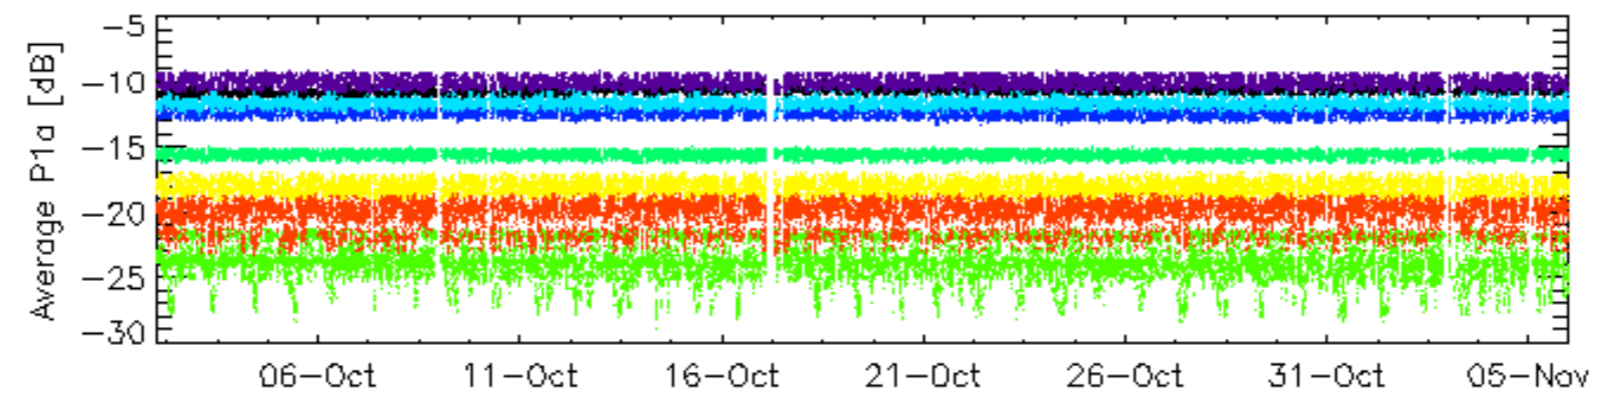
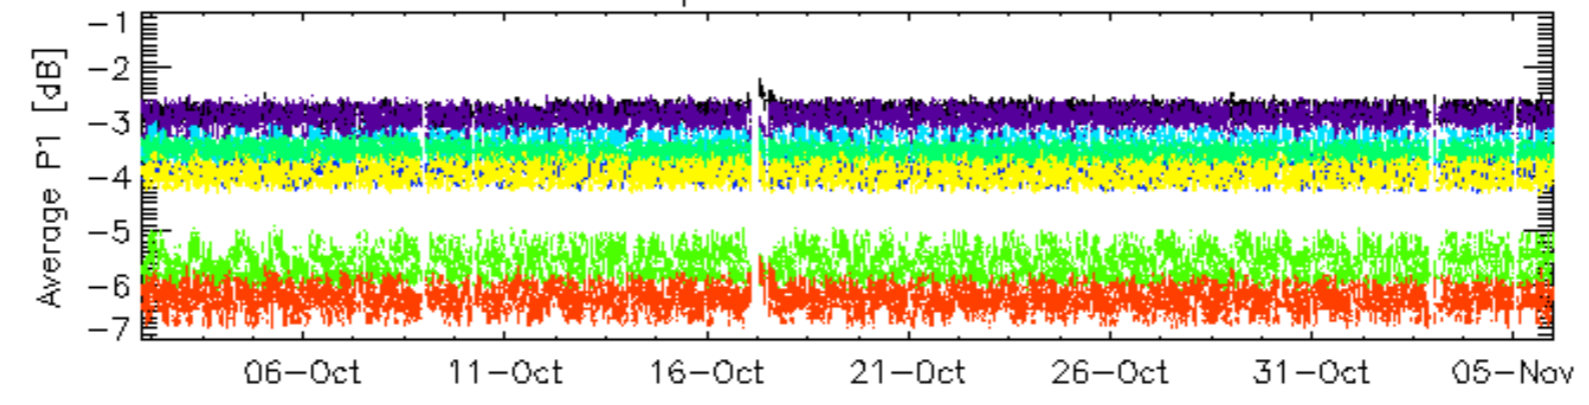


rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

Cal pulses for GM1 SS3

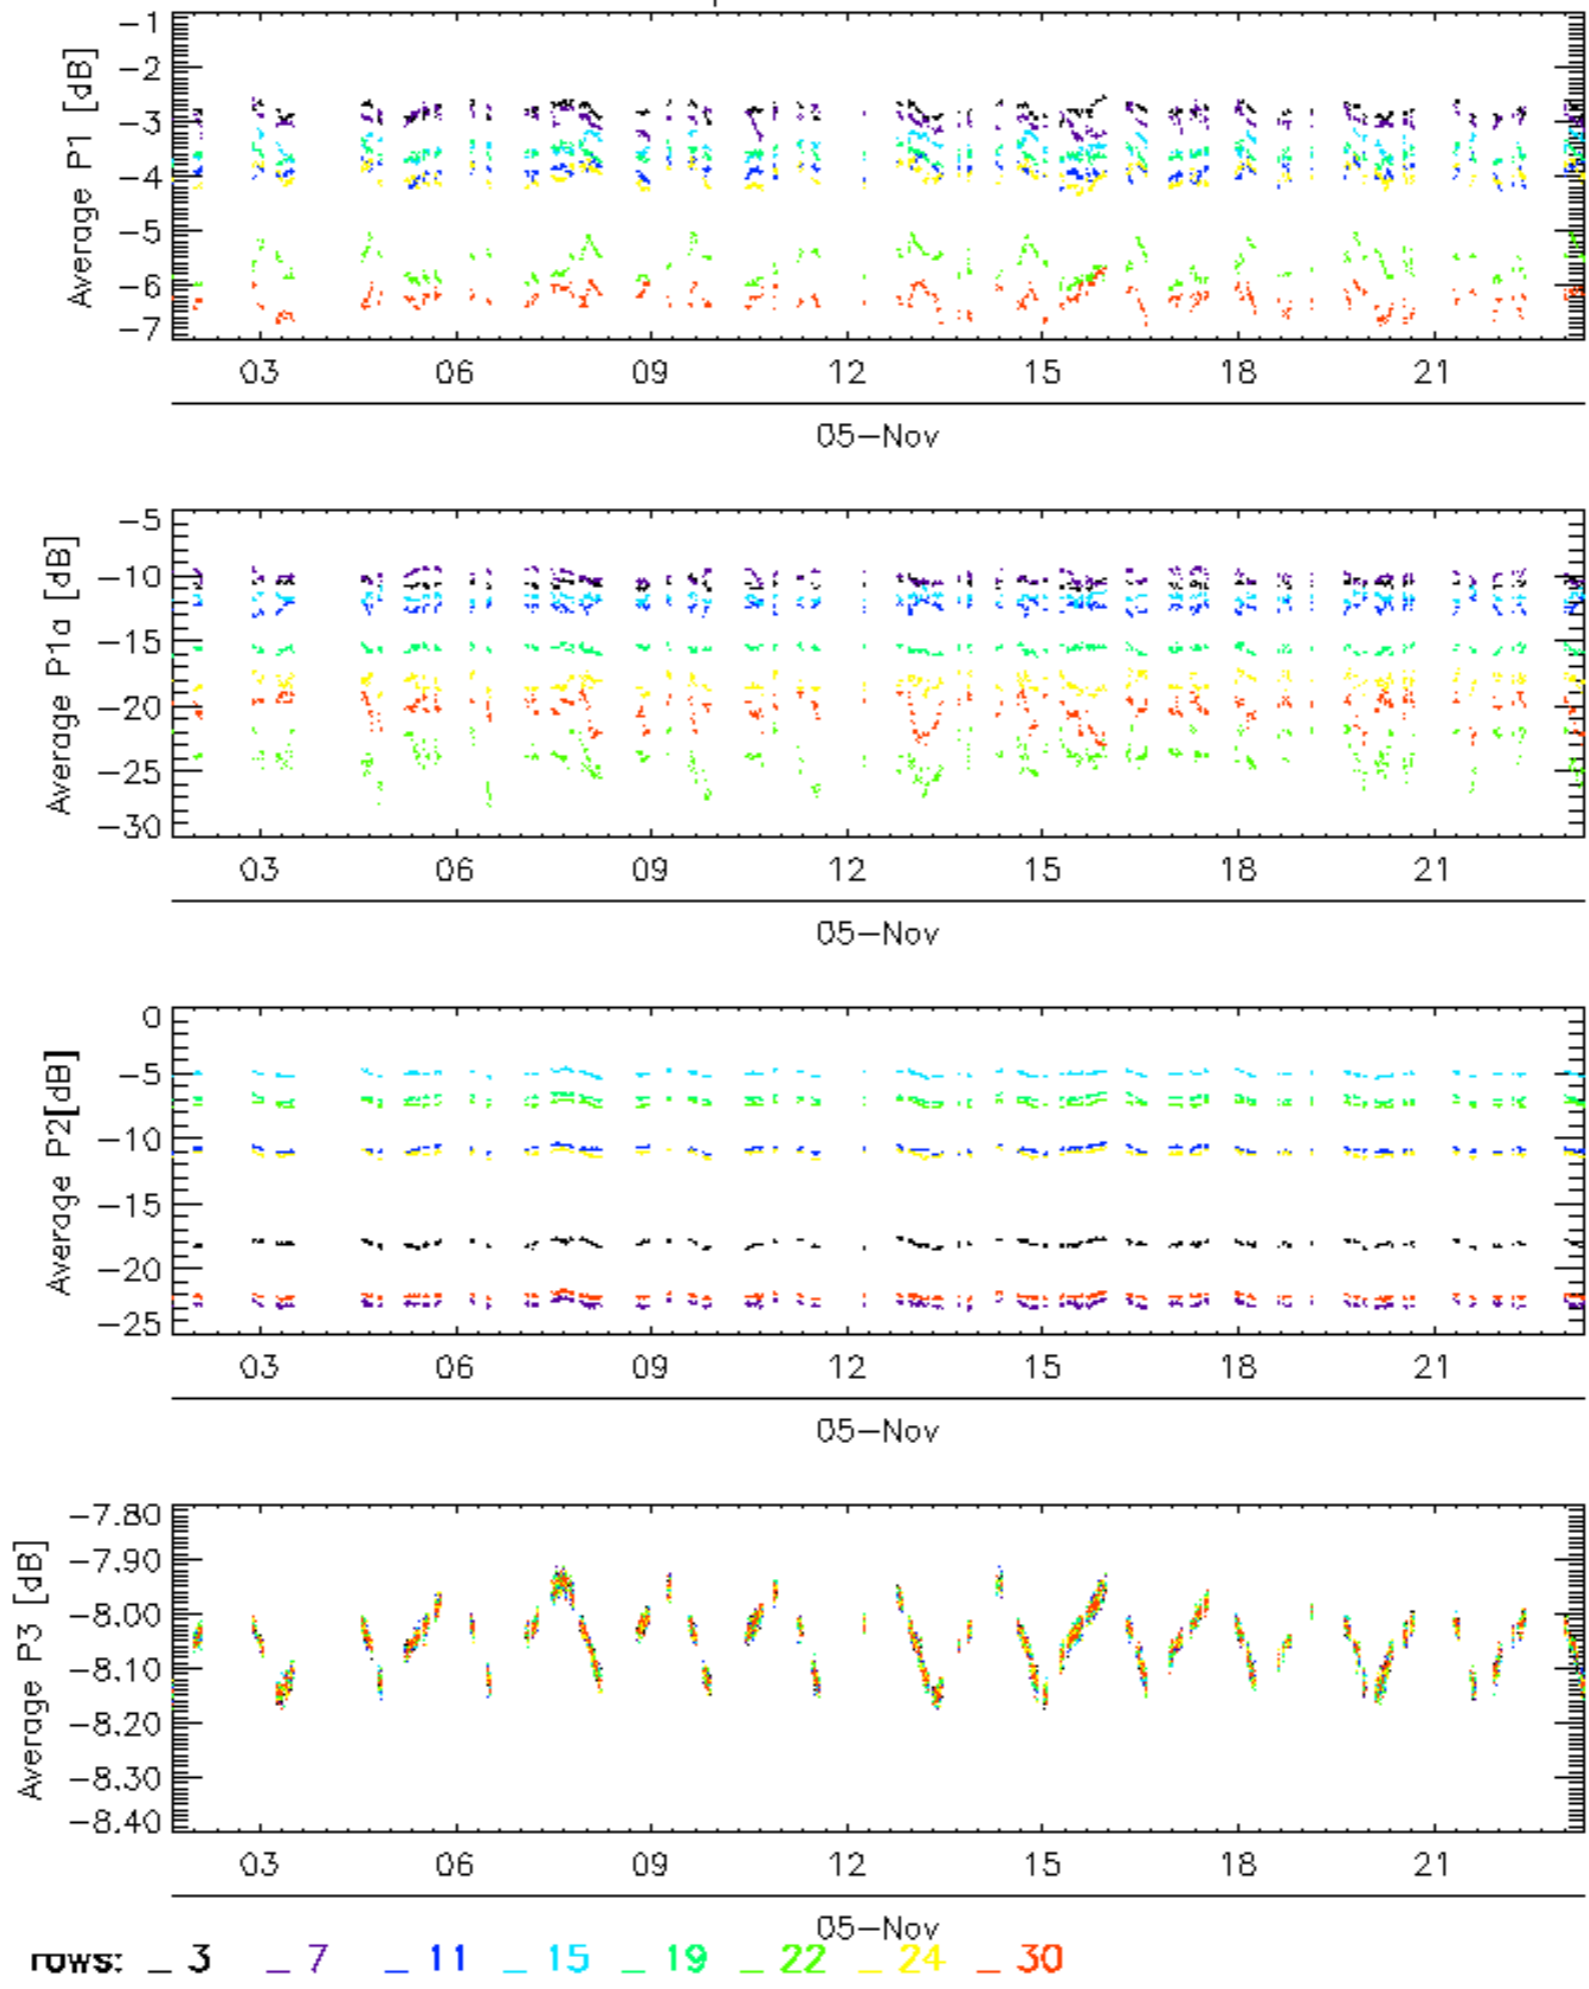


Cal pulses for WVS IS2





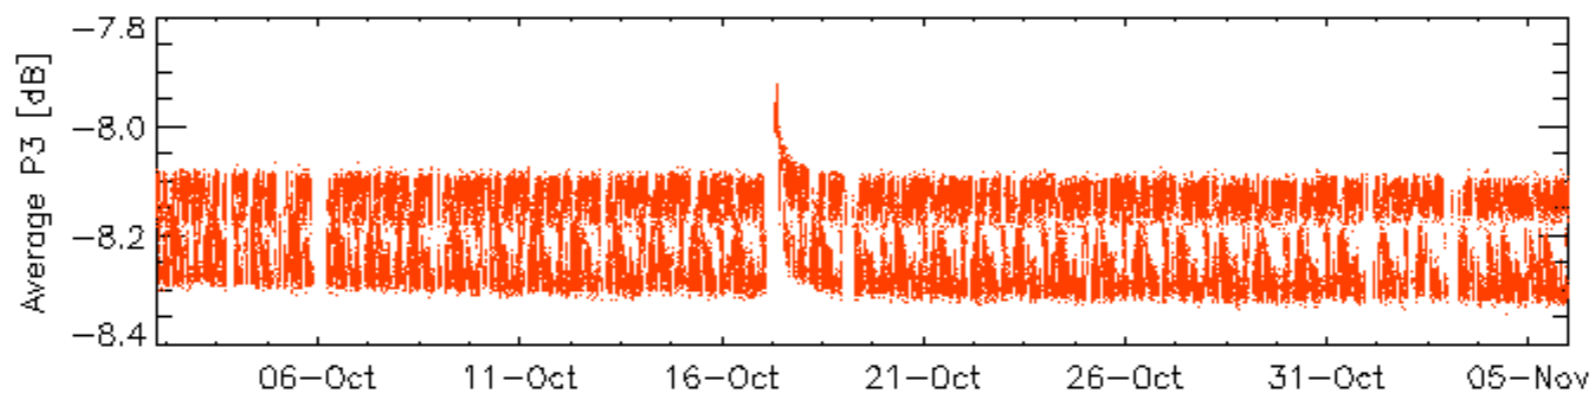
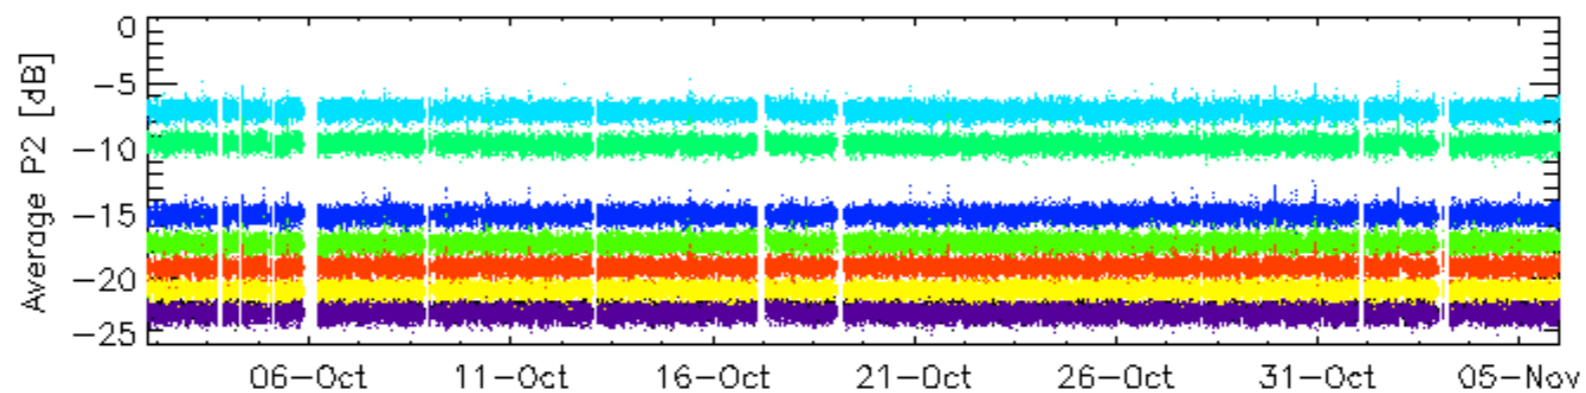
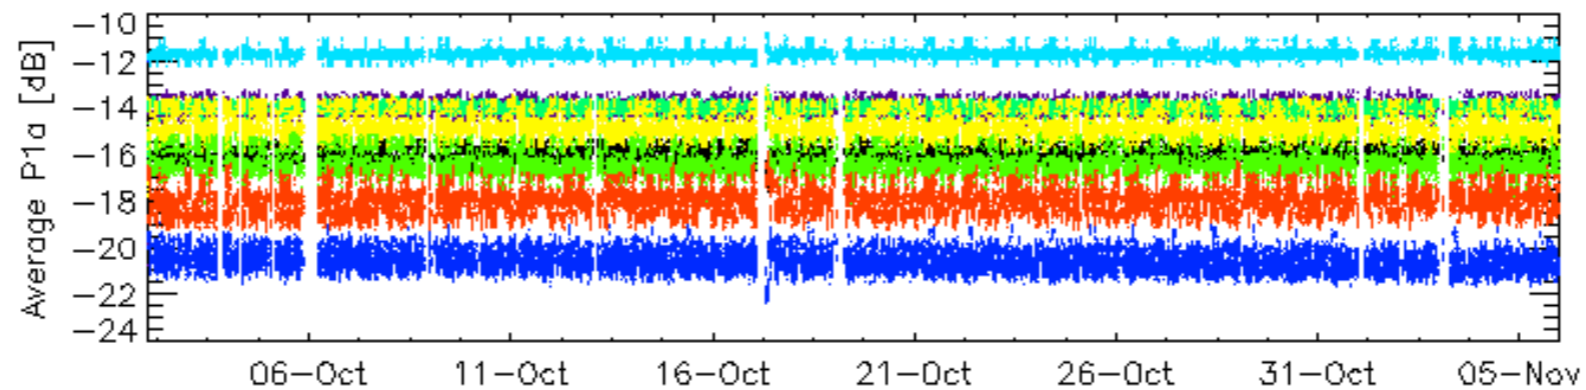
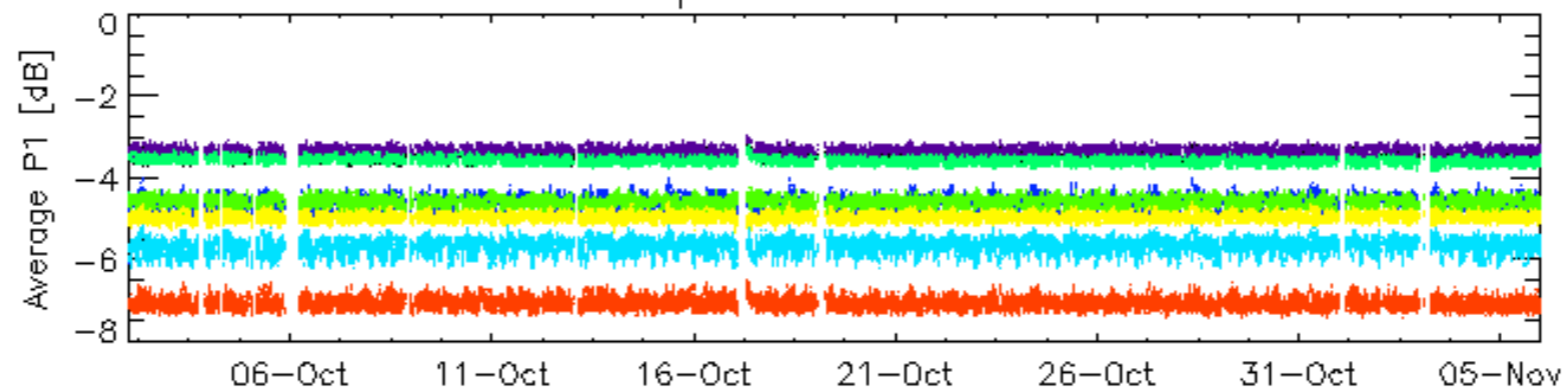



rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

Cal pulses for WVS IS2

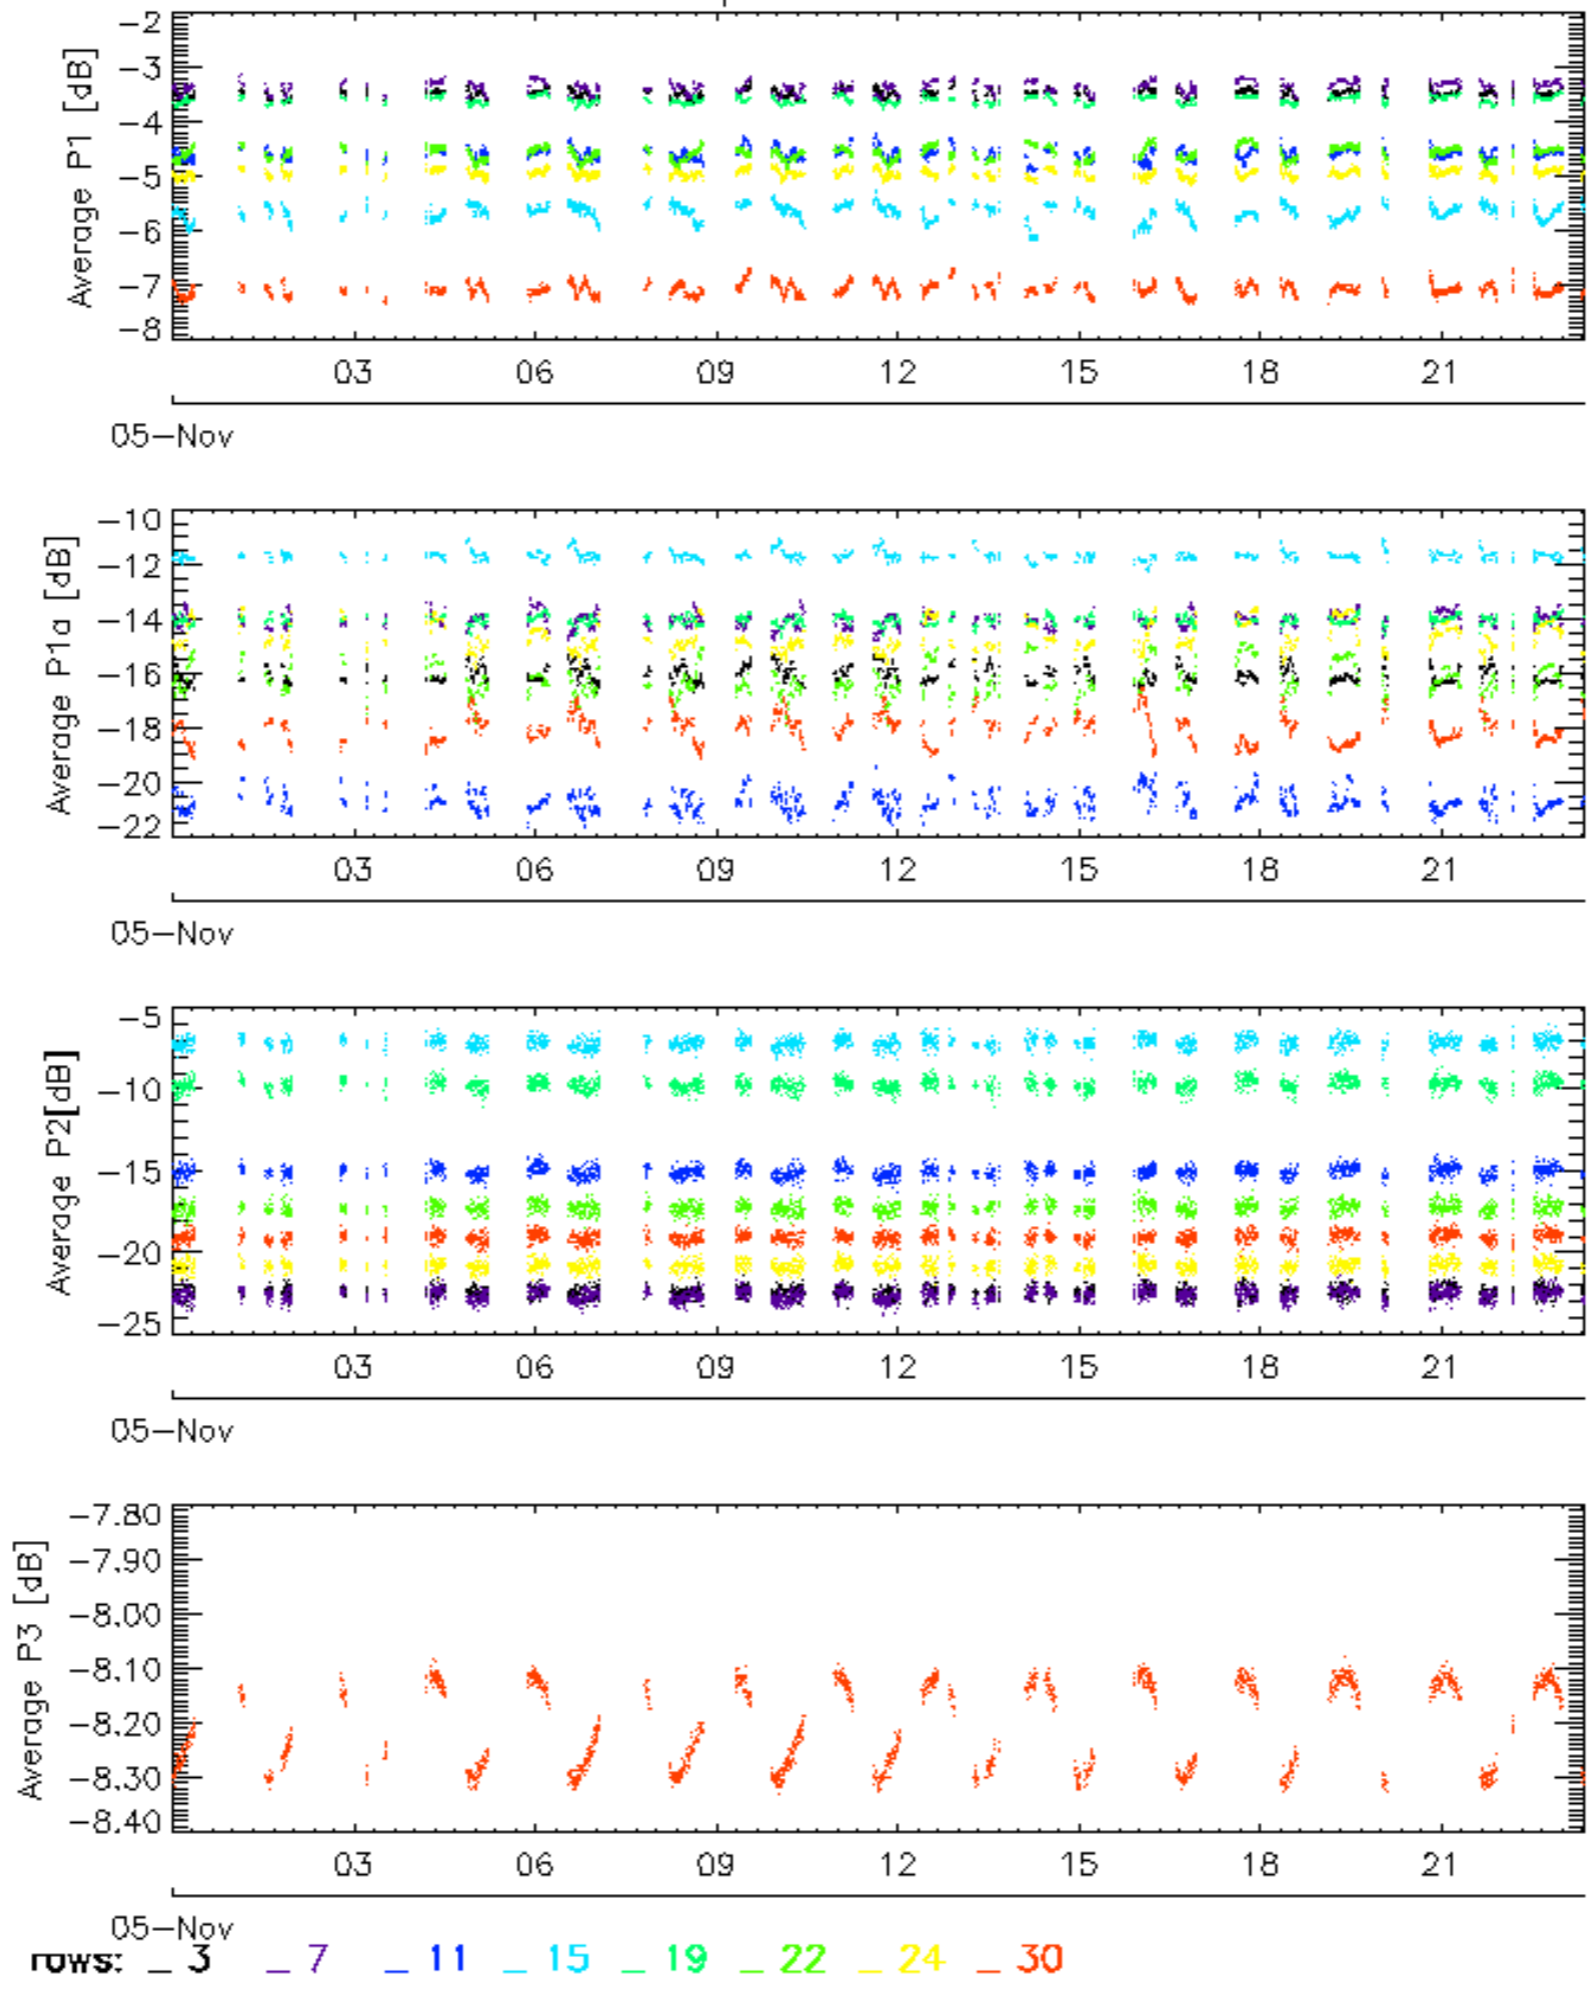


No anomalies observed.

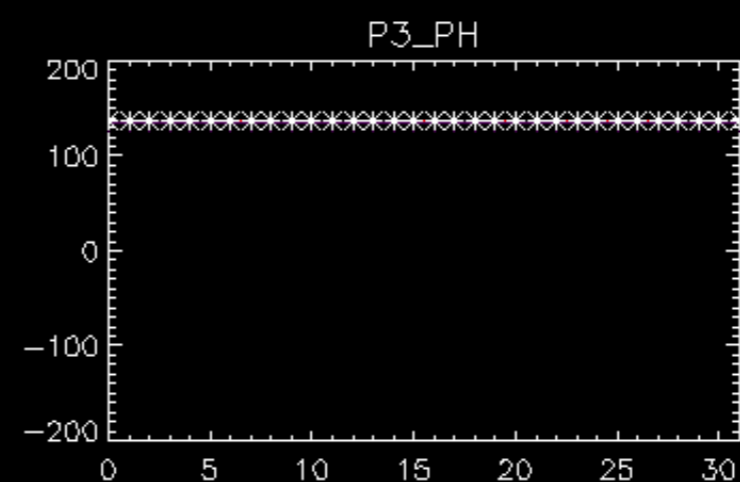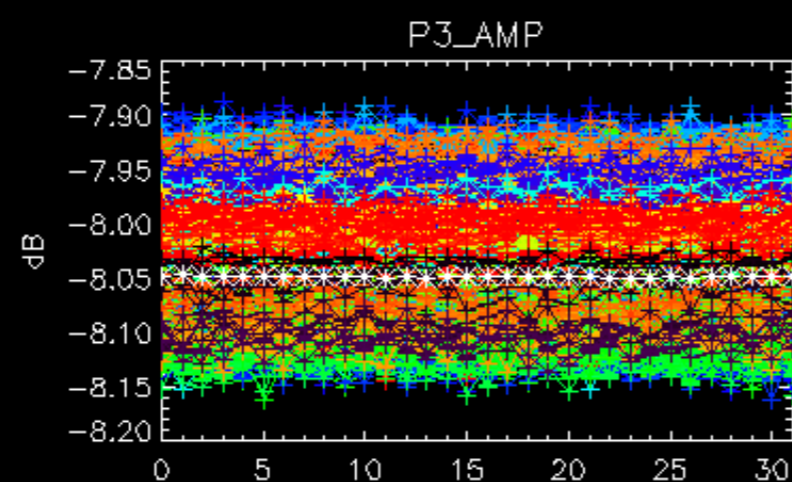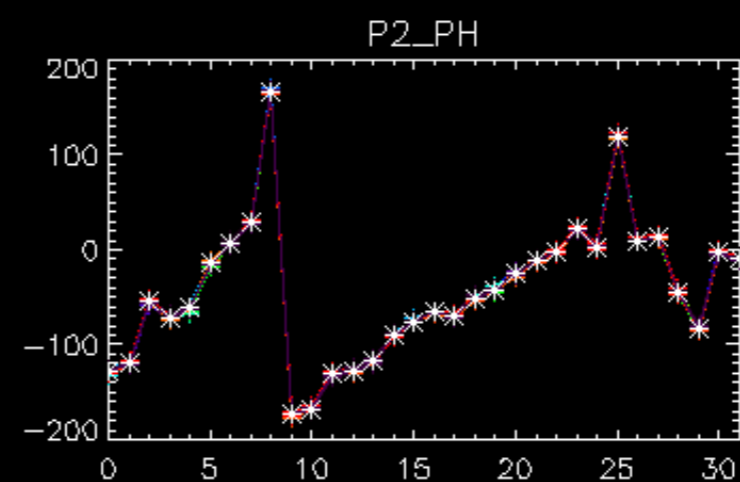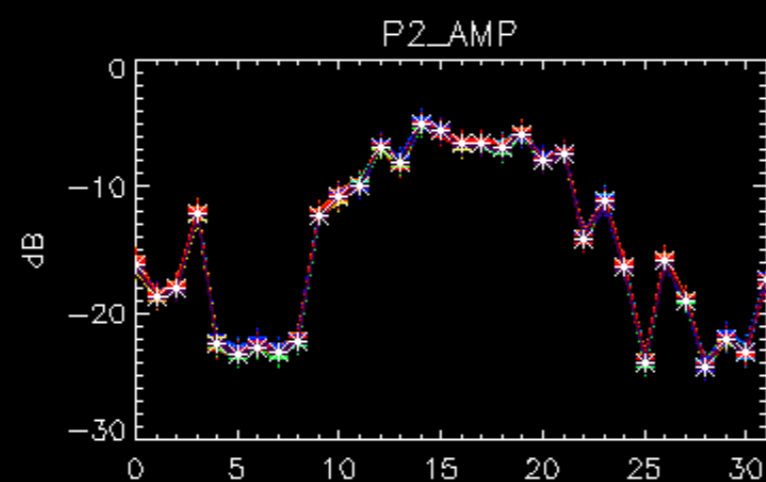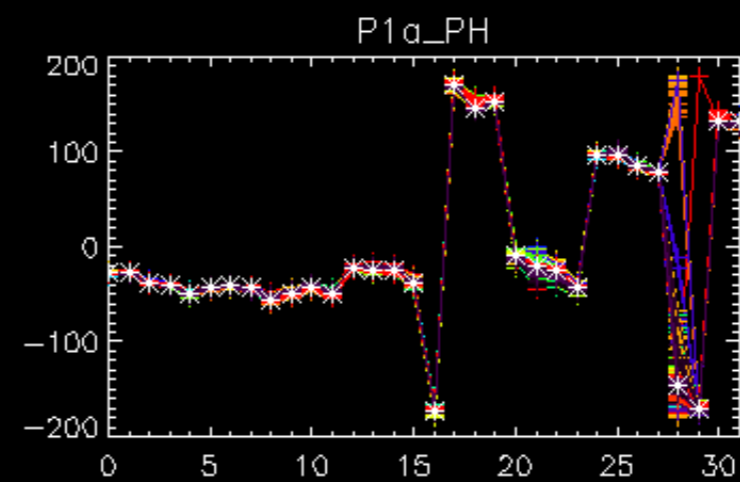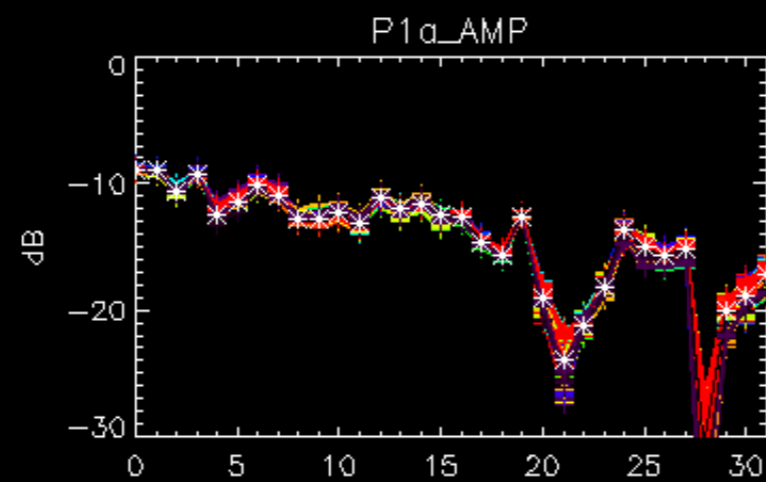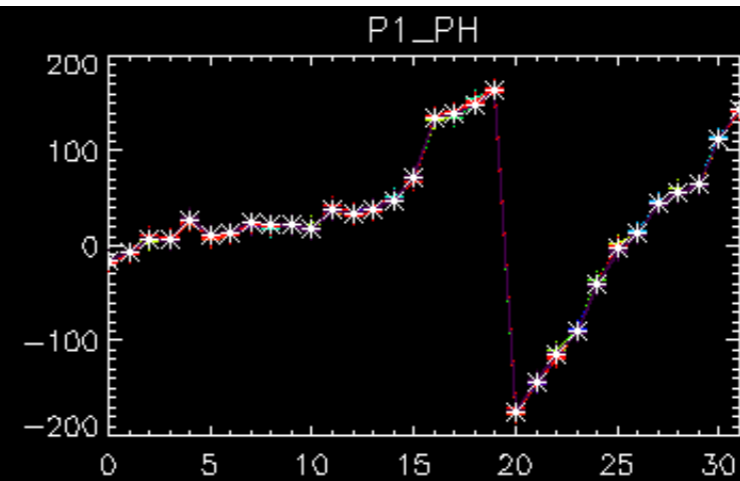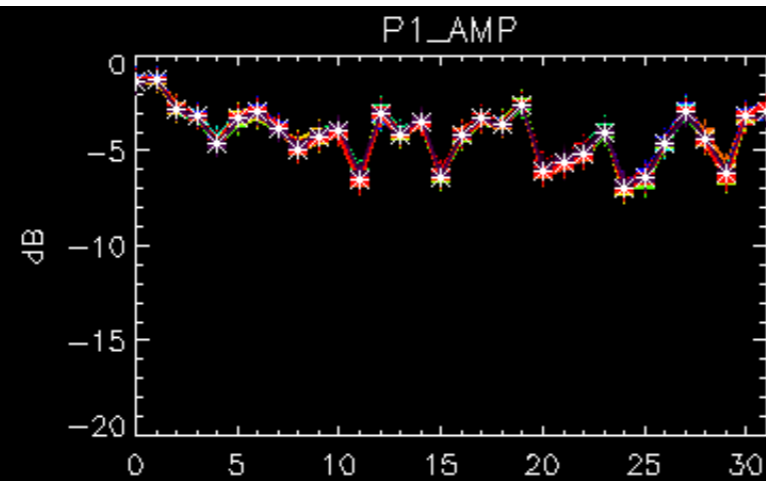

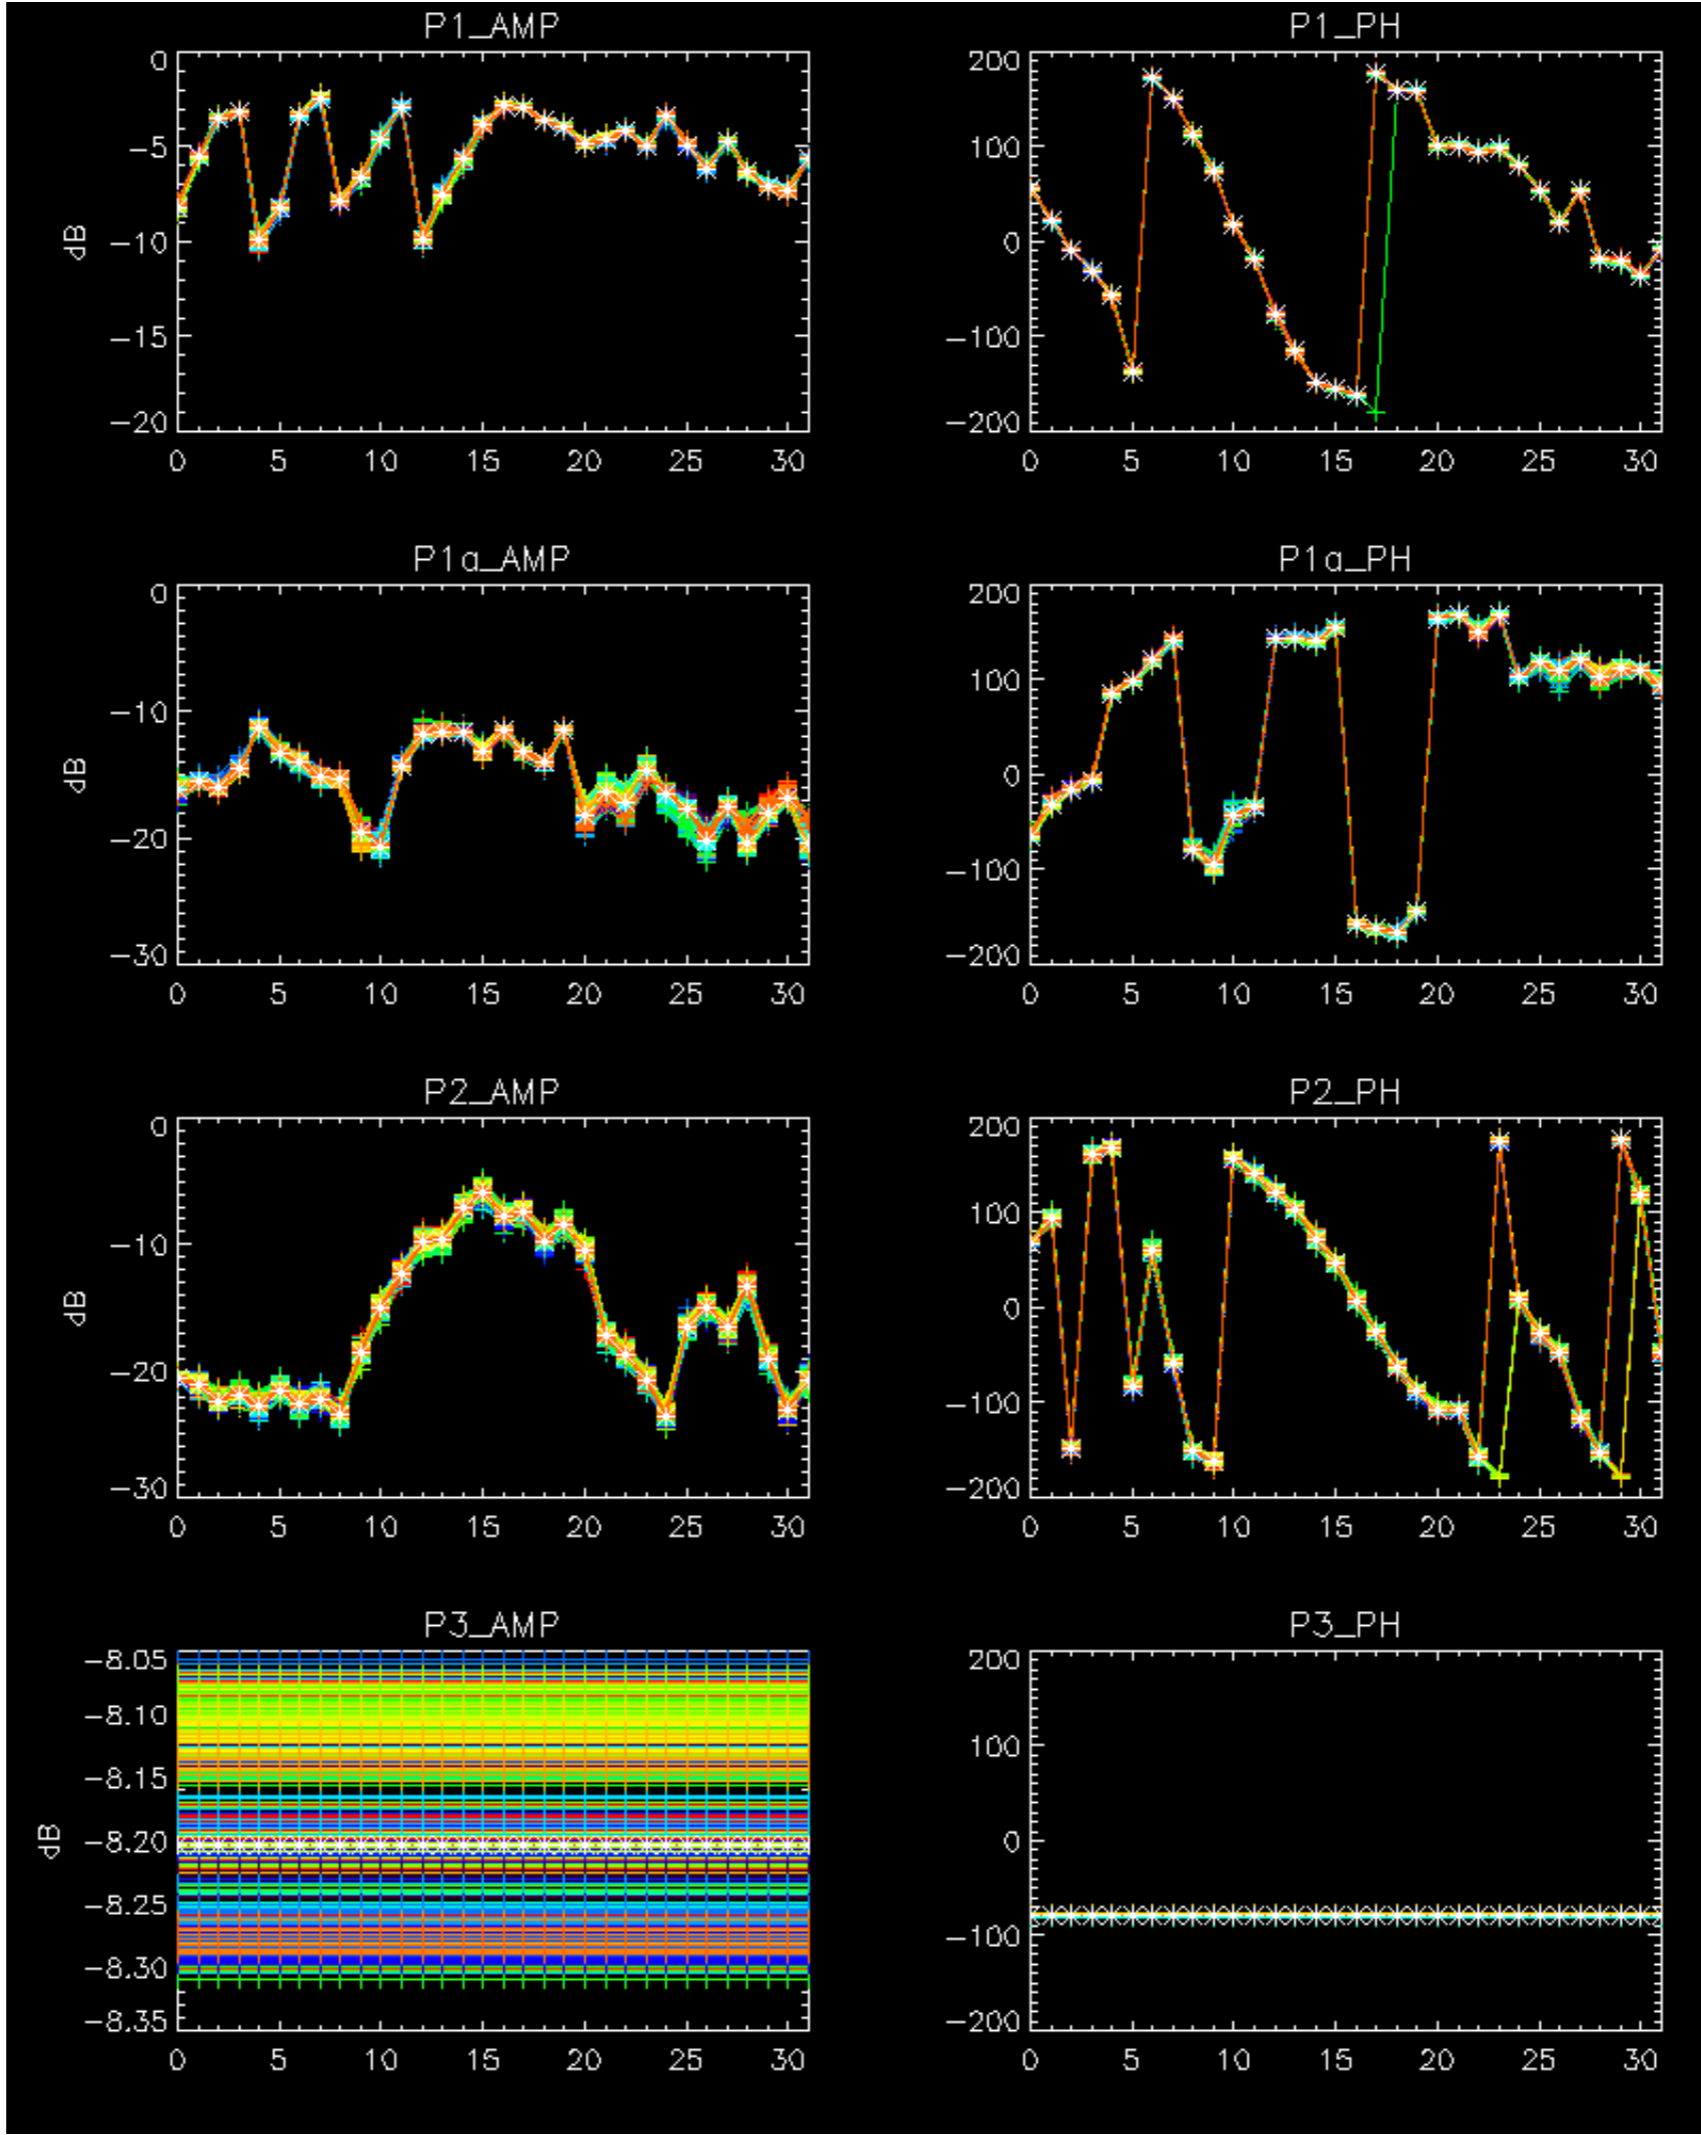


- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.


Doppler 'GM1' 'SS1' ascending

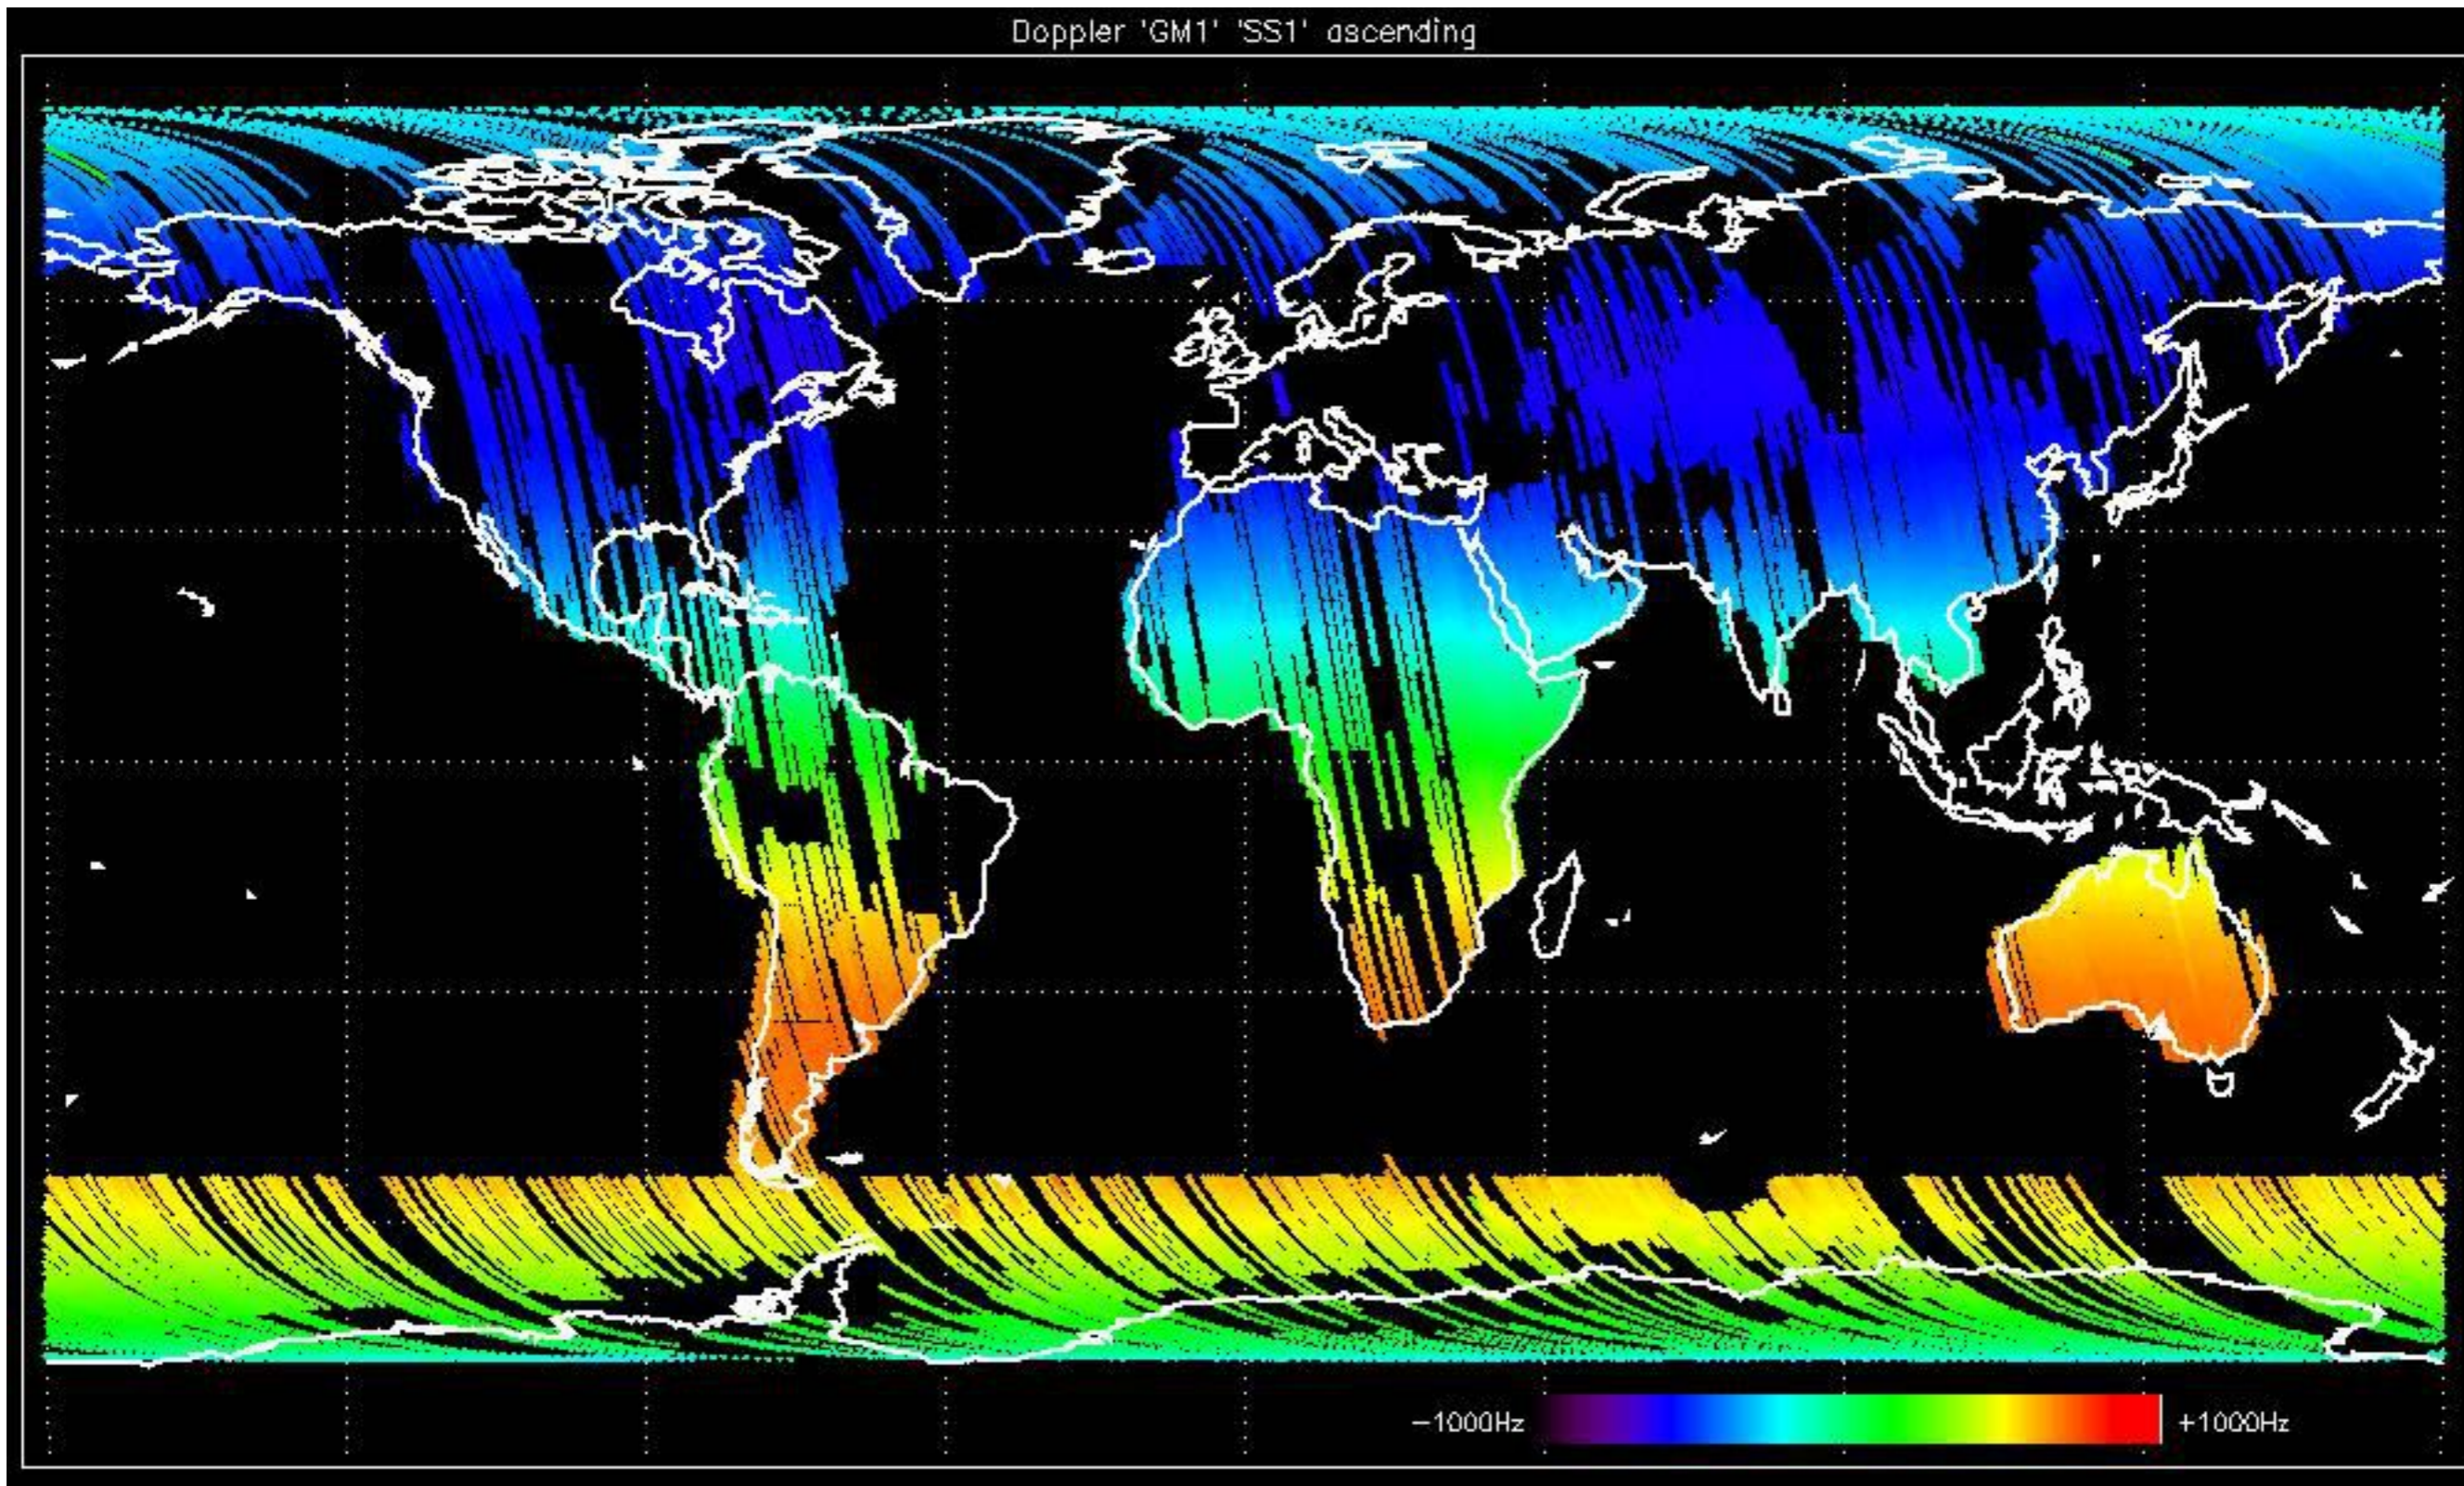


Doppler 'GM1' 'SS1' descending

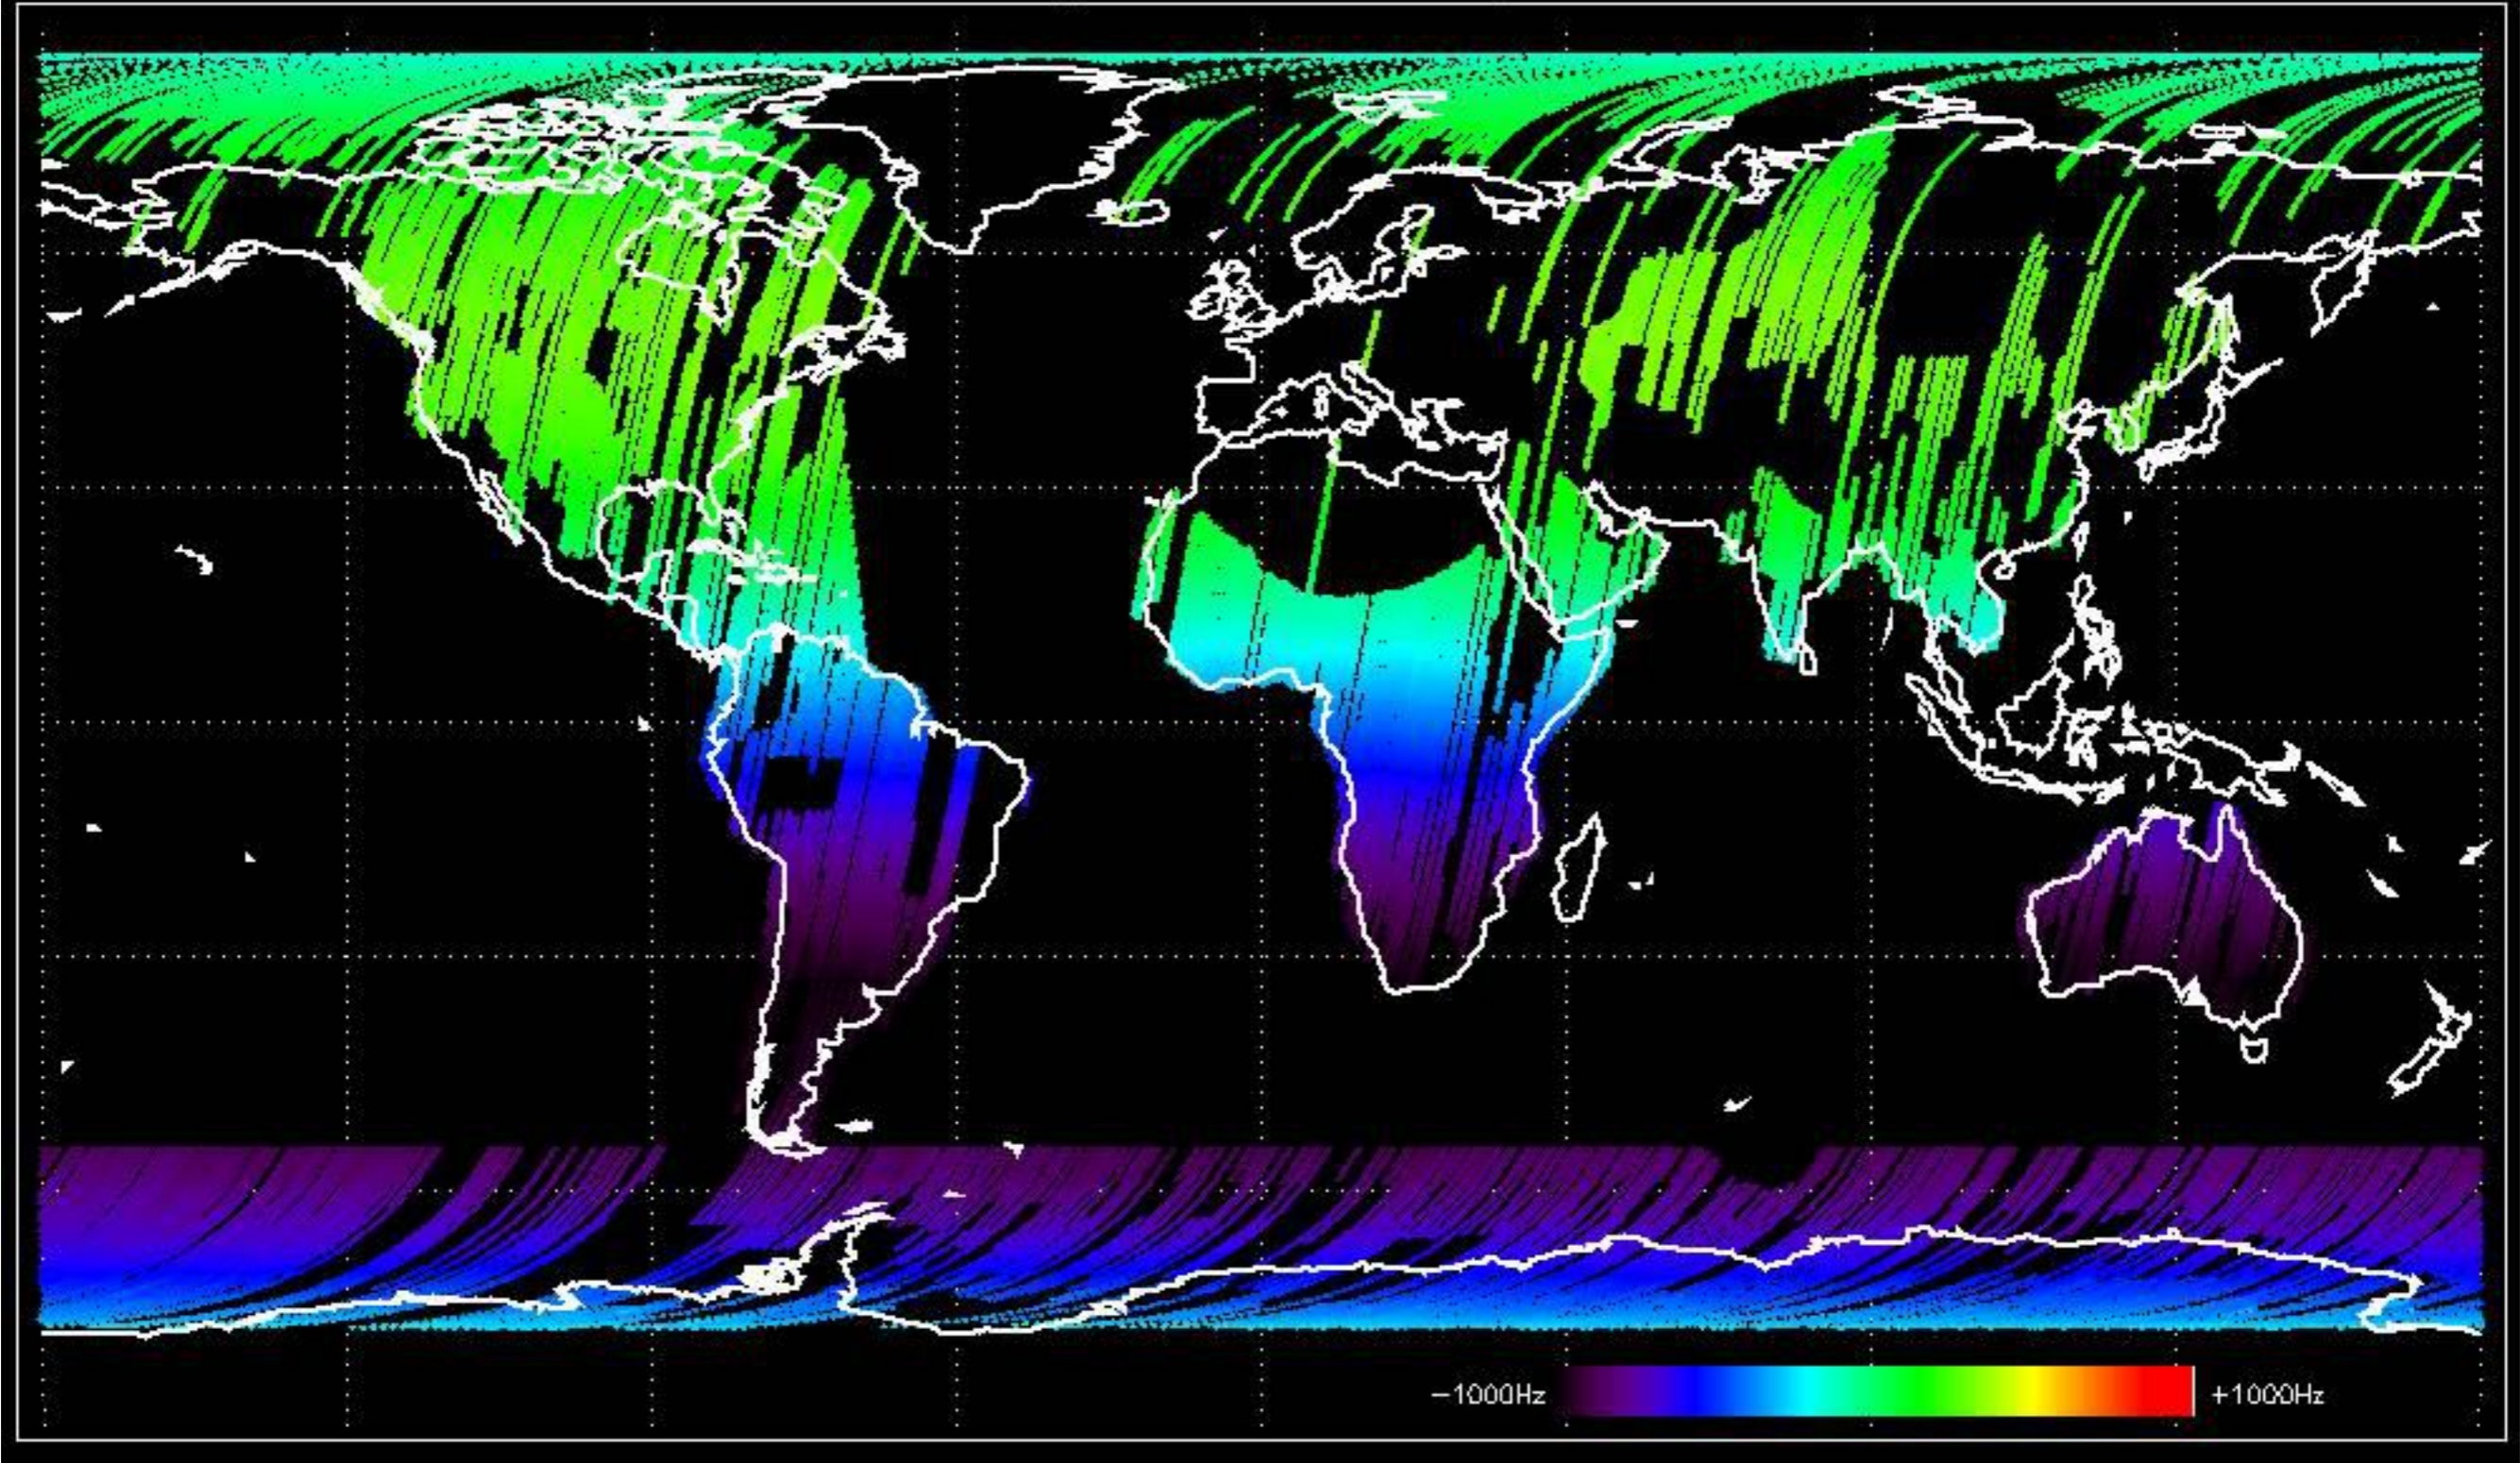




Doppler 'WVS' 'IS2' ascending



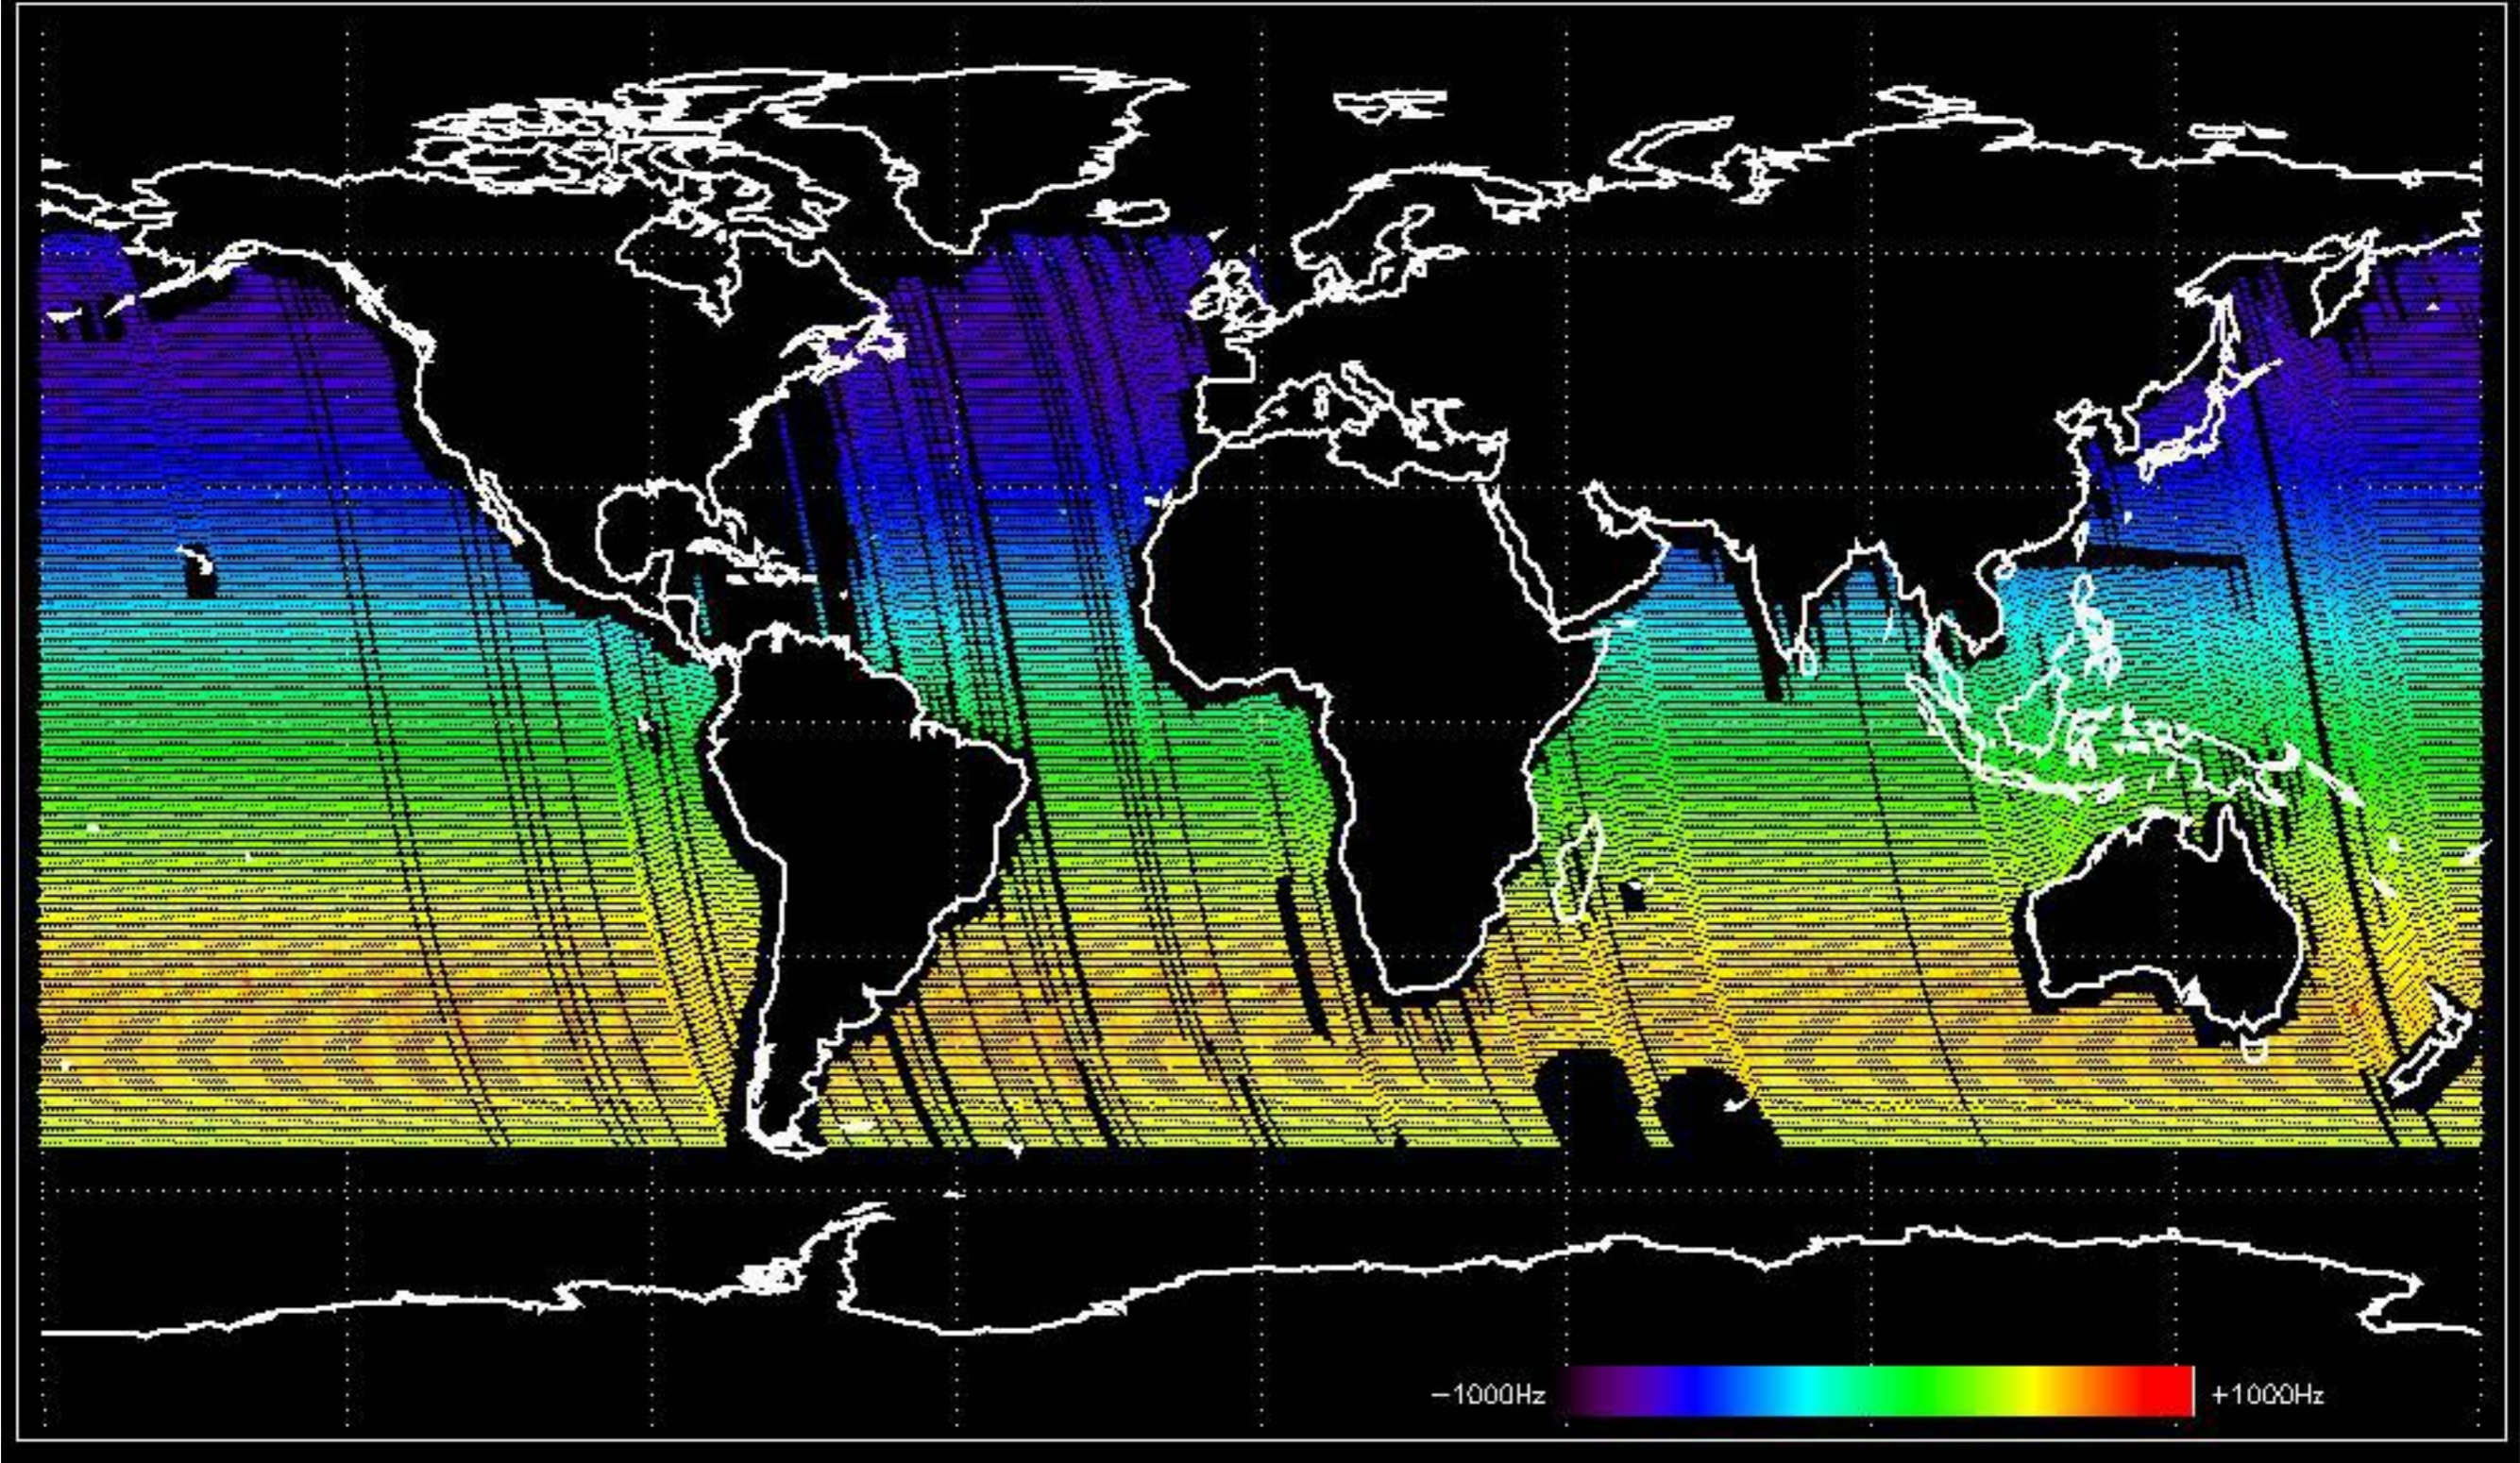


Doppler 'WVS' 'IS2' descending

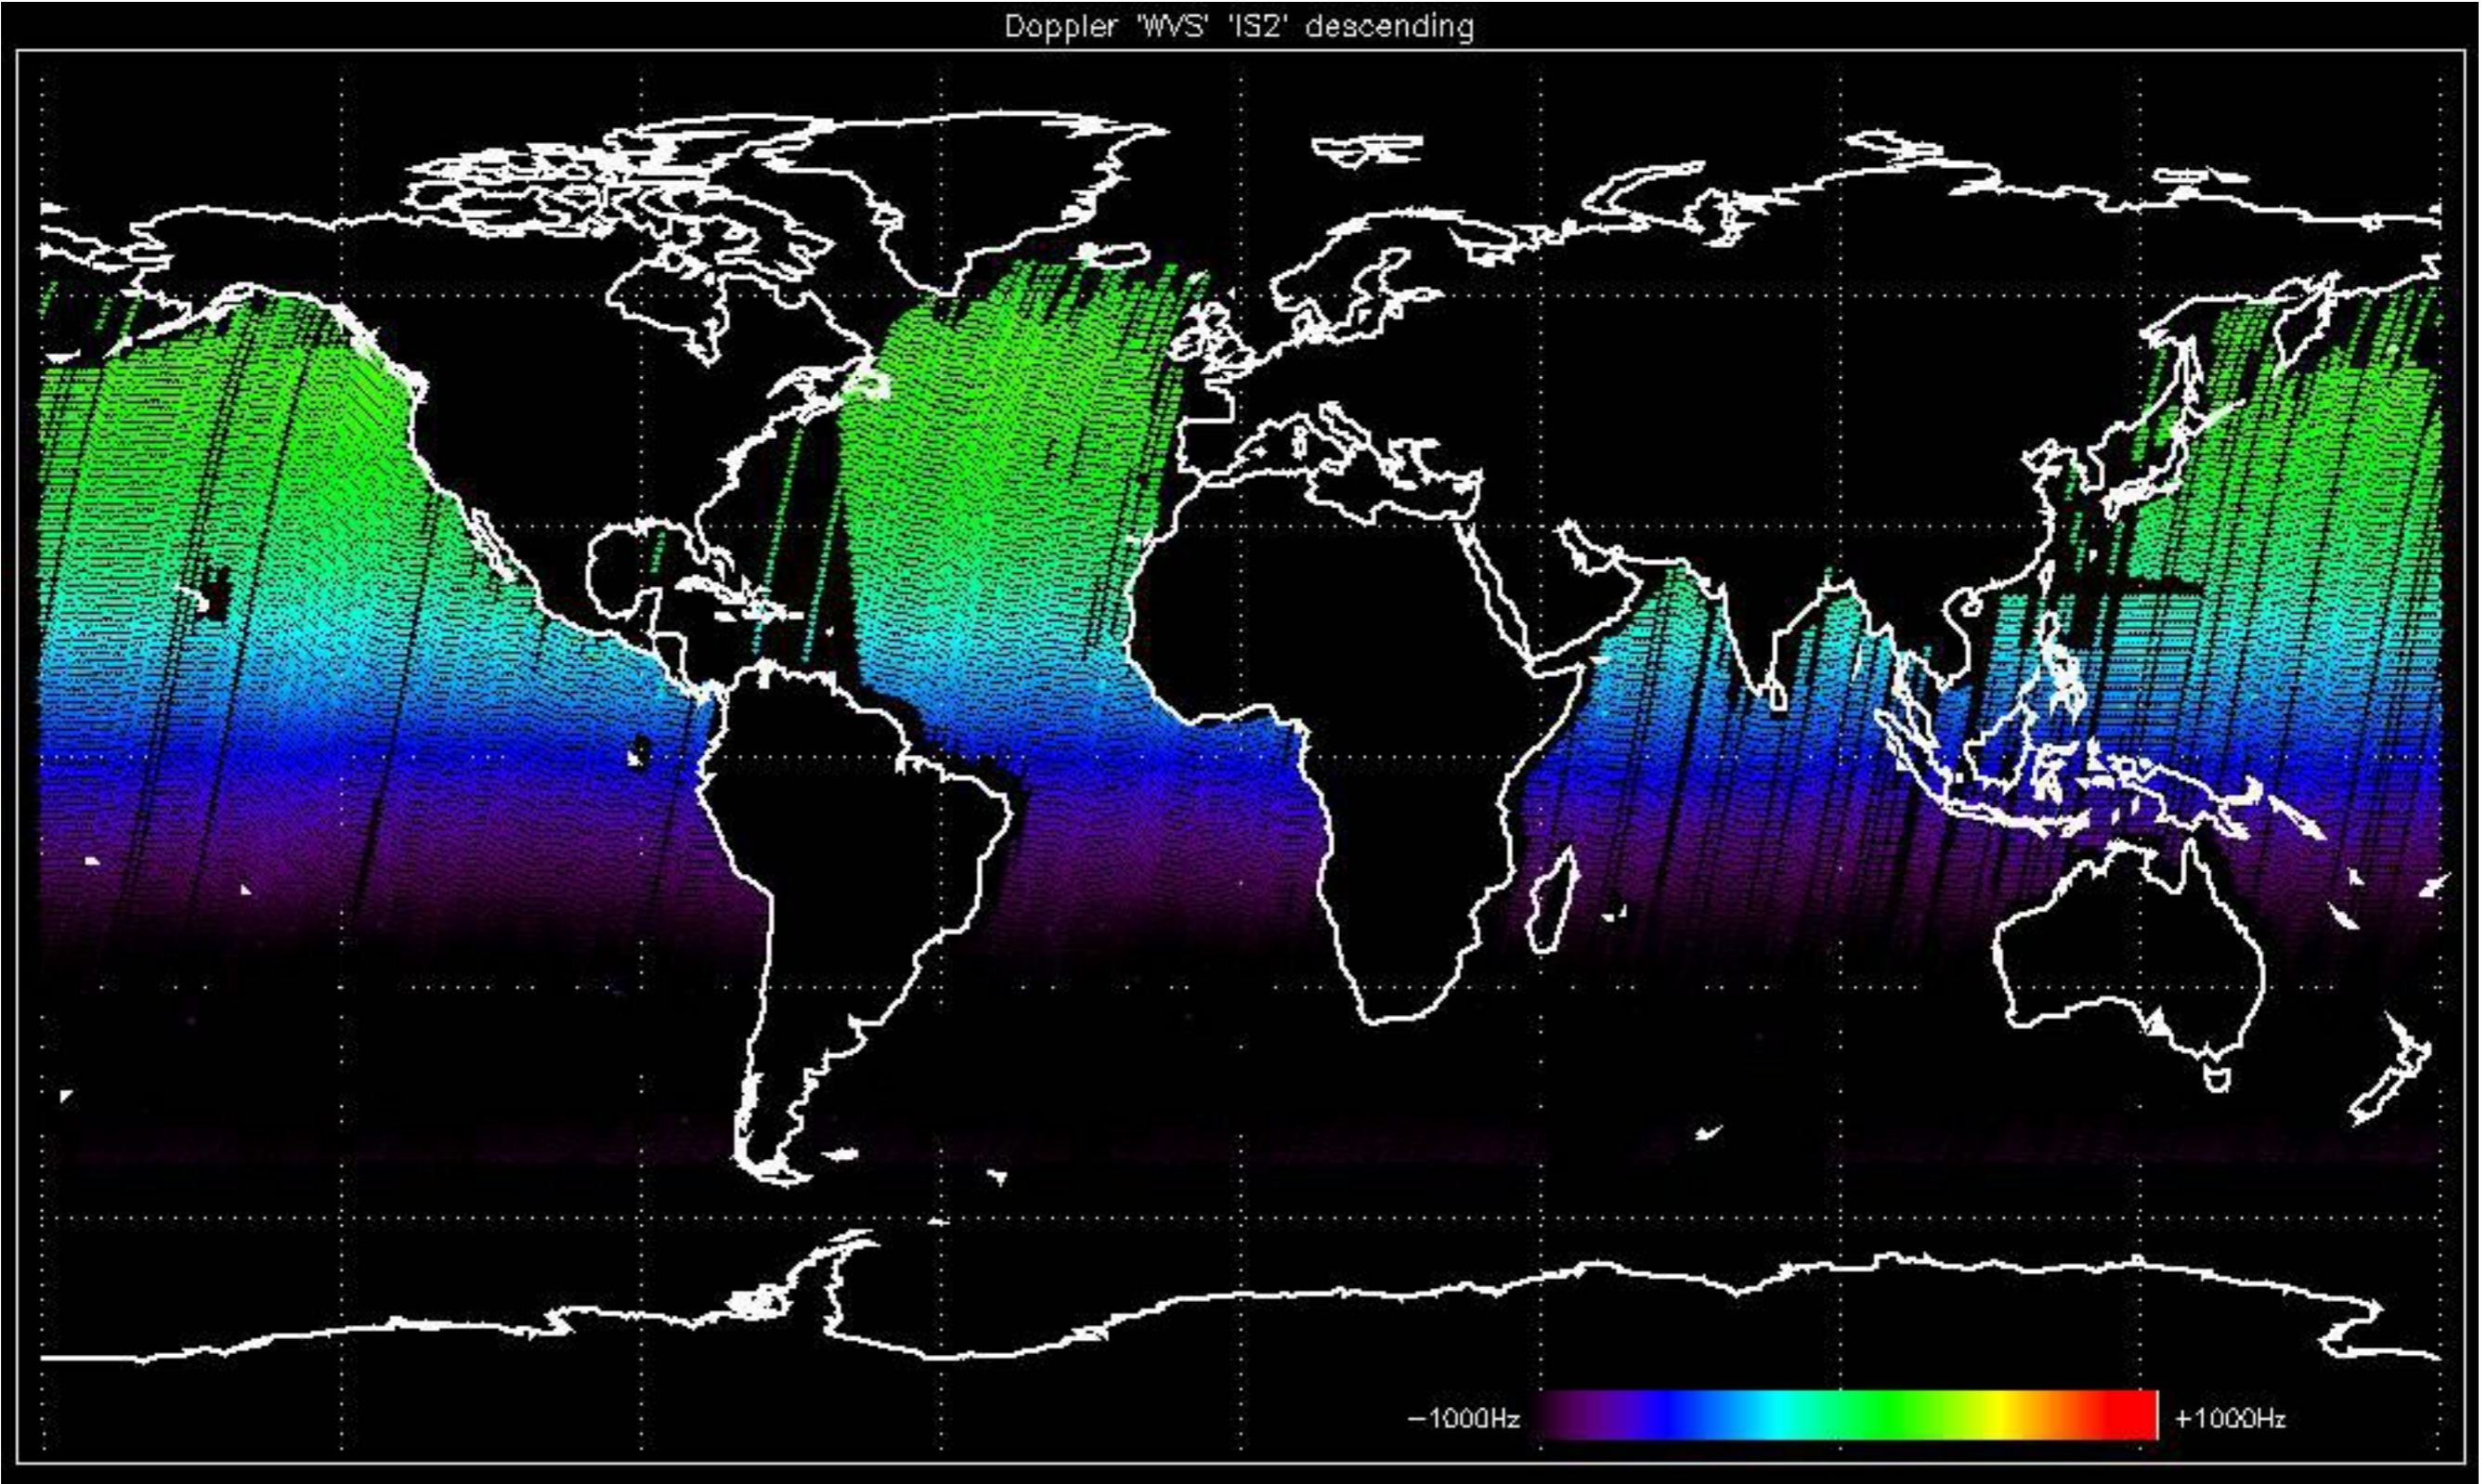


GM1 mode doppler

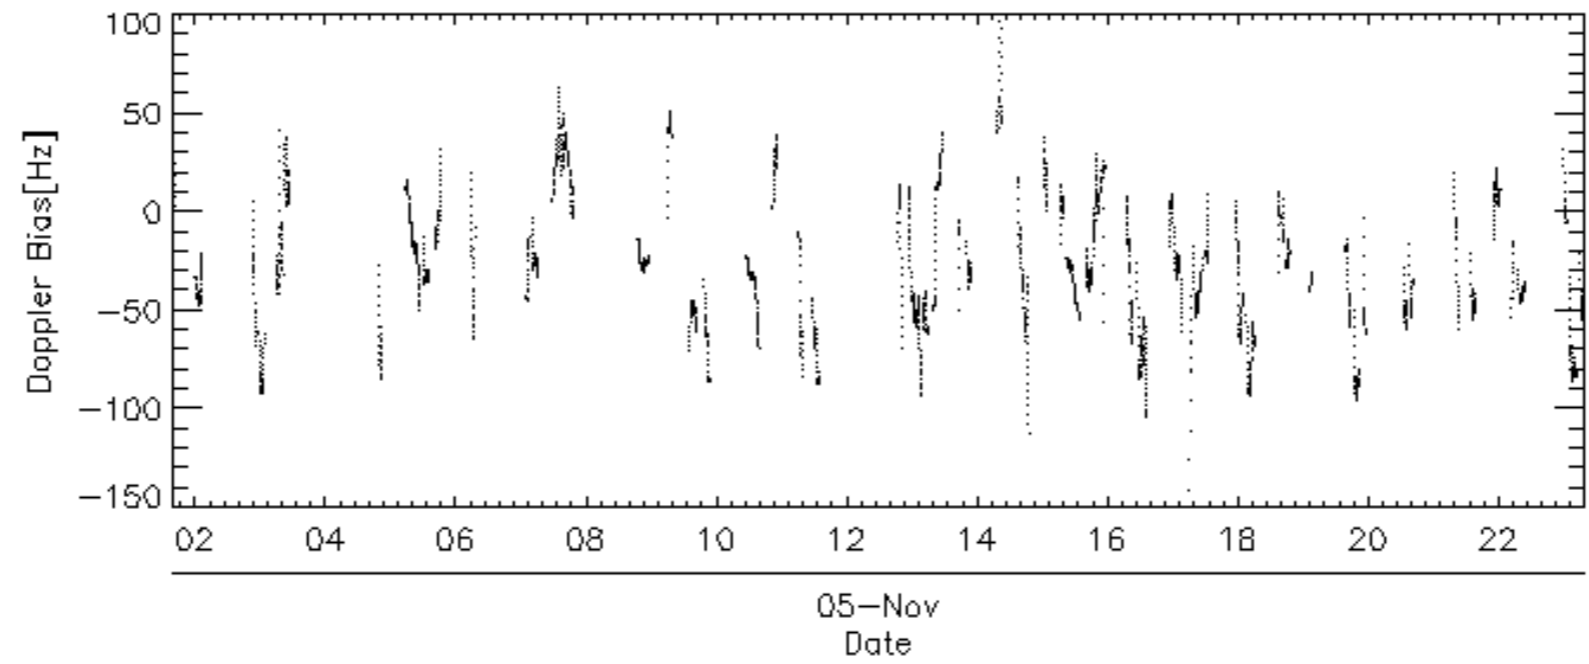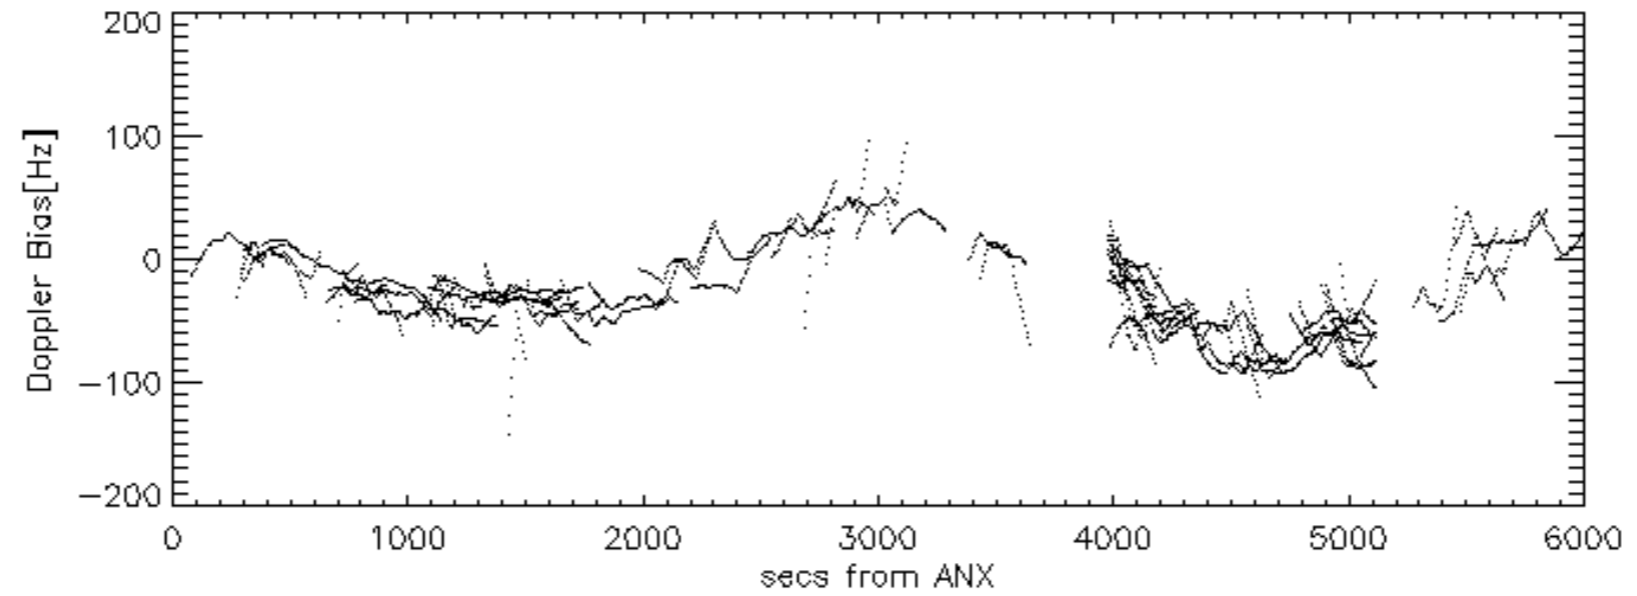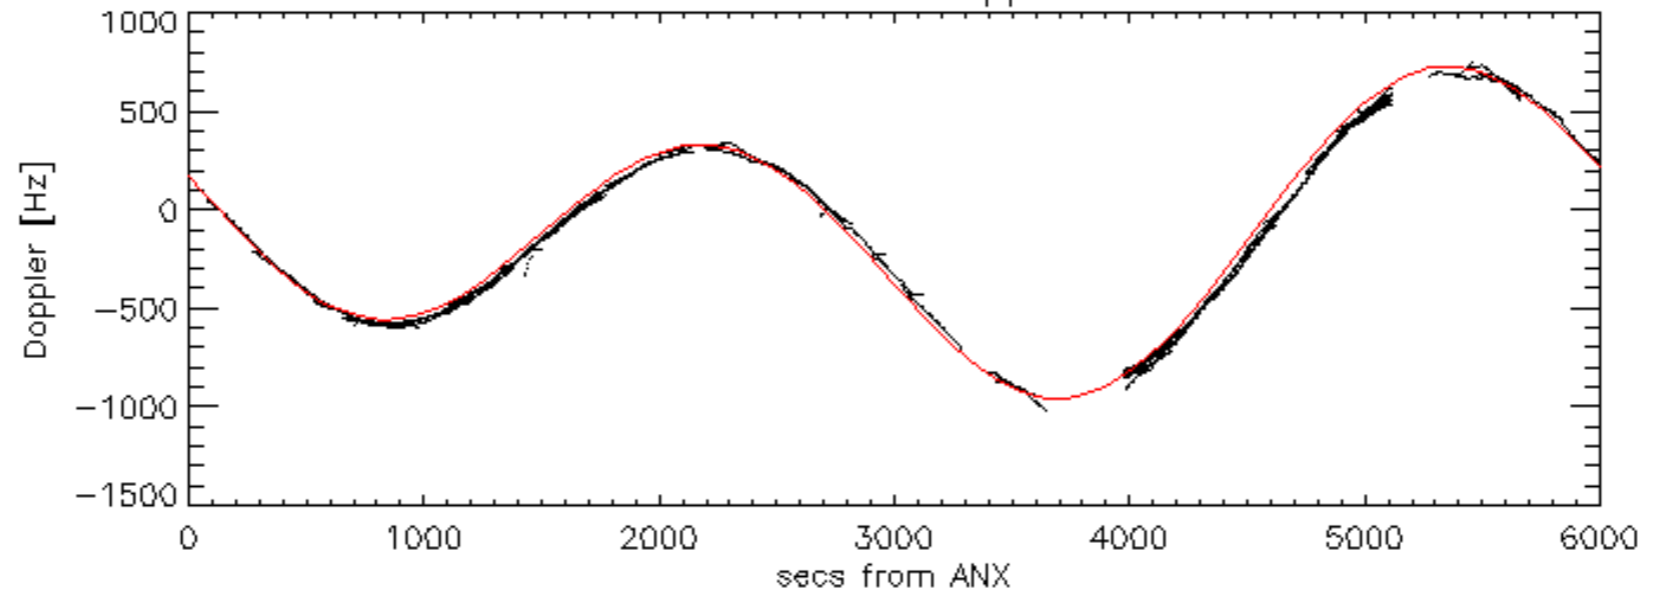


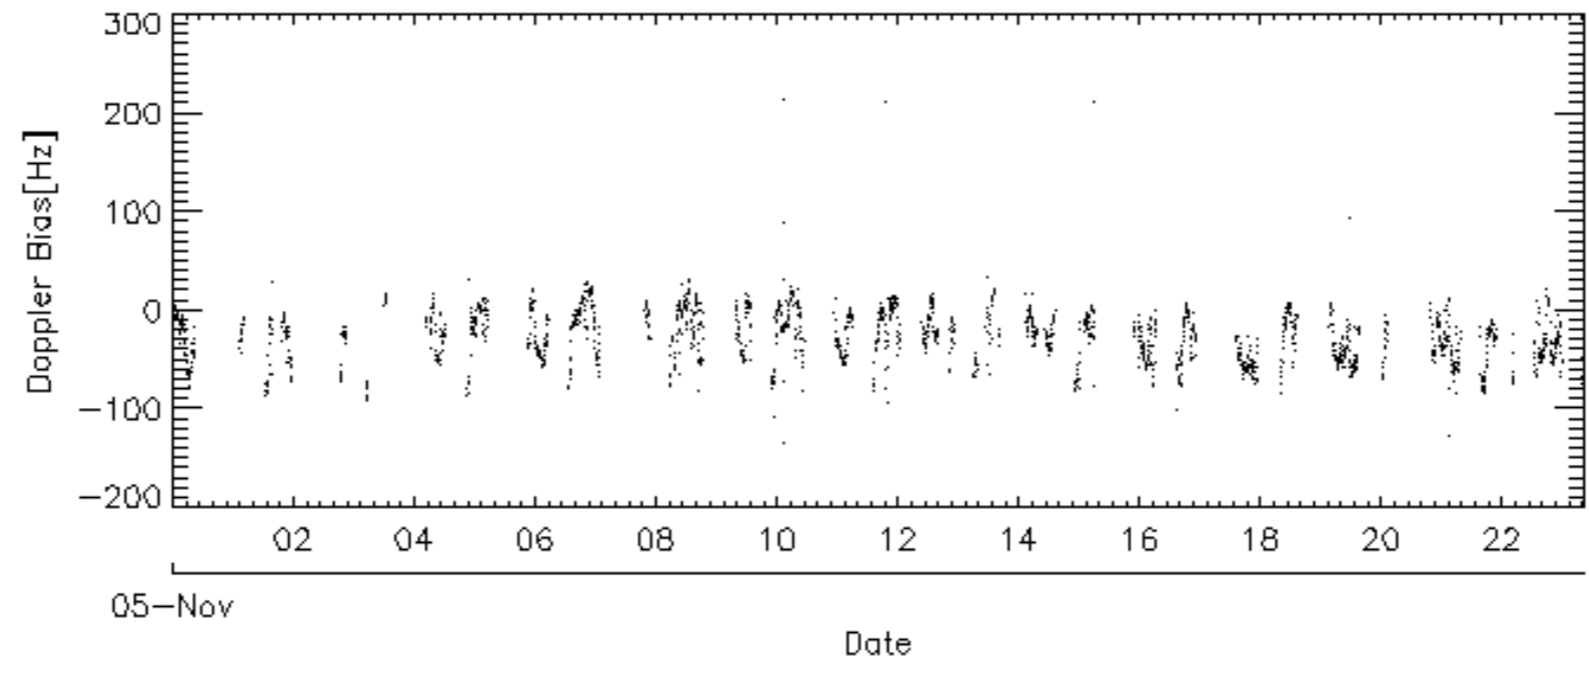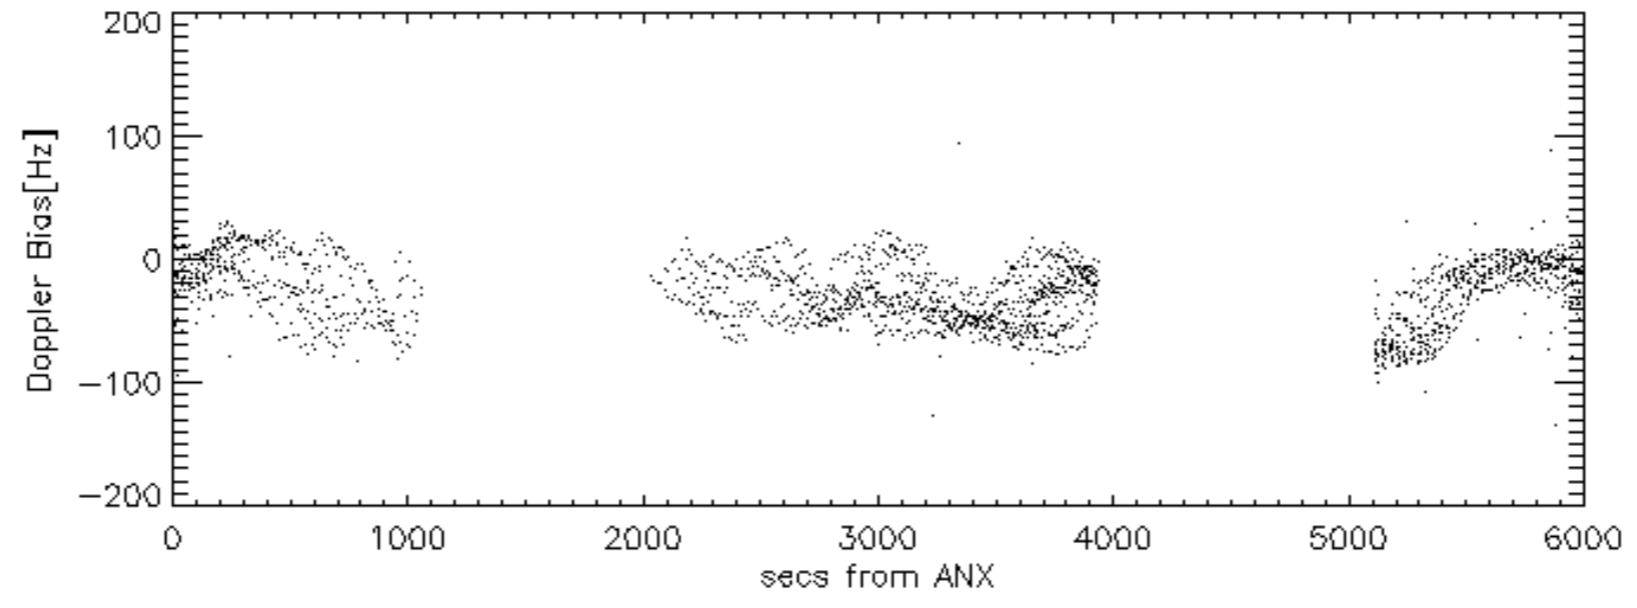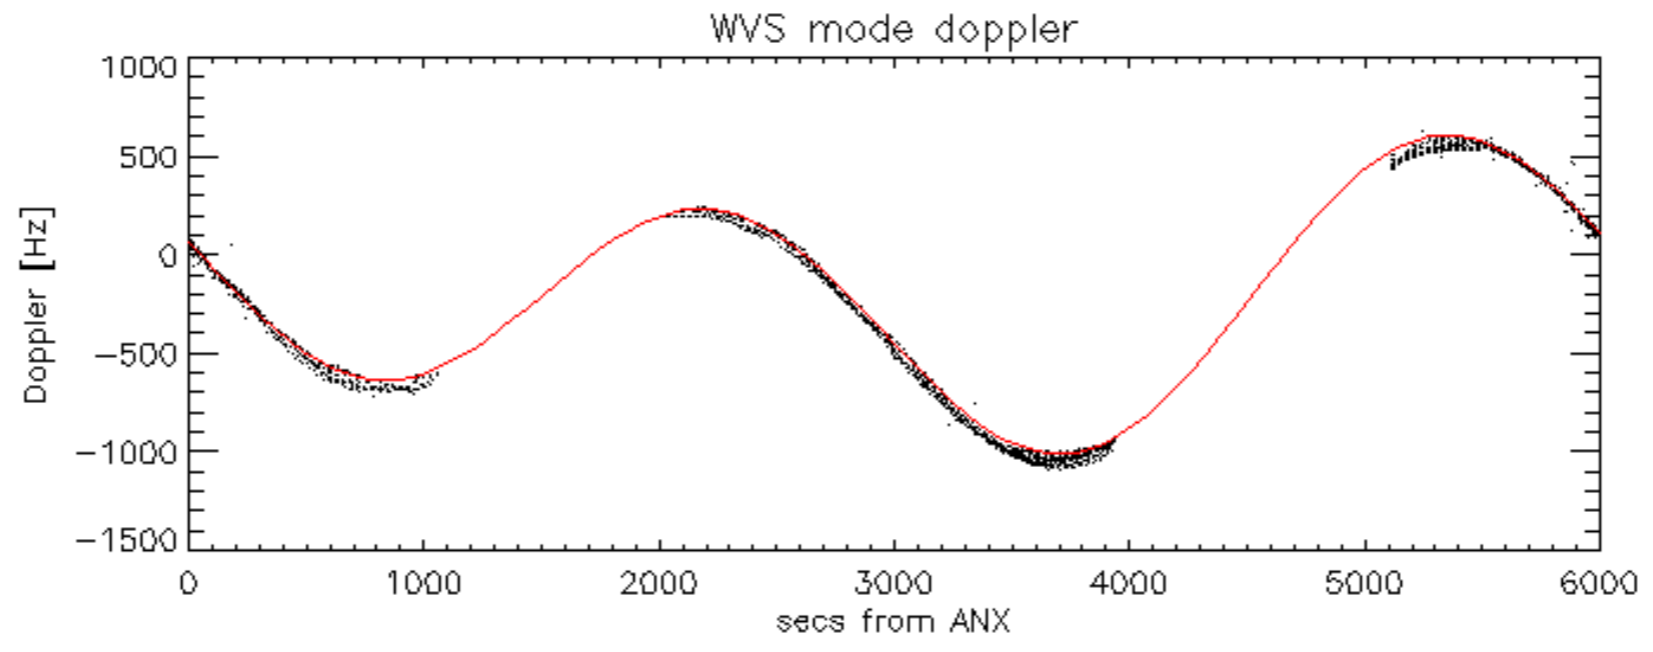


Doppler difference, estimated-predicted 'GM1' 'SS1' ascending -error mean of -31.885646 Hz

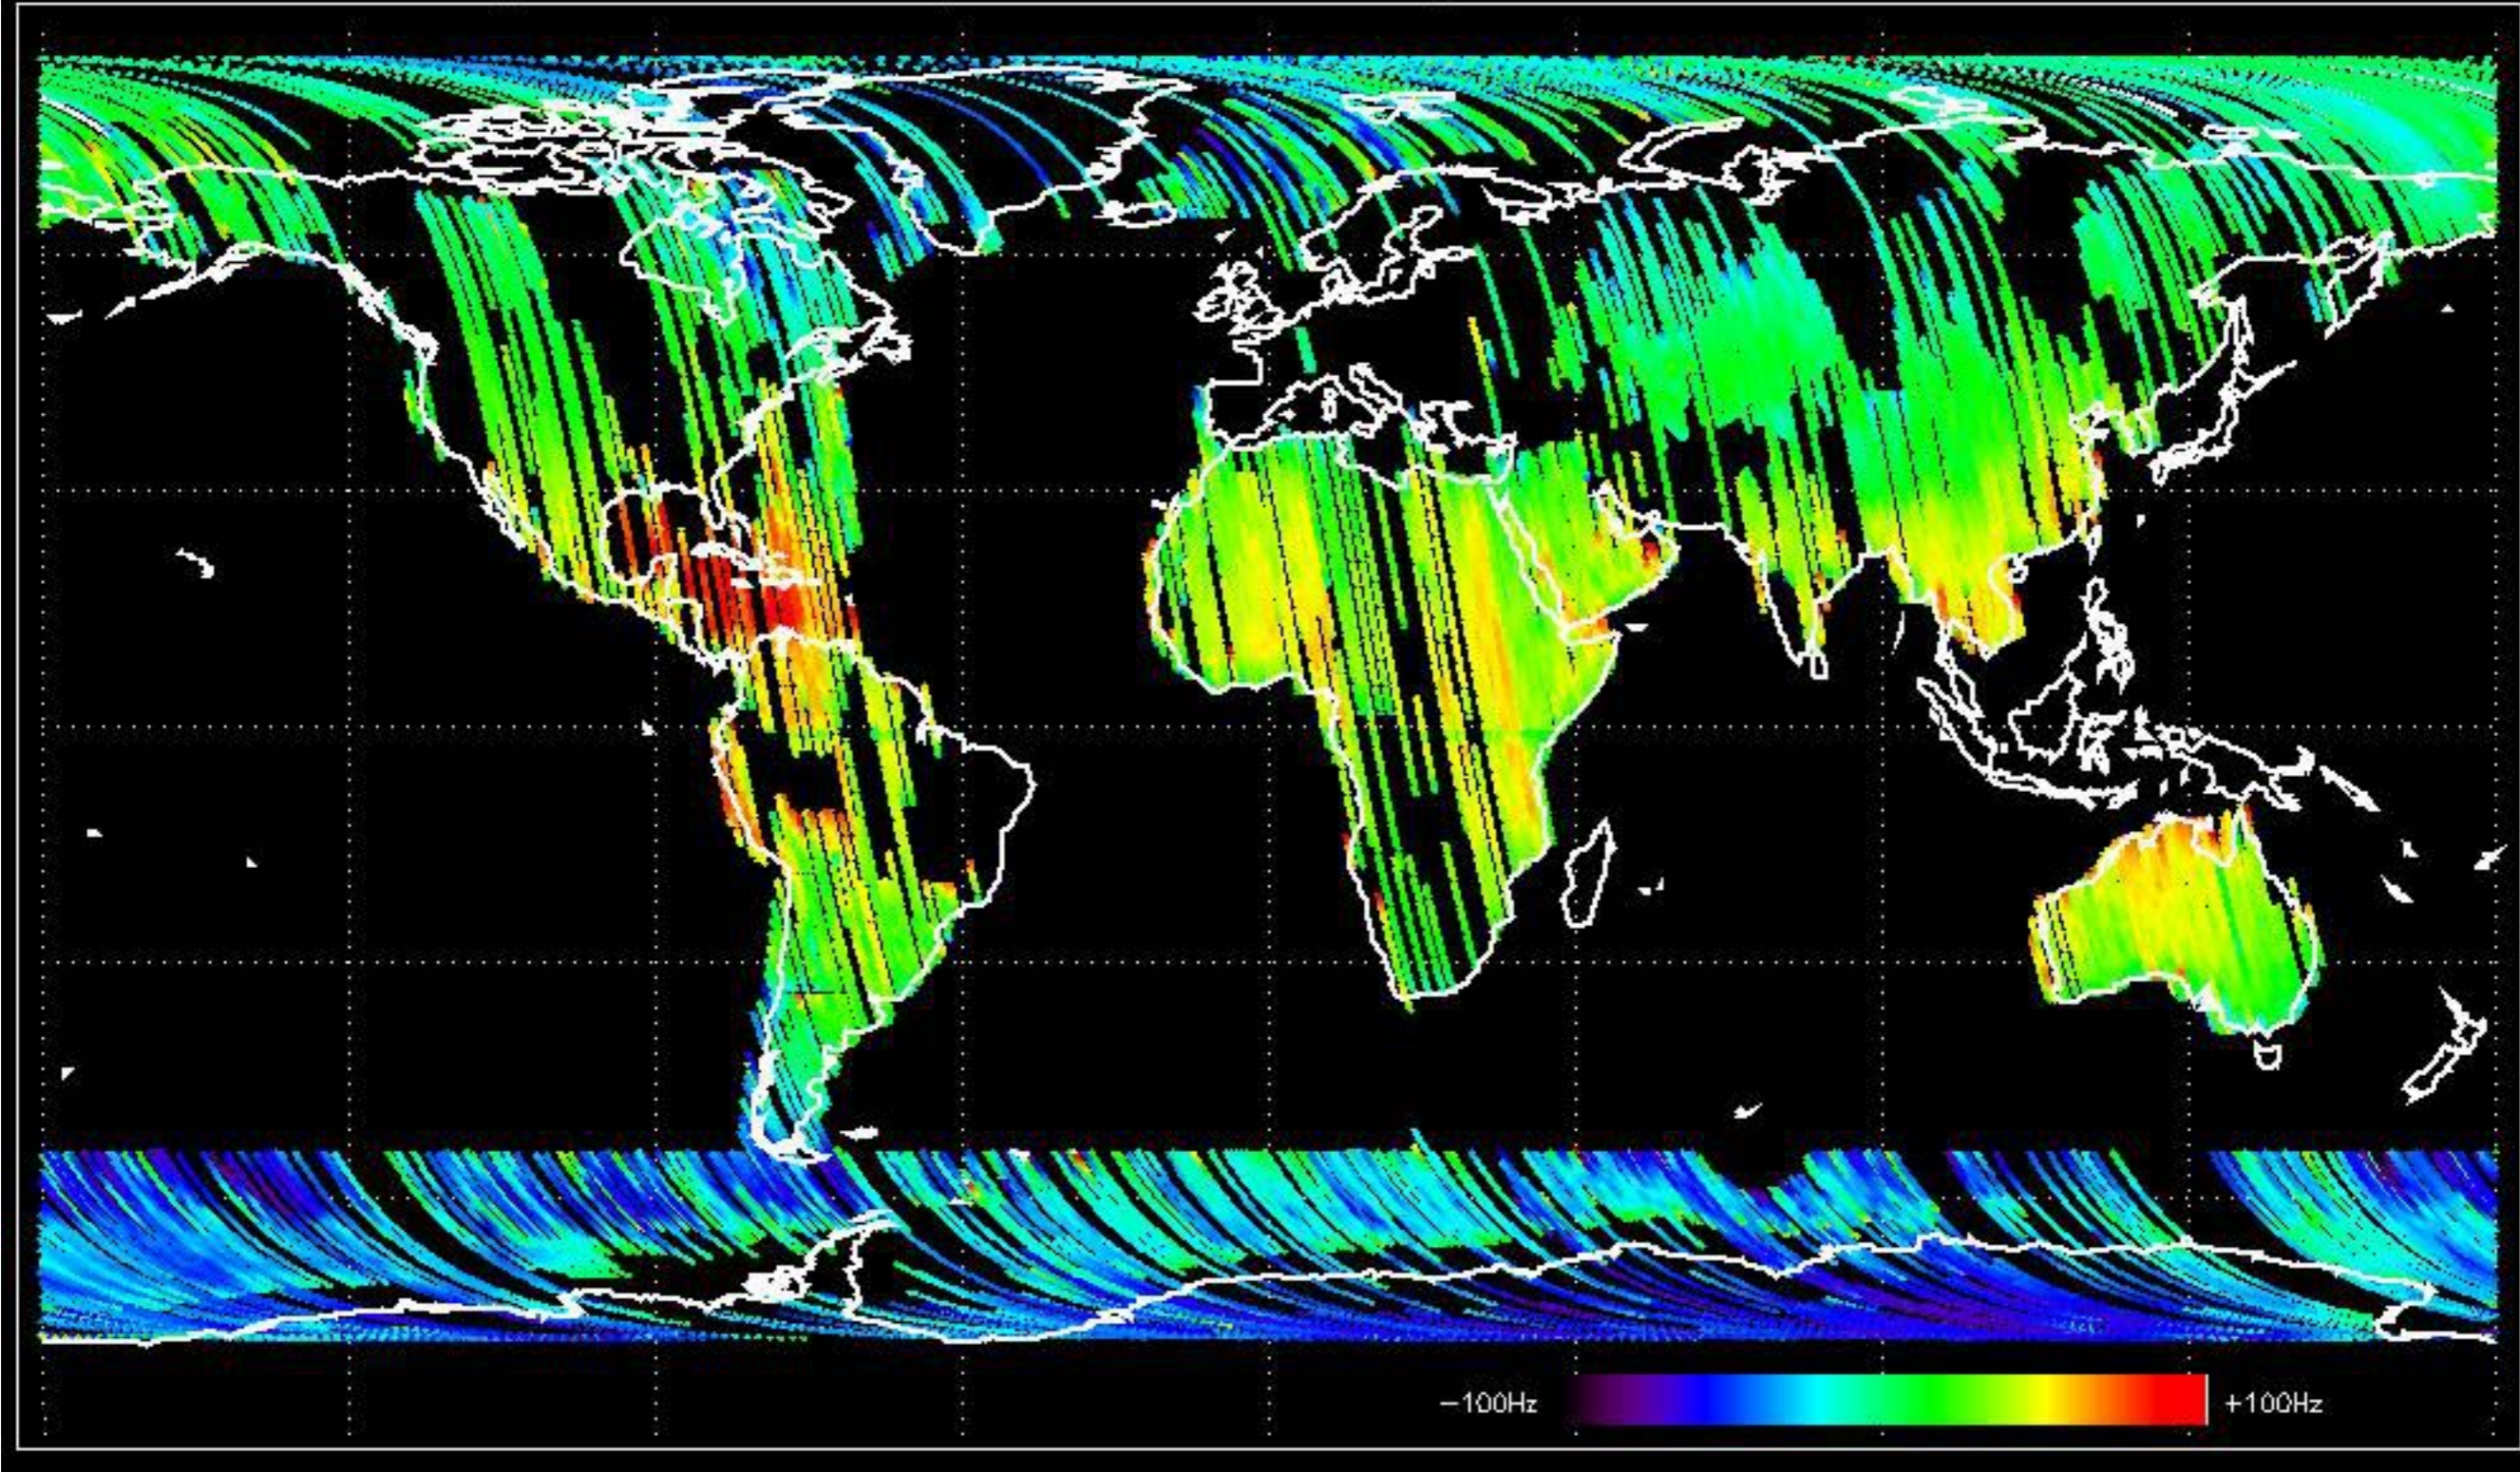


Doppler difference, estimated-predicted 'GM1' 'SS1' descending -error mean of -23.714564 Hz

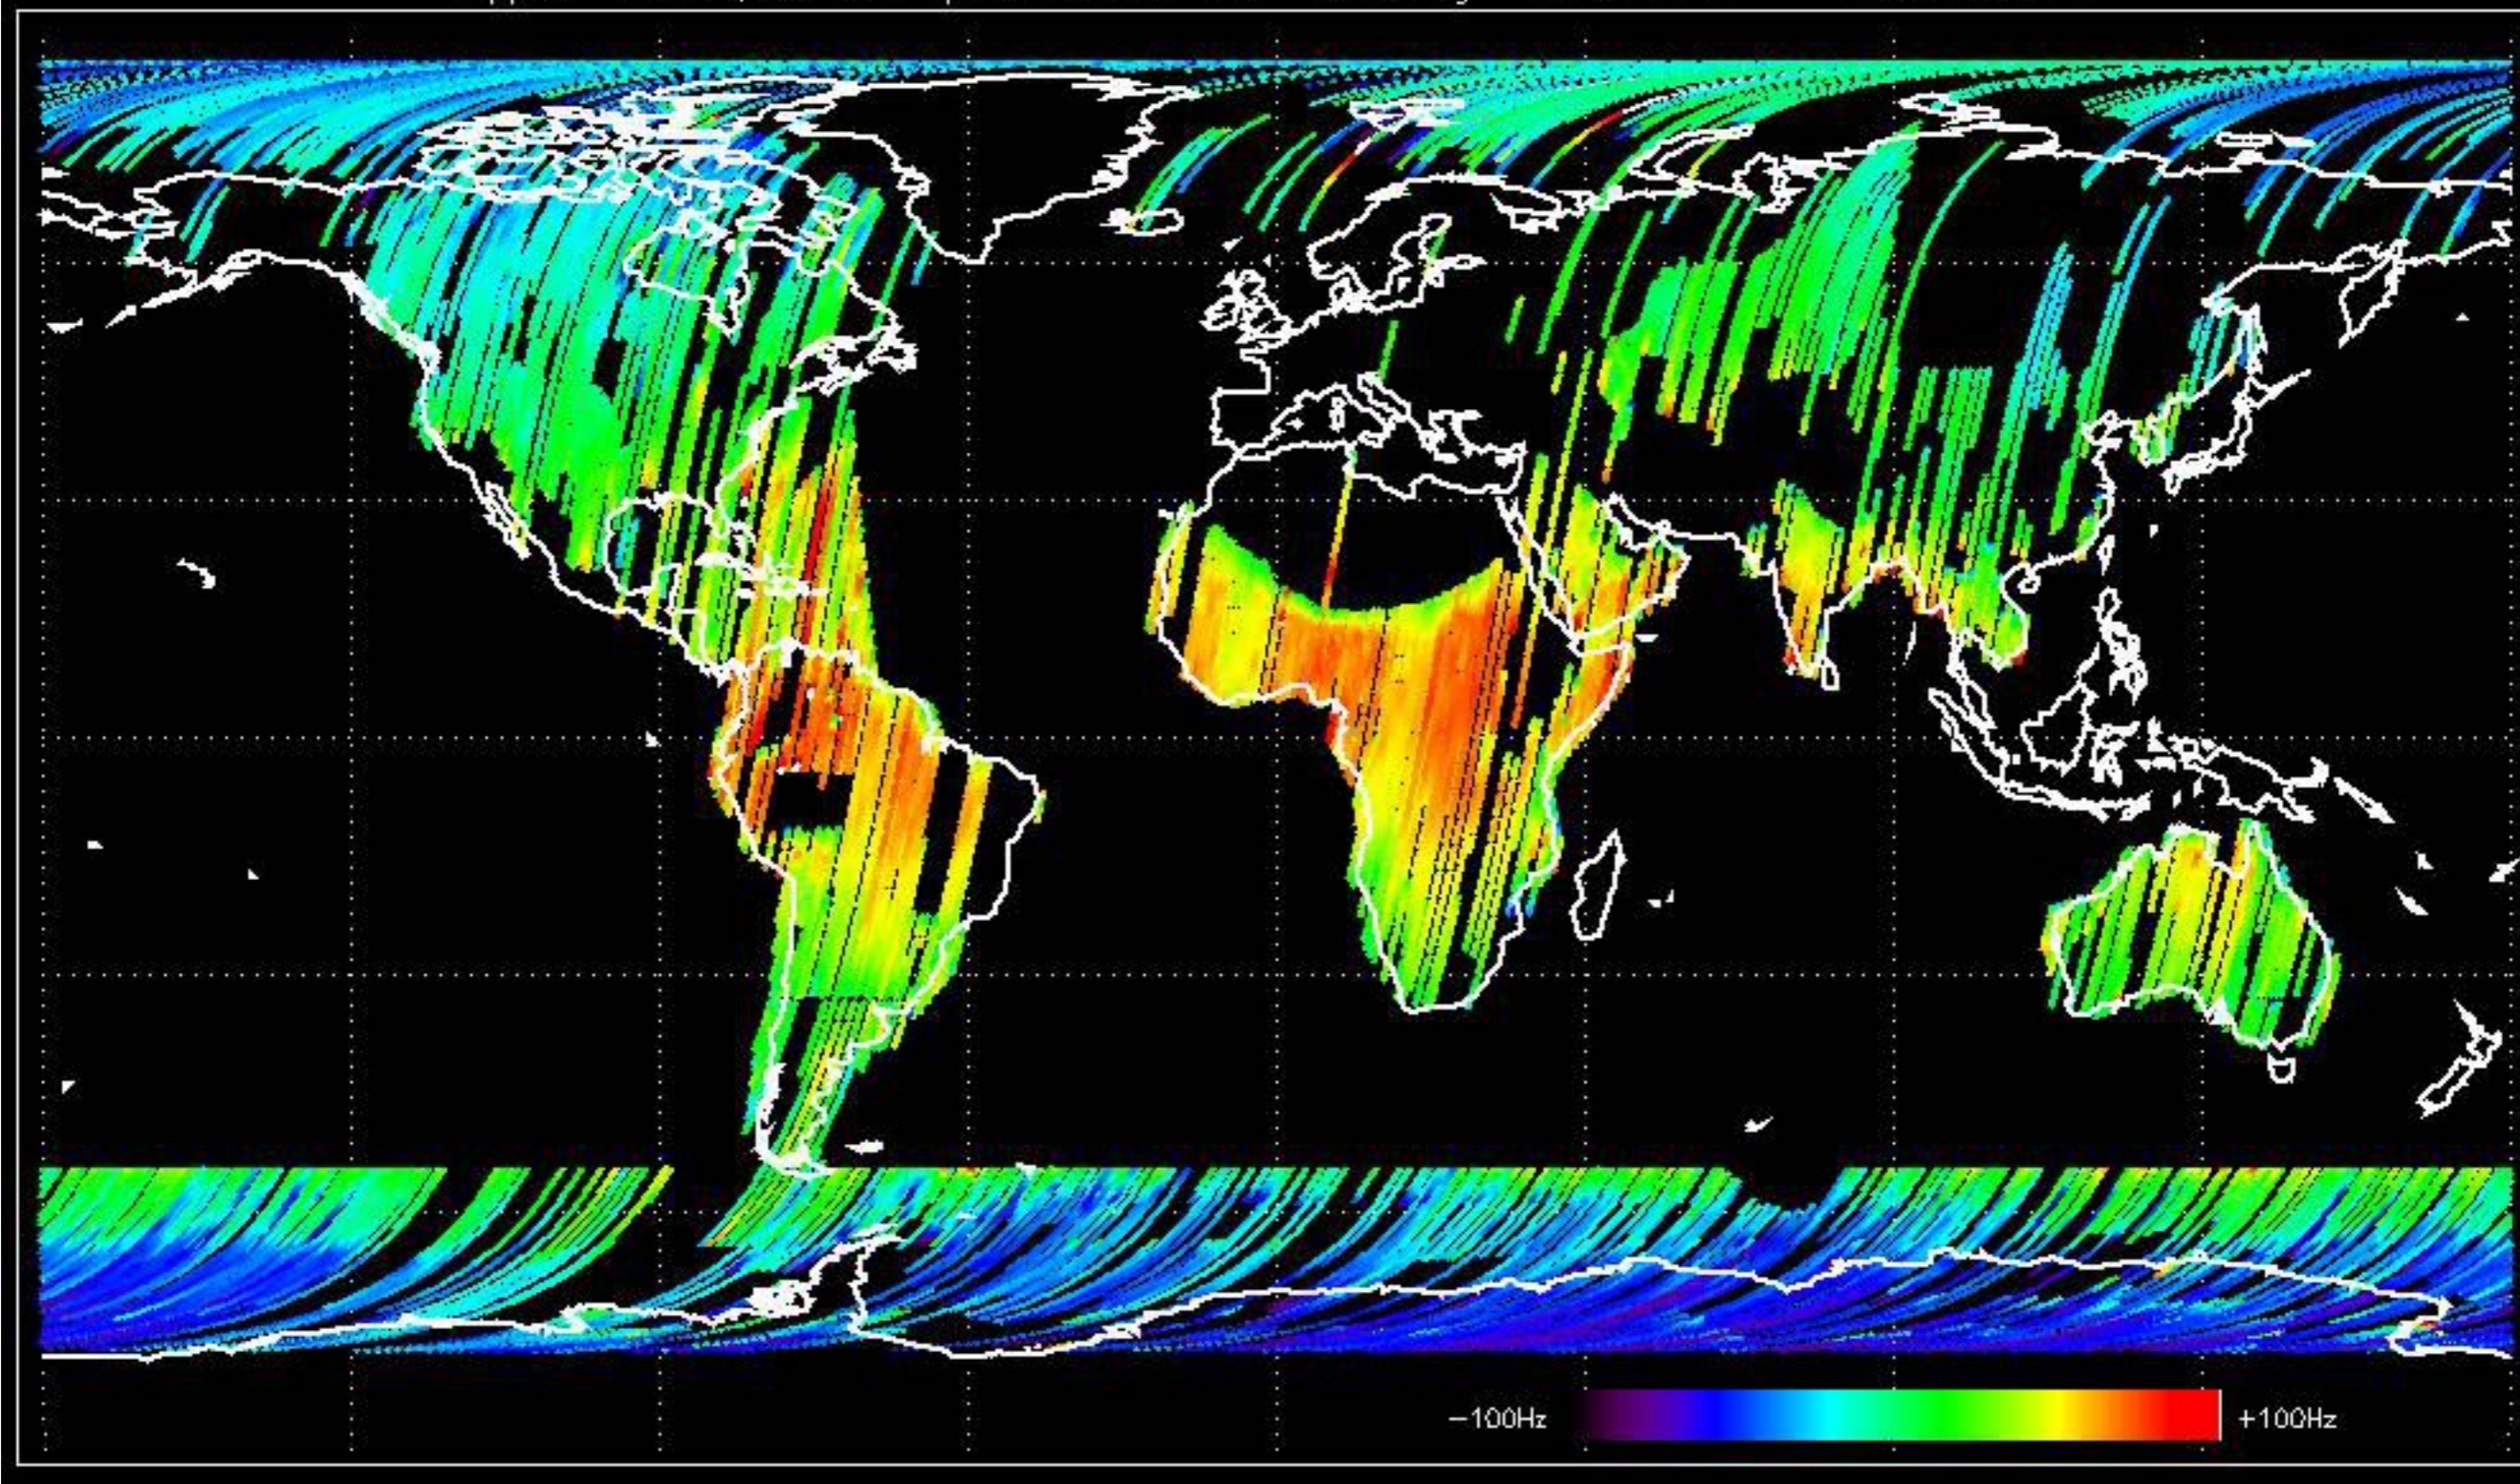

Doppler difference, estimated-predicted 'WVS' 'IS2' ascending -error mean of -26.965931 Hz

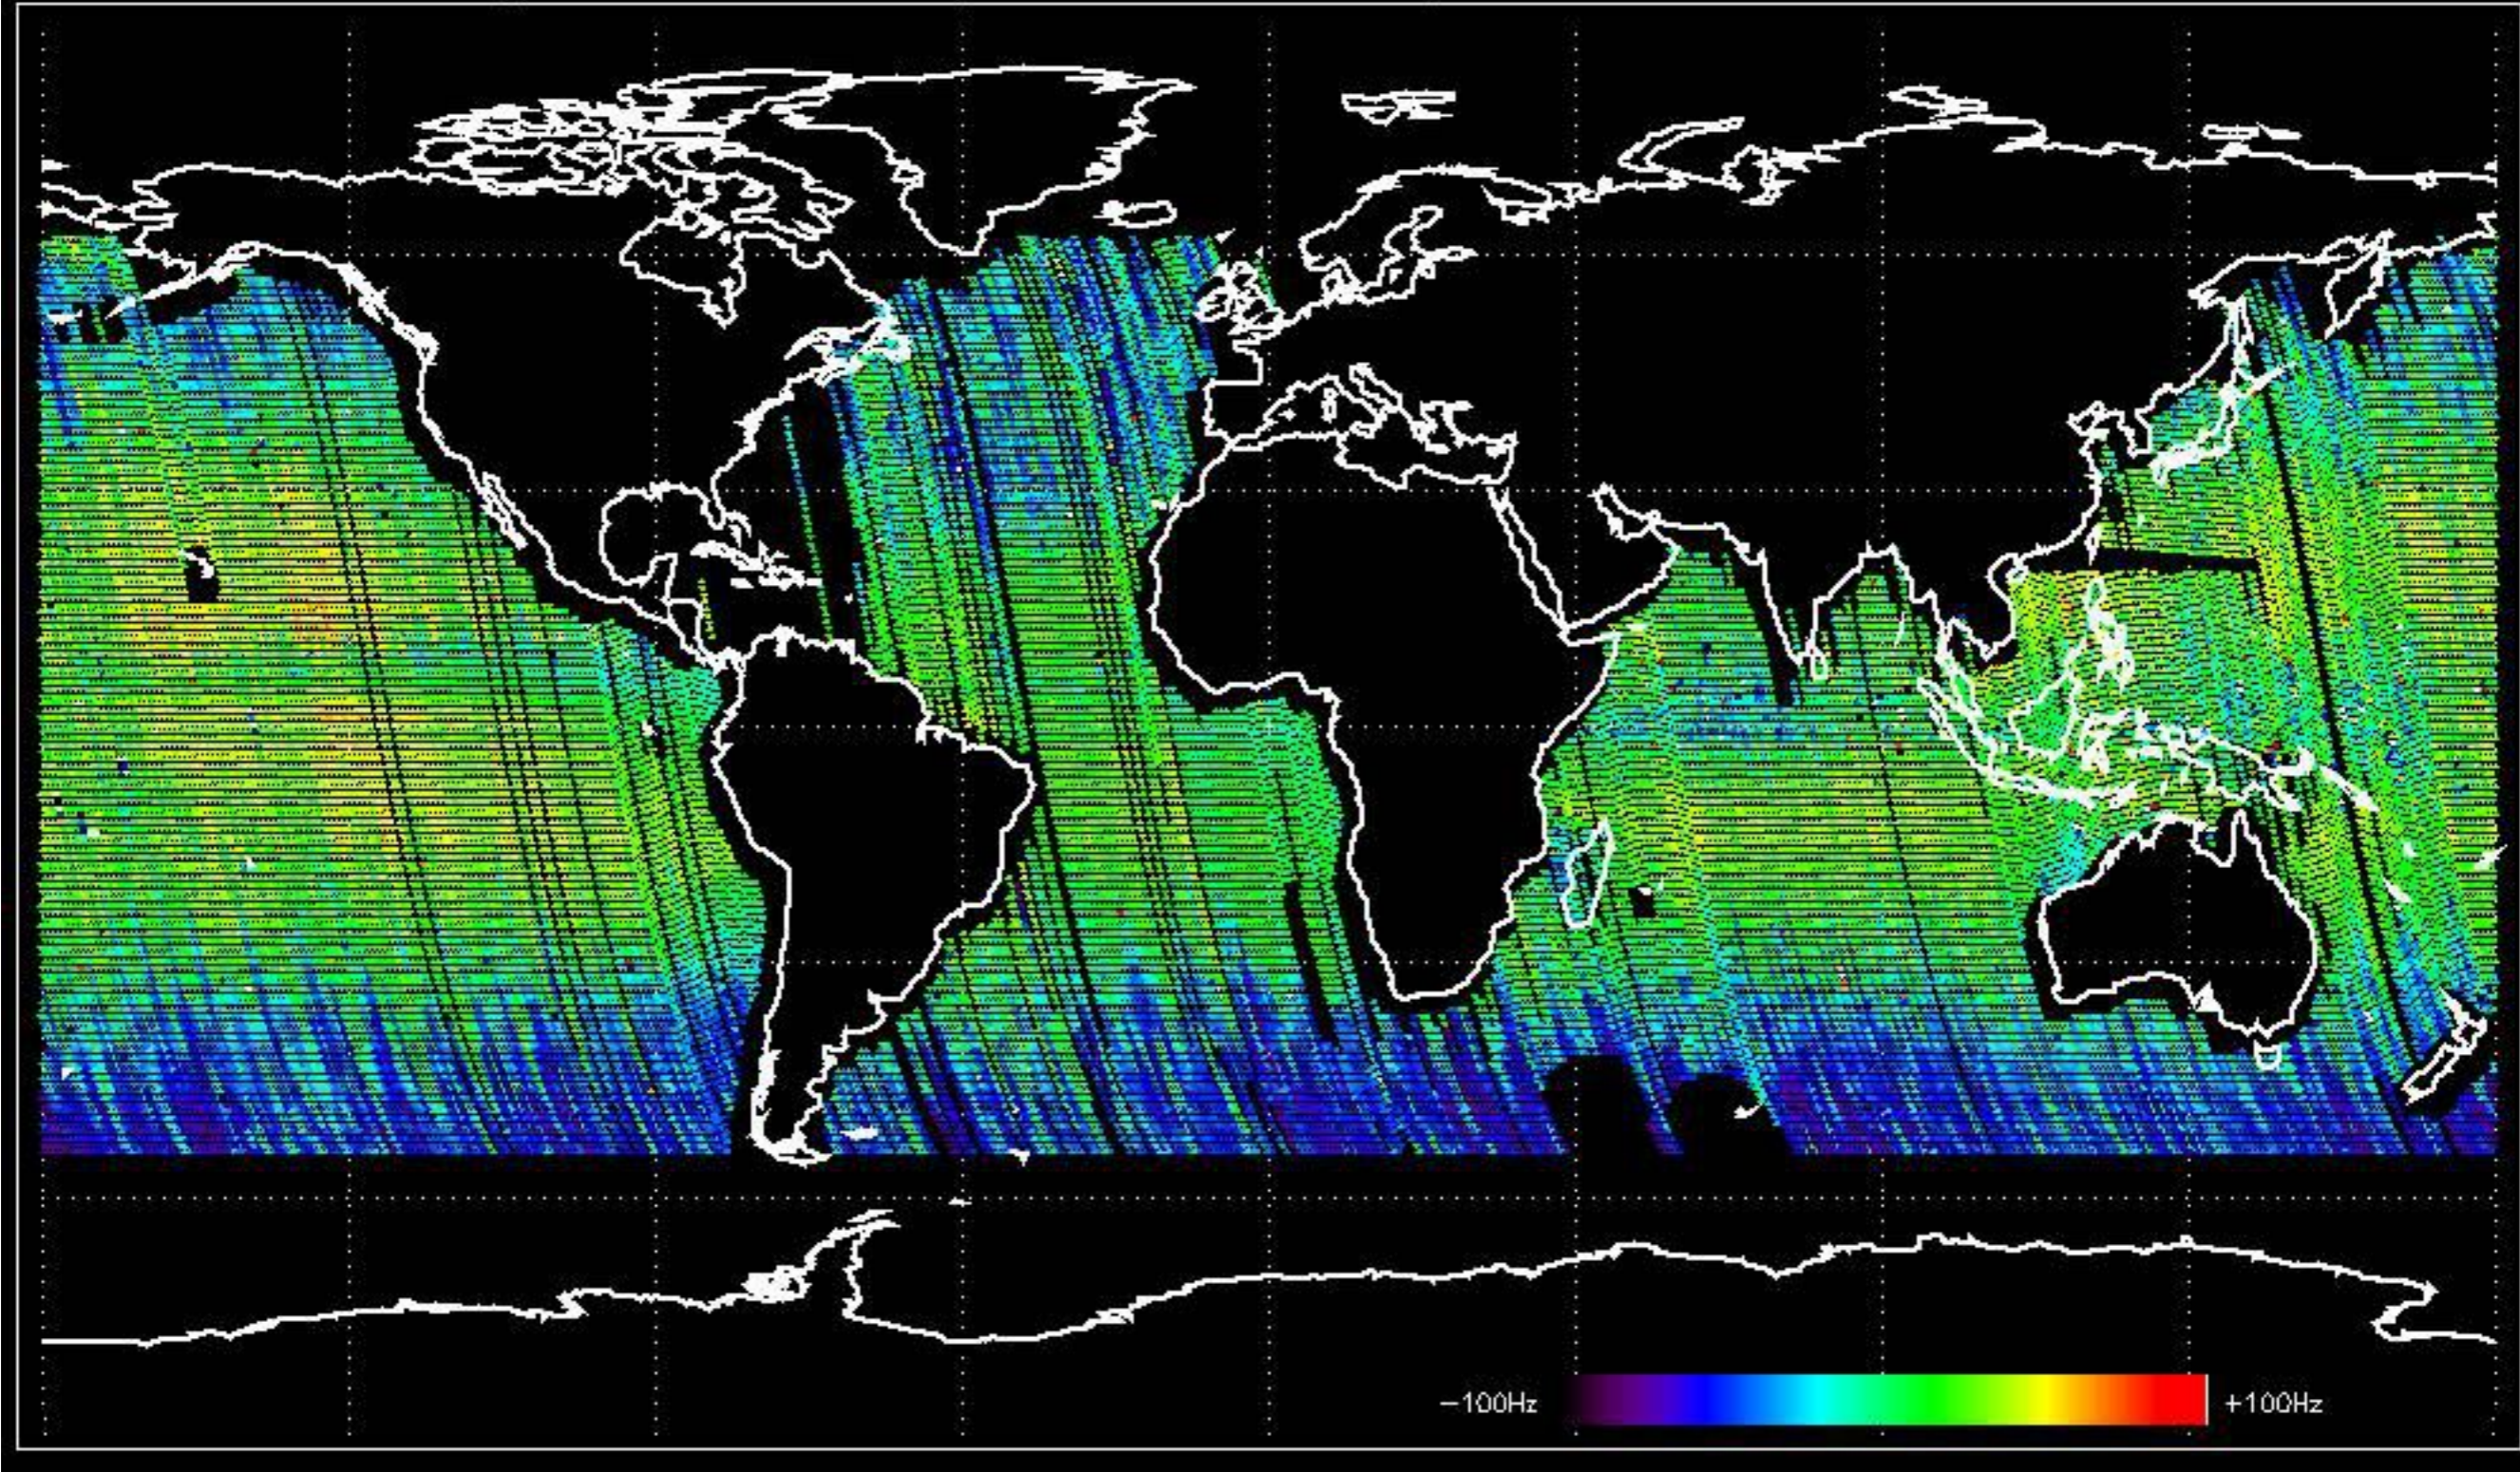



Doppler difference, estimated-predicted 'WVS' 'IS2' descending -error mean of -32.315355 Hz

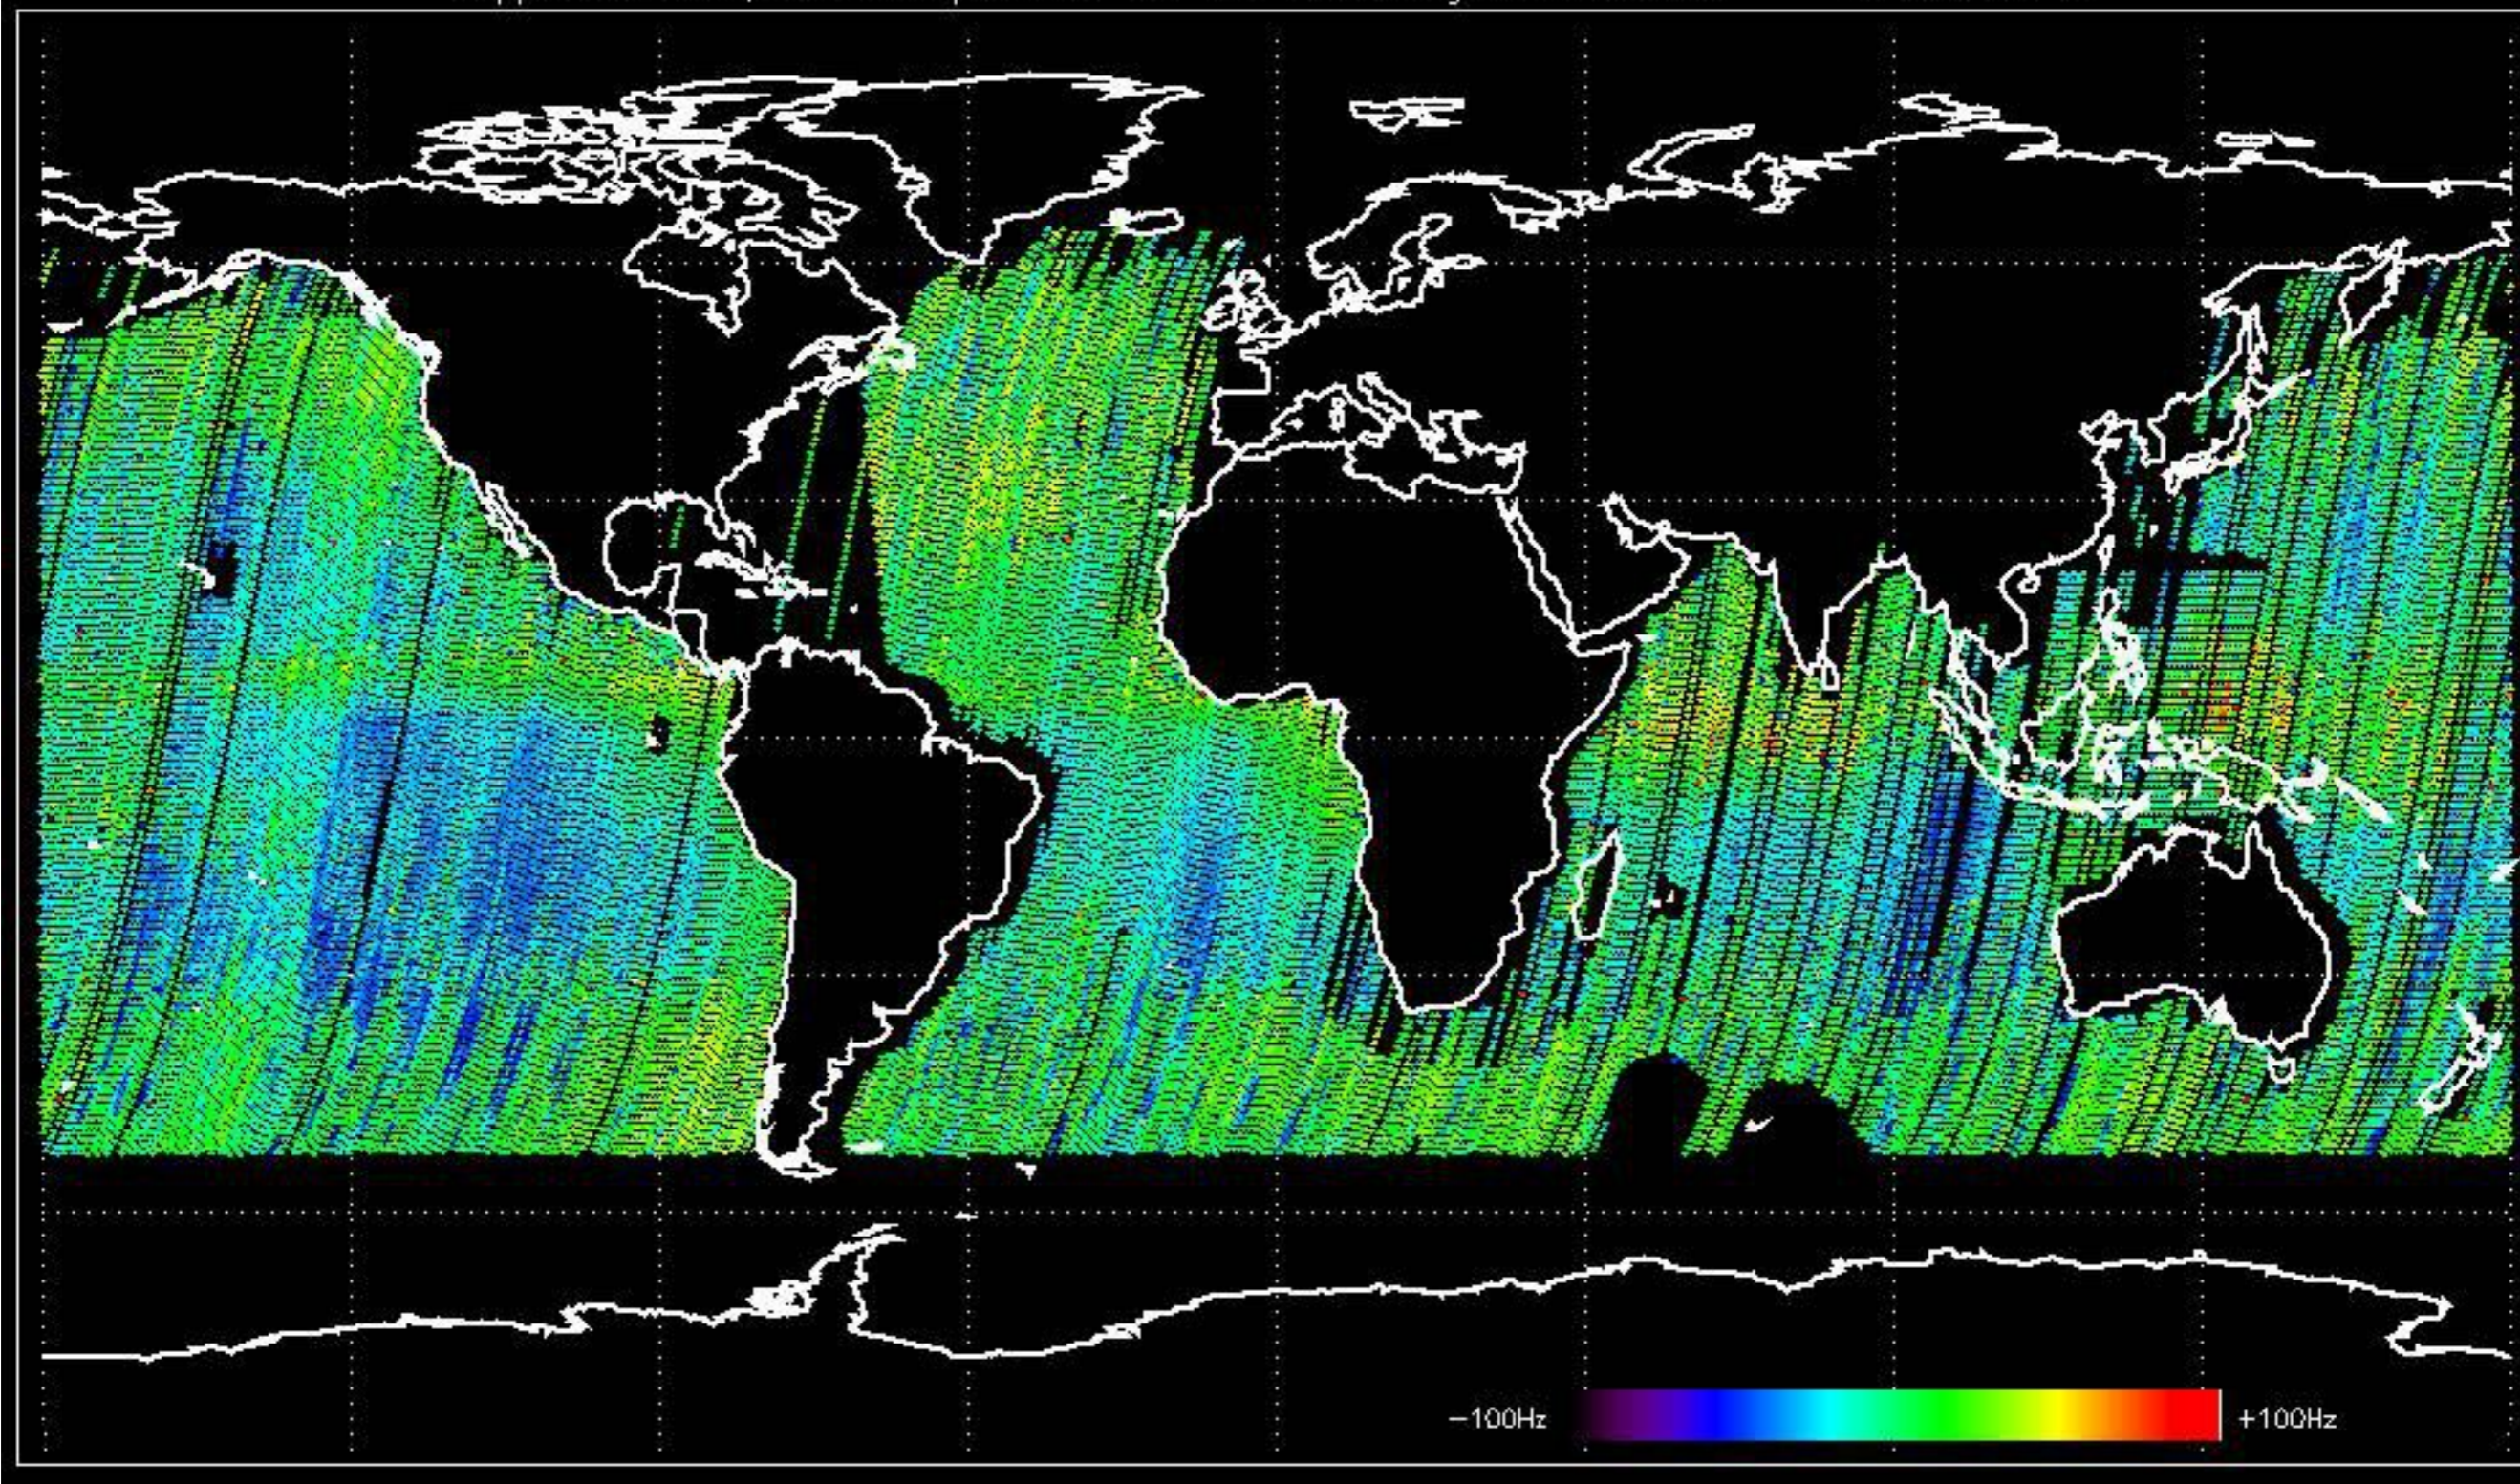





The MS mode provides an internal health check on an individual module basis.
The purpose of this mode is to identify to identify any malfunctioning modules and
to identify modules for which calibration offsets are to be applied.
No anomalies observed on available MS products:




No anomalies observed.

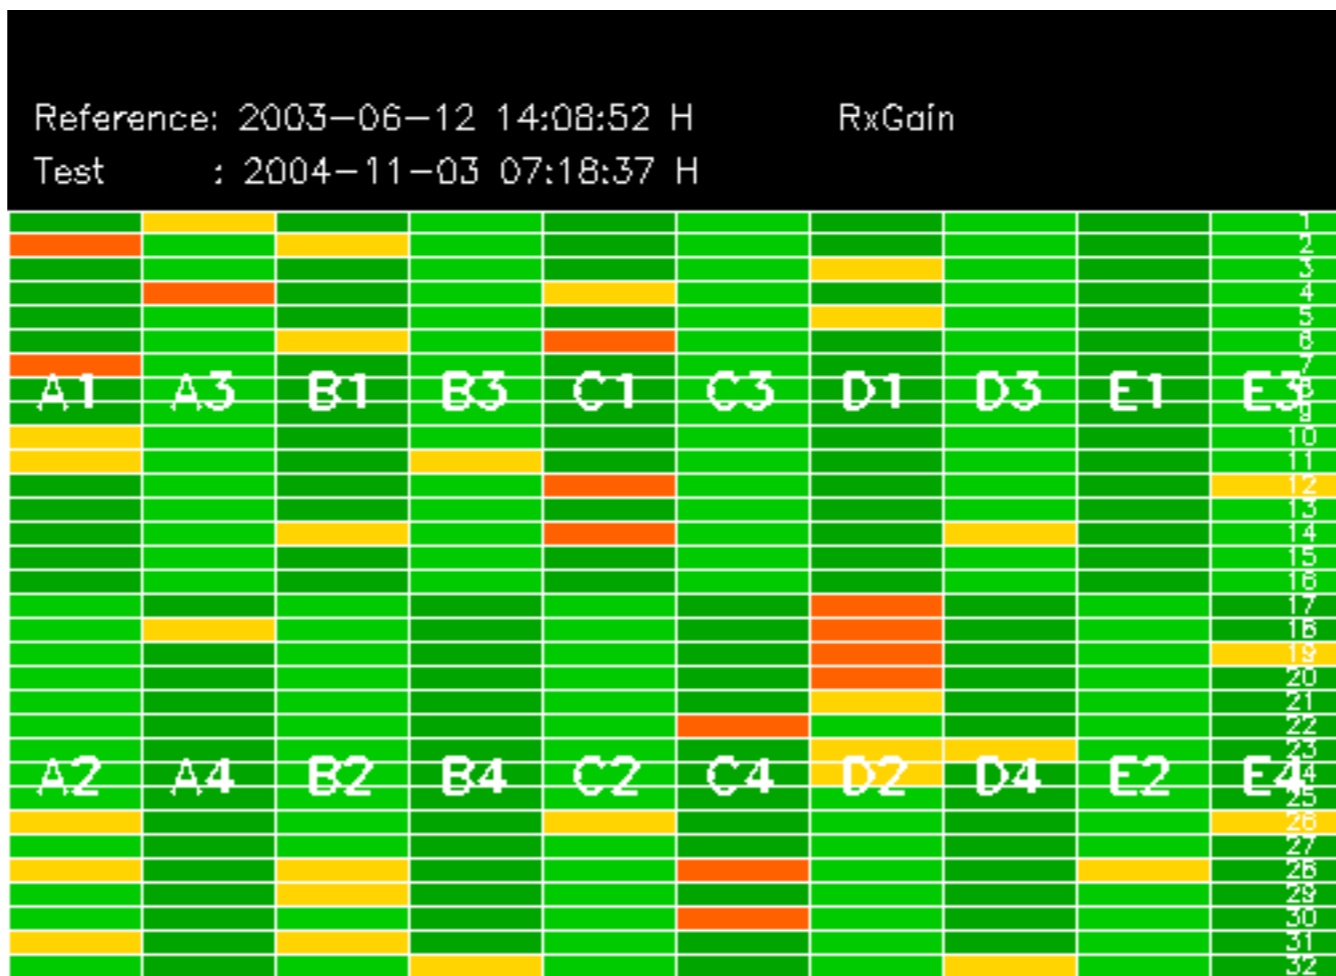


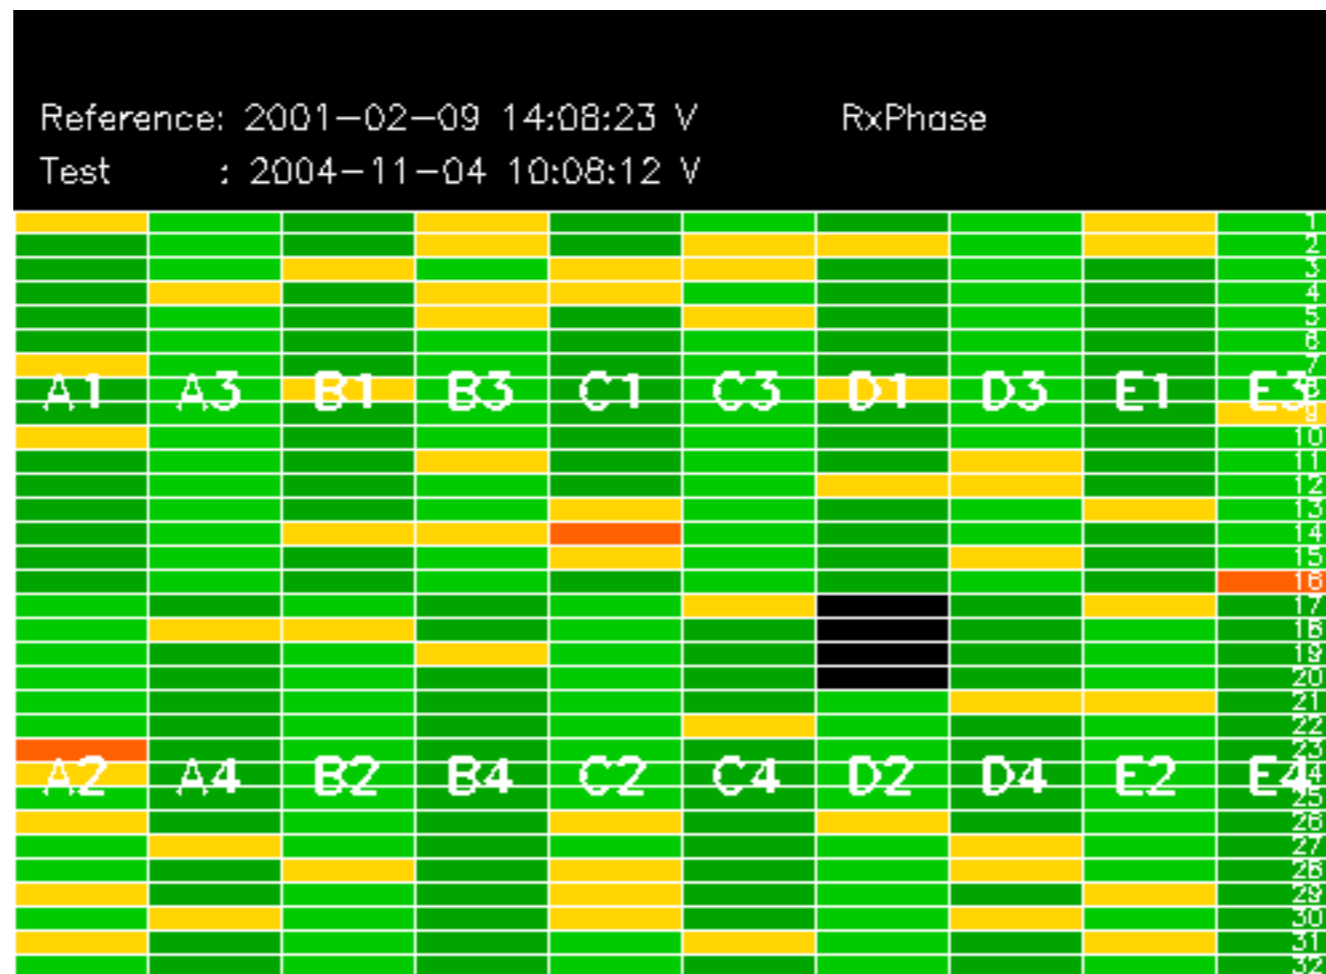

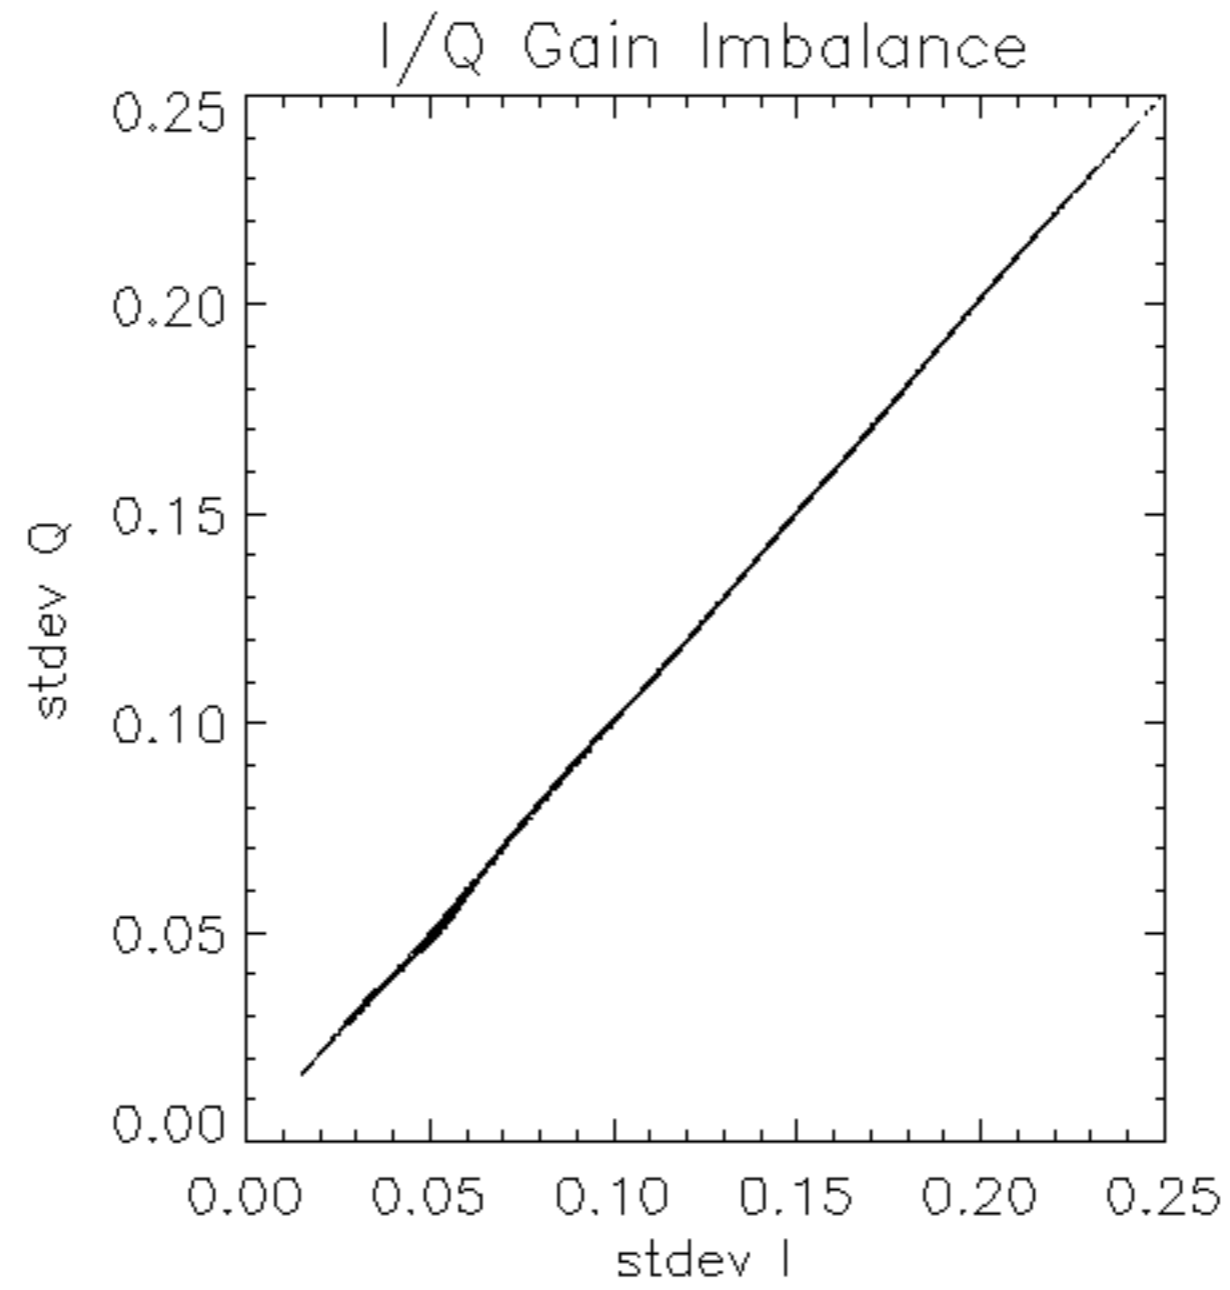


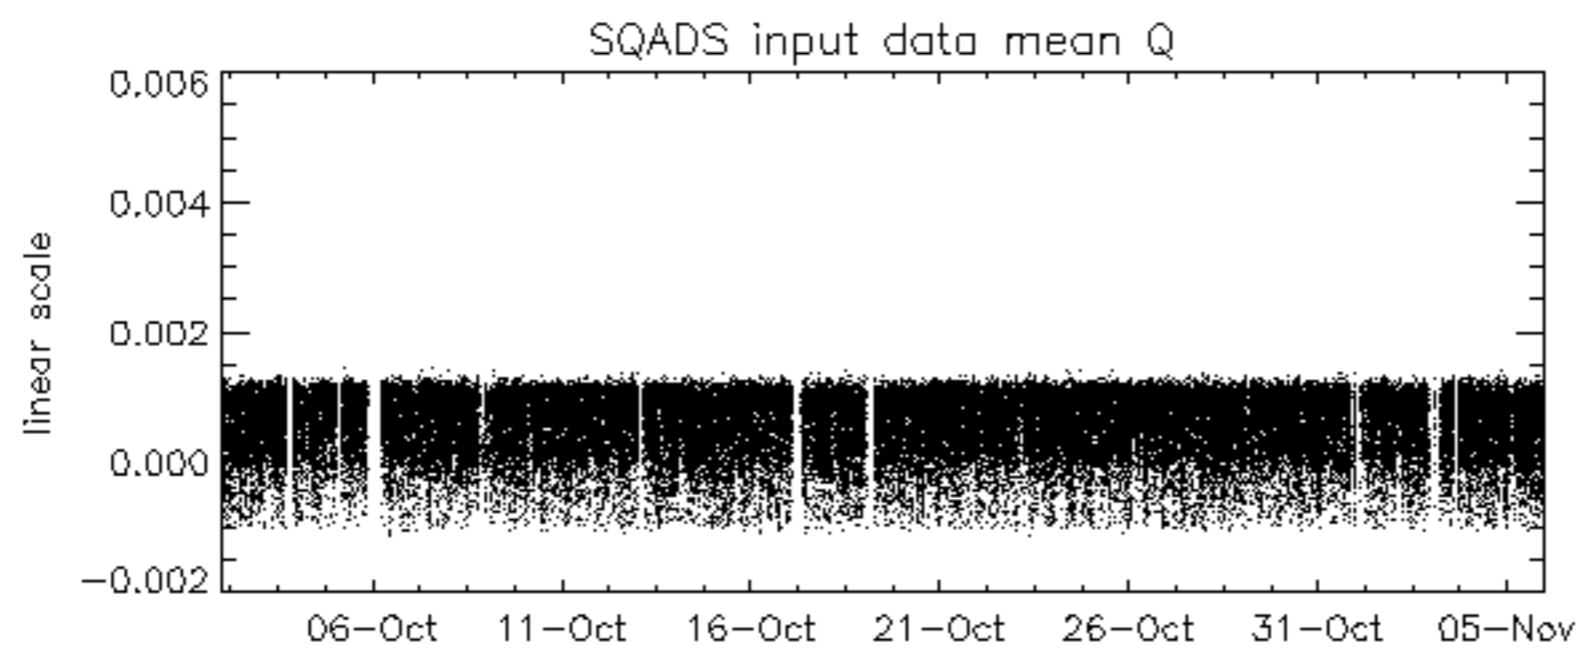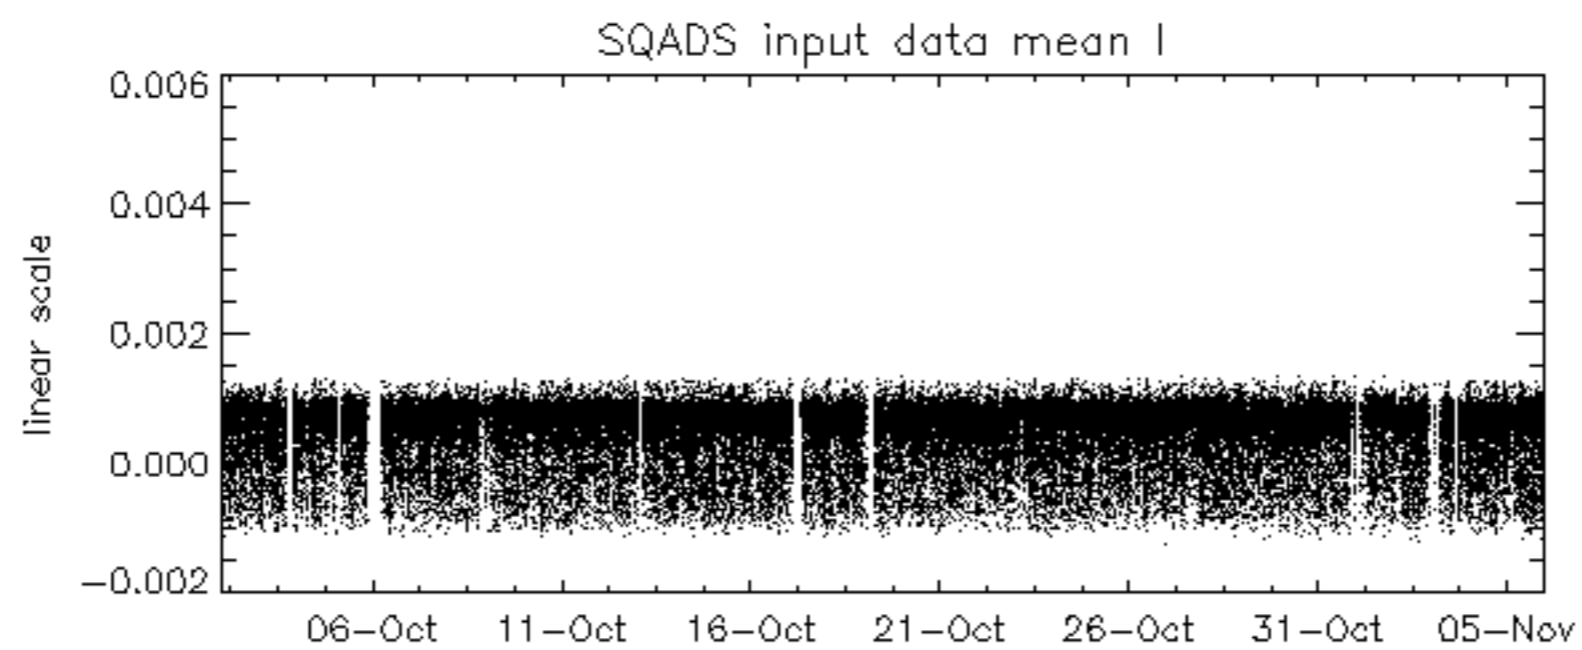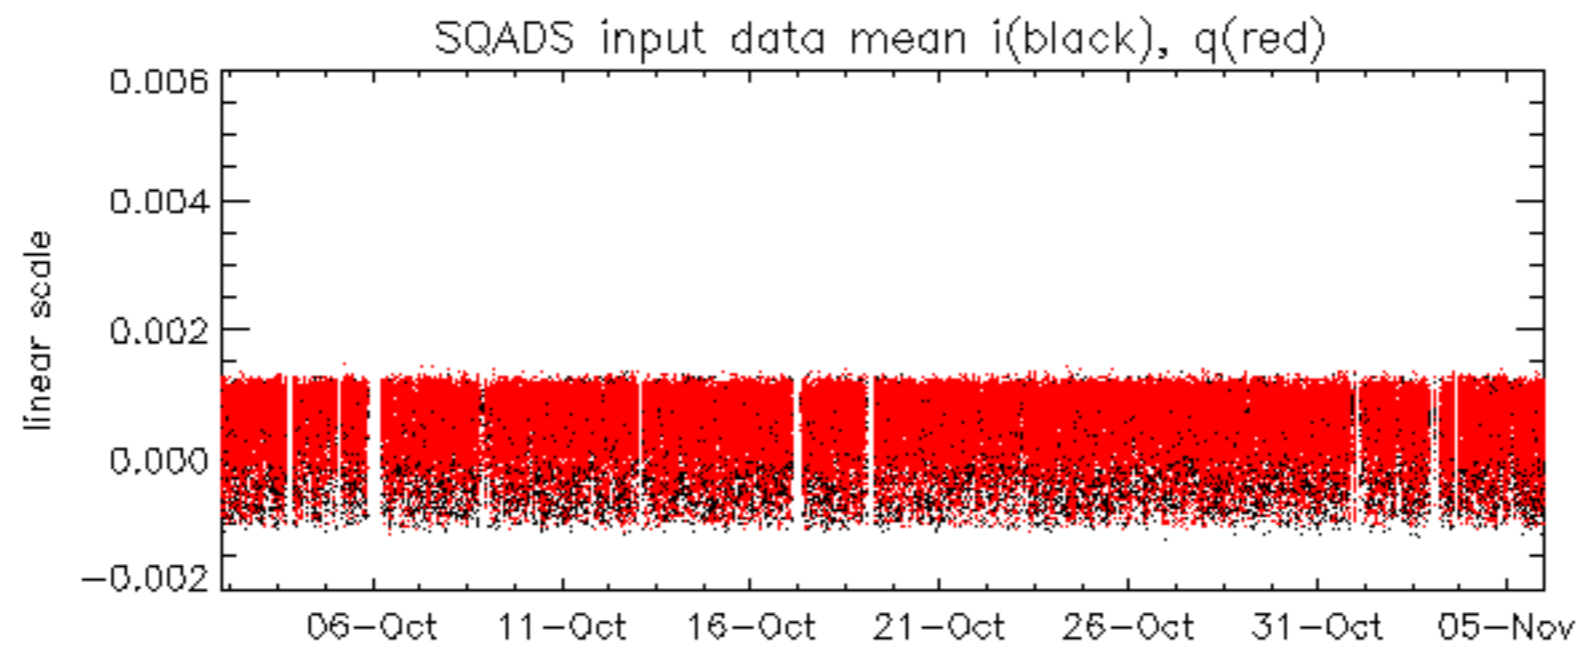


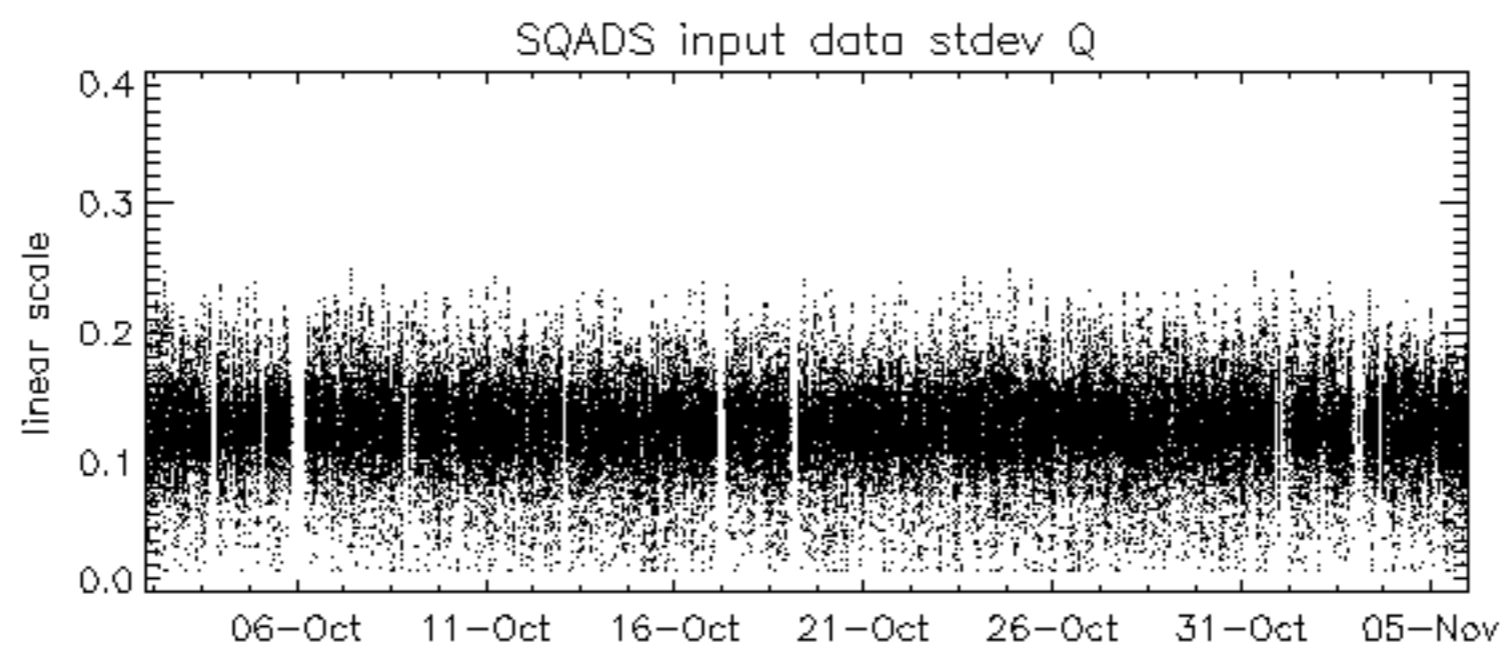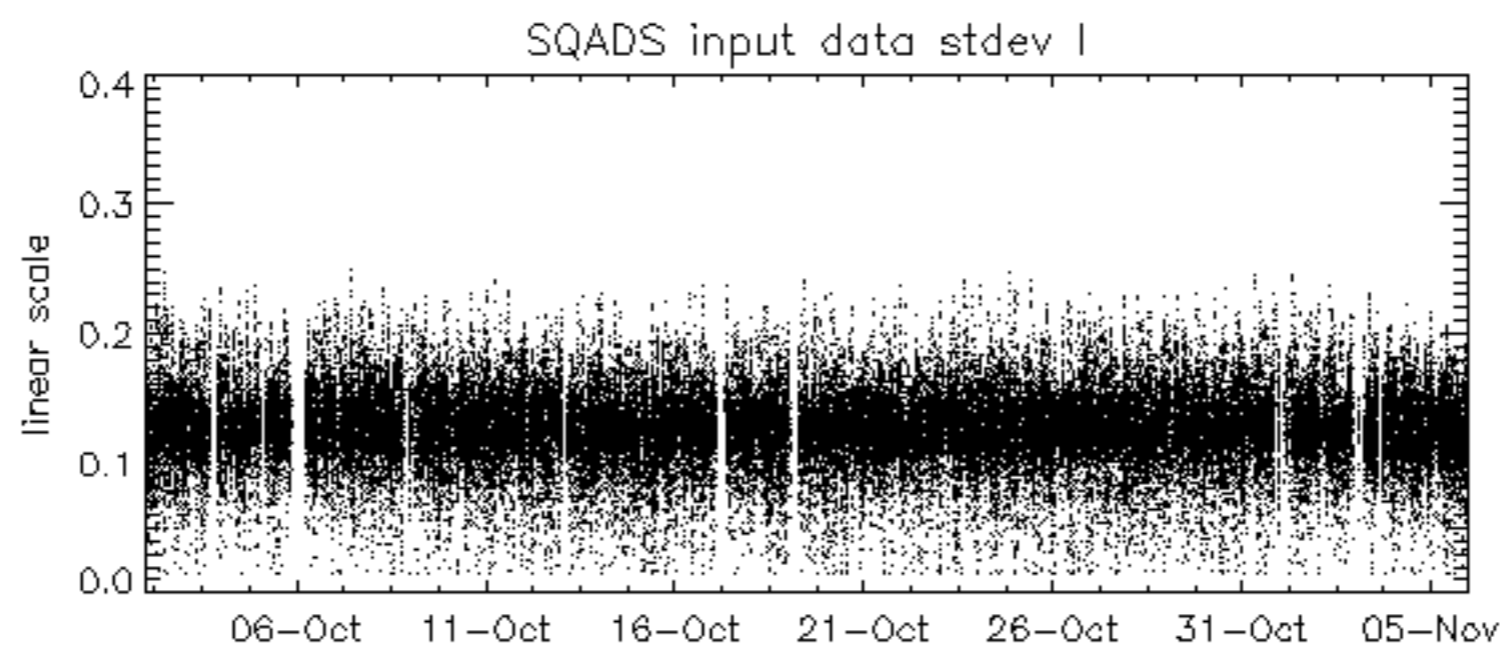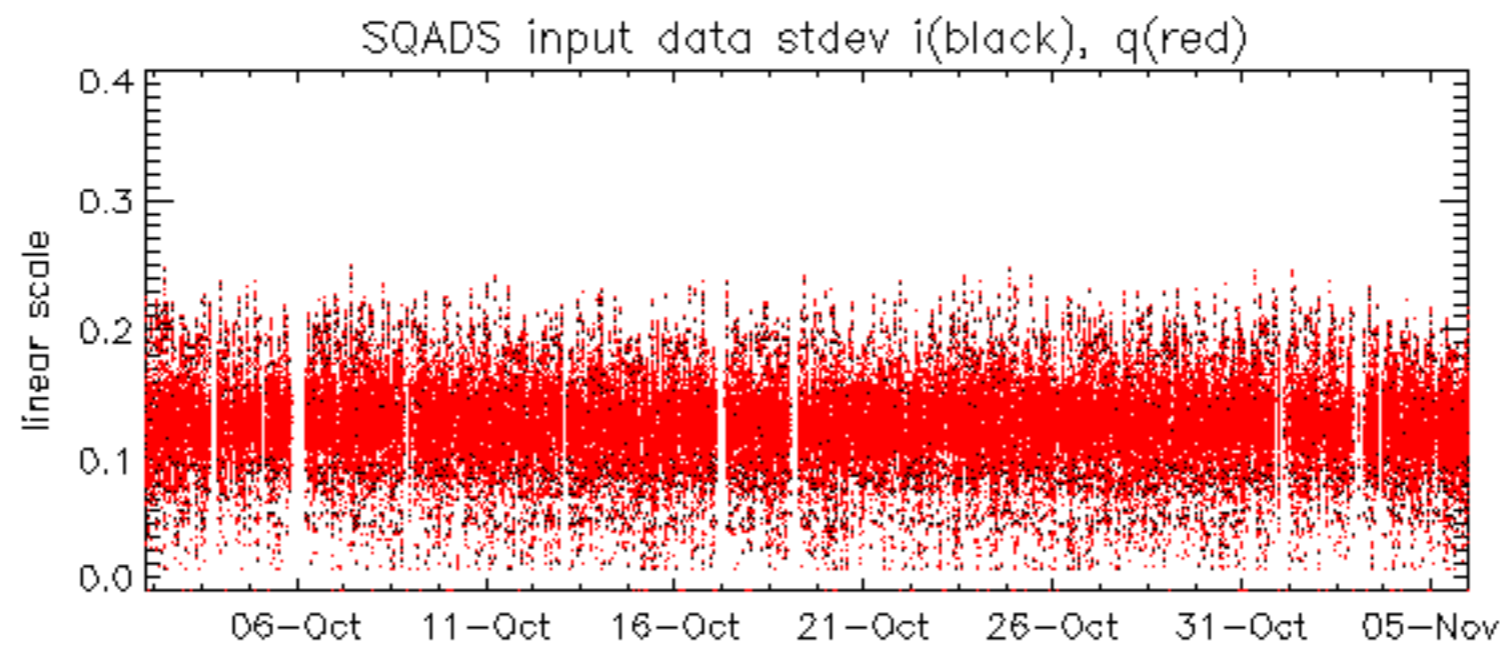


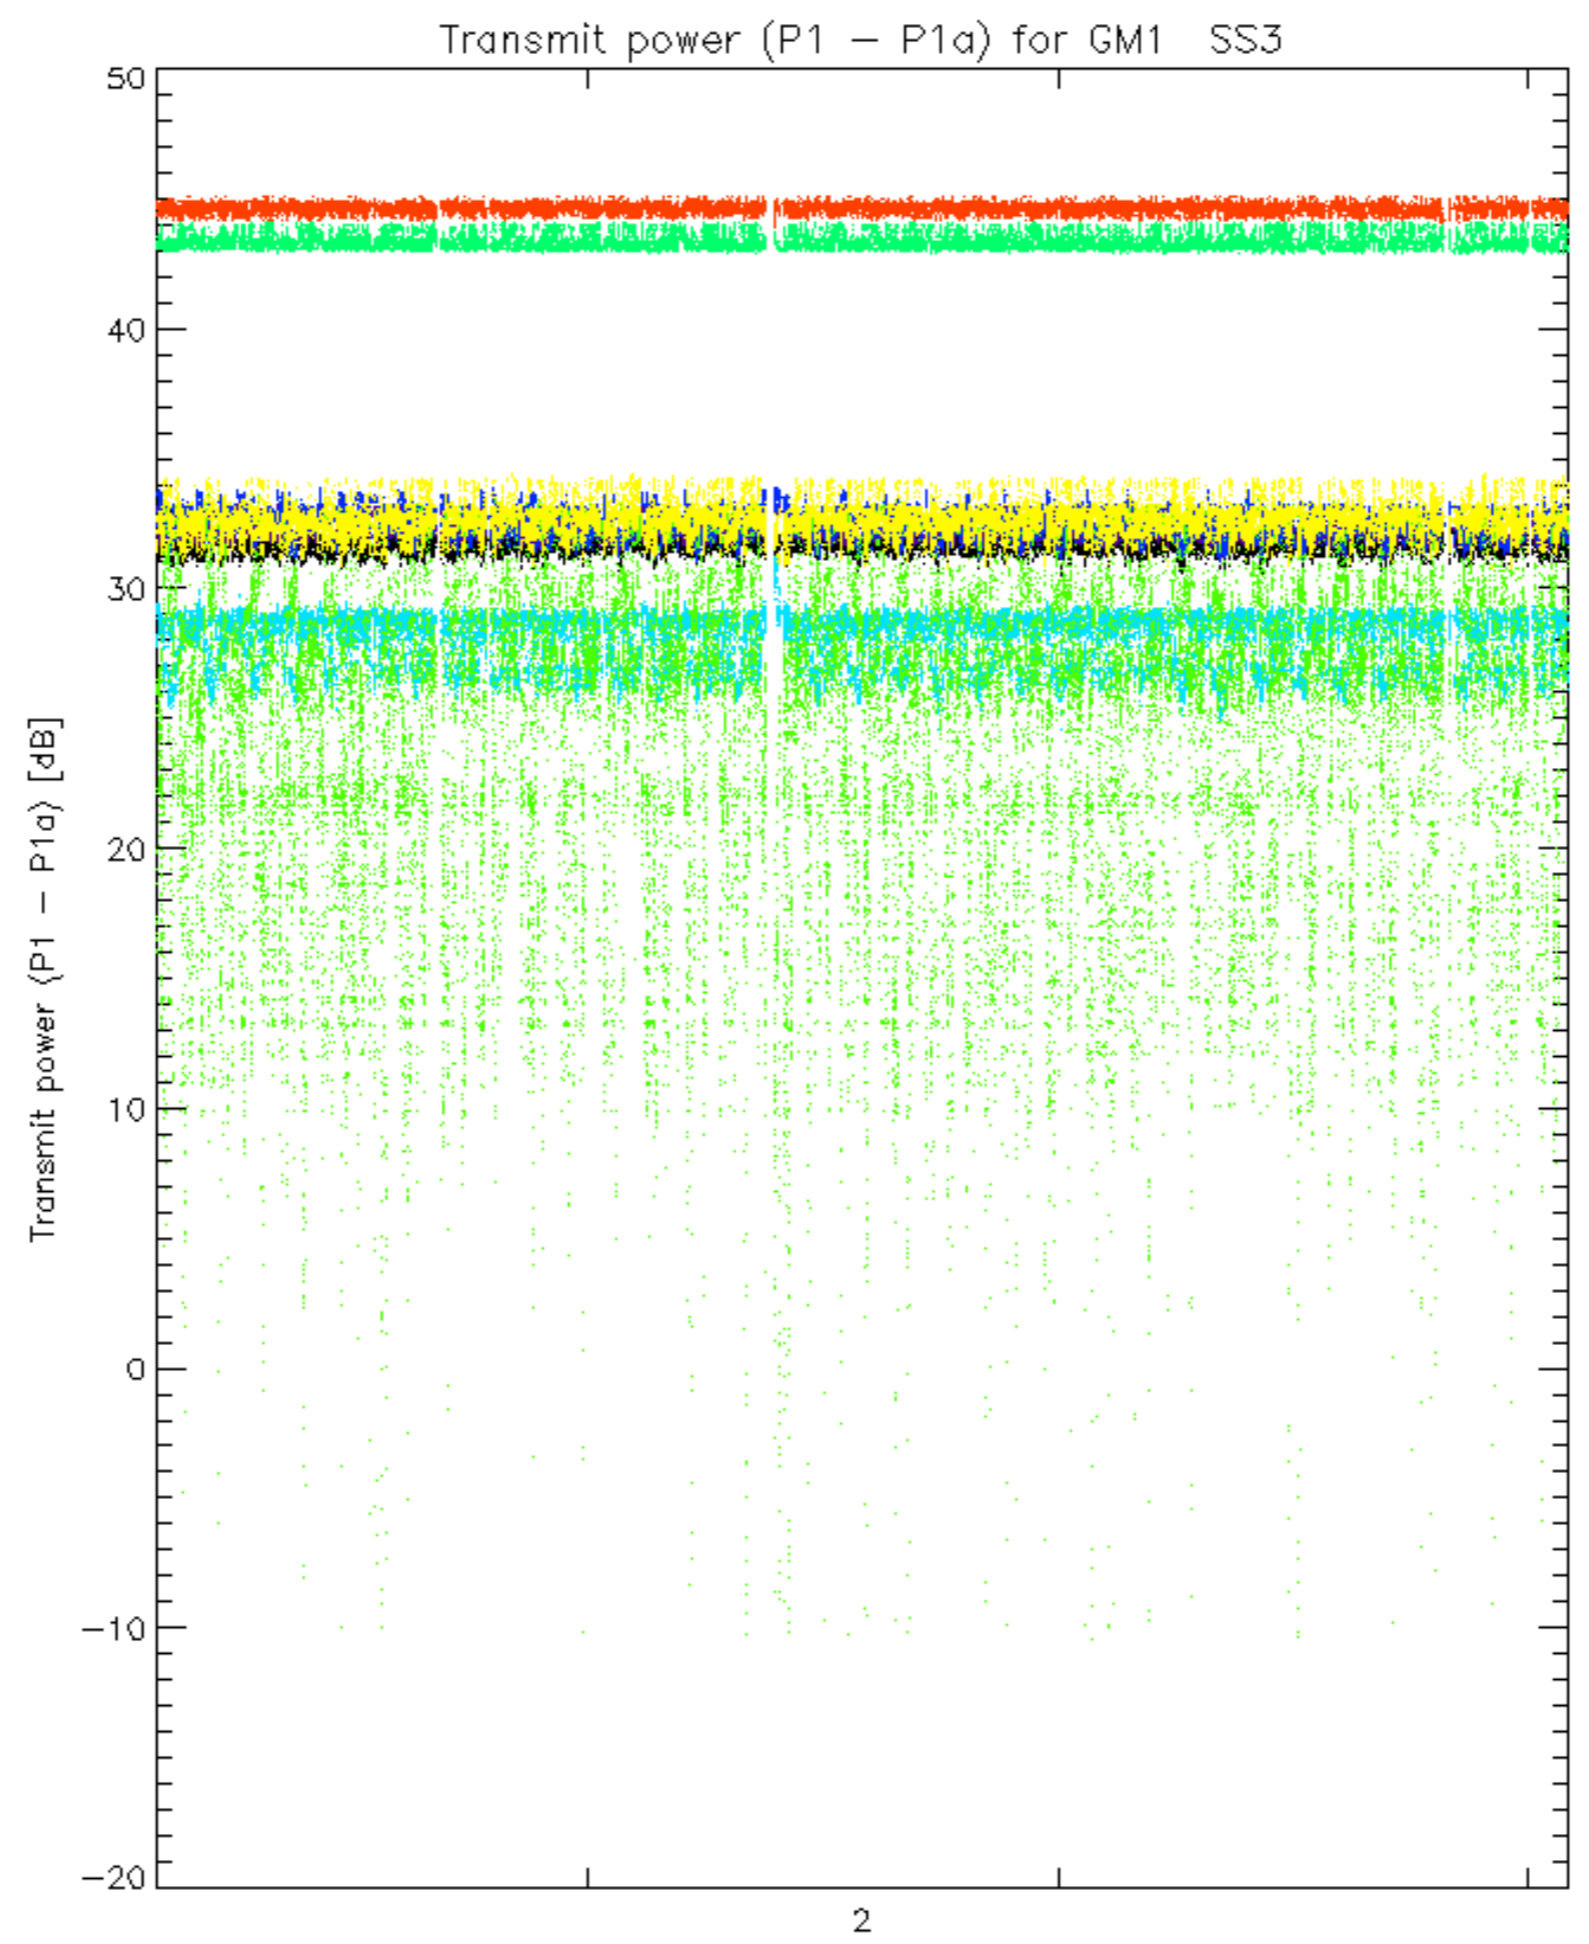

rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 24 _ 30

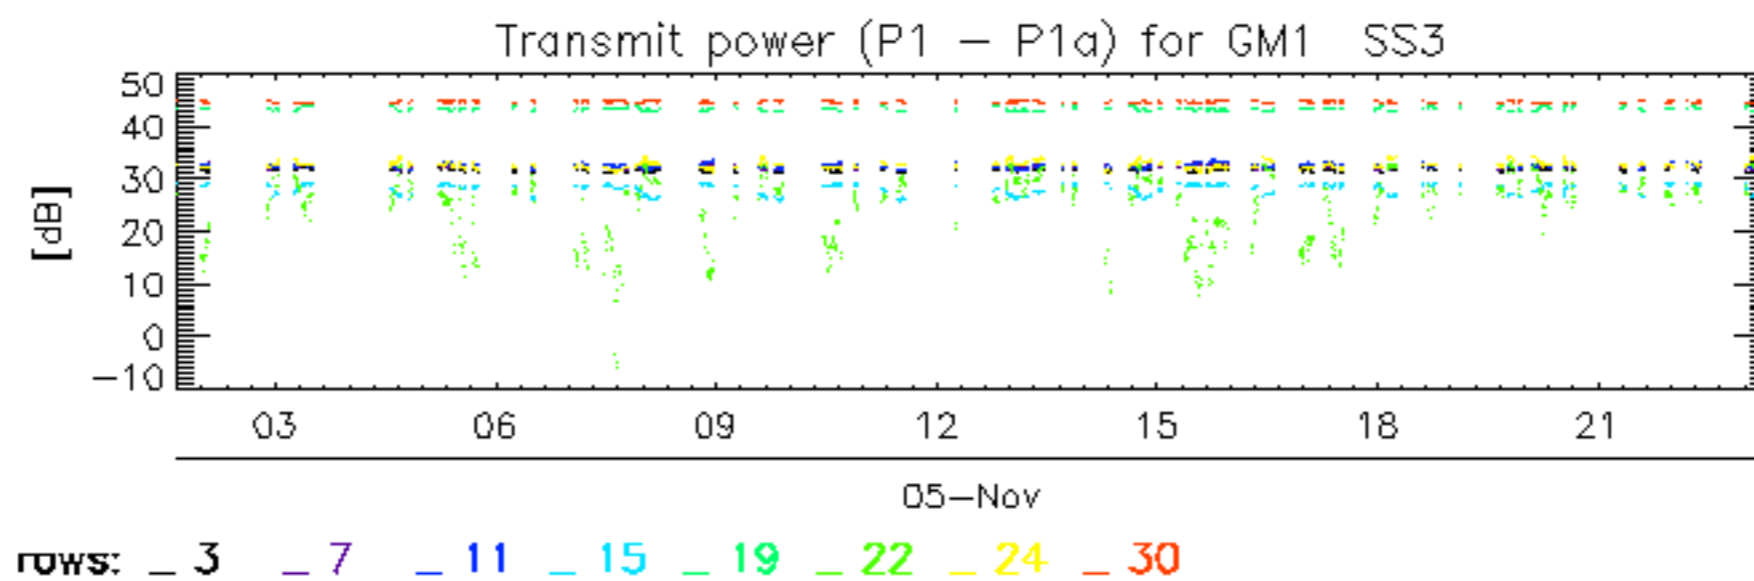

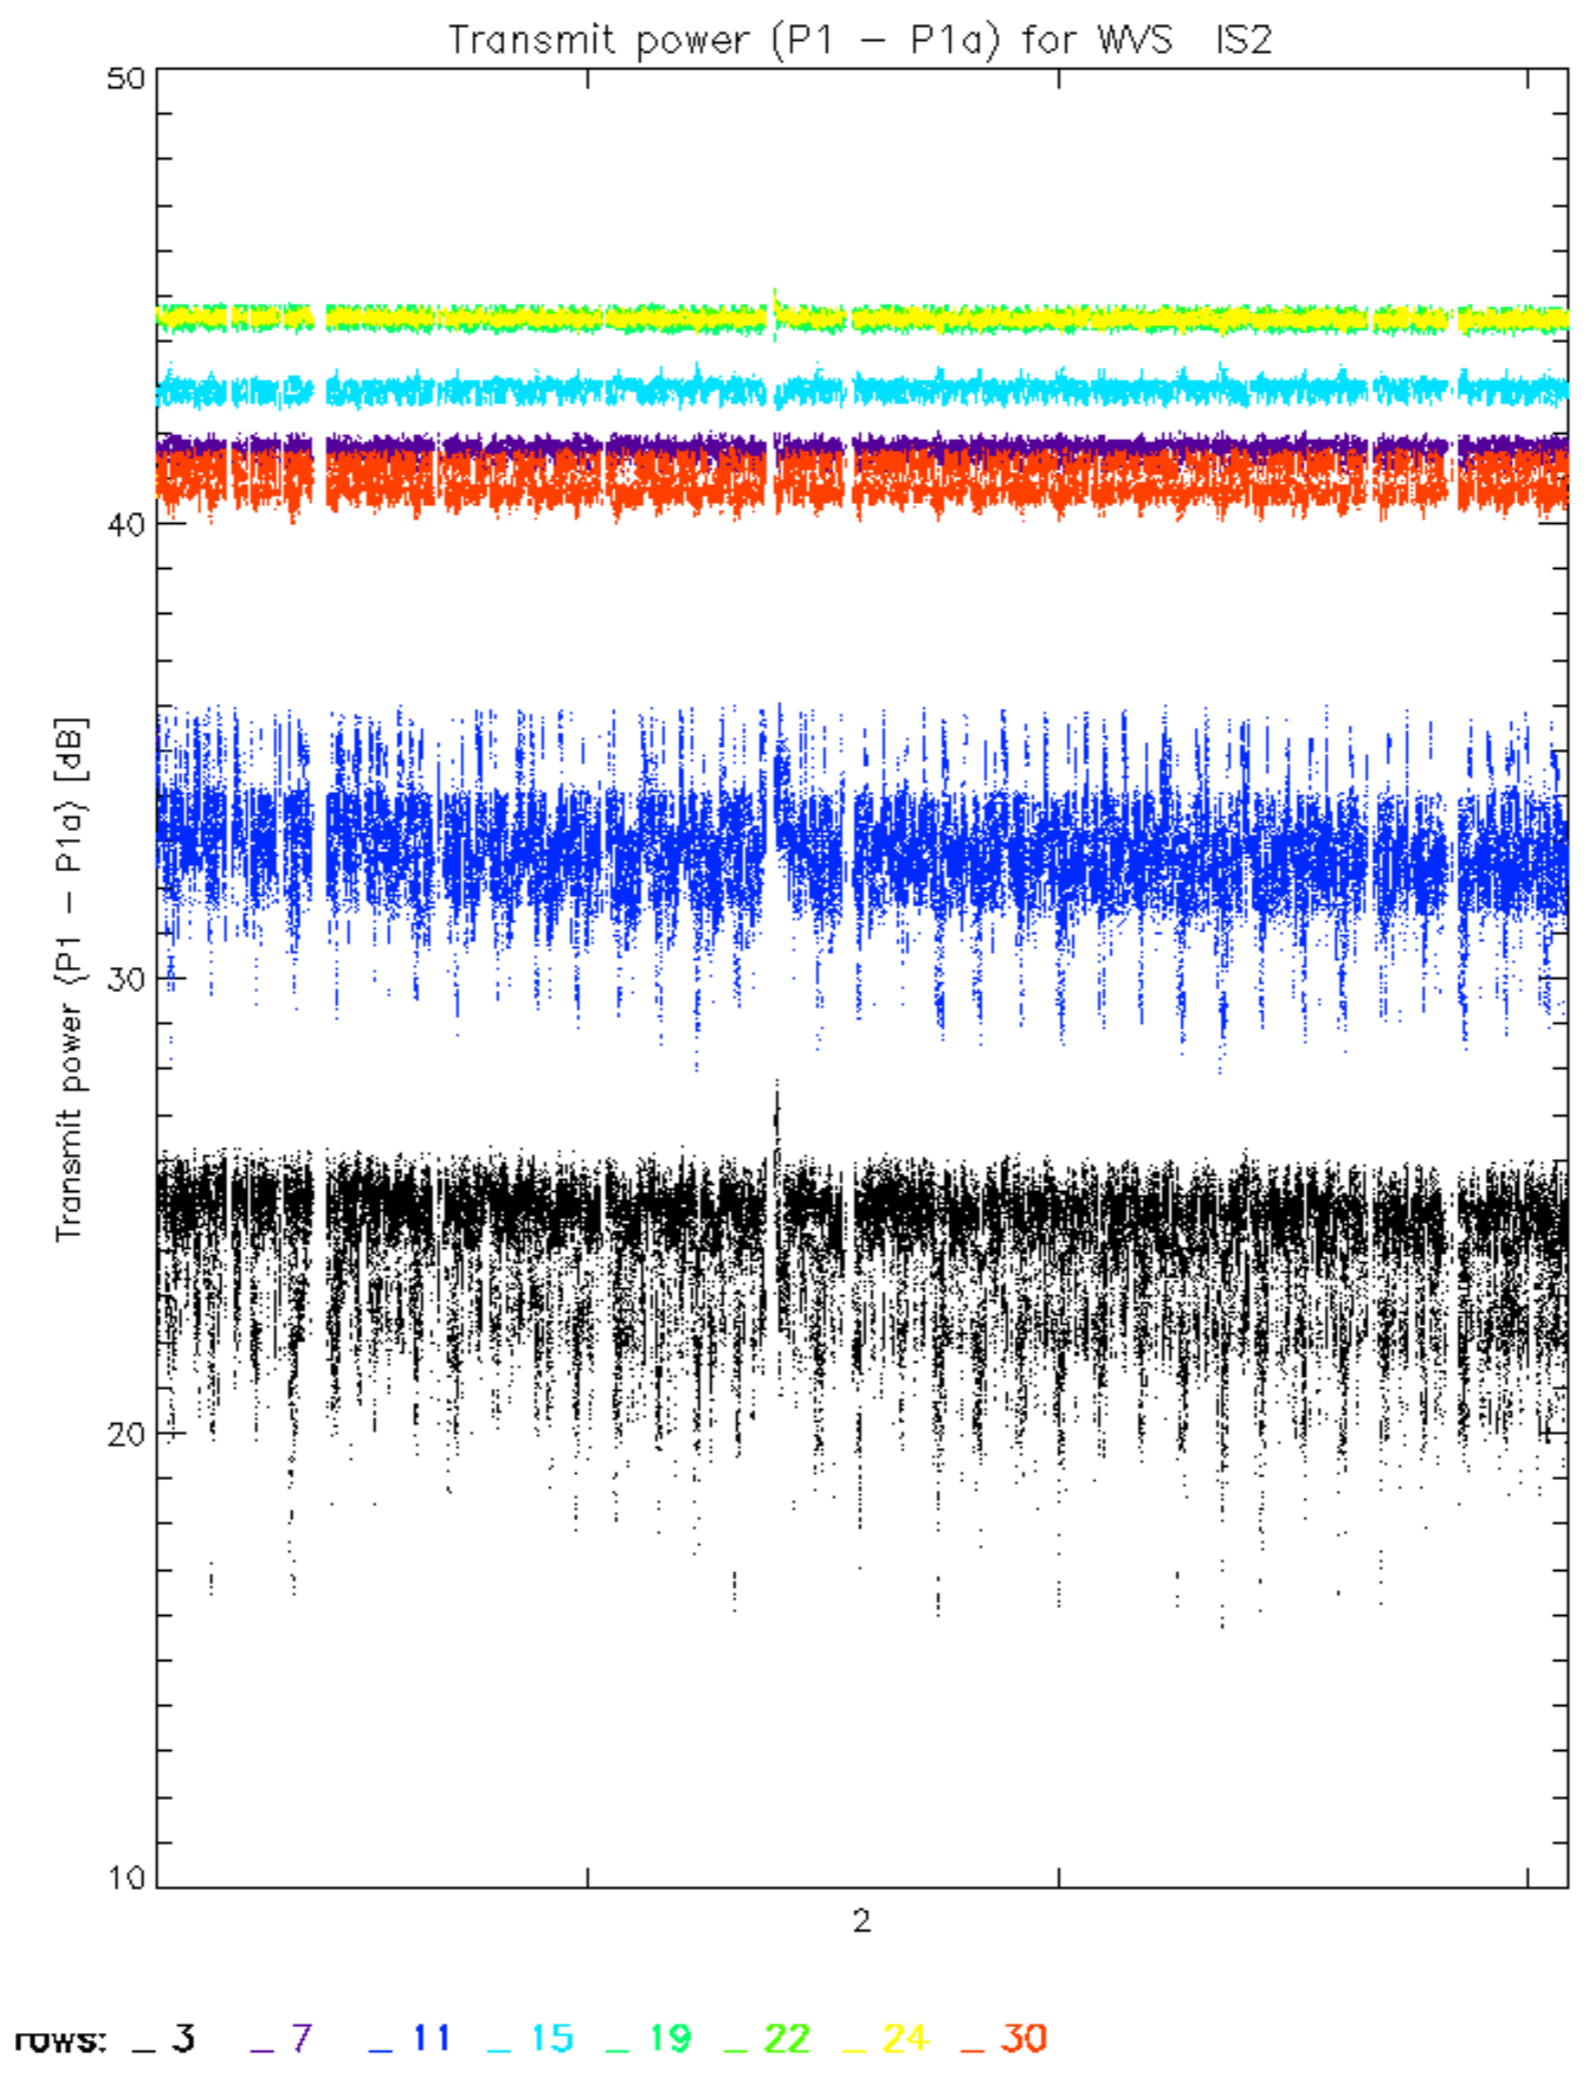

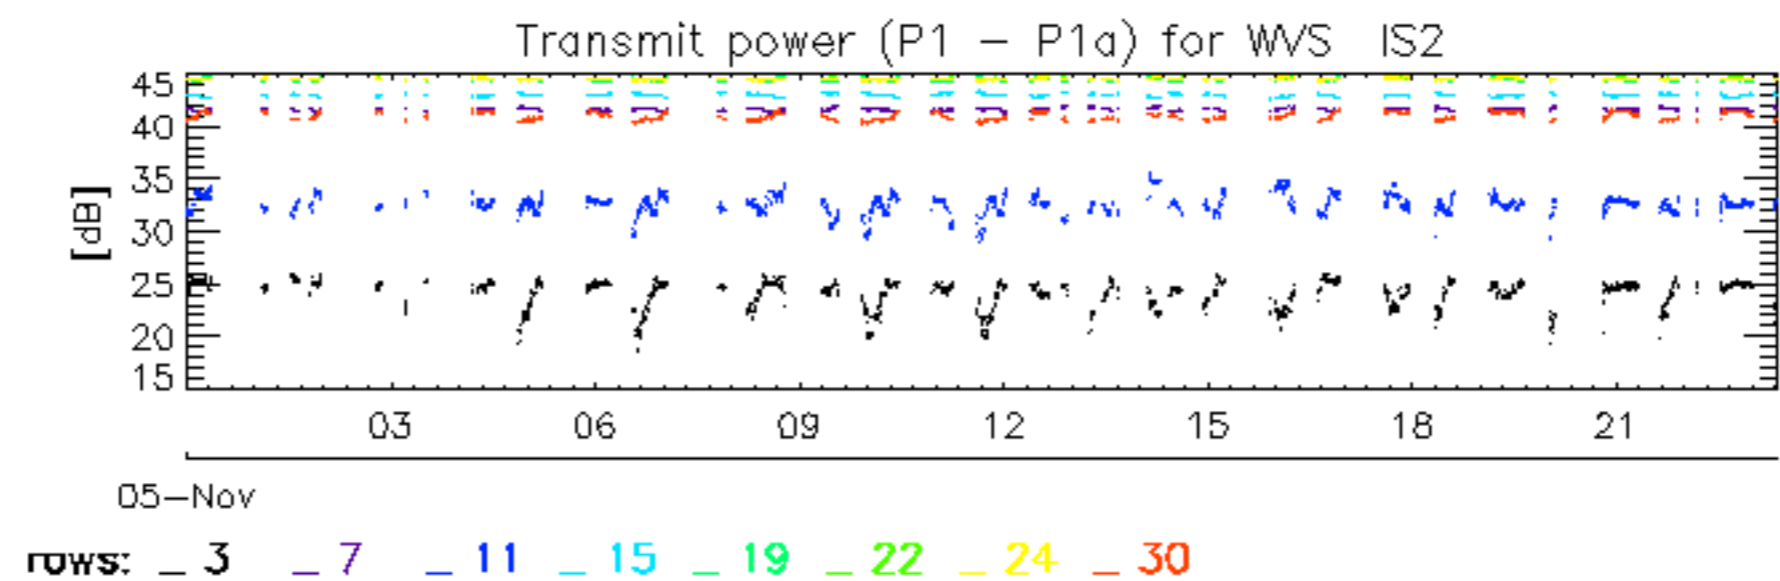

No unavailabilities during the reported period.