

PRELIMINARY REPORT OF 041219

ATTENTION: This report is automatically generated no comments are provided on data analysis

last update on Sun Dec 19 10:58:32 GMT 2004

1. [Introduction](#)
2. [Summary](#)
 - [Instrument Unavailability](#)
 - [Auxiliary files used](#)
 - [Browse Visual Inspection](#)
 - [Module Stepping Results](#)
 - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
 - [Daily statistics](#)
 - [Cyclic statistics](#)
 - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
 - [raw data mean I and Q](#)
 - [raw data stdev I and Q](#)
 - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
 - [Unbiased Doppler Error for WVS](#)
 - [Absolute Doppler for WVS](#)
 - [Doppler evolution versus ANX for WVS](#)
 - [Unbiased Doppler Error for GM1](#)
 - [Absolute Doppler for GM1](#)
 - [Doppler evolution versus ANX for GM1](#)

1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA_WVS_1P), global monitoring products (ASA_GM1_1P), which are the available few hours after the acquisition, on the browse (BP) products and on the Module Stepping (MS) product.

2 - Summary

2.1 - Instrument Unavailability

No unavailabilities during the reported period.

2.2 - Auxiliary files

Summary of the auxiliary files used from 2004-12-18 00:00:00 to 2004-12-19 10:58:32

PDHS-K					
AUXILIARY FILE	WVS	GM1	IMM	APM	WSM
ASA_INS_AXVIEC20041215_180208_20030211_000000_20051231_000000	25	43	4	2	0
ASA_XCA_AXVIEC20041027_164238_20040412_000000_20051231_000000	25	43	4	2	0
ASA_CON_AXVIEC20041215_175442_20030601_000000_20051231_000000	25	43	4	2	0
ASA_XCH_AXVIEC20041215_180350_20020301_000000_20051231_000000	25	43	4	2	0

PDHS-E					
AUXILIARY FILE	WVS	GM1	IMM	APM	WSM
ASA_INS_AXVIEC20041215_180208_20030211_000000_20051231_000000	41	49	4	9	4
ASA_XCA_AXVIEC20041027_164238_20040412_000000_20051231_000000	41	49	4	9	4
ASA_CON_AXVIEC20041215_175442_20030601_000000_20051231_000000	41	49	4	9	4
ASA_XCH_AXVIEC20041215_180350_20020301_000000_20051231_000000	41	49	4	9	4

2.3 - Browse Visual Inspection

2.4 - Data Analysis

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.

3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis. The purpose of this mode is to identify any malfunctioning modules and to identify modules for which calibration offsets are to be applied. No anomalies observed on available MS products:

Polarisation	Start Time
V	20041217 055511
H	20041218 084445

MSM in V/V polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
☒	☒
☒	☒

⊗	
⊗	

MSM in H/H polarisation

Pre-launch Reference	DDS-B (2003-06-12) reference
⊗	
⊗	
⊗	
⊗	

4 - Internal calibration Results

No anomalies observed.

4.1 - Daily statistics

4.1.1 - Evolution for WVS

Evolution of cal pulses for WVS
⊗
⊗

4.1.2 - Evolution for GM1

Evolution of cal pulses for GM1
⊗
⊗

4.2 - Cyclic statistics

4.2.1 - Evolution for WVS

Evolution of cal pulses for WVS

P1a Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

P1 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P1	-3.464565	0.029312	0.001213
7	P1	-3.125899	0.031130	0.134647
11	P1	-4.636619	0.045956	-0.068679
15	P1	-5.664777	0.034919	-0.041428
19	P1	-3.641585	0.005108	-0.041352
22	P1	-4.578697	0.016640	0.007861
26	P1	-4.929146	0.016531	-0.029930
30	P1	-7.103098	0.014046	-0.048346
3	P1	-15.958421	0.116946	0.036331
7	P1	-15.375113	0.332077	-0.757078
11	P1	-20.715347	0.486550	-0.090317
15	P1	-11.623698	0.089826	0.021975
19	P1	-14.137388	0.029109	-0.074249
22	P1	-16.129227	0.458616	0.150561
26	P1	-17.785749	0.266390	0.041473
30	P1	-17.902225	0.304013	0.071700

P2 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P2	-22.366362	0.085395	0.021578
7	P2	-22.601923	0.141208	0.048032
11	P2	-14.957712	0.136080	0.155923
15	P2	-7.170488	0.110234	0.015848
19	P2	-9.725295	0.140645	0.027821
22	P2	-17.199242	0.098641	0.058641
26	P2	-16.526550	0.105421	-0.015305

30	P2	-18.996365	0.082518	0.092477
----	----	------------	----------	----------

P3 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P3	-8.211211	0.006930	-0.013006
7	P3	-8.211212	0.006930	-0.013005
11	P3	-8.211212	0.006931	-0.012990
15	P3	-8.211212	0.006931	-0.012990
19	P3	-8.211213	0.006930	-0.013011
22	P3	-8.211209	0.006930	-0.013023
26	P3	-8.211204	0.006930	-0.013035
30	P3	-8.211024	0.006932	-0.012967

4.2.2 - Evolution for GM1

Evolution of cal pulses for GM1
<input type="checkbox"/>

P1a Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
-----	-------	-----------	------------	-----------------

P1 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P1	-2.842328	0.110875	-0.073081
7	P1	-2.978851	0.064471	-0.025106
11	P1	-3.937500	0.049138	-0.058246
15	P1	-3.515927	0.078065	-0.058797
19	P1	-3.601171	0.012803	-0.024762
22	P1	-5.610542	0.067994	-0.042416
26	P1	-6.501829	0.023285	-0.040154
30	P1	-6.296103	0.042416	-0.050926
3	P1	-10.651641	0.059891	-0.191884
7	P1	-10.106472	0.154496	0.000098
11	P1	-12.403994	0.198960	-0.038723

15	P1	-11.726297	0.101918	0.009474
19	P1	-15.631209	0.049052	-0.027411
22	P1	-24.116043	2.179658	-0.060956
26	P1	-15.096966	0.394823	0.149610
30	P1	-20.162647	0.951945	0.136619

P2 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P2	-18.048519	0.035408	0.020107
7	P2	-22.645573	0.028603	0.087972
11	P2	-10.746897	0.033536	0.180083
15	P2	-5.065041	0.023812	-0.003575
19	P2	-6.969558	0.032773	0.000244
22	P2	-7.326123	0.025883	0.046234
26	P2	-23.960382	0.018326	-0.014706
30	P2	-22.053318	0.018537	0.086130

P3 Cyclic statistics

row	pulse	mean (dB)	stdev (dB)	slope(dB/cycle)
3	P3	-8.044768	0.002657	-0.004320
7	P3	-8.044738	0.002663	-0.004104
11	P3	-8.044805	0.002653	-0.003783
15	P3	-8.044670	0.002662	-0.004256
19	P3	-8.044840	0.002667	-0.003866
22	P3	-8.044760	0.002666	-0.003993
26	P3	-8.044854	0.002661	-0.003963
30	P3	-8.044699	0.002649	-0.004184

4.3 - cal pulses monitoring (all rows)

4.3.1 - Evolution for WVS



4.3.2 - Evolution for GM1



5 - RAW data statistics

No anomalies observed.

5.1 - Input mean I/Q

channel	stat	DSS-B
MEAN I	mean	0.000440490
	stdev	2.41766e-07
MEAN Q	mean	0.000499940
	stdev	2.54571e-07



5.2 - Input stdev I/Q

channel	stat	DSS-B
STDEV I	mean	0.125663
	stdev	0.00100055
STDEV Q	mean	0.125901
	stdev	0.00100969



5.3 - Gain imbalance I/Q



6 - Doppler Analysis

Preliminary report. The data is not yet controlled

6.1 - Unbiased Doppler Error for WVS

Evolution of unbiased Doppler error (Real - Expected)

Acsending


Descending

6.2 - Absolute Doppler for WVS

Evolution of Absolute Doppler

Ascending

Descending

6.3 - Doppler evolution versus ANX for WVS

Evolution Doppler error versus ANX

6.4 - Unbiased Doppler Error for GM1

Evolution of unbiased Doppler error (Real - Expected)

Ascending

Descending

6.5 - Absolute Doppler for GM1

Evolution of Absolute Doppler

Ascending





Descending

6.6 - Doppler evolution versus ANX for GM1

Evolution Doppler error versus ANX




Cal pulses for GM1 SS3

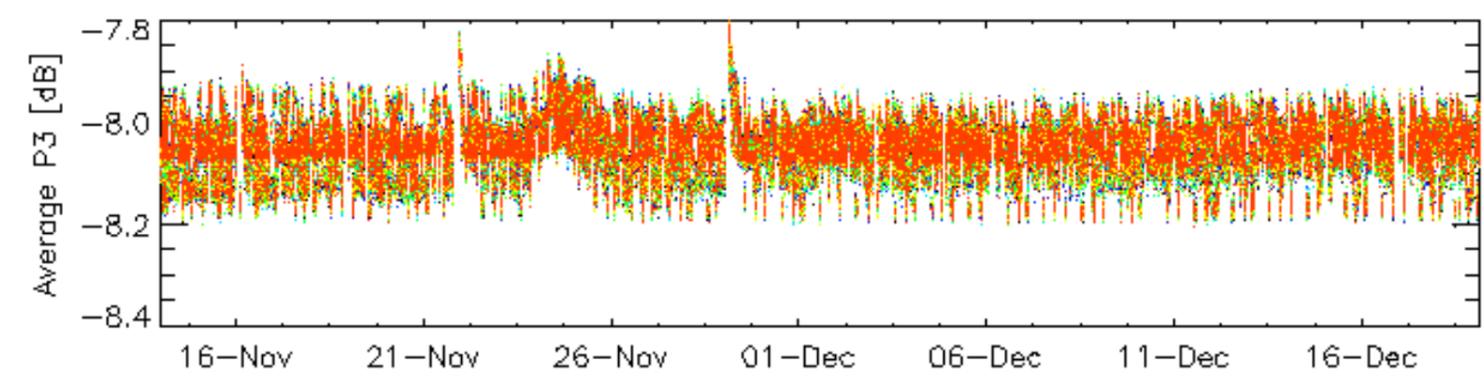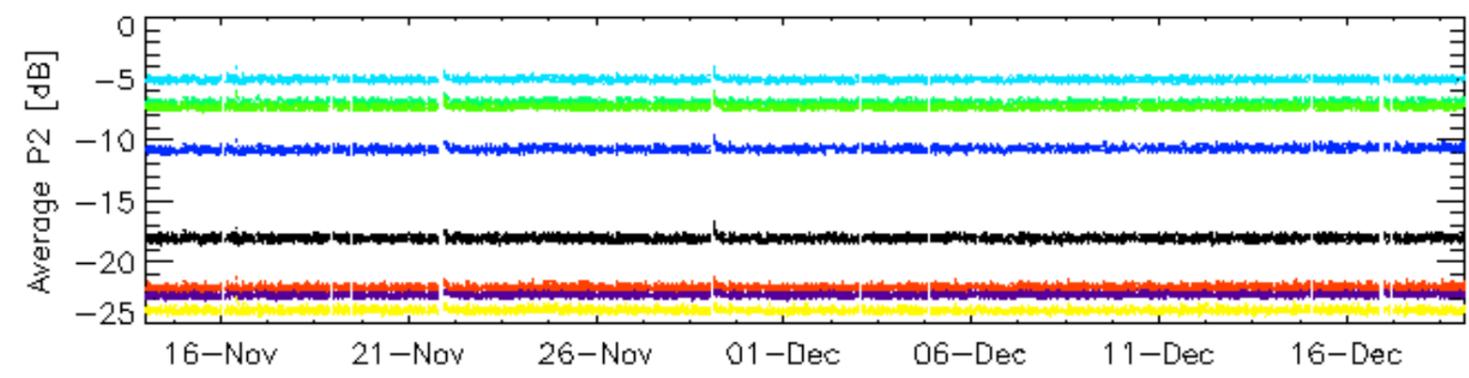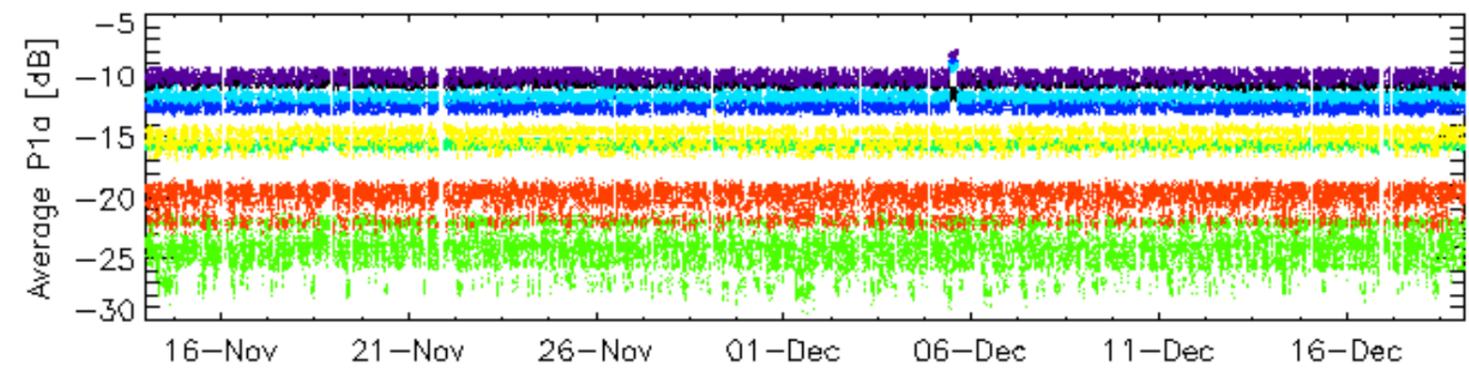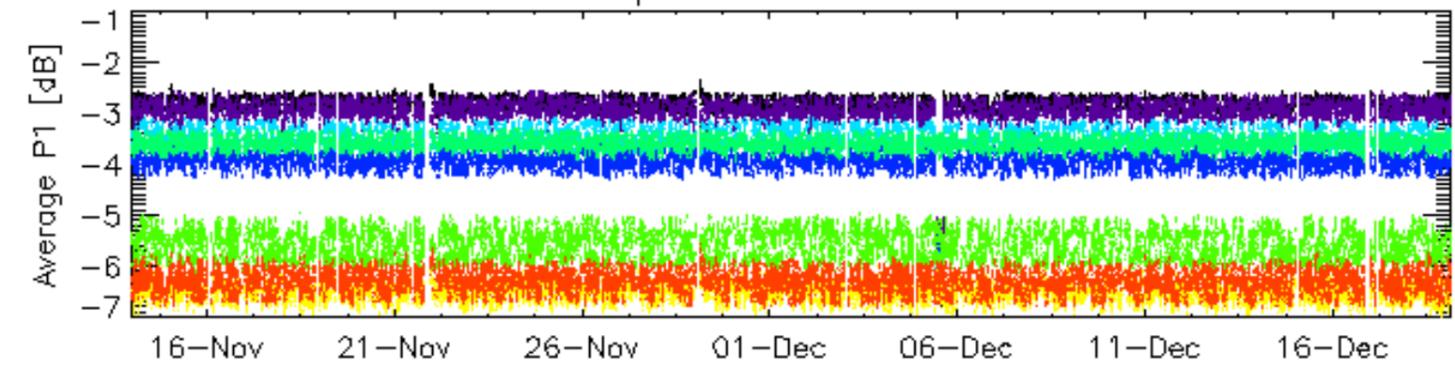





rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 26 _ 30

Cal pulses for GM1 SS3

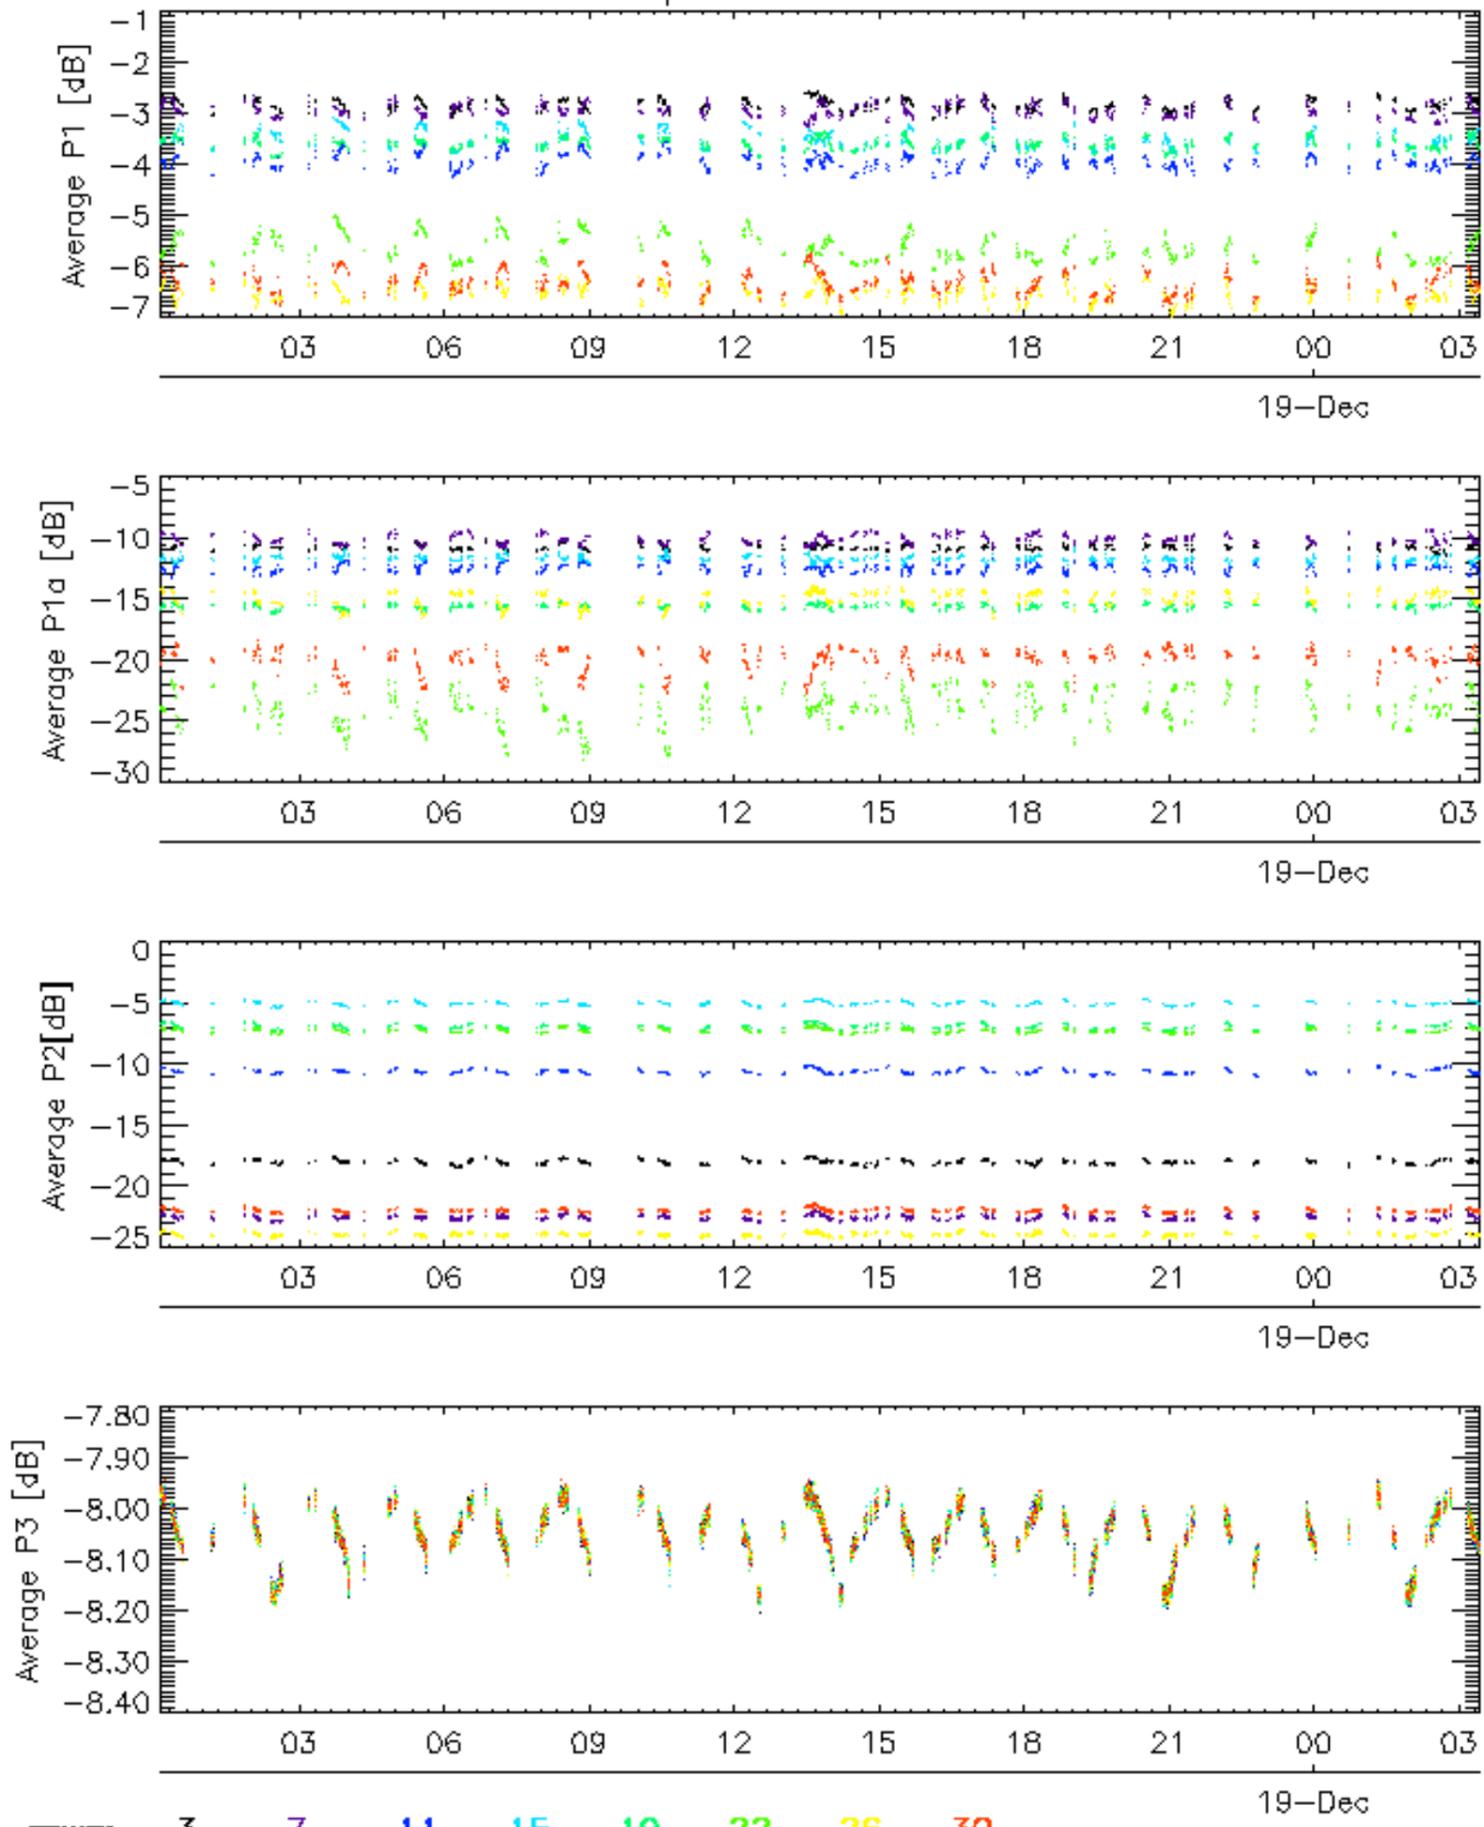


rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 26 _ 30

Cal pulses for WVS IS2

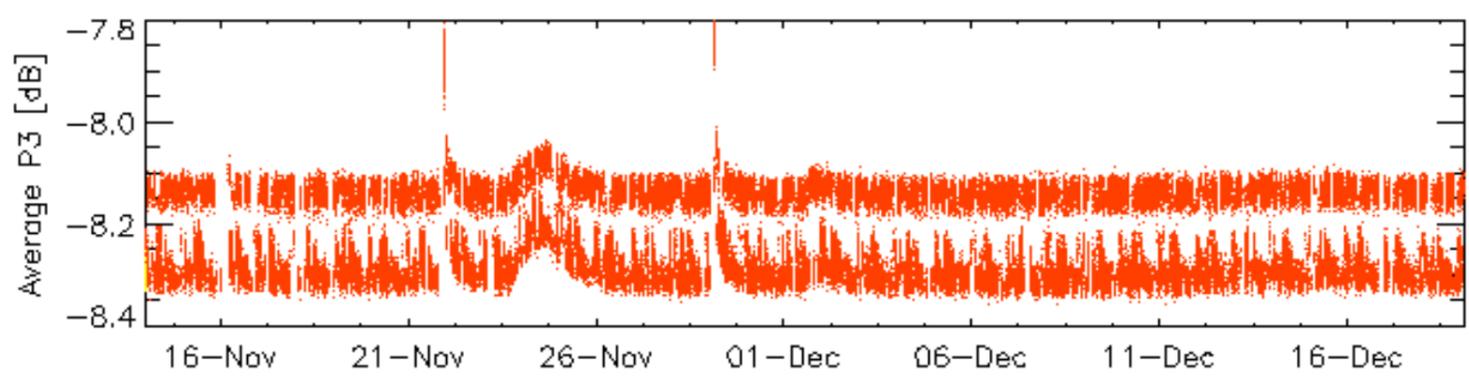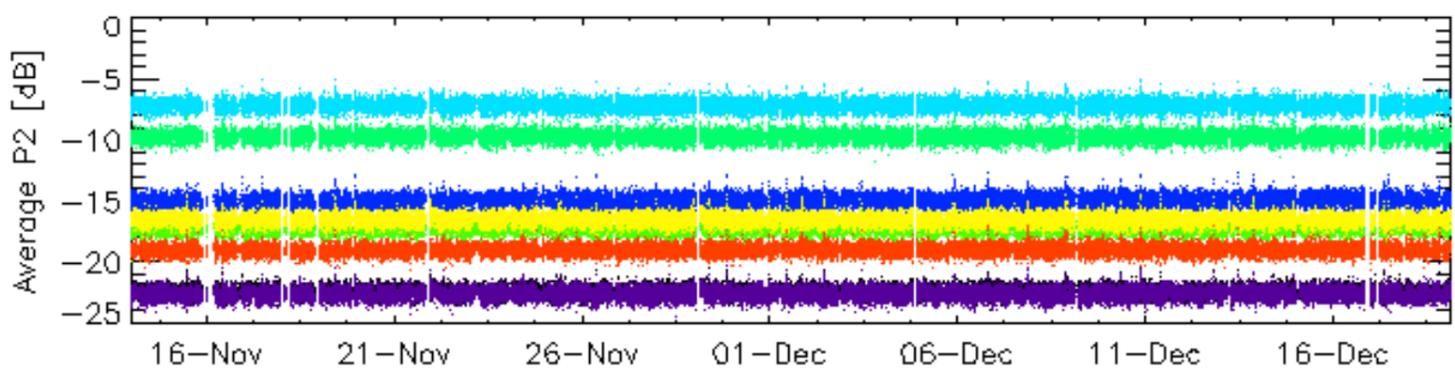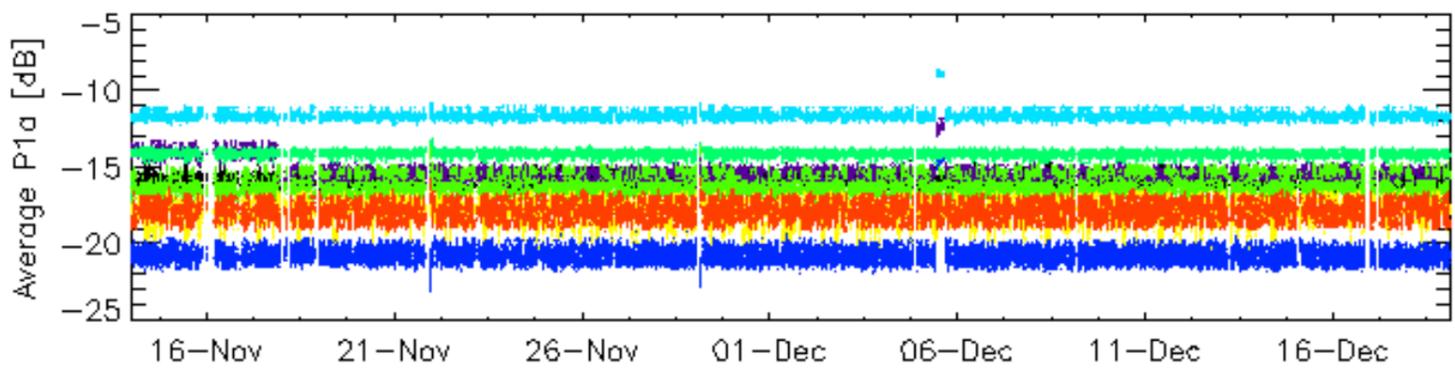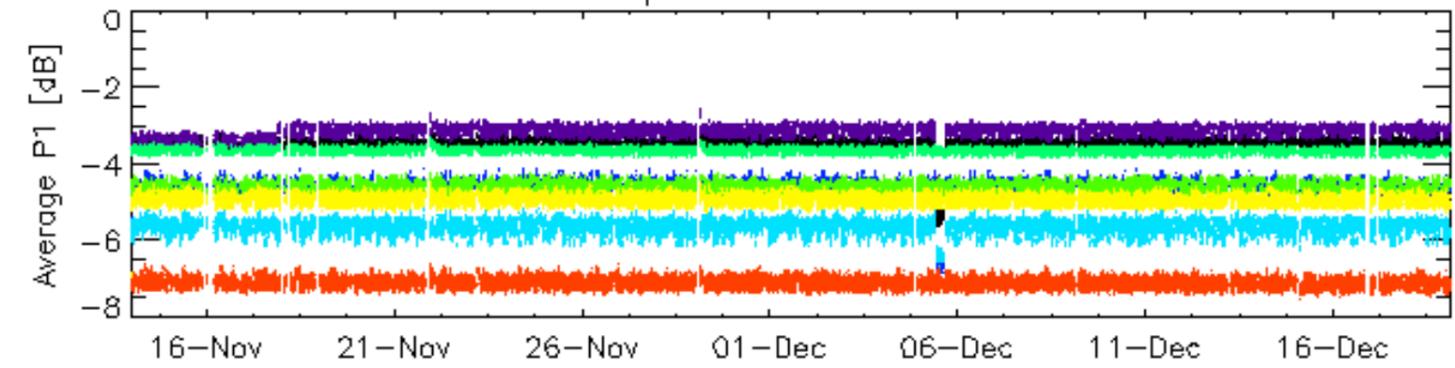



rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 26 _ 30

Cal pulses for WVS IS2

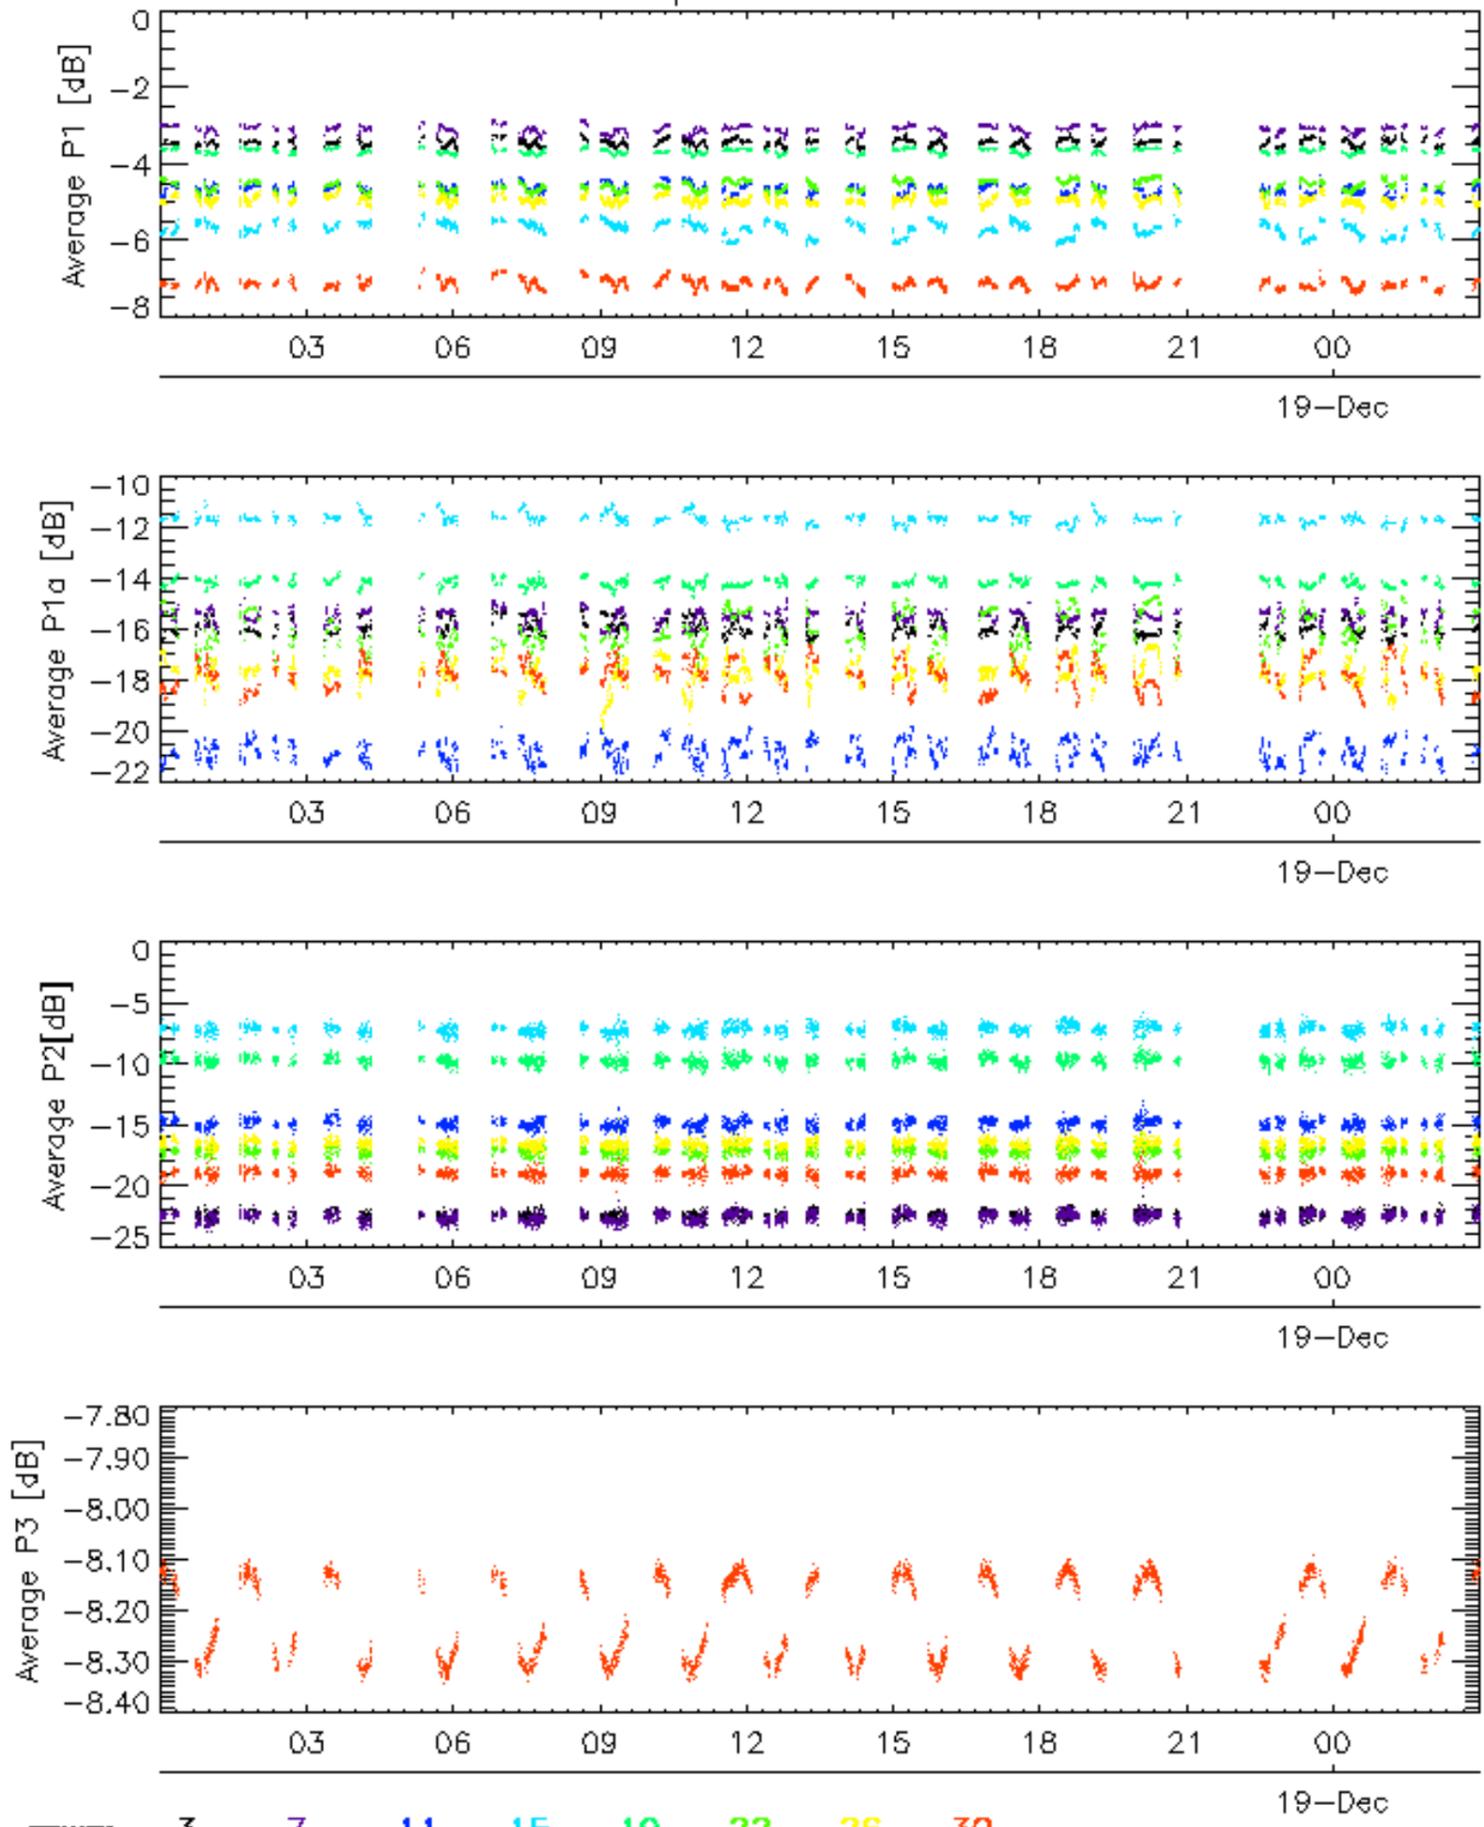


No anomalies observed.

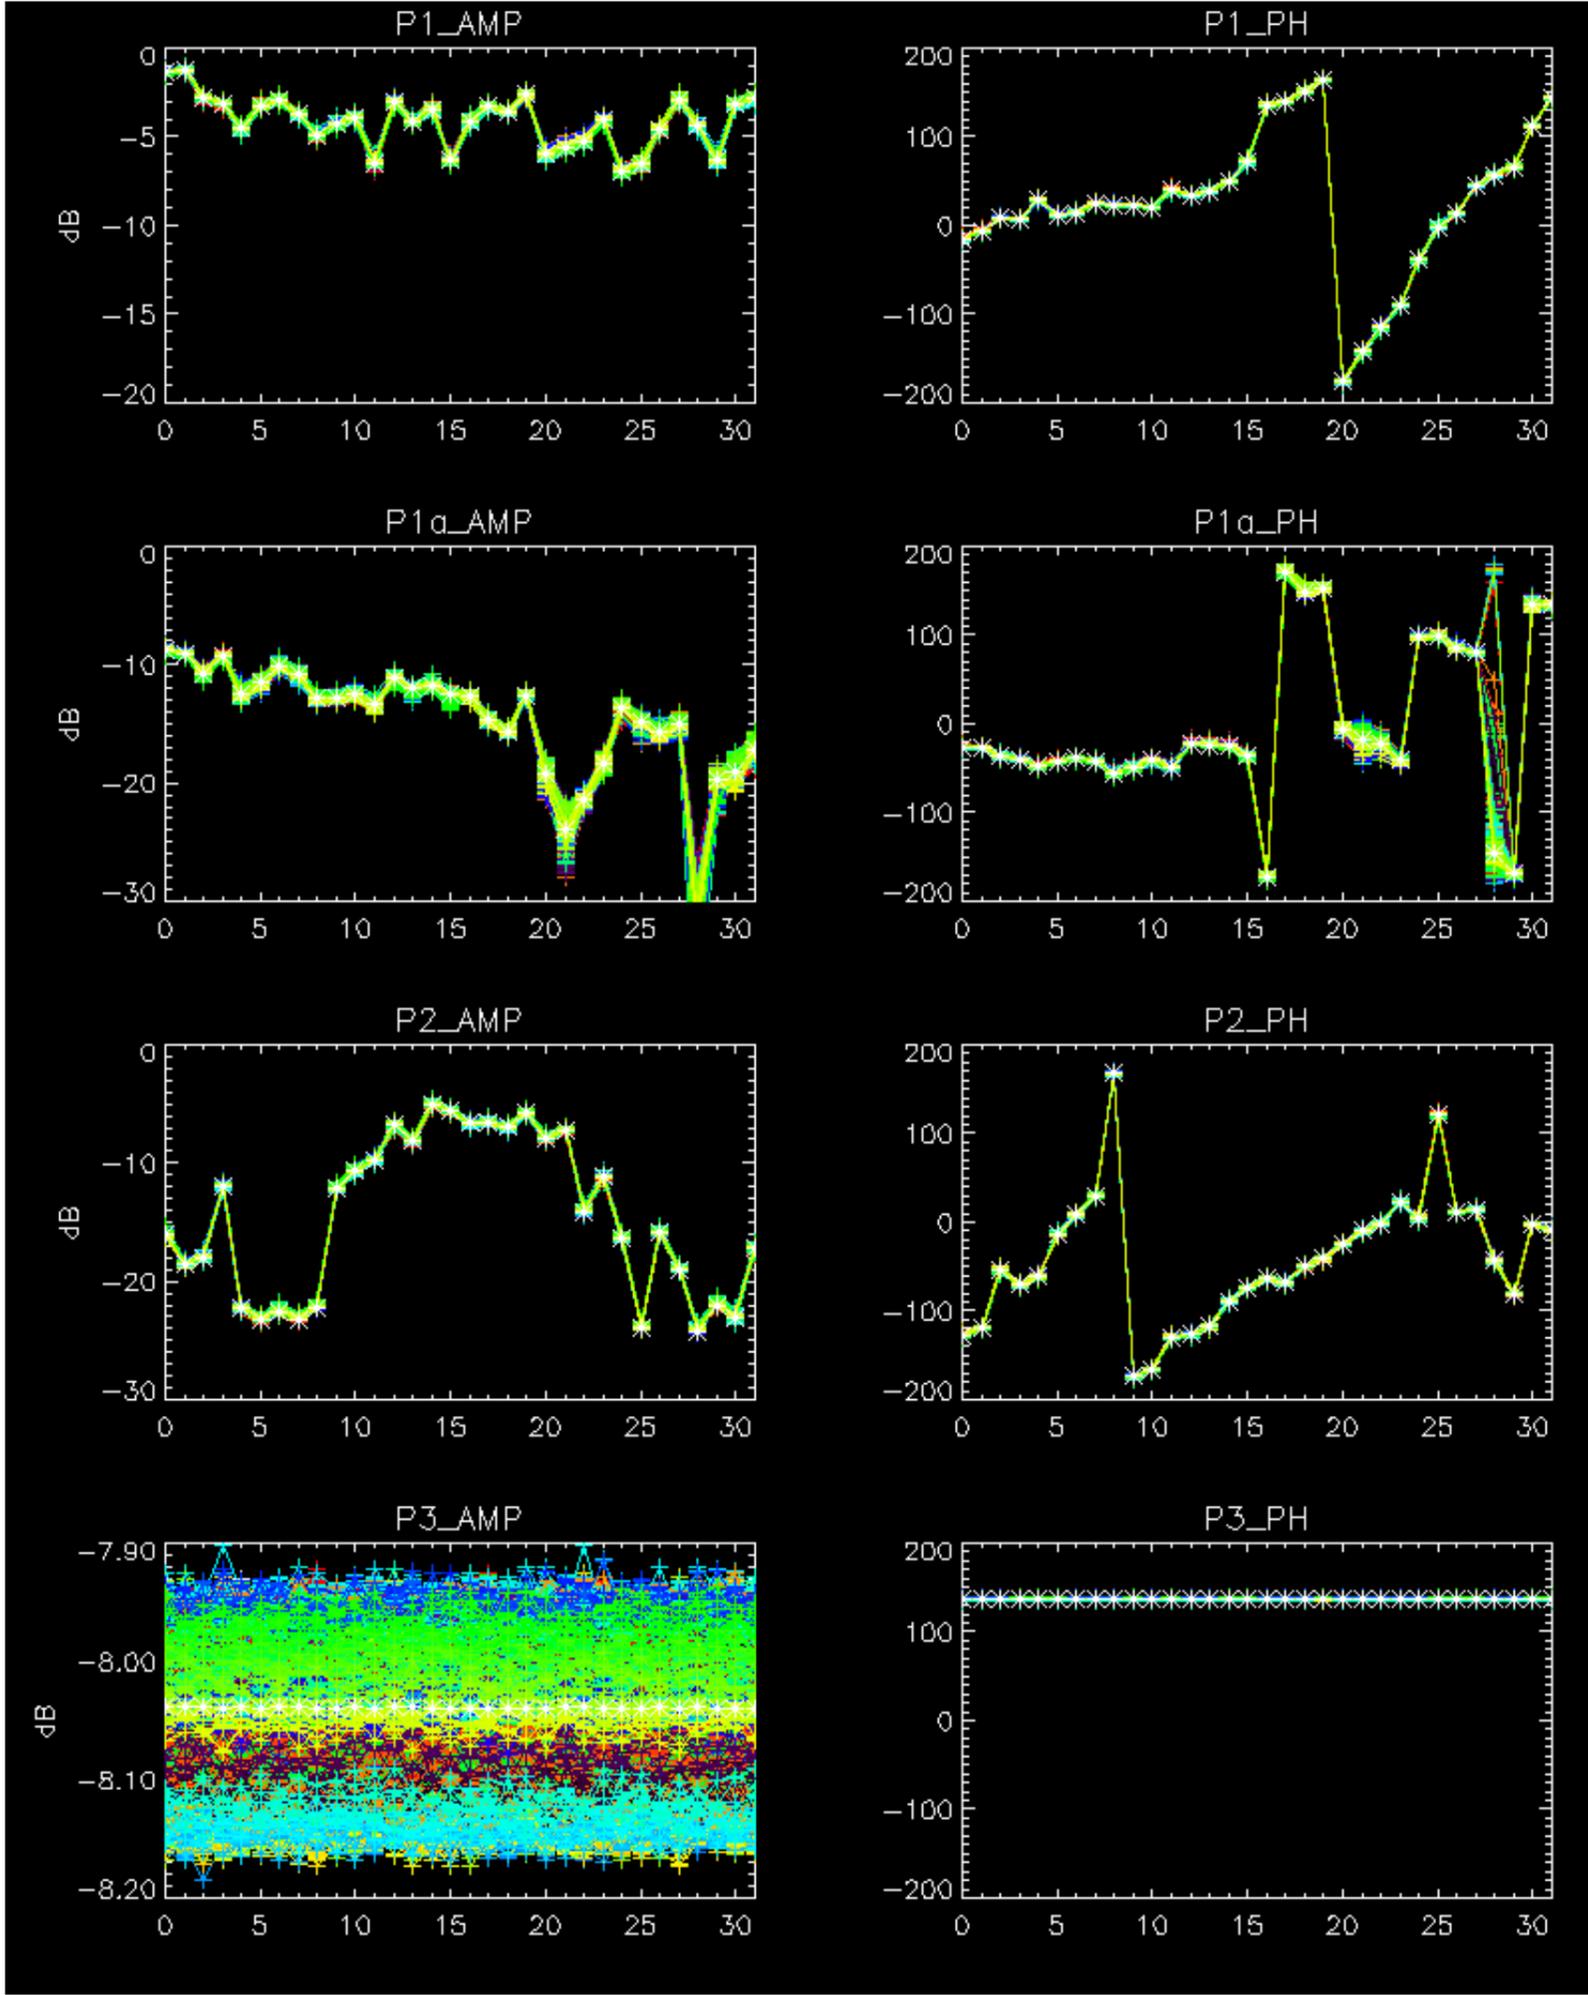

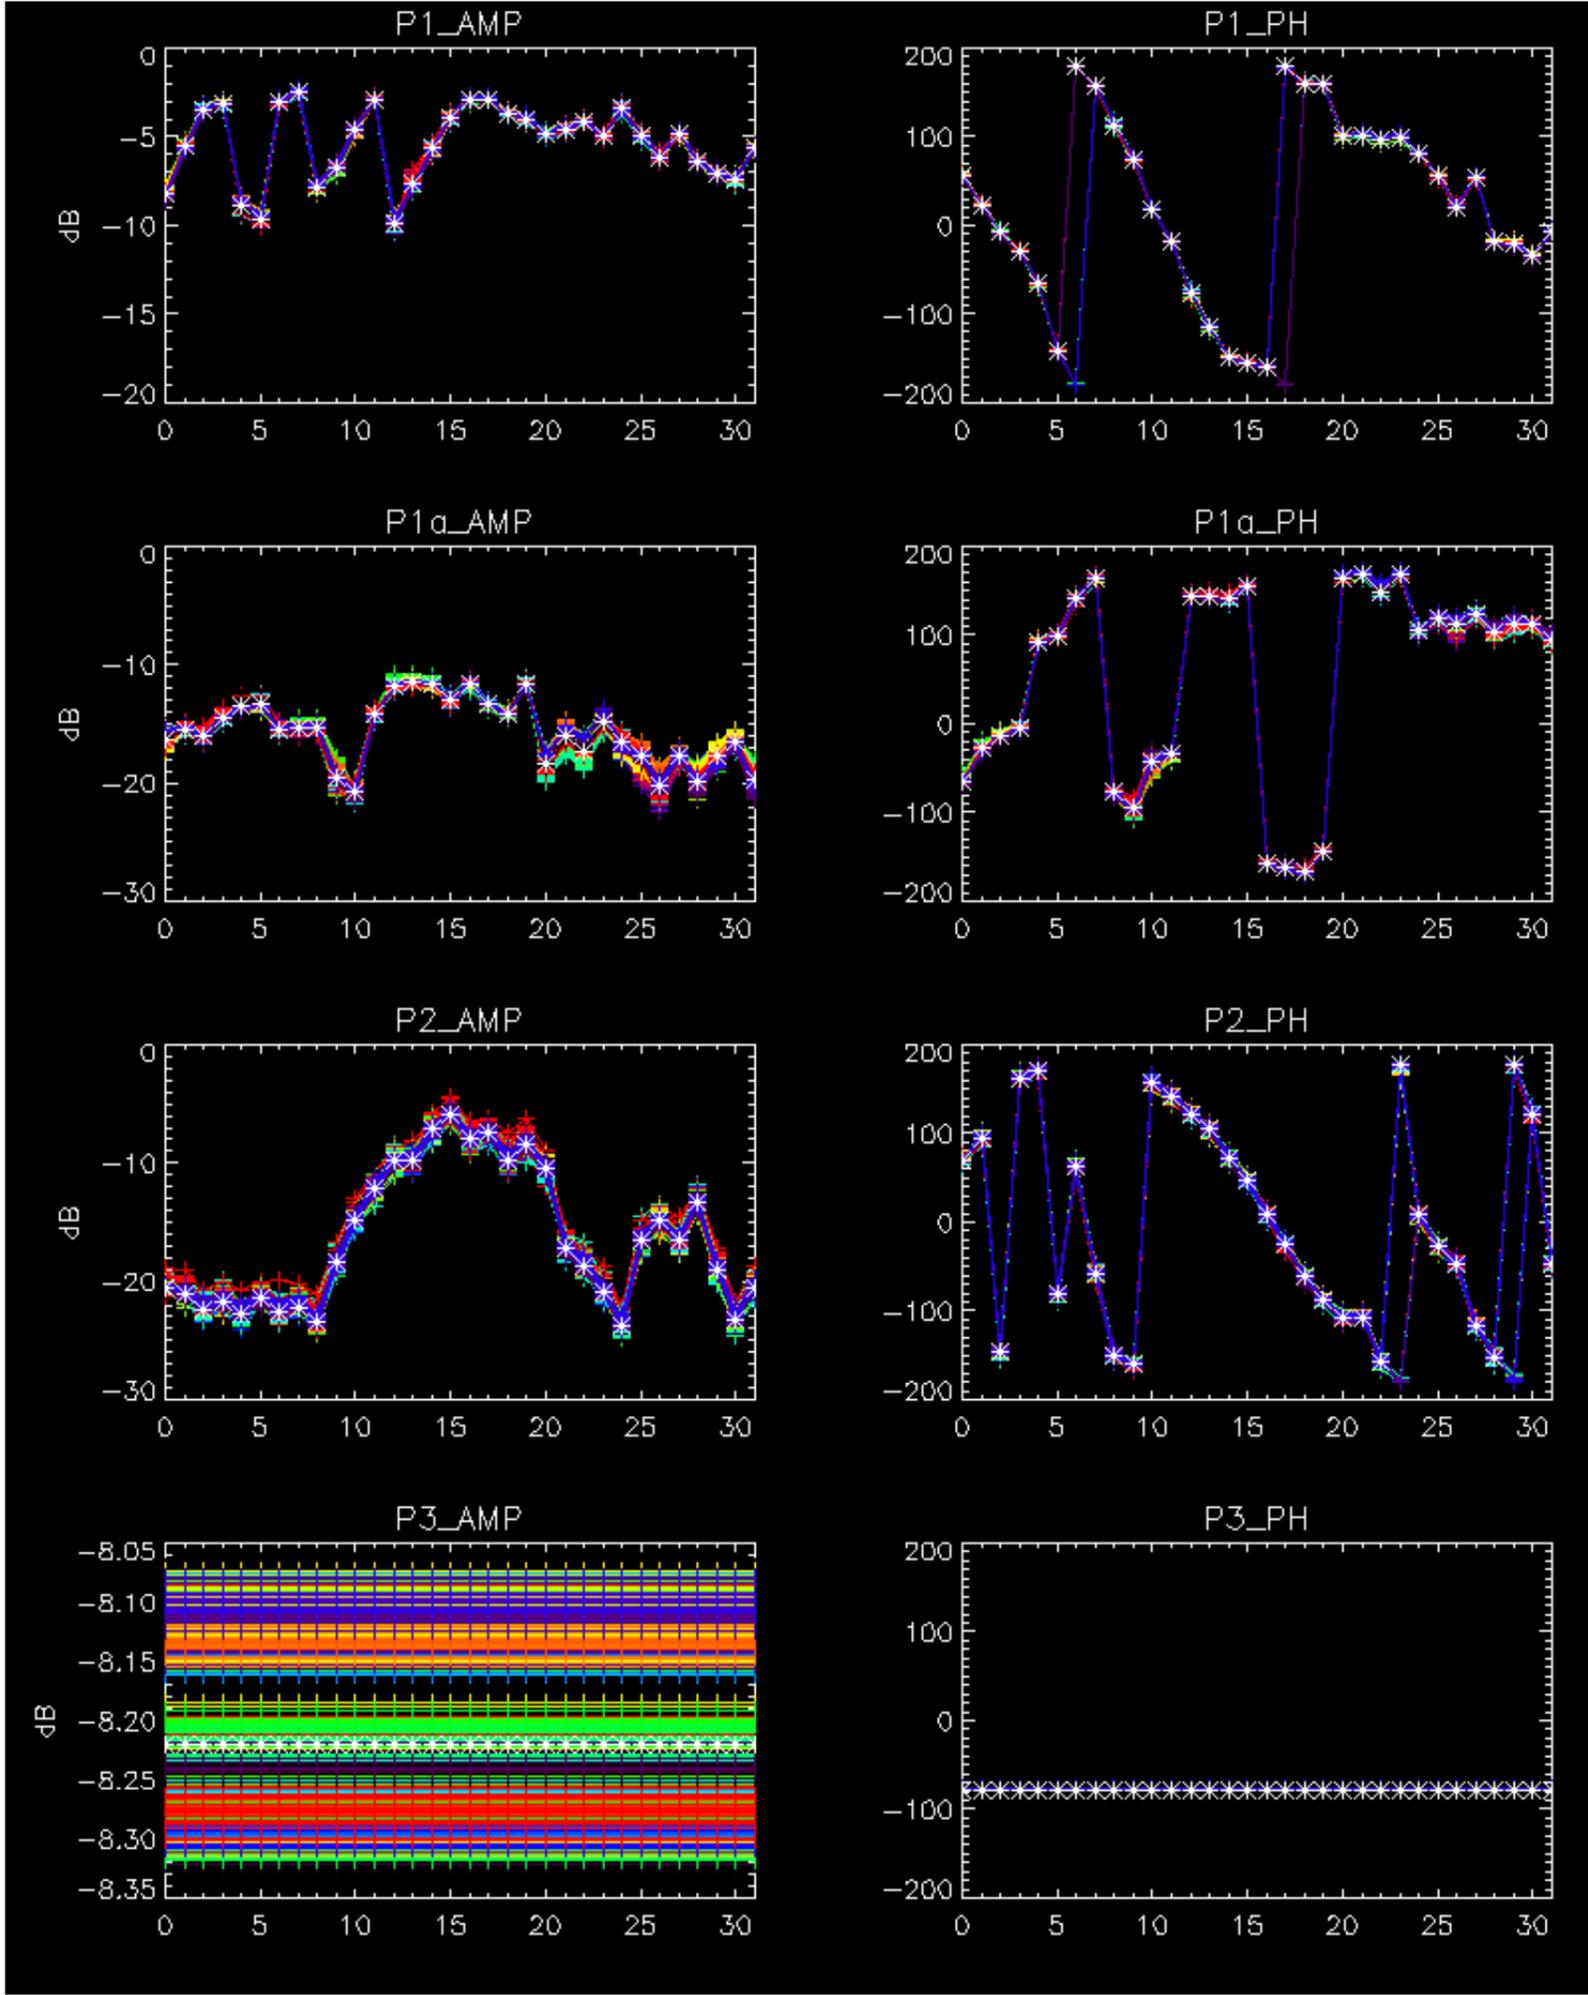


- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.


Doppler 'GM1' 'SS1' ascending

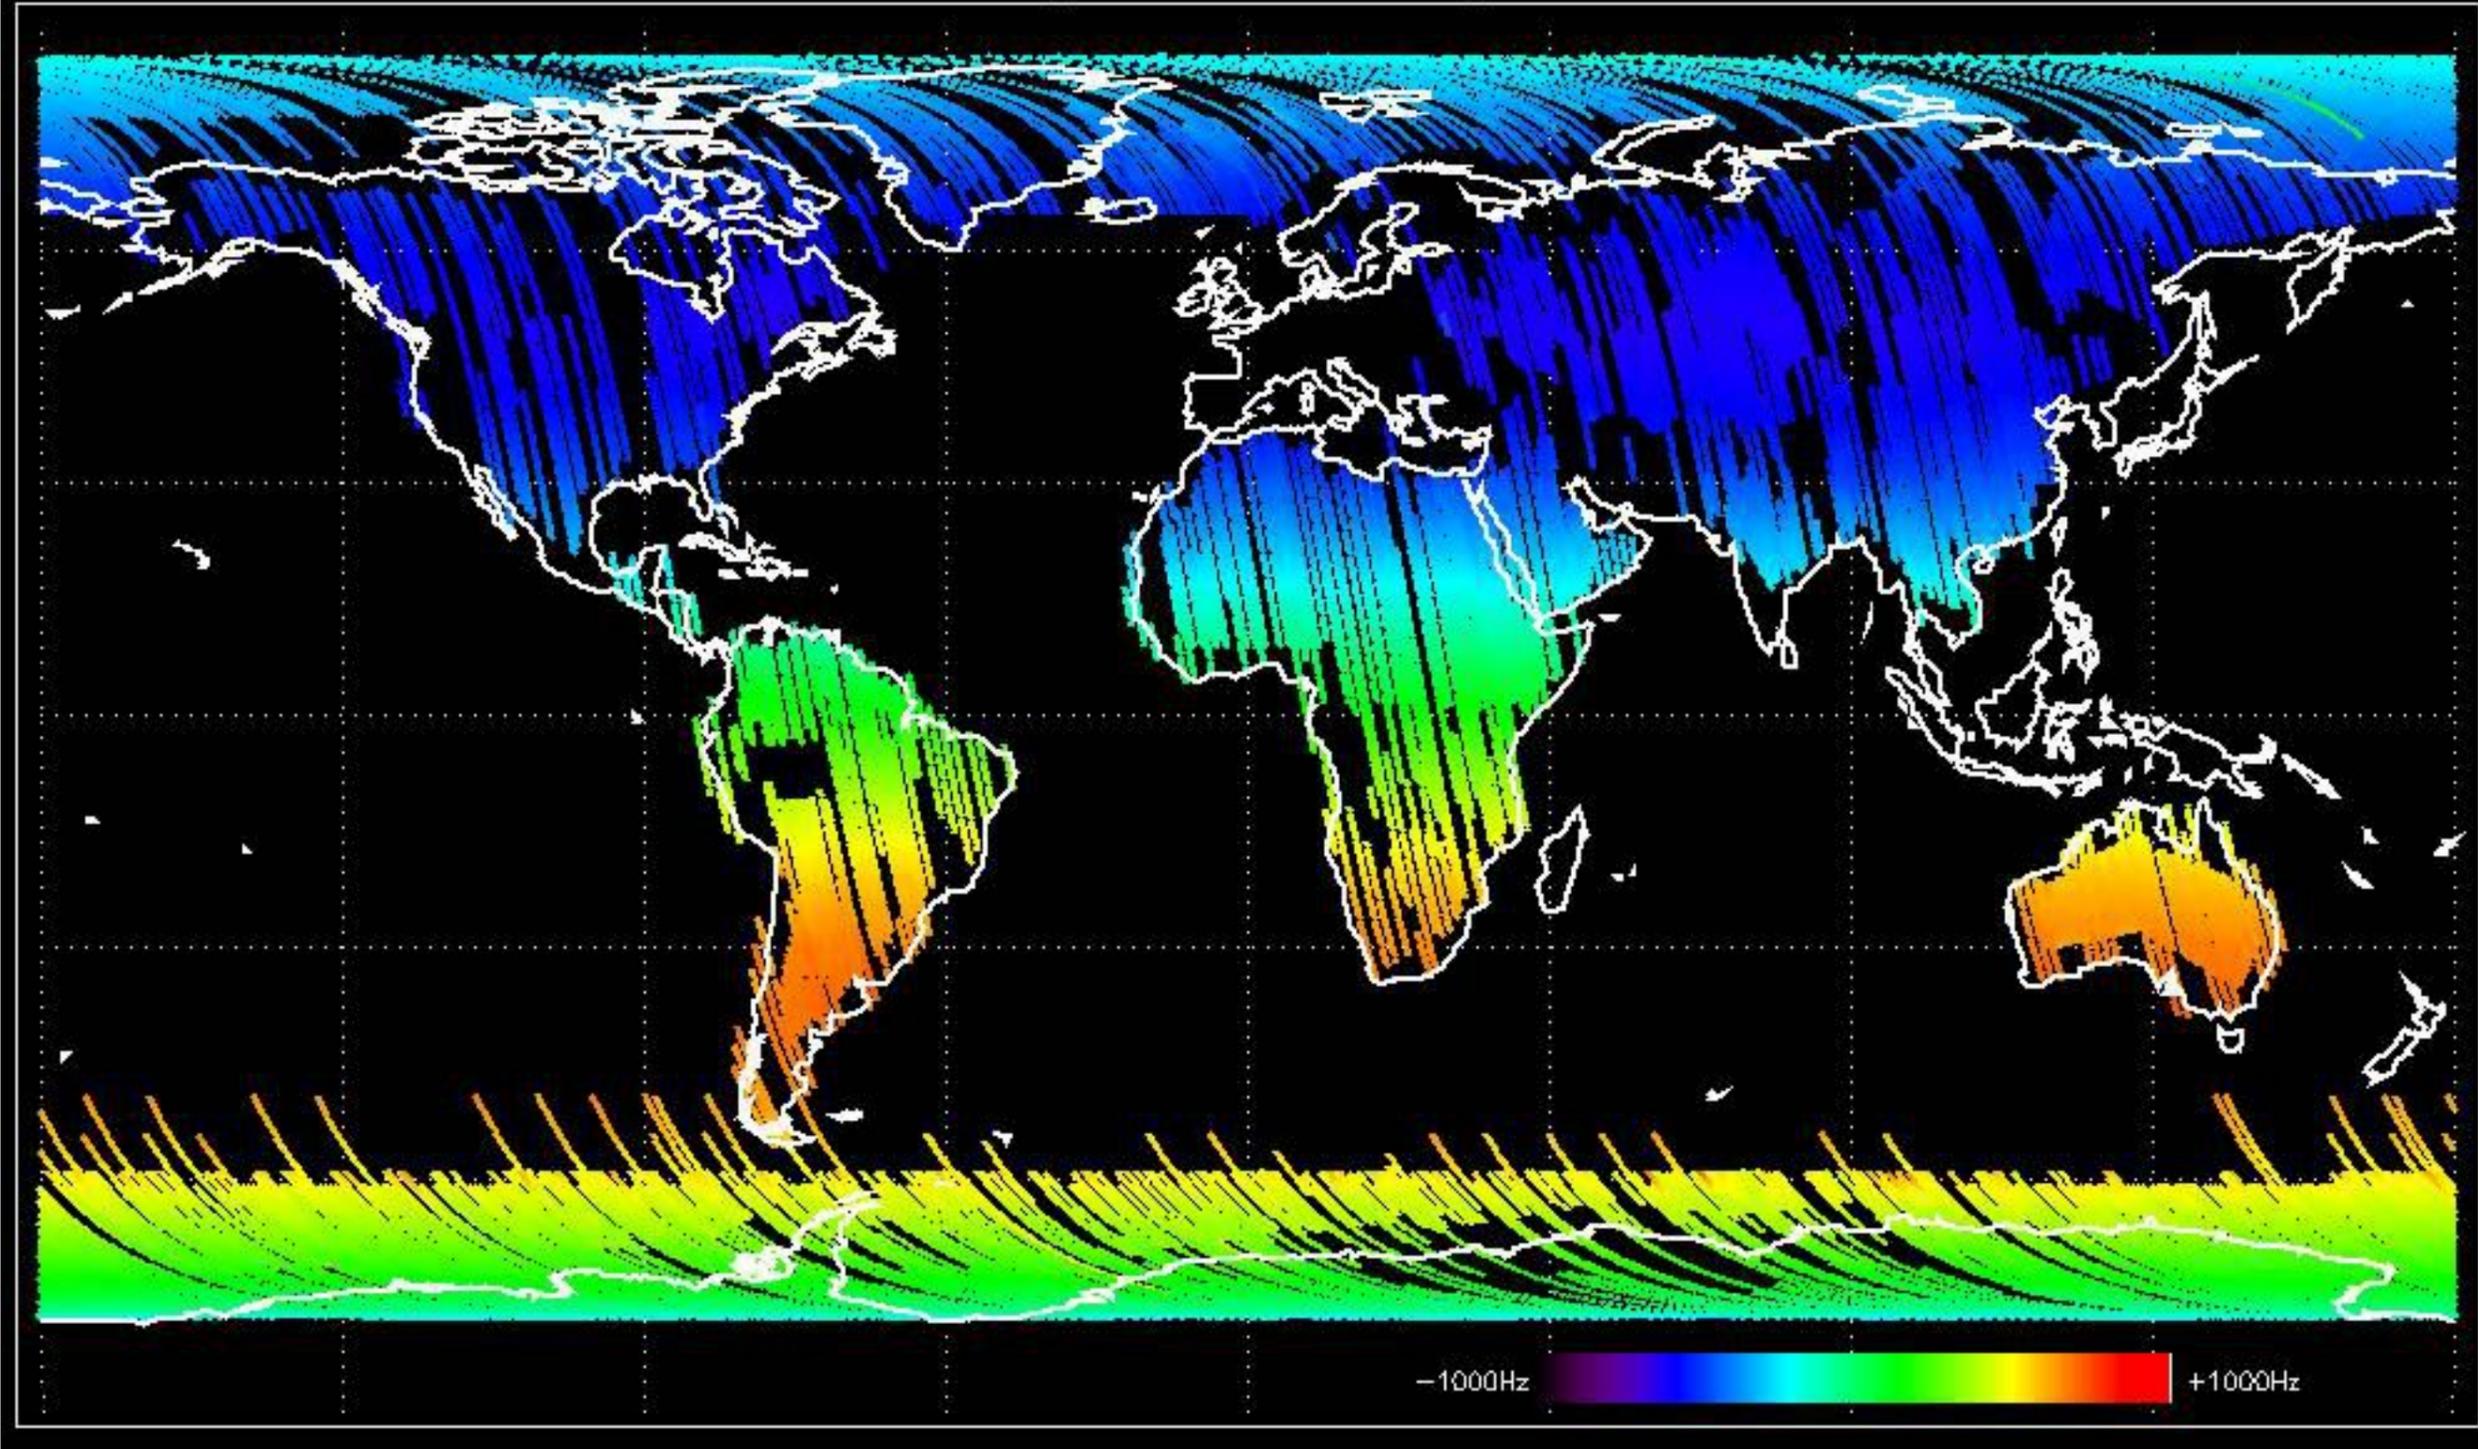


Doppler 'GM1' 'SS1' descending

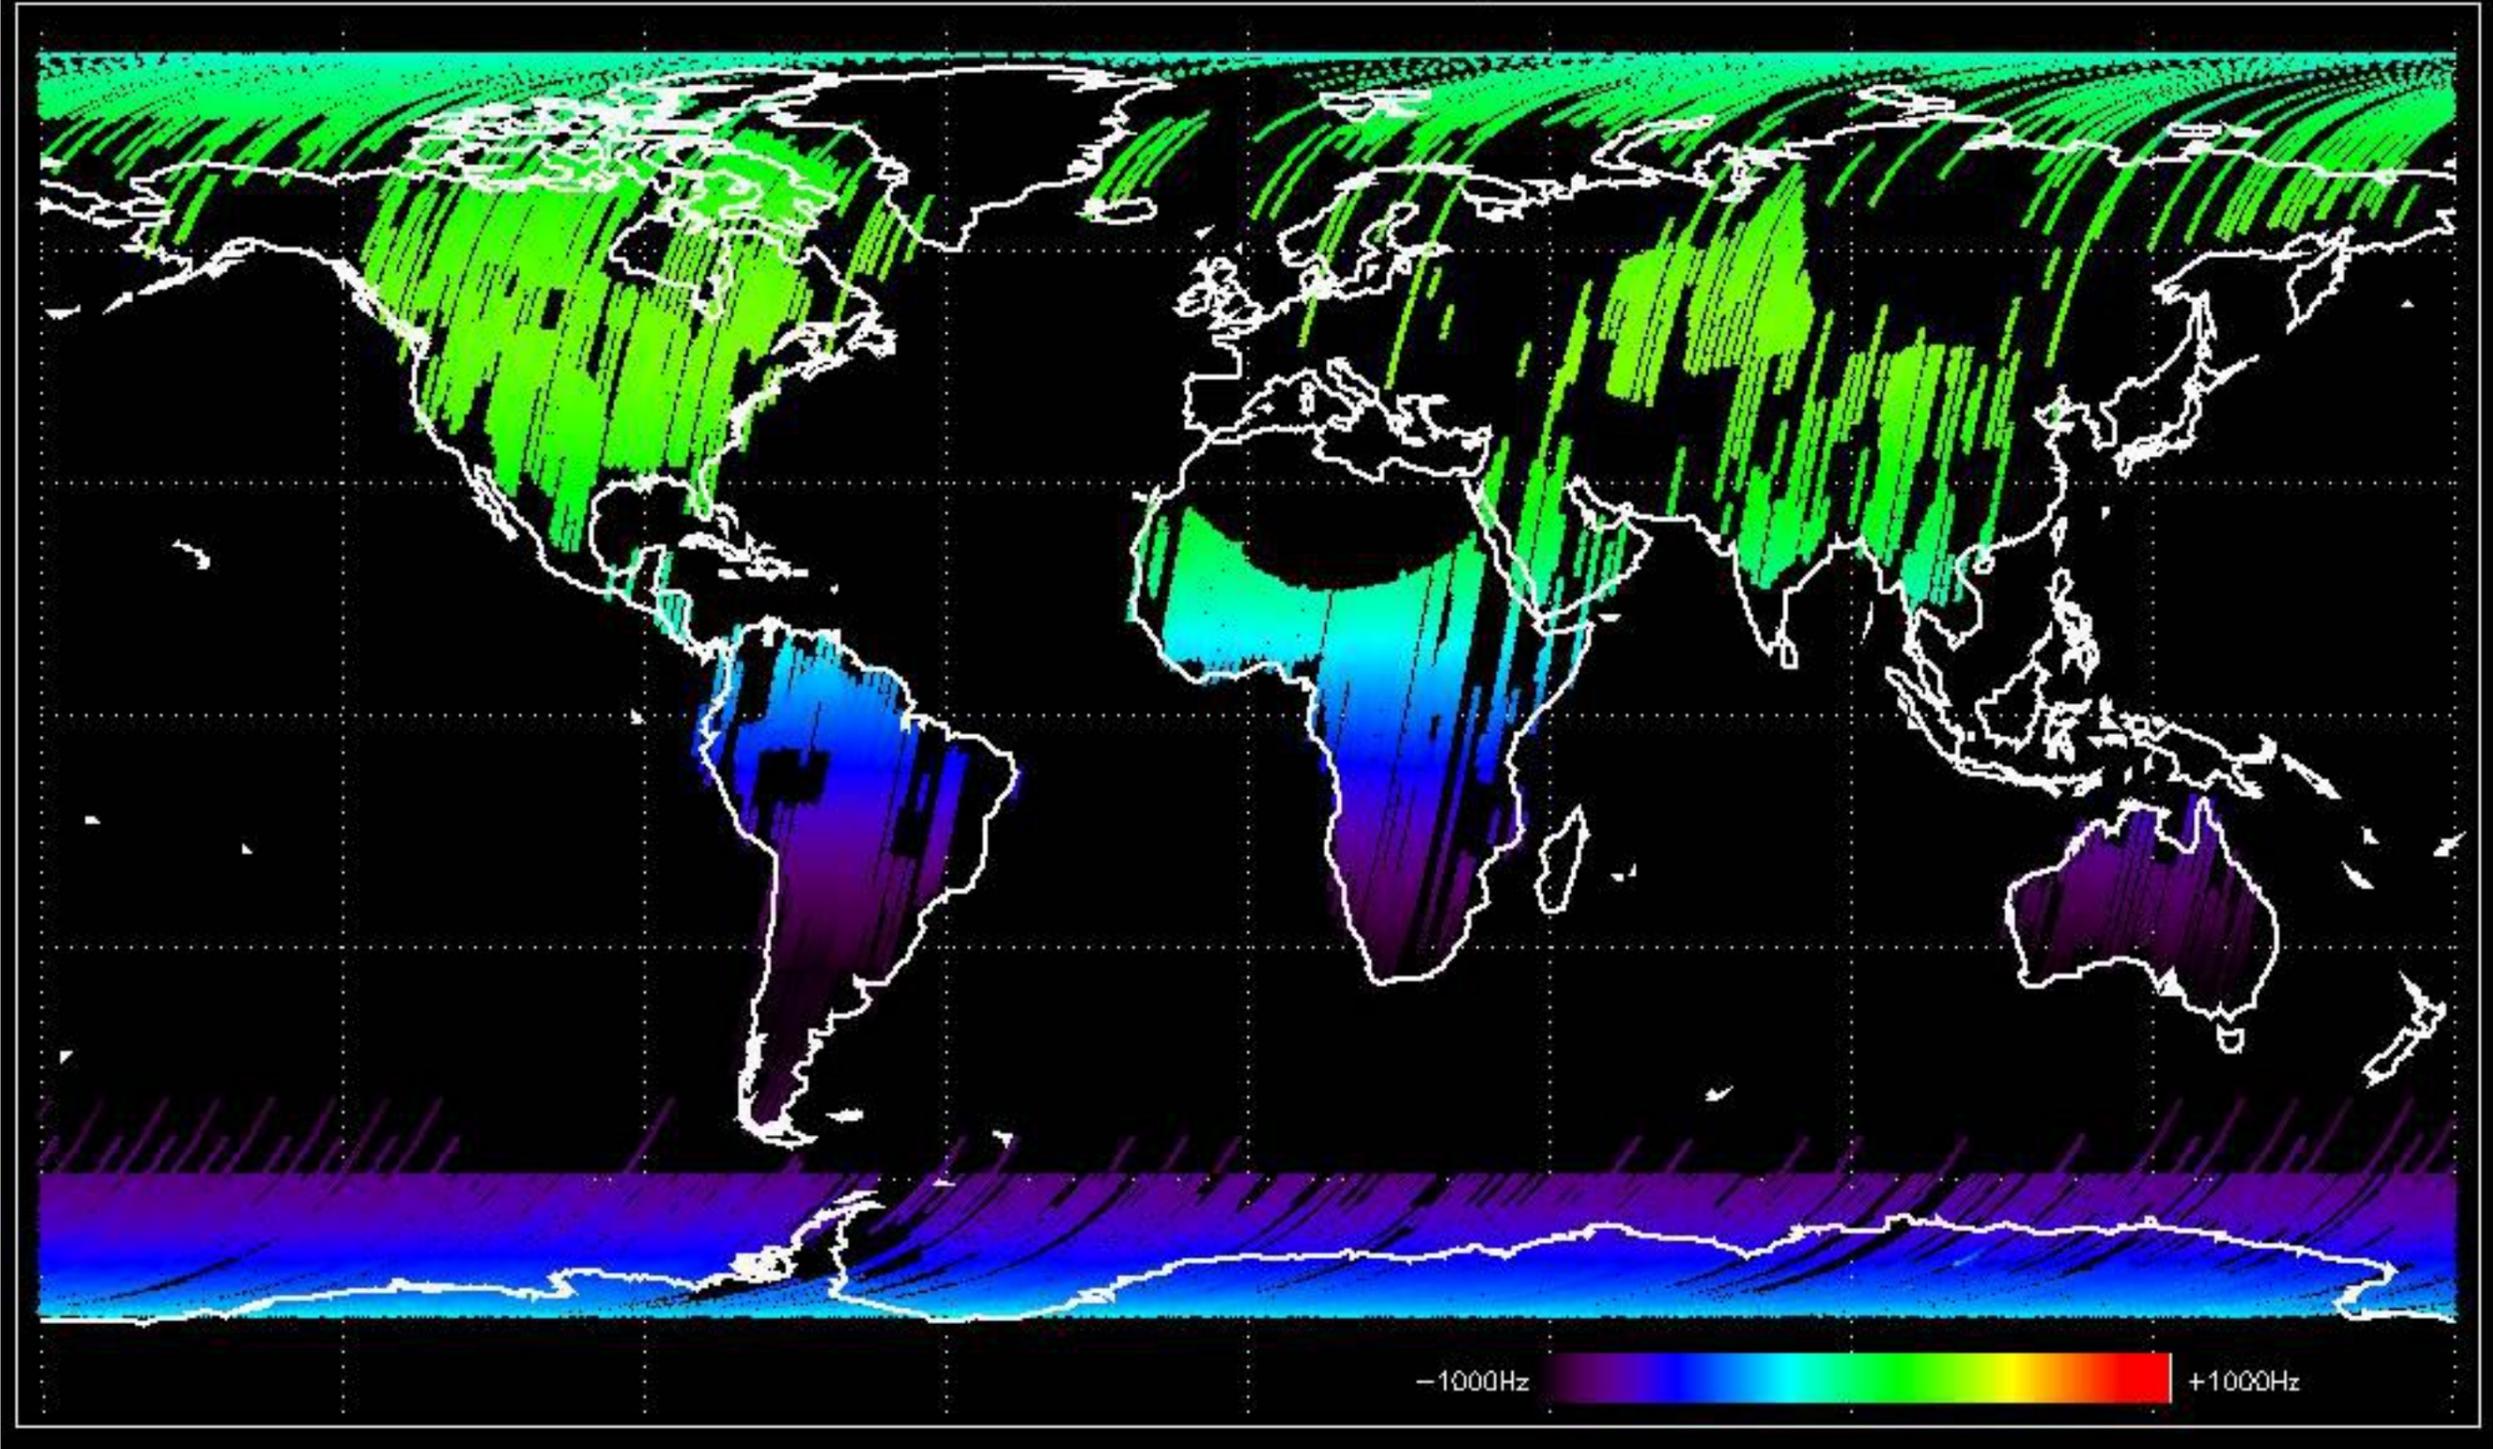




Doppler 'WVS' 'IS2' ascending



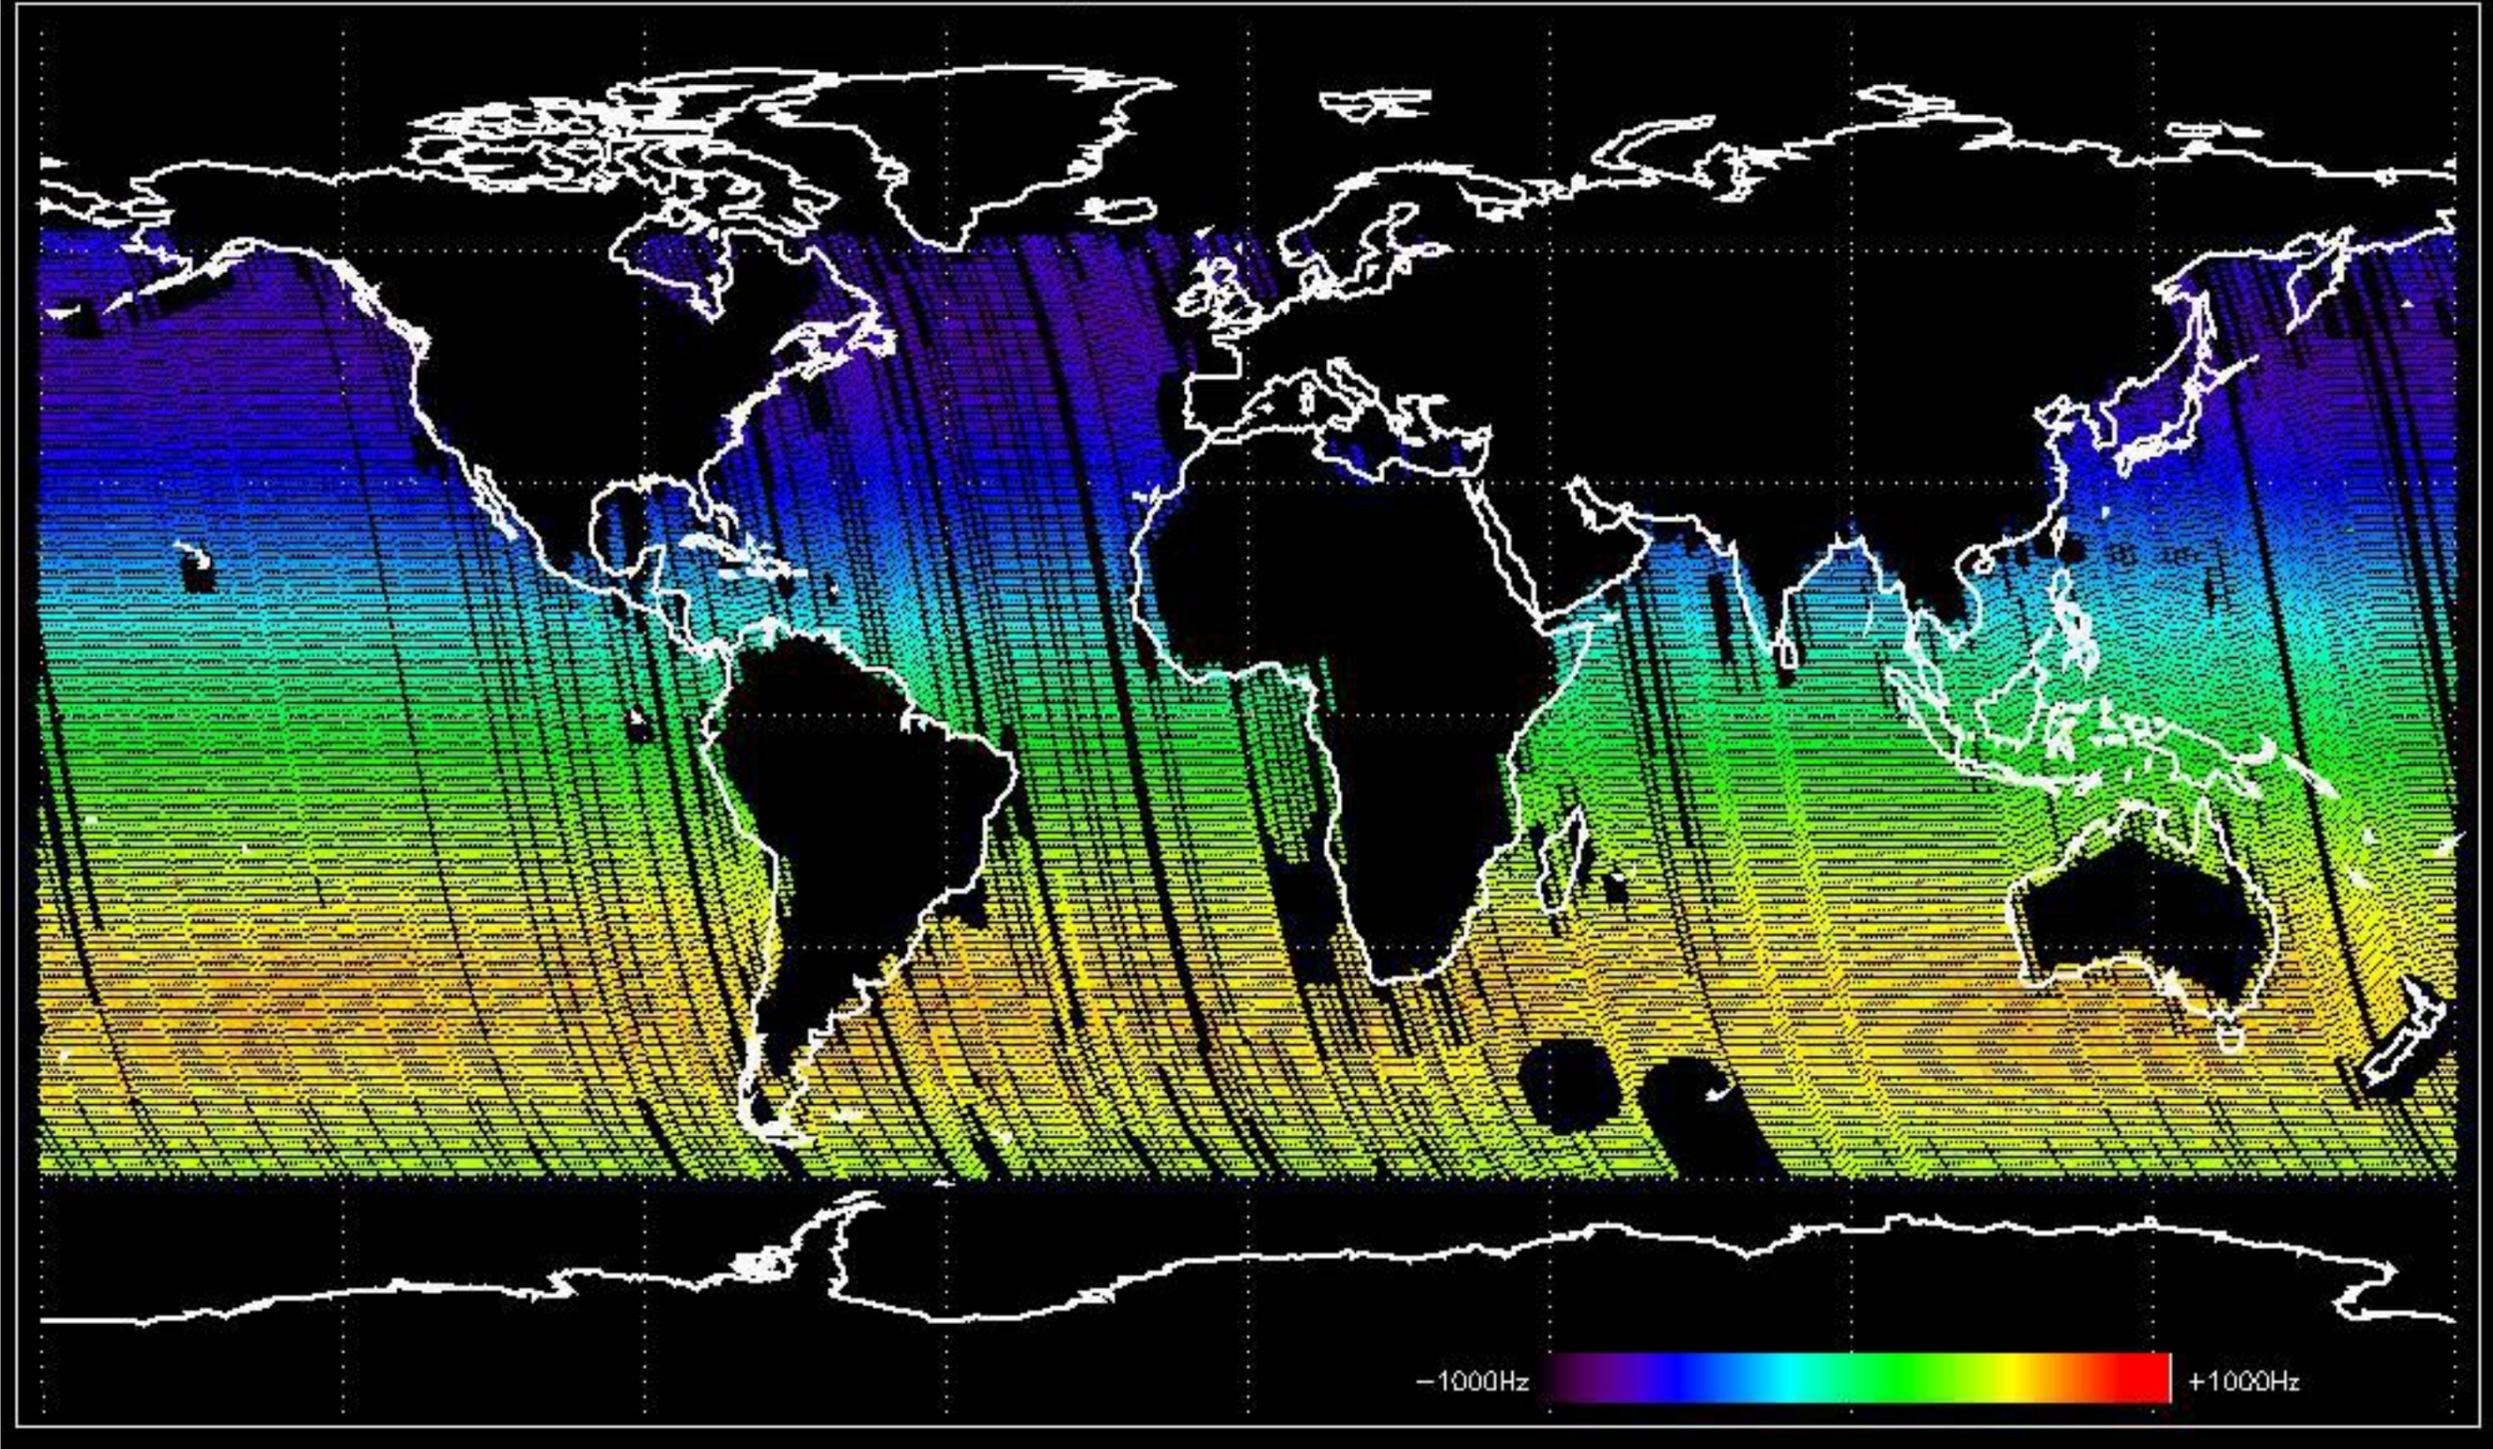


Doppler 'WVS' 'IS2' descending

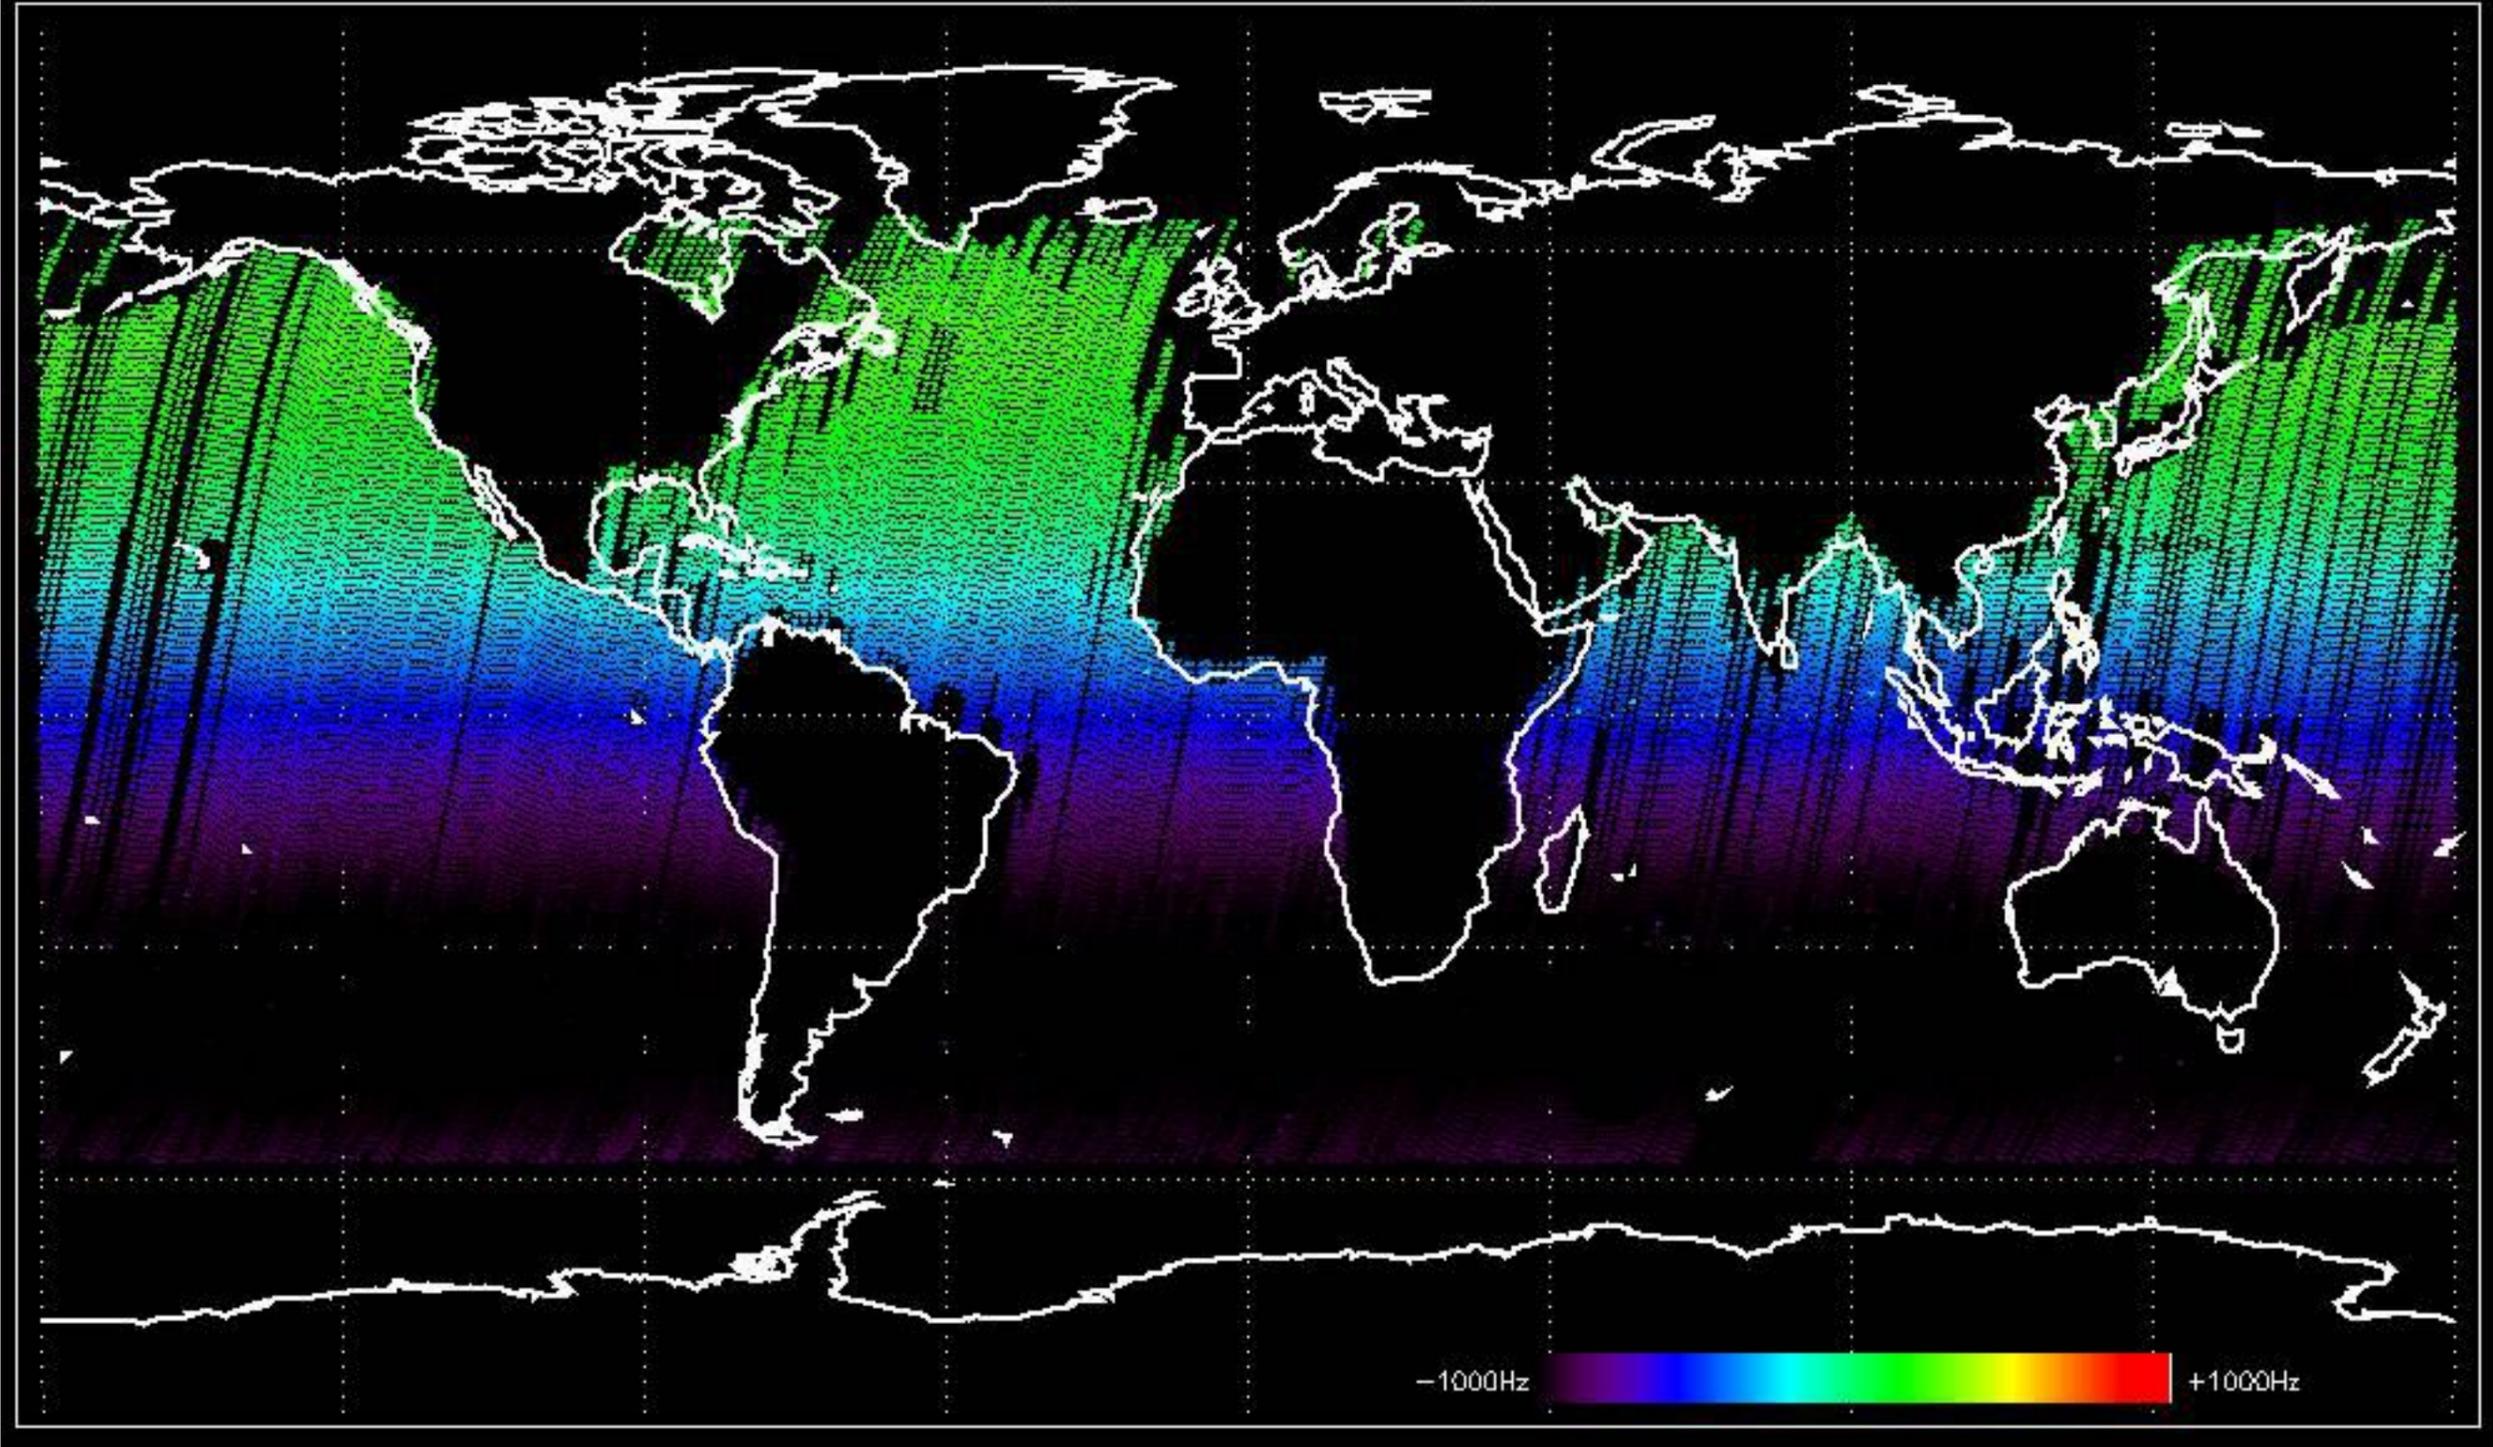


GM1 mode doppler

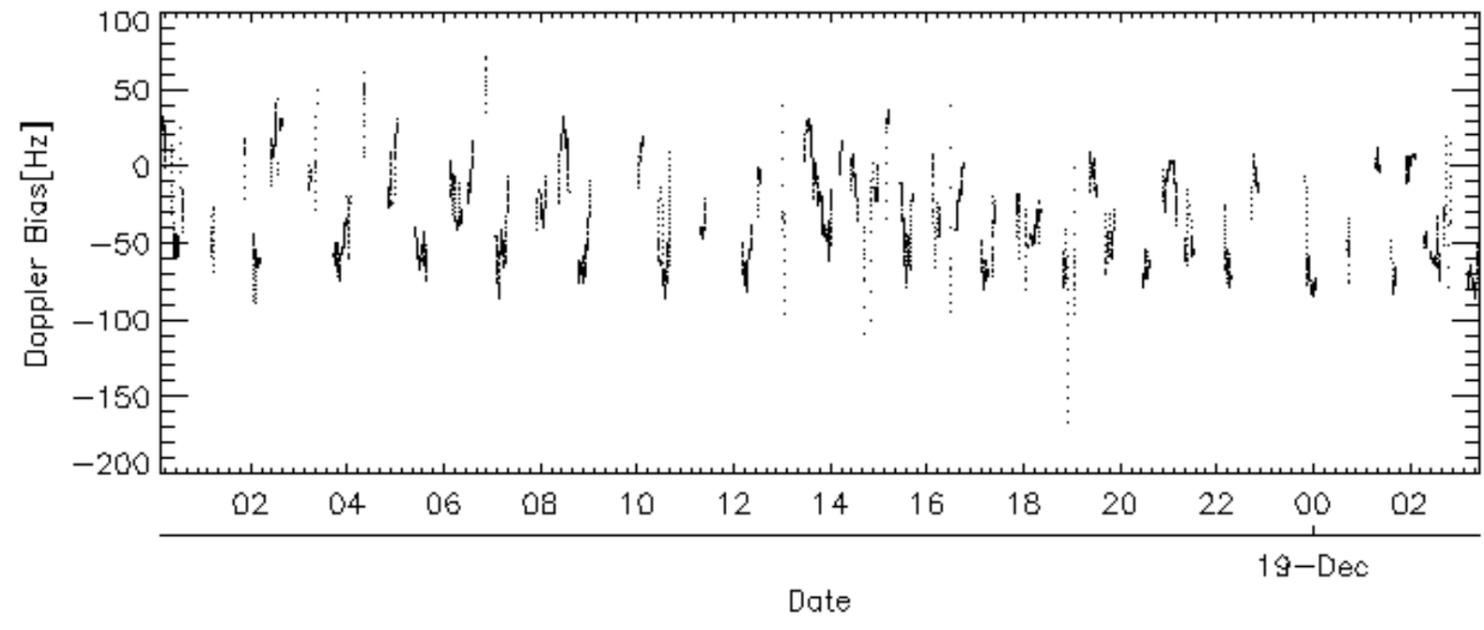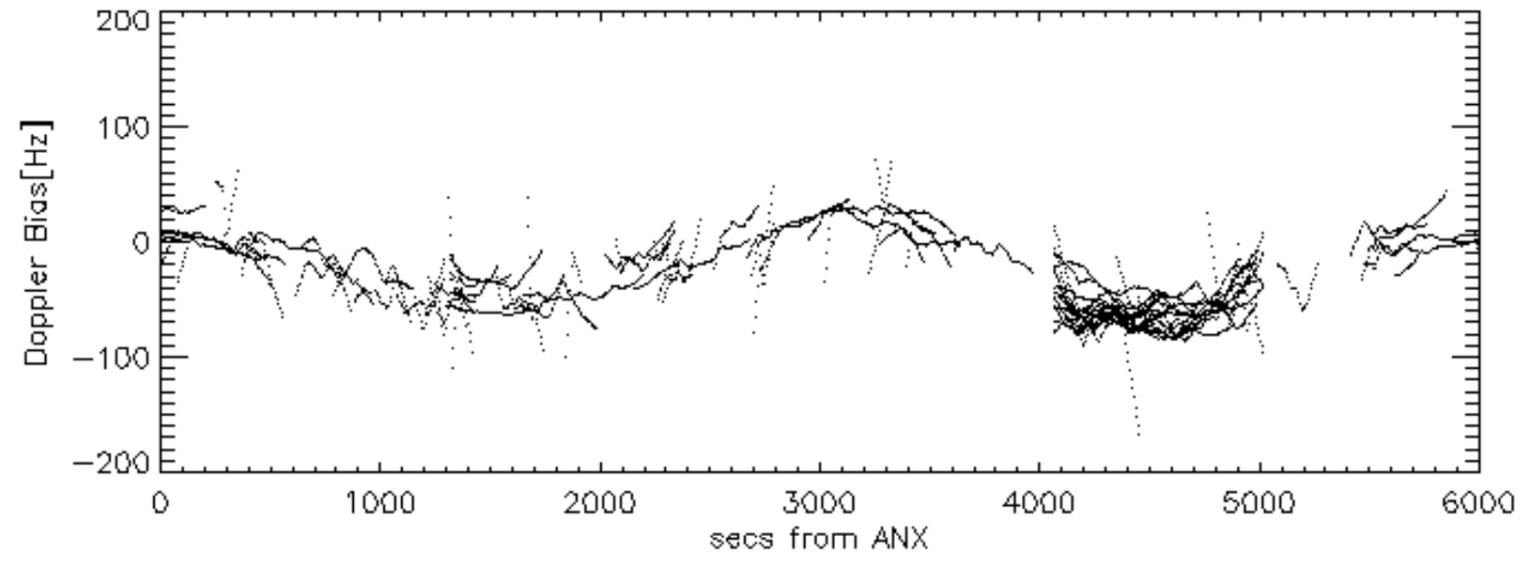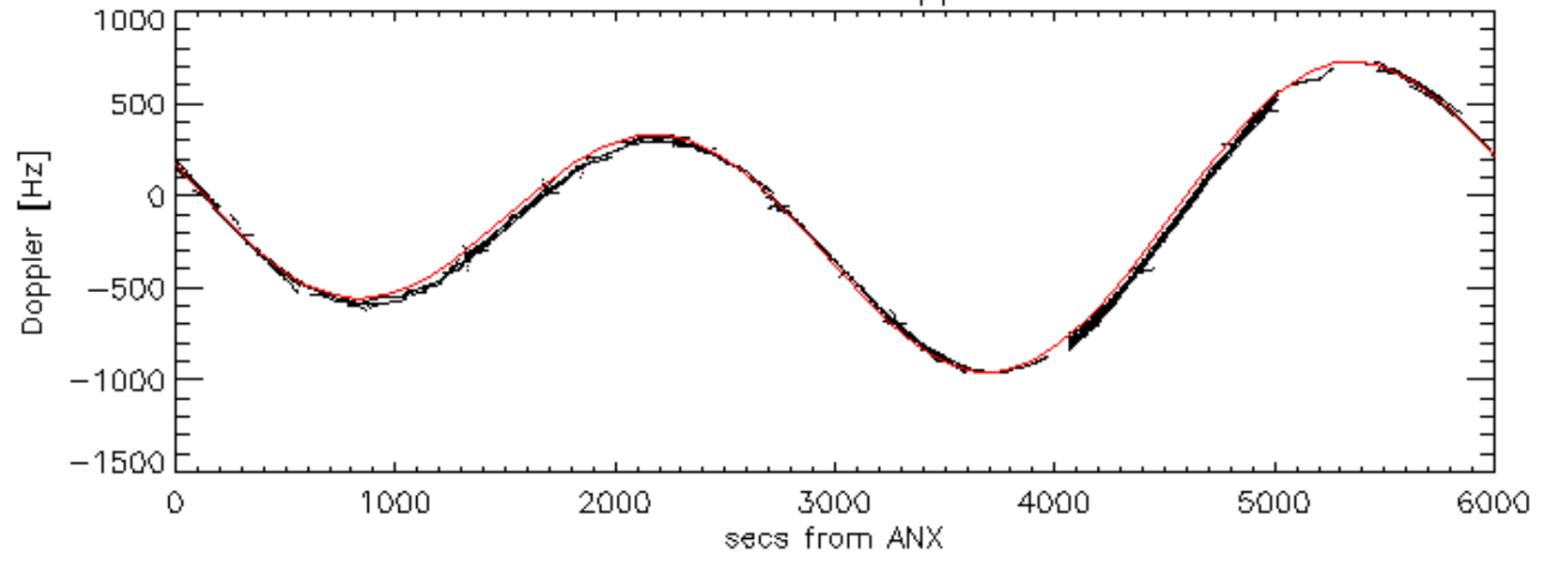


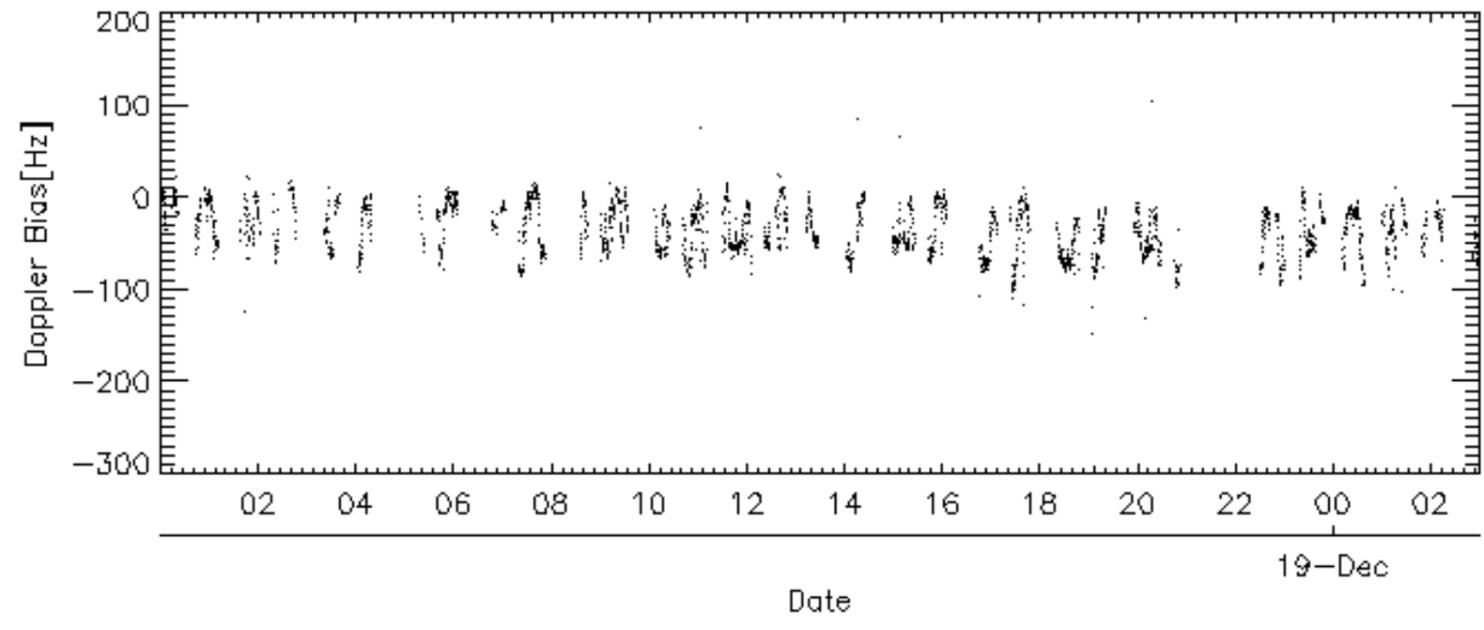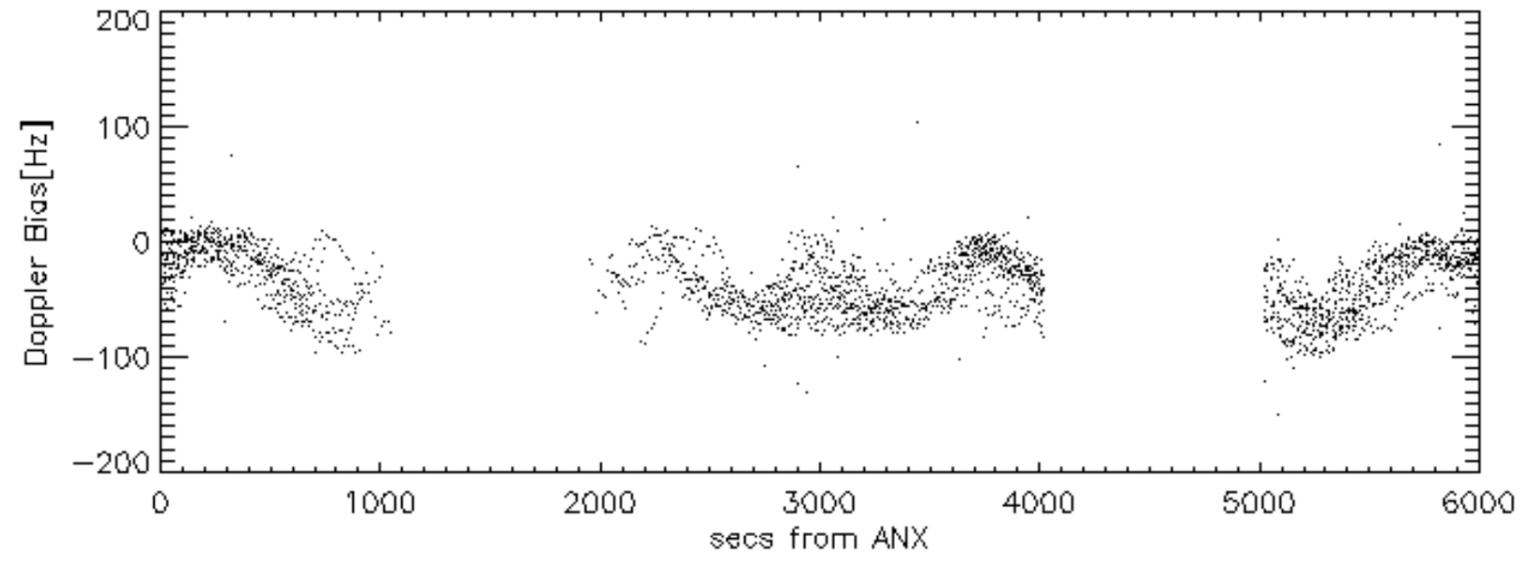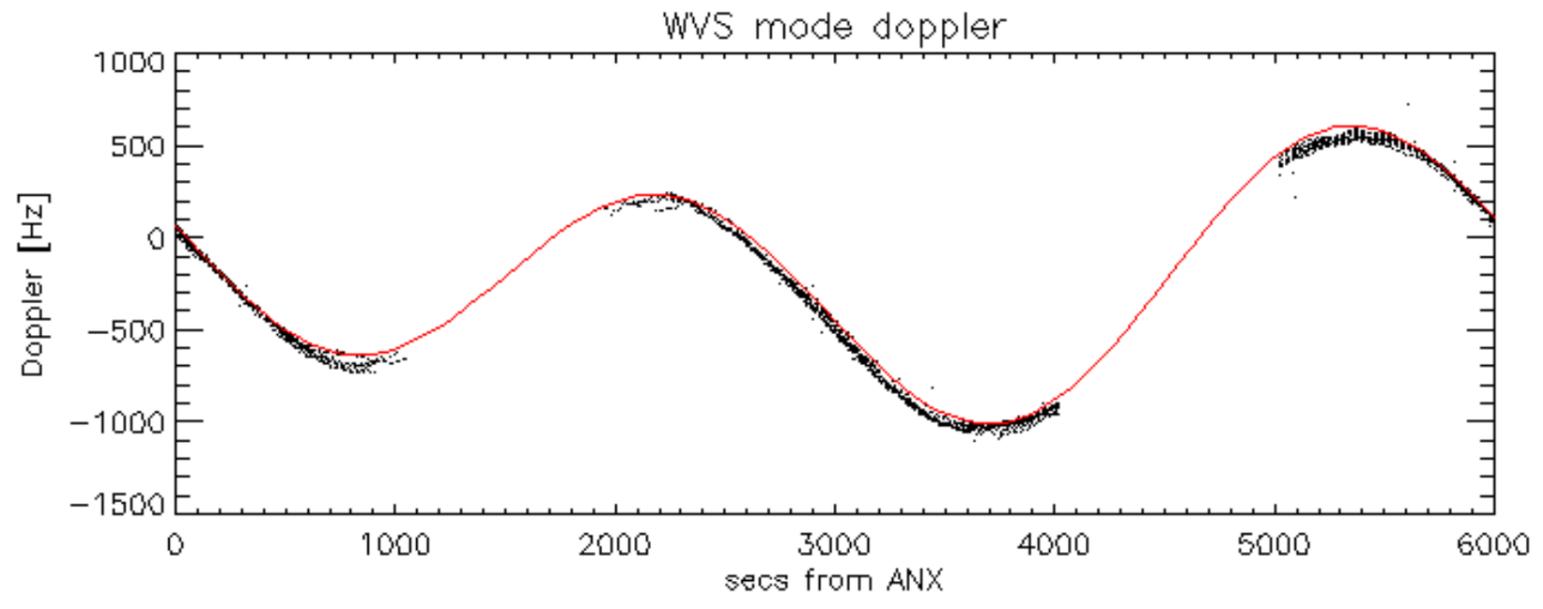


Doppler difference, estimated-predicted 'GM1' 'SS1' ascending -error mean of -37.866640 Hz

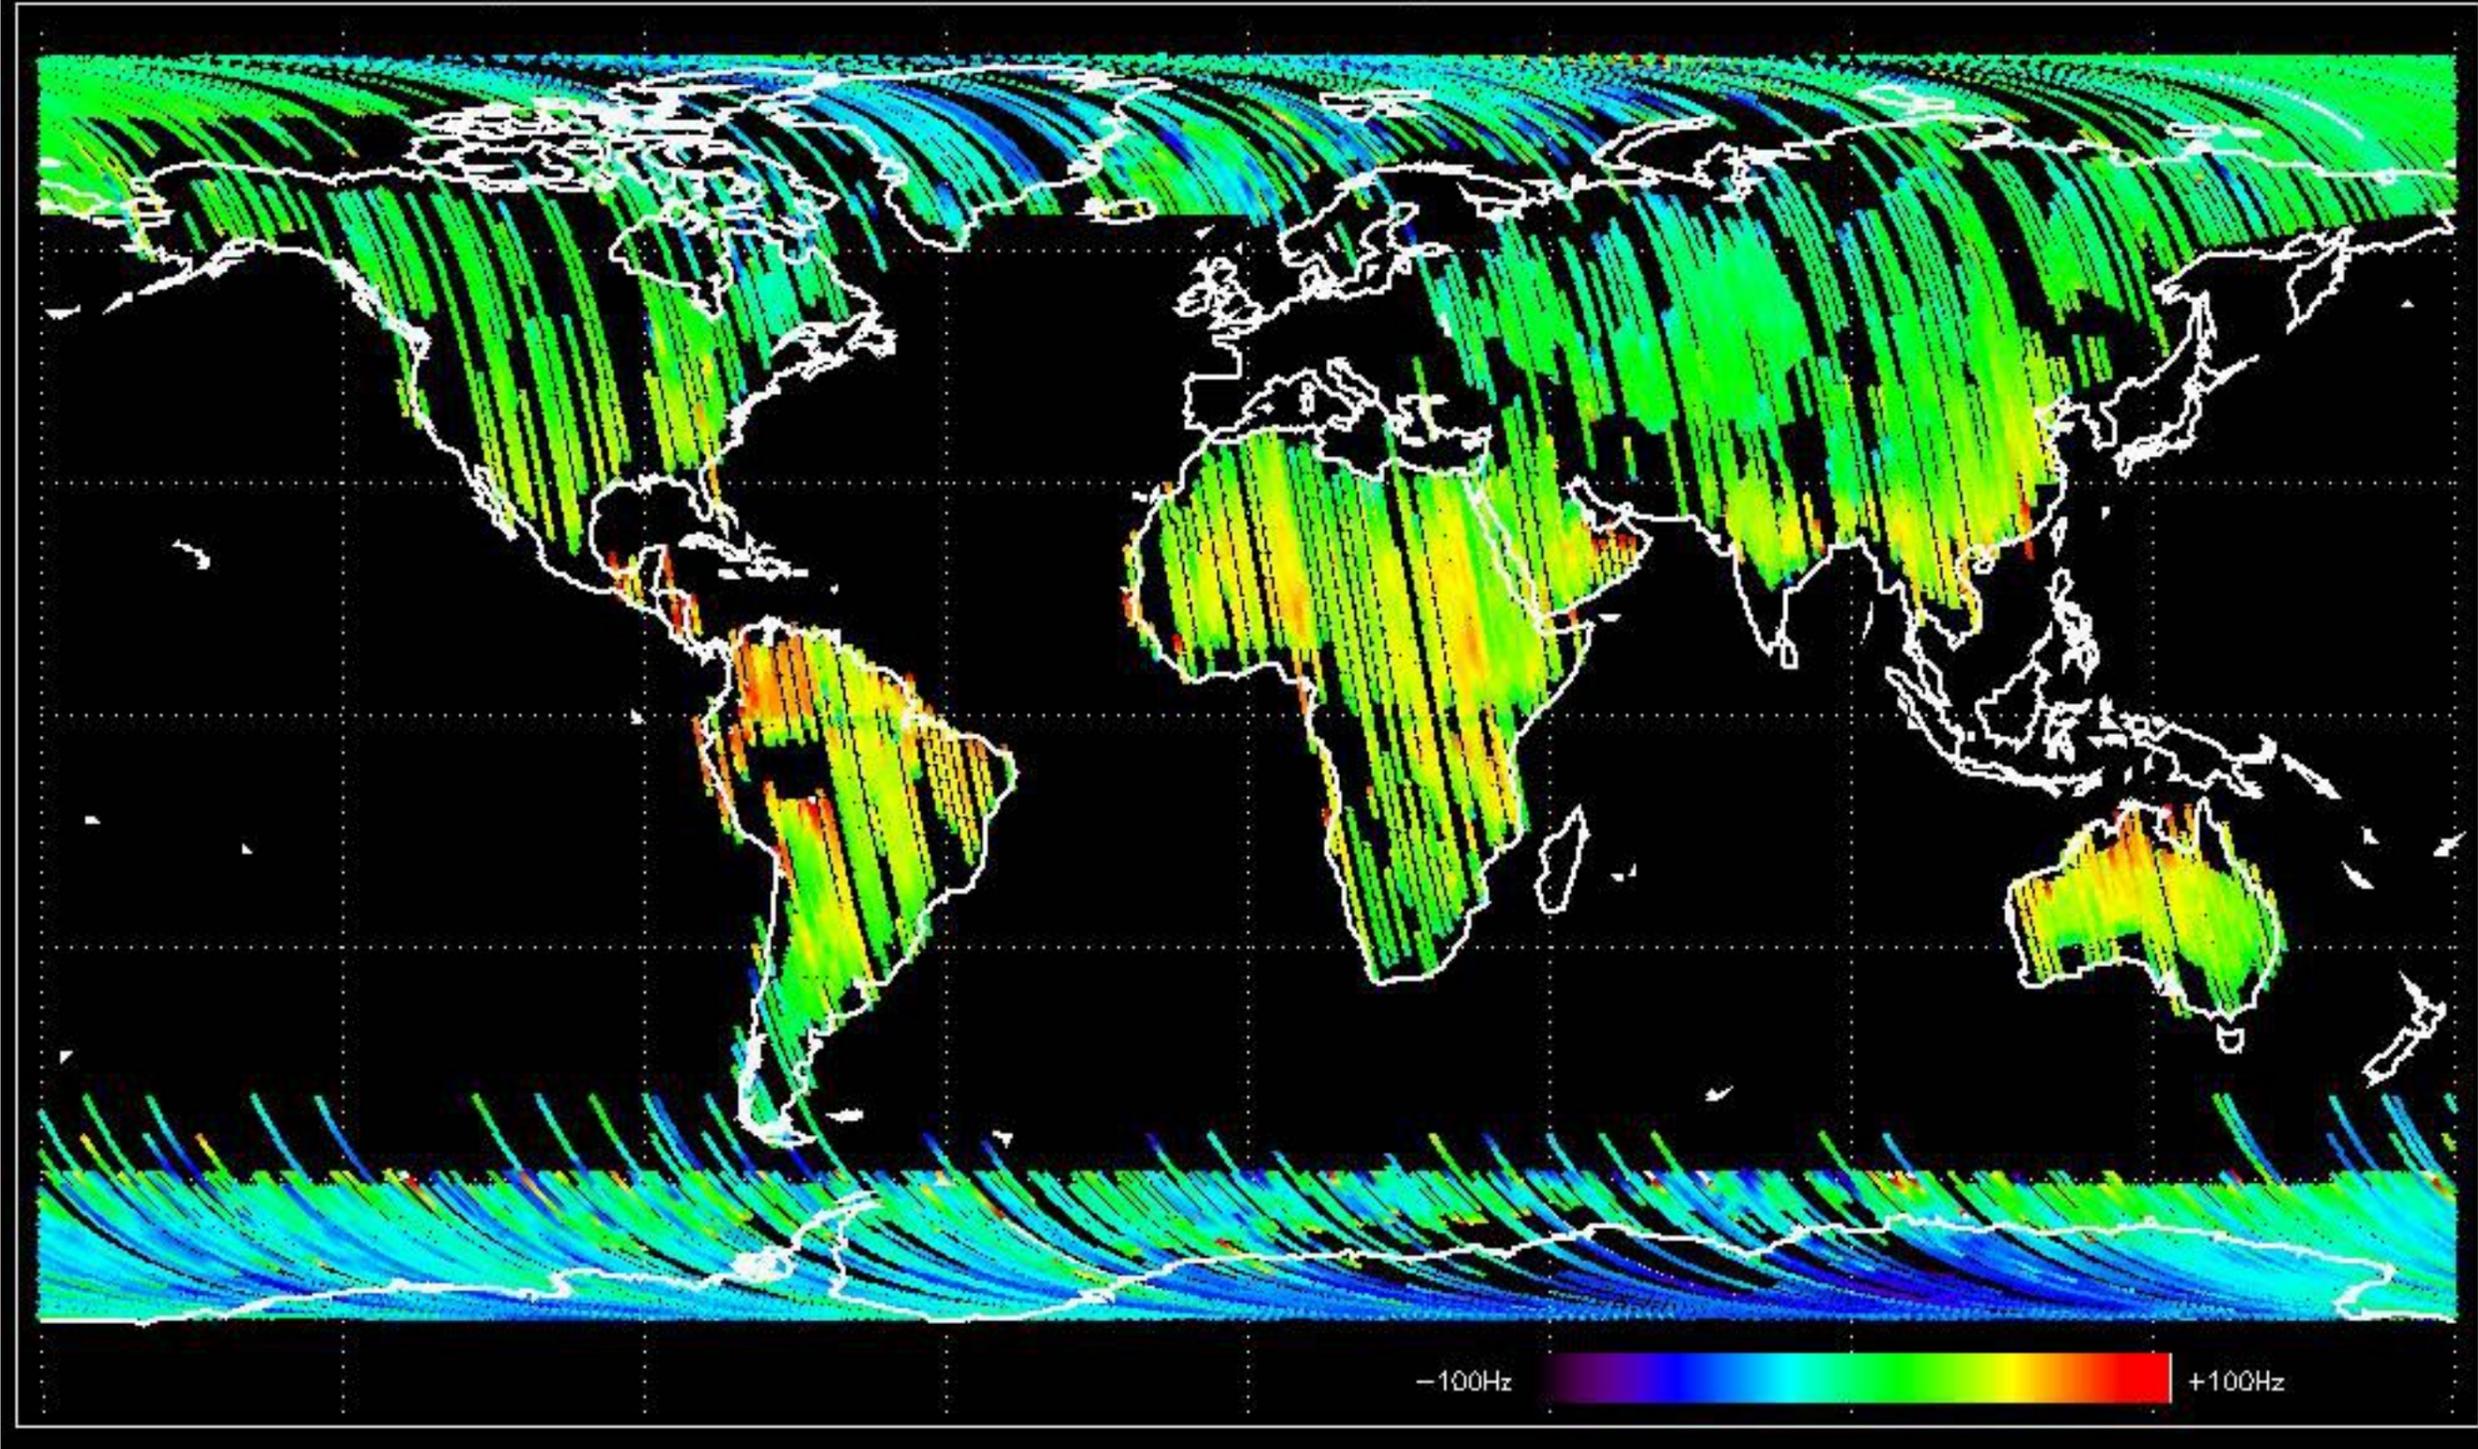


Doppler difference, estimated-predicted 'GM1' 'SS1' descending -error mean of -33.951083 Hz

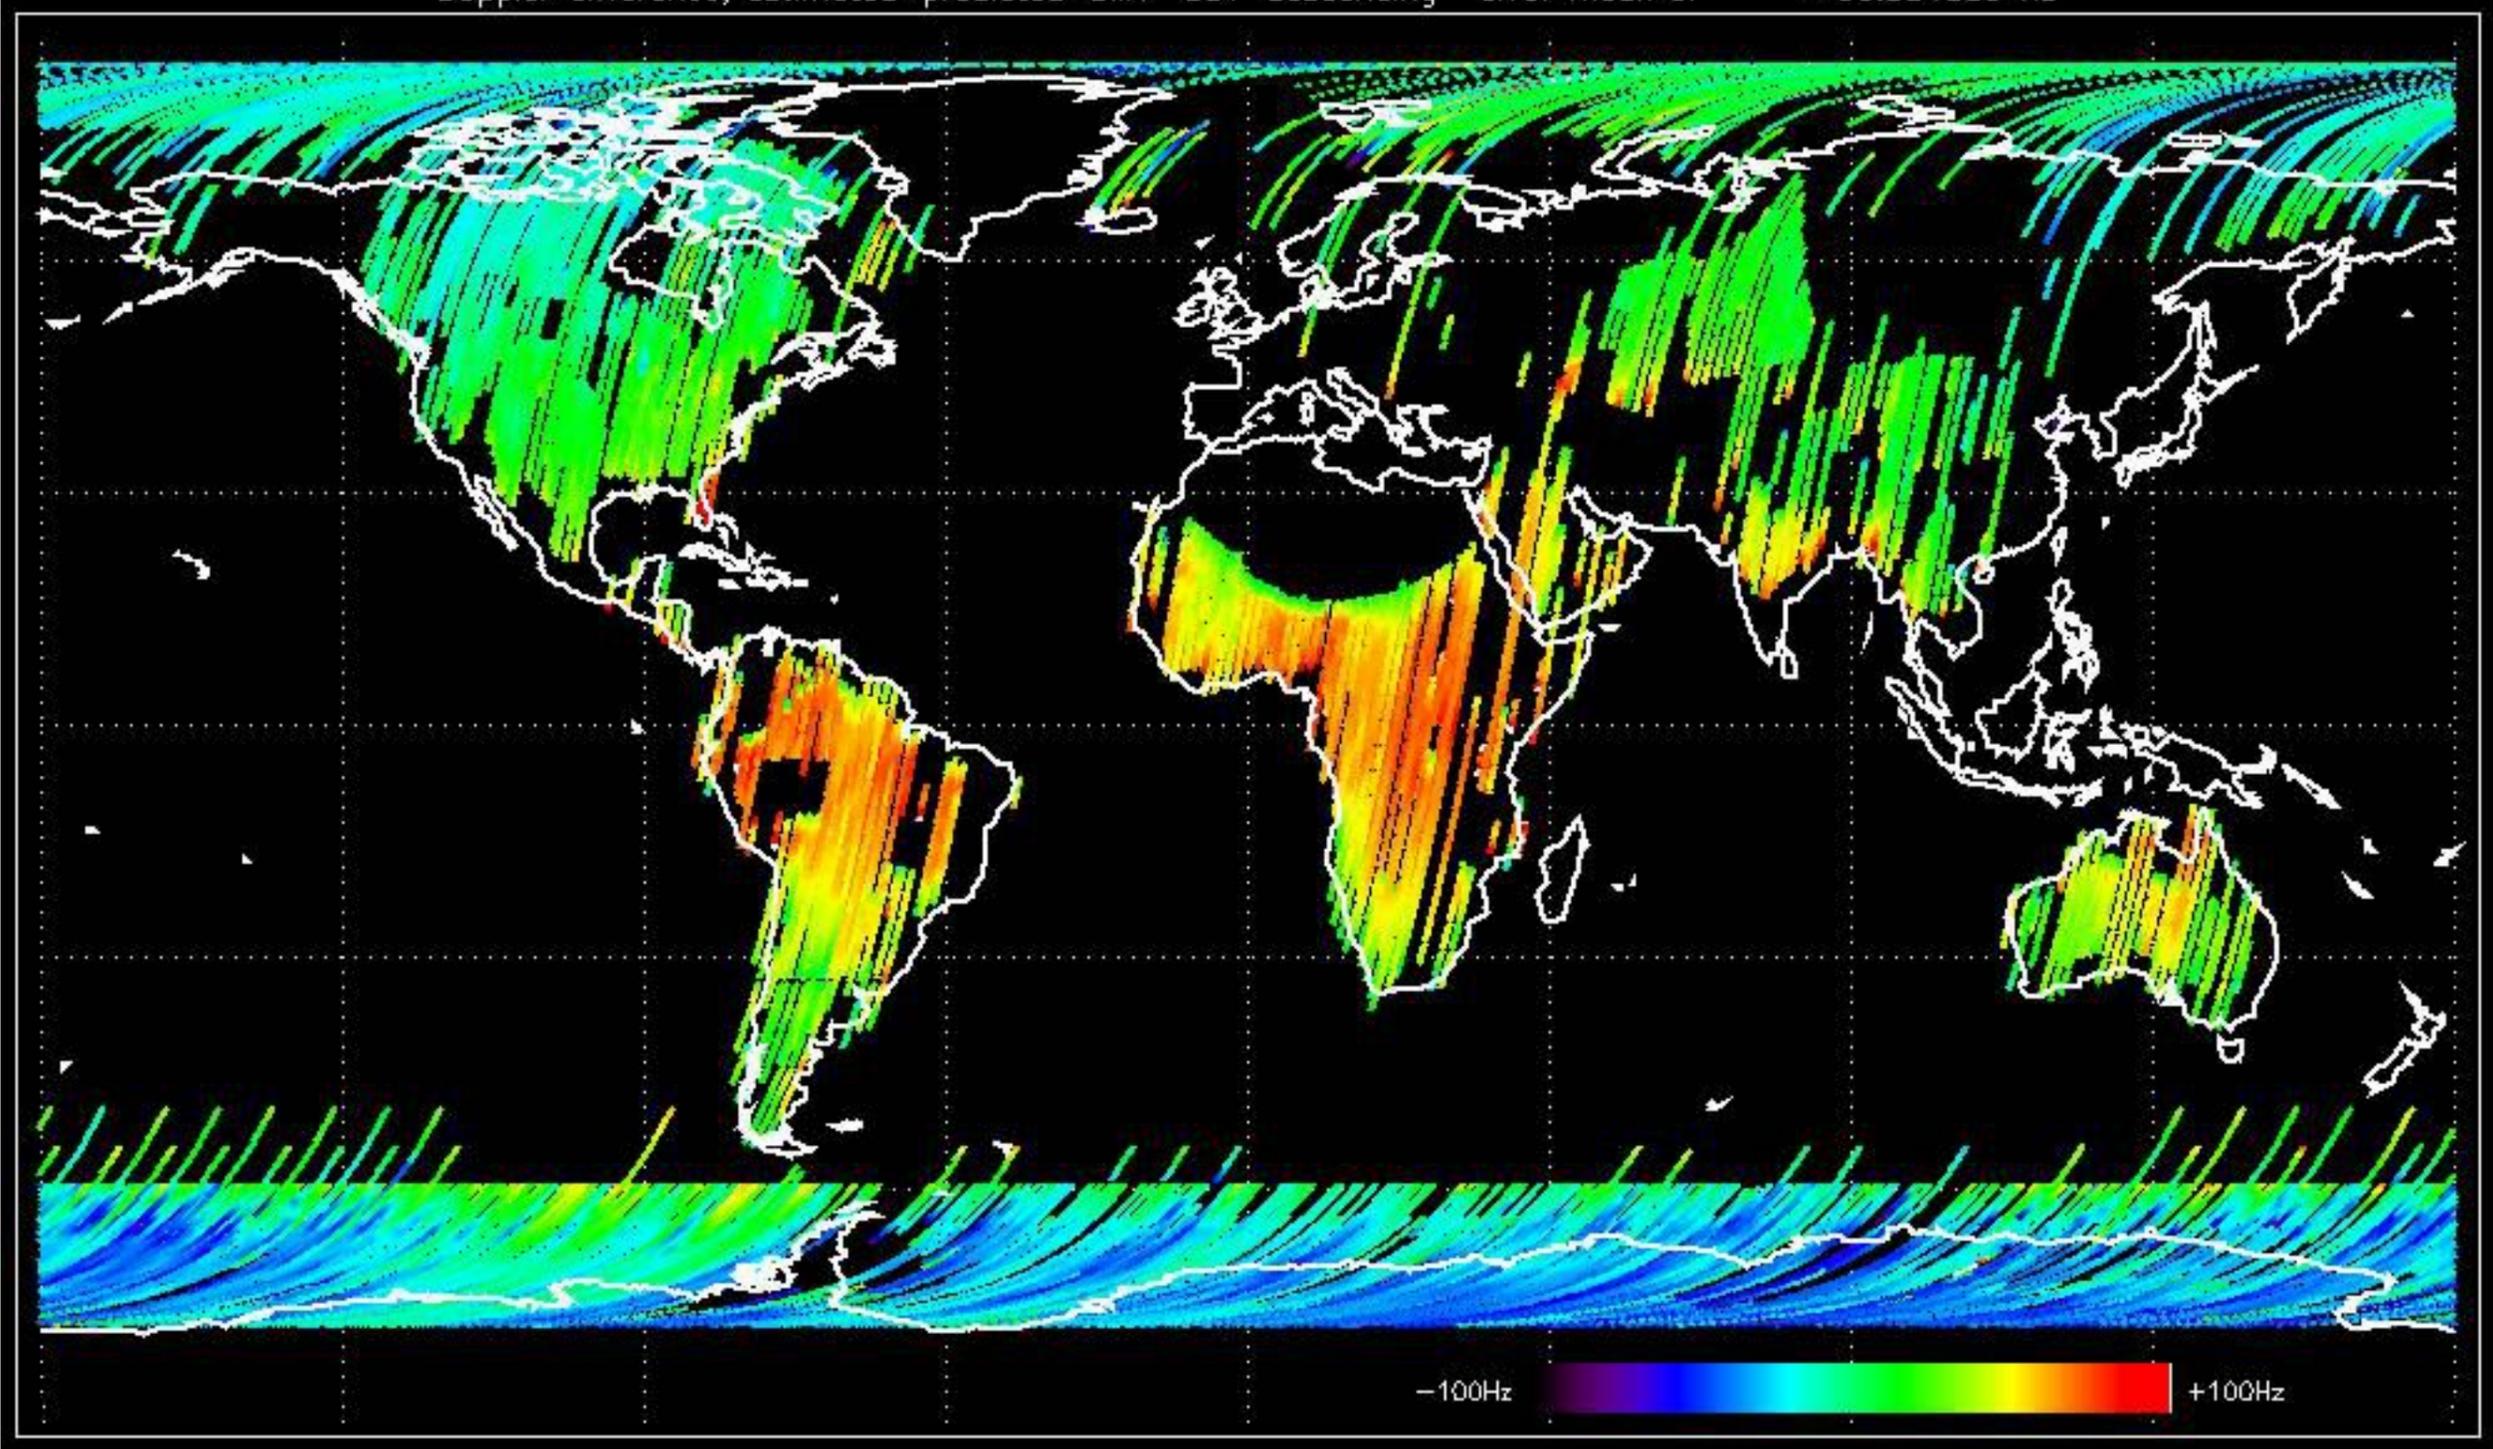

Doppler difference, estimated-predicted 'WVS' 'IS2' ascending -error mean of -32.082849 Hz

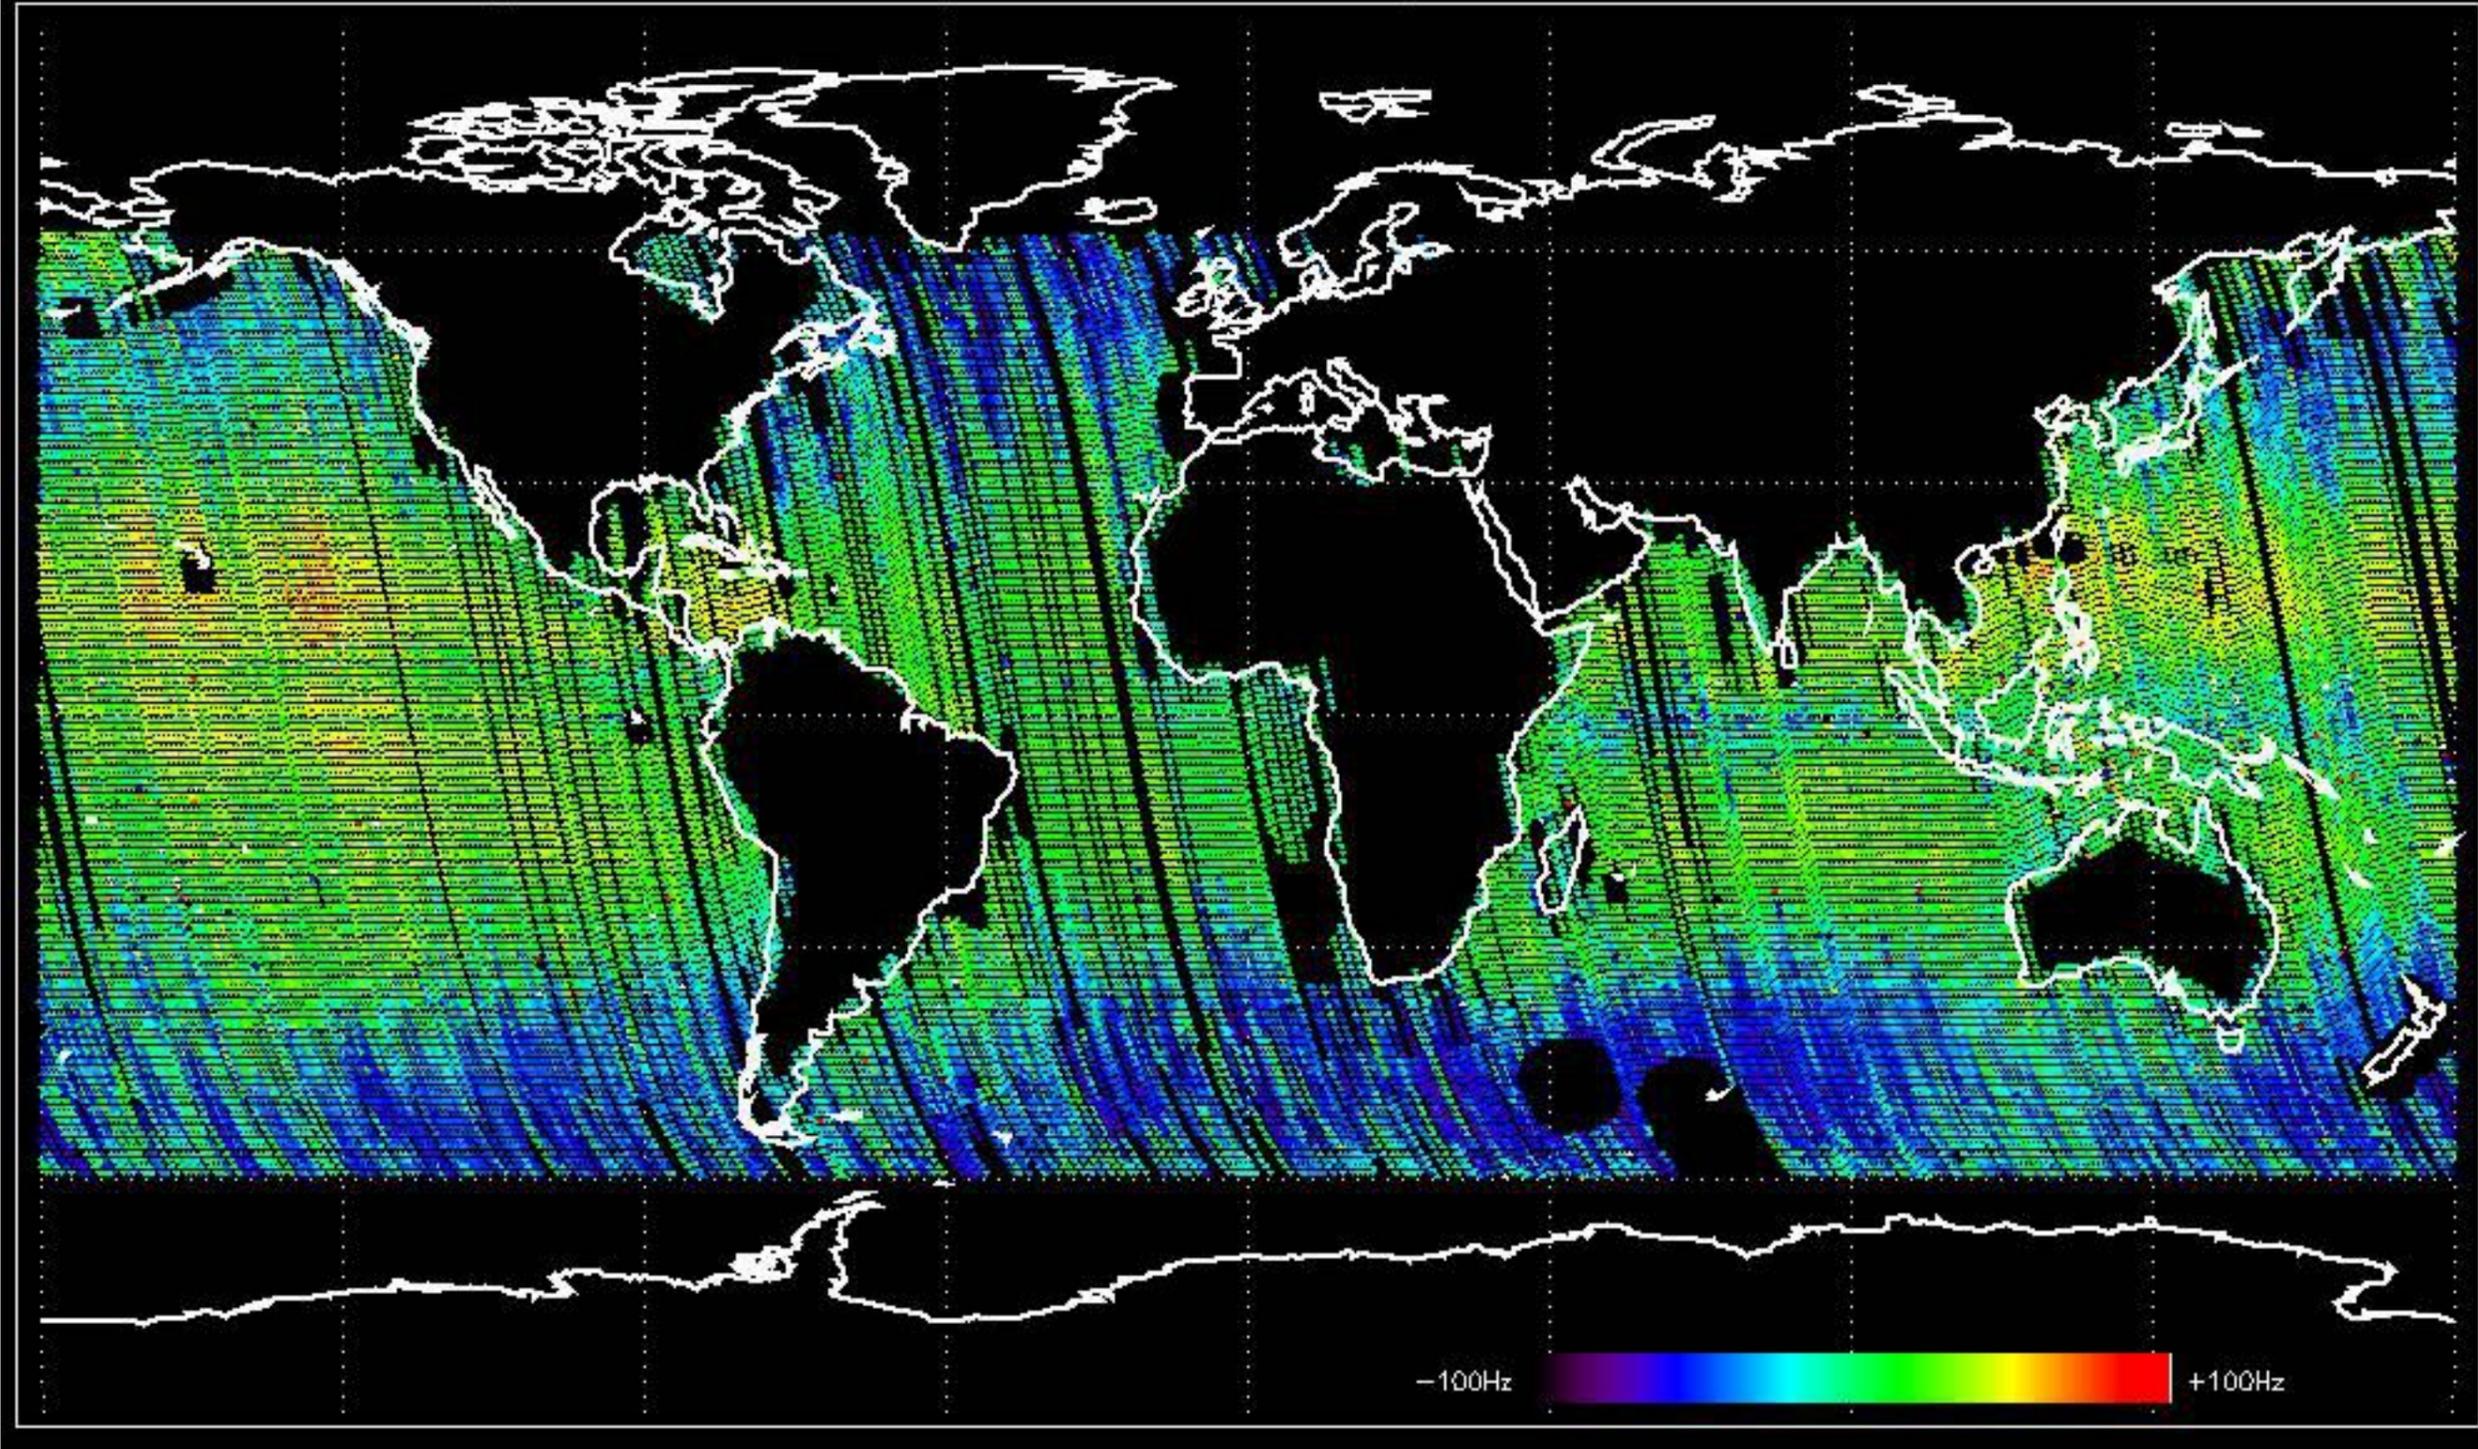





Doppler difference, estimated-predicted 'WVS' 'IS2' descending -error mean of -34.389712 Hz



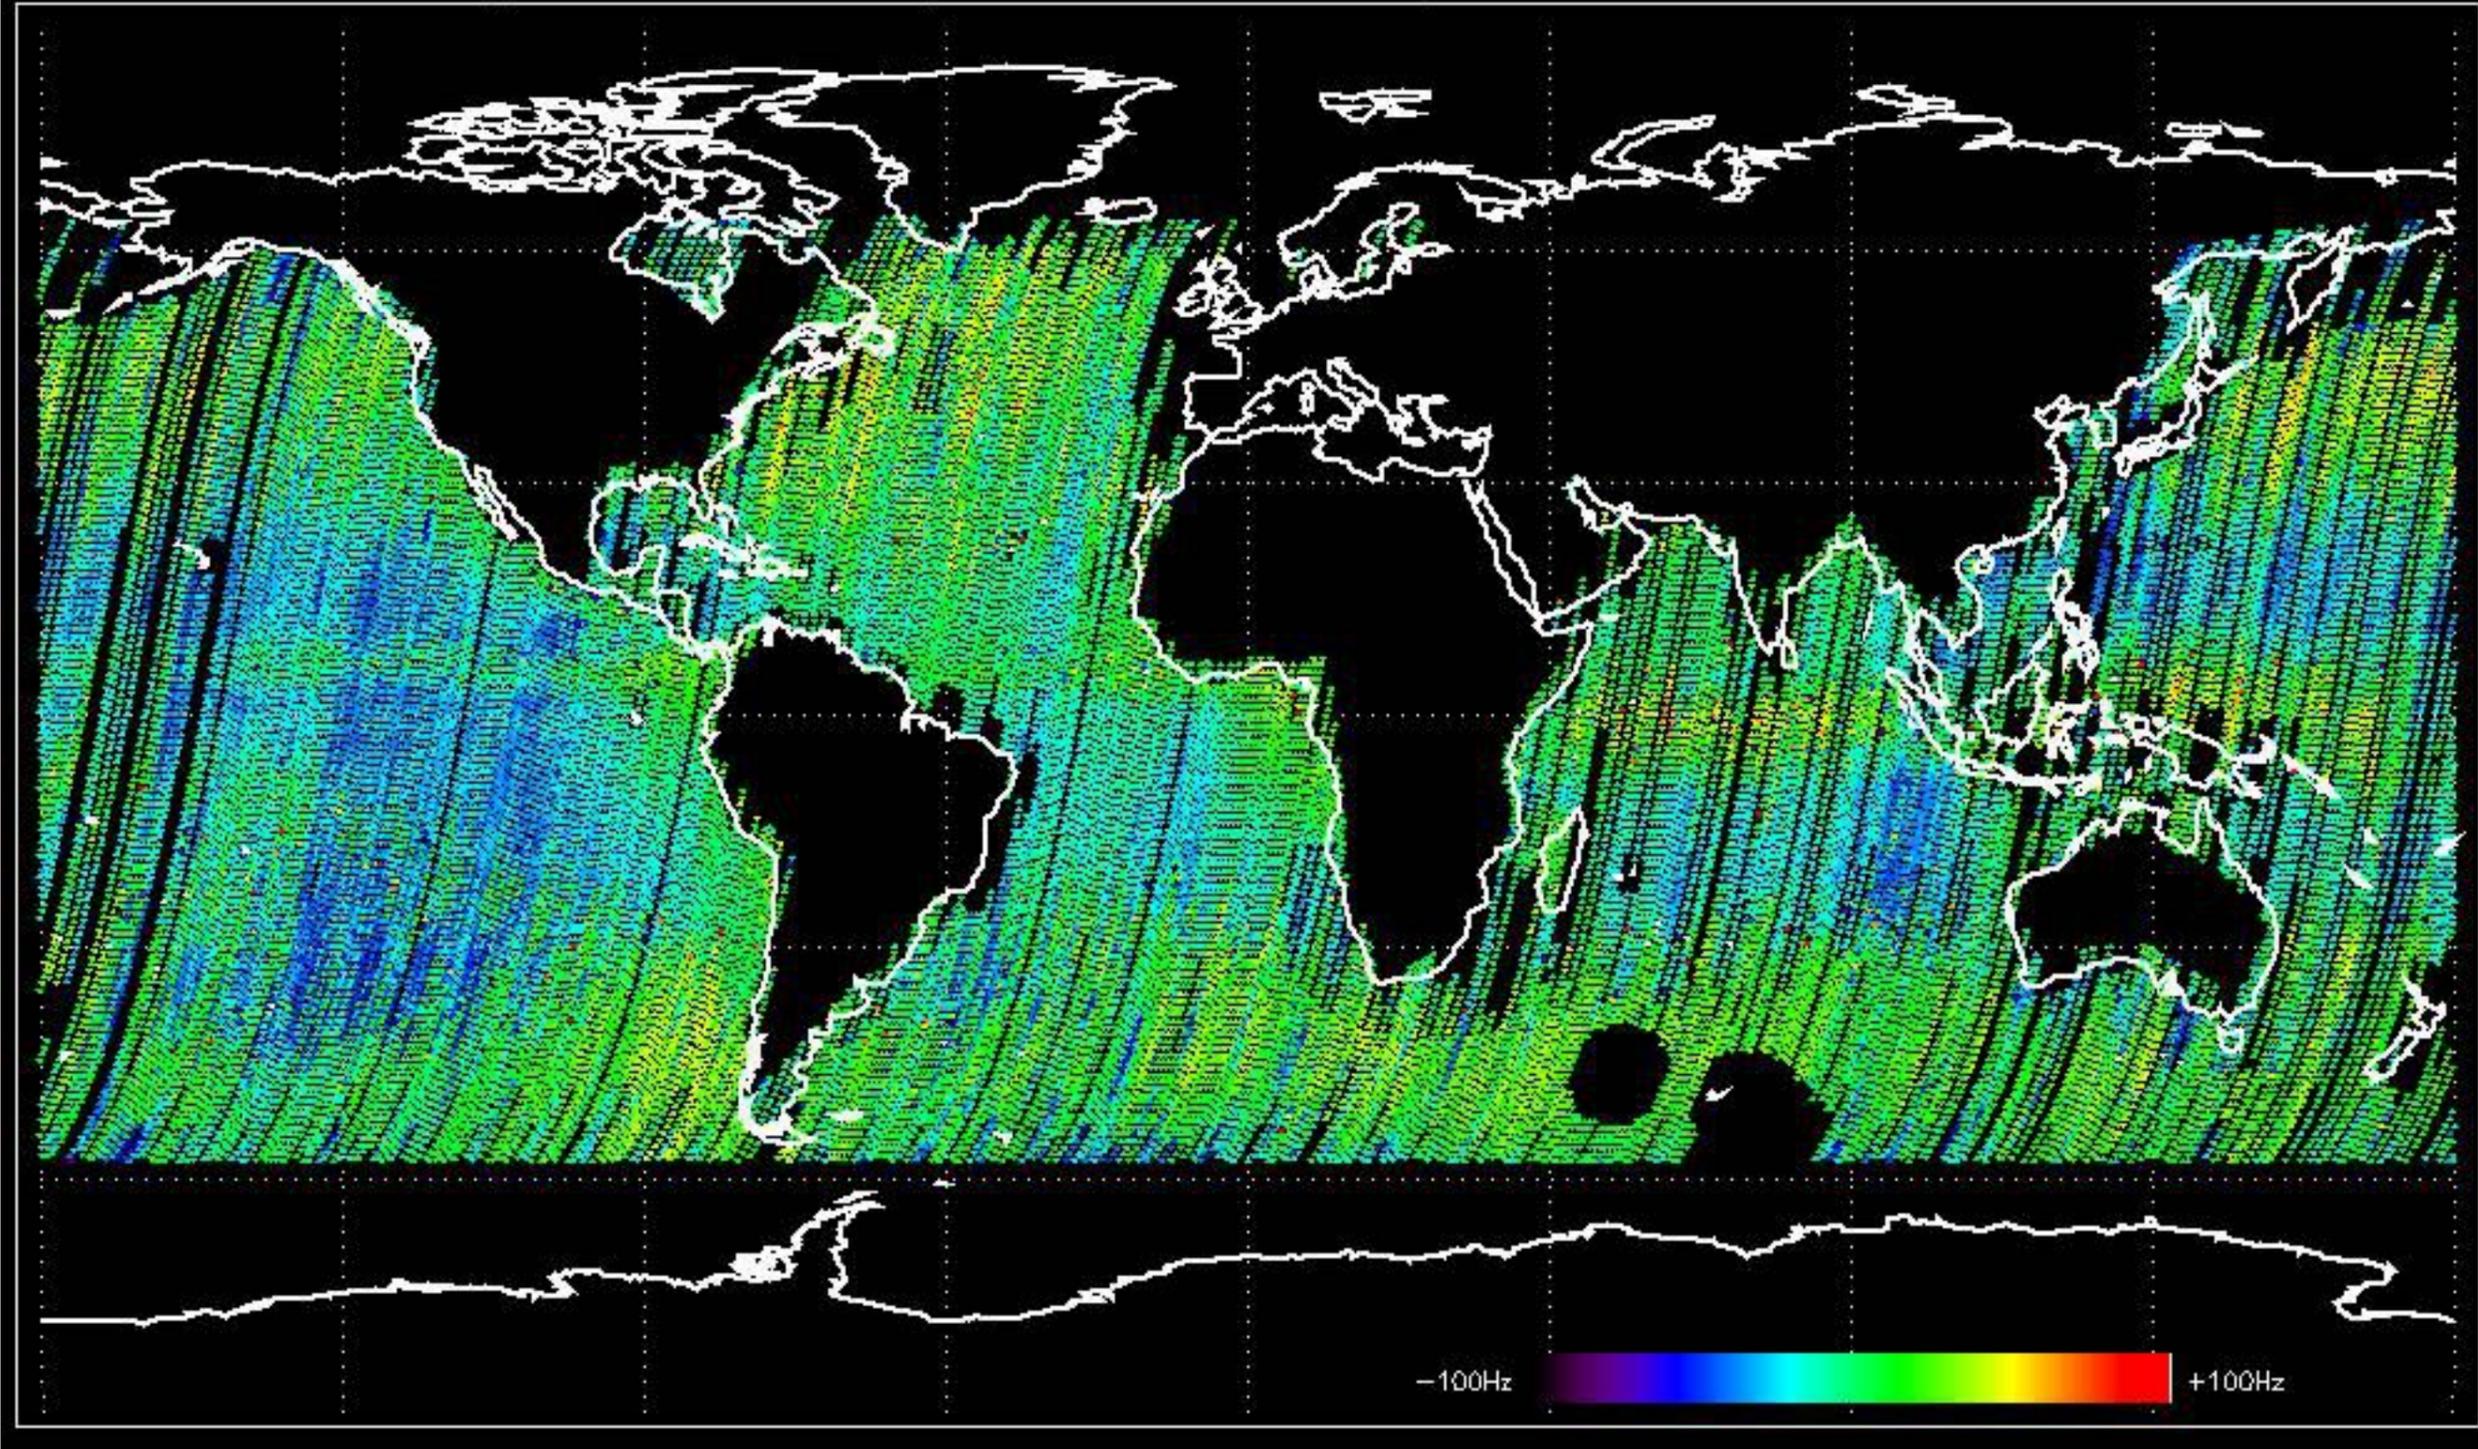



The MS mode provides an internal health check on an individual module basis.
The purpose of this mode is to identify to identify any malfunctioning modules and
to identify modules for which calibration offsets are to be applied.
No anomalies observed on available MS products:

No anomalies observed.

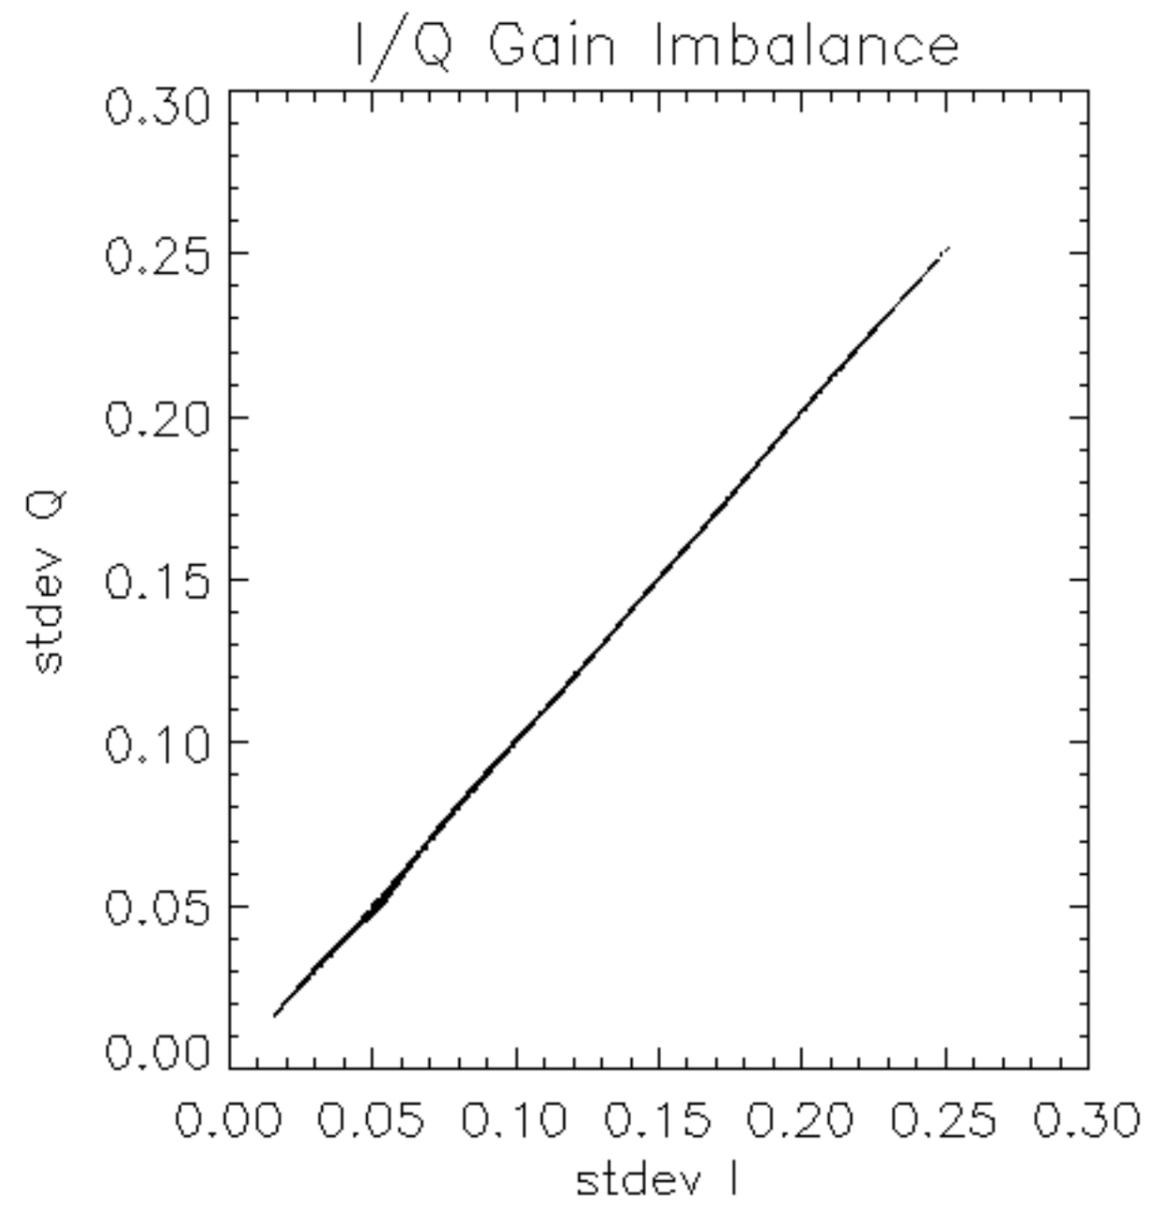


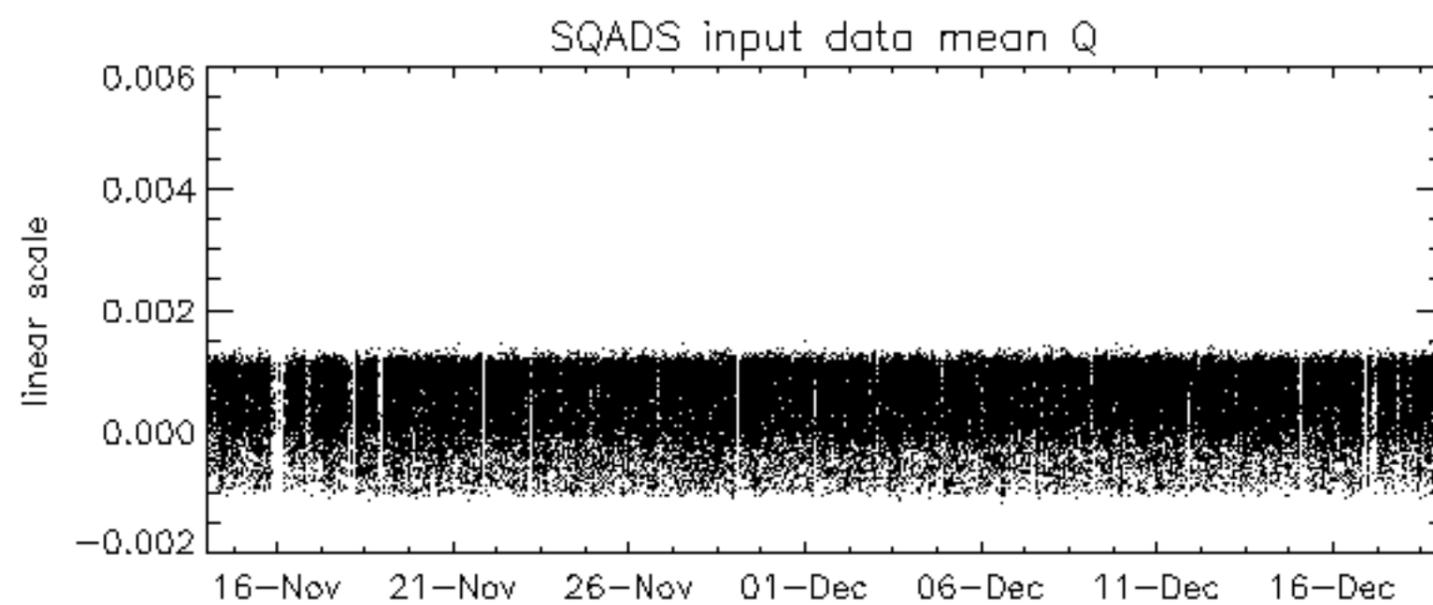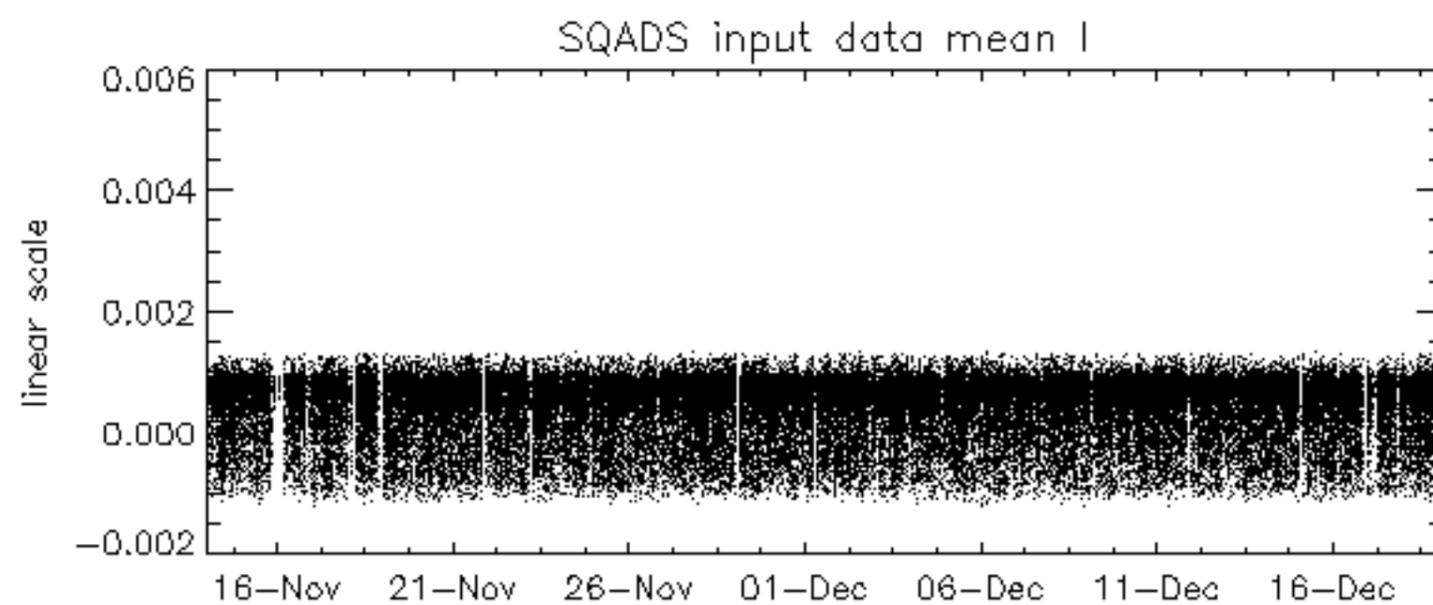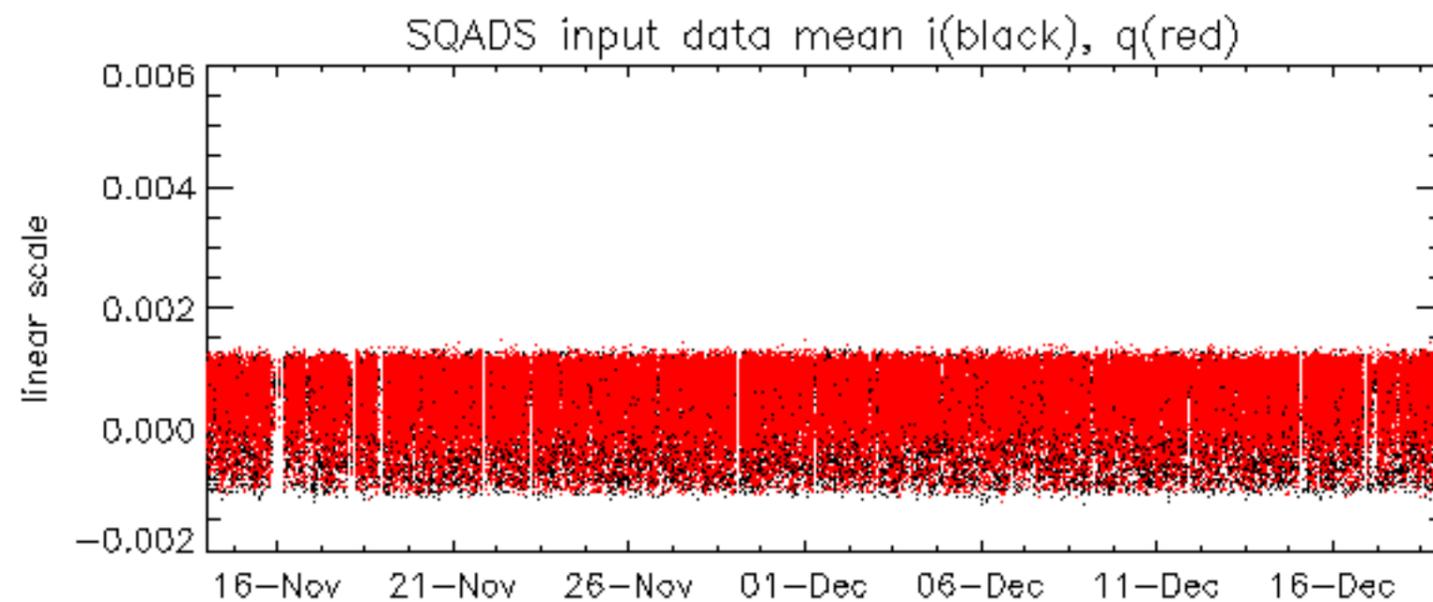

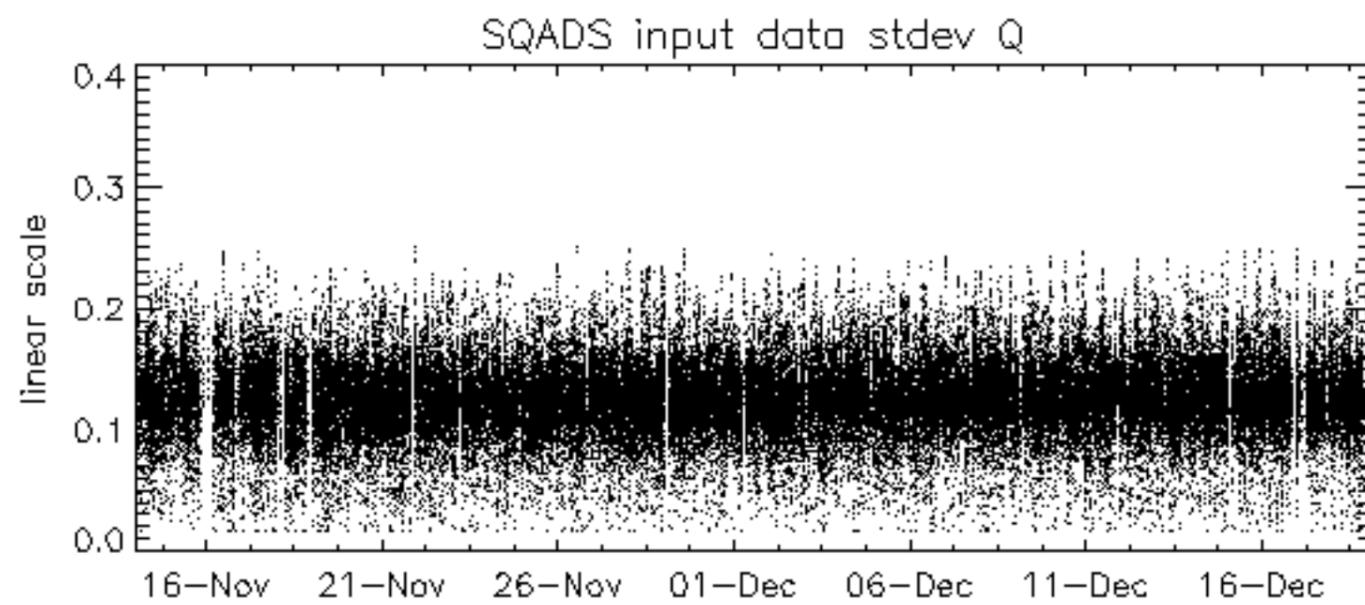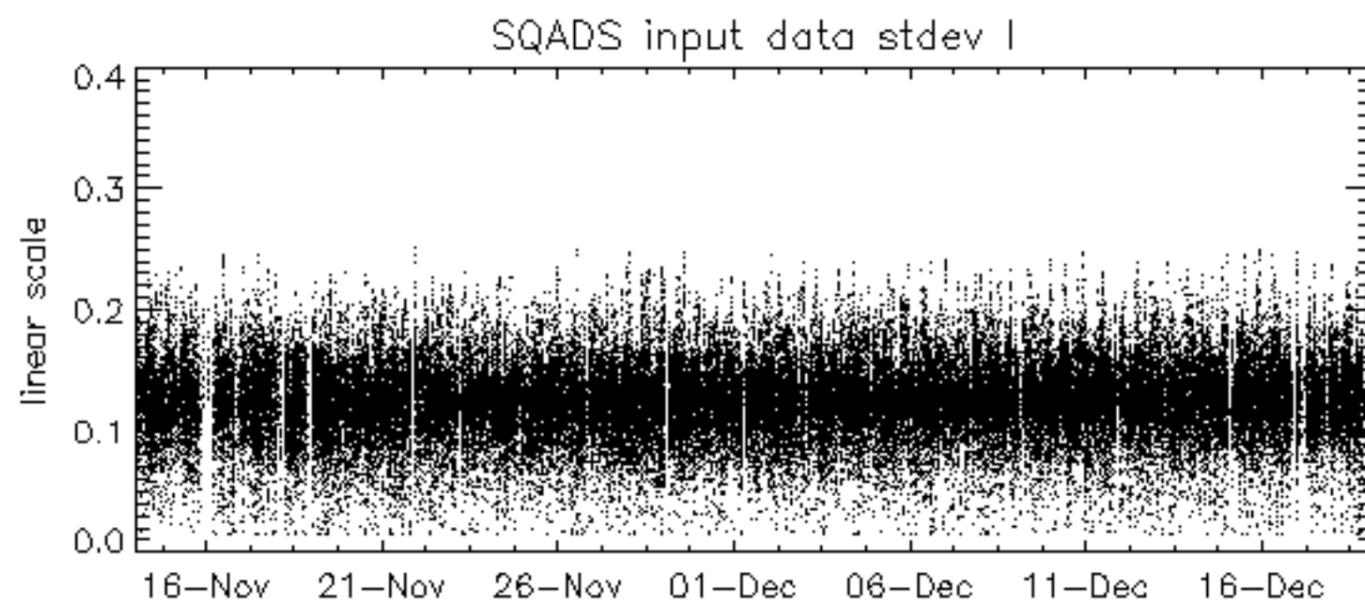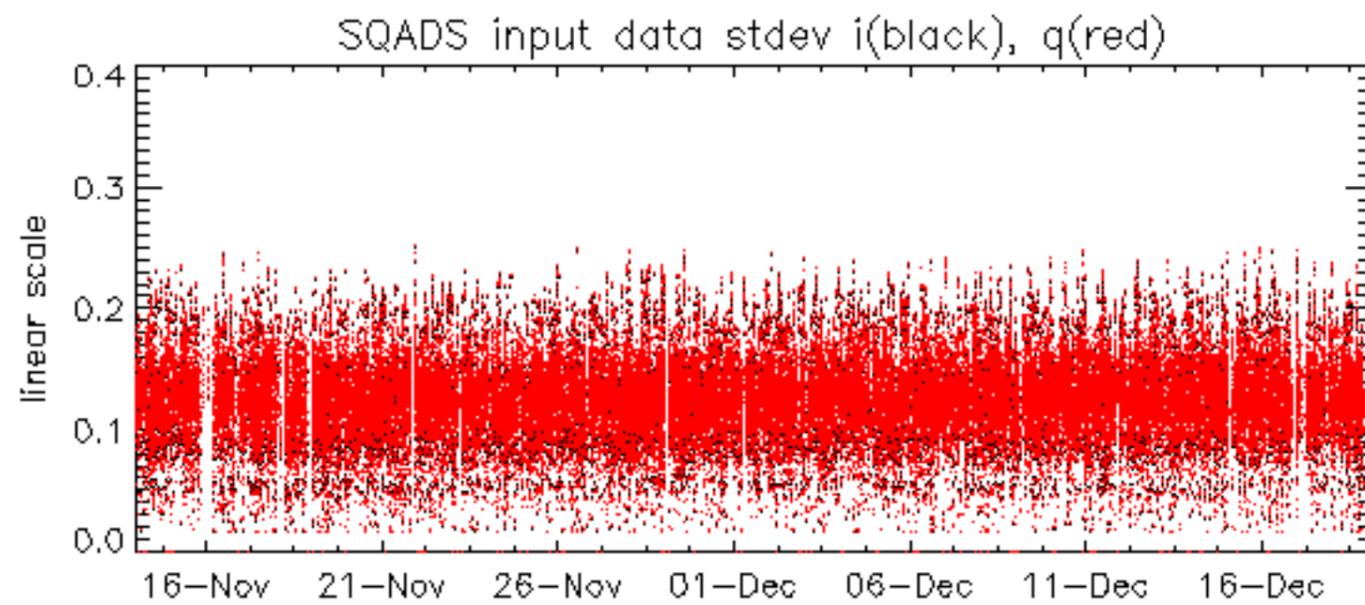

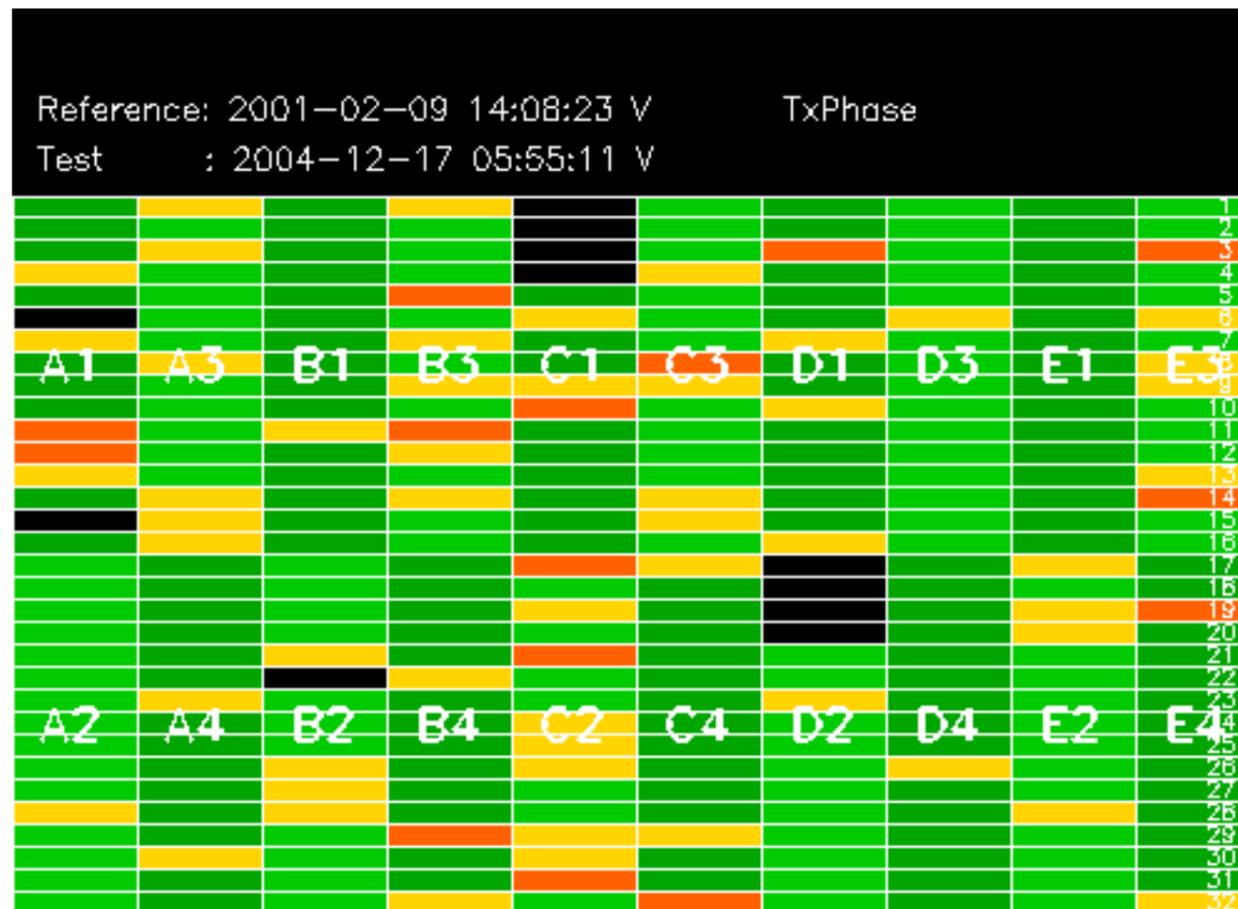


Transmit power (P1 - P1a) for GM1 SS3

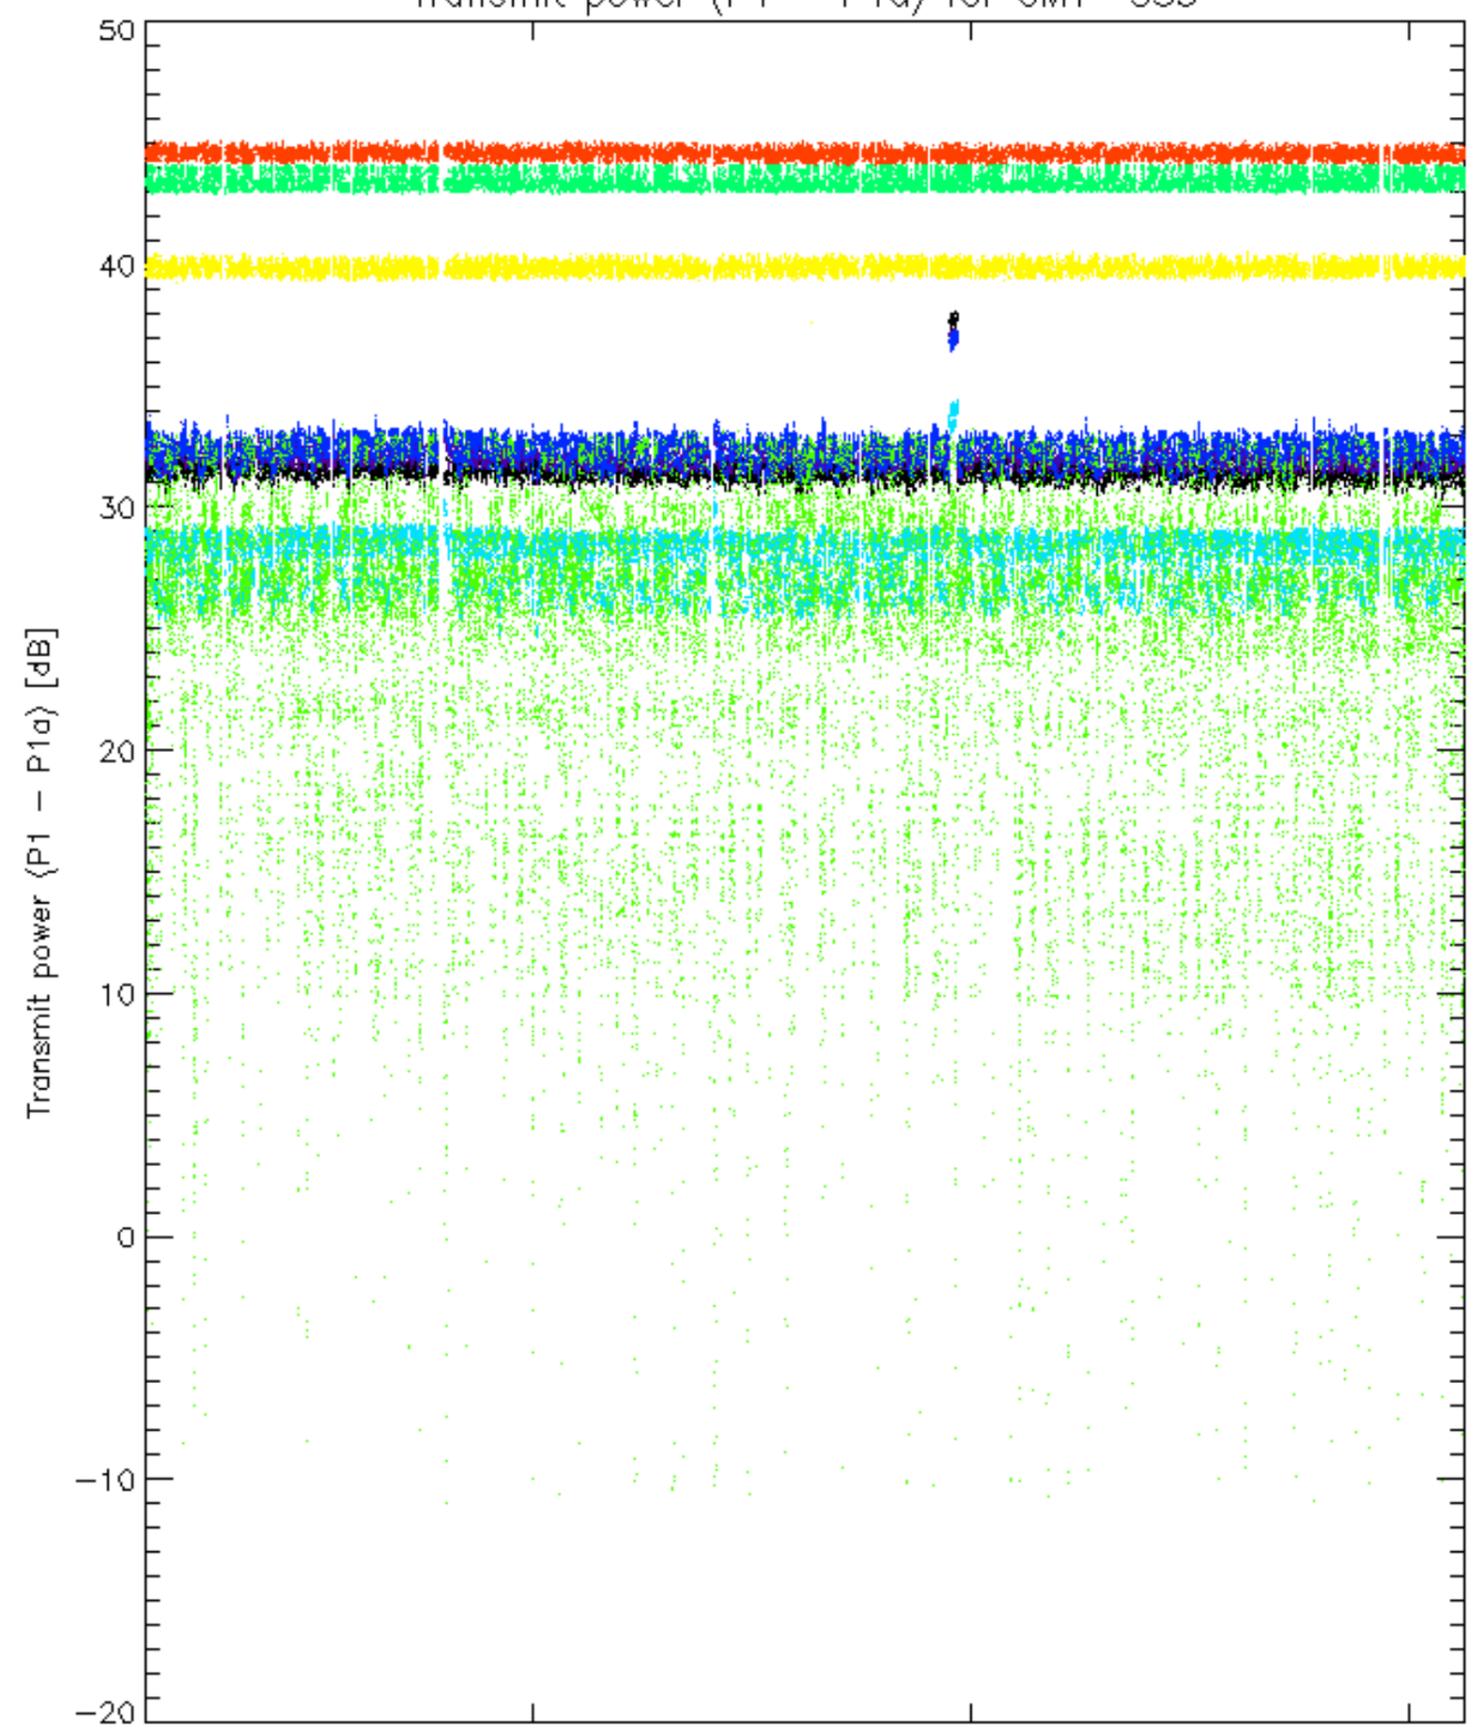


14


rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 26 _ 30

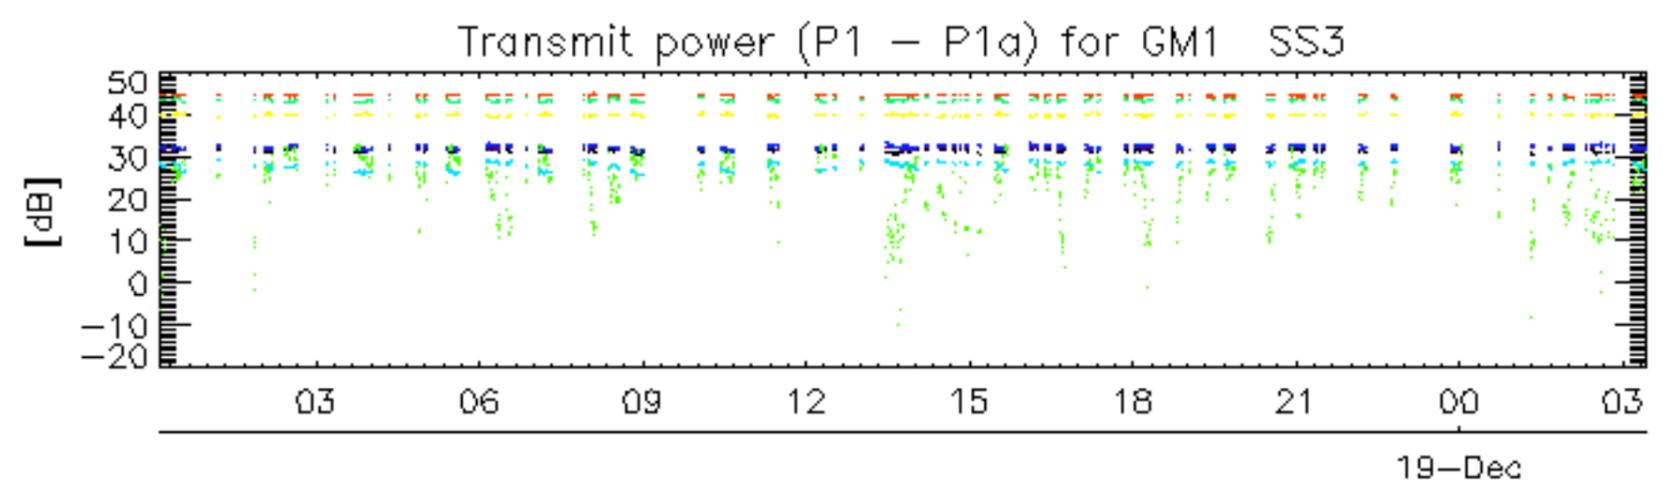

rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 26 _ 30

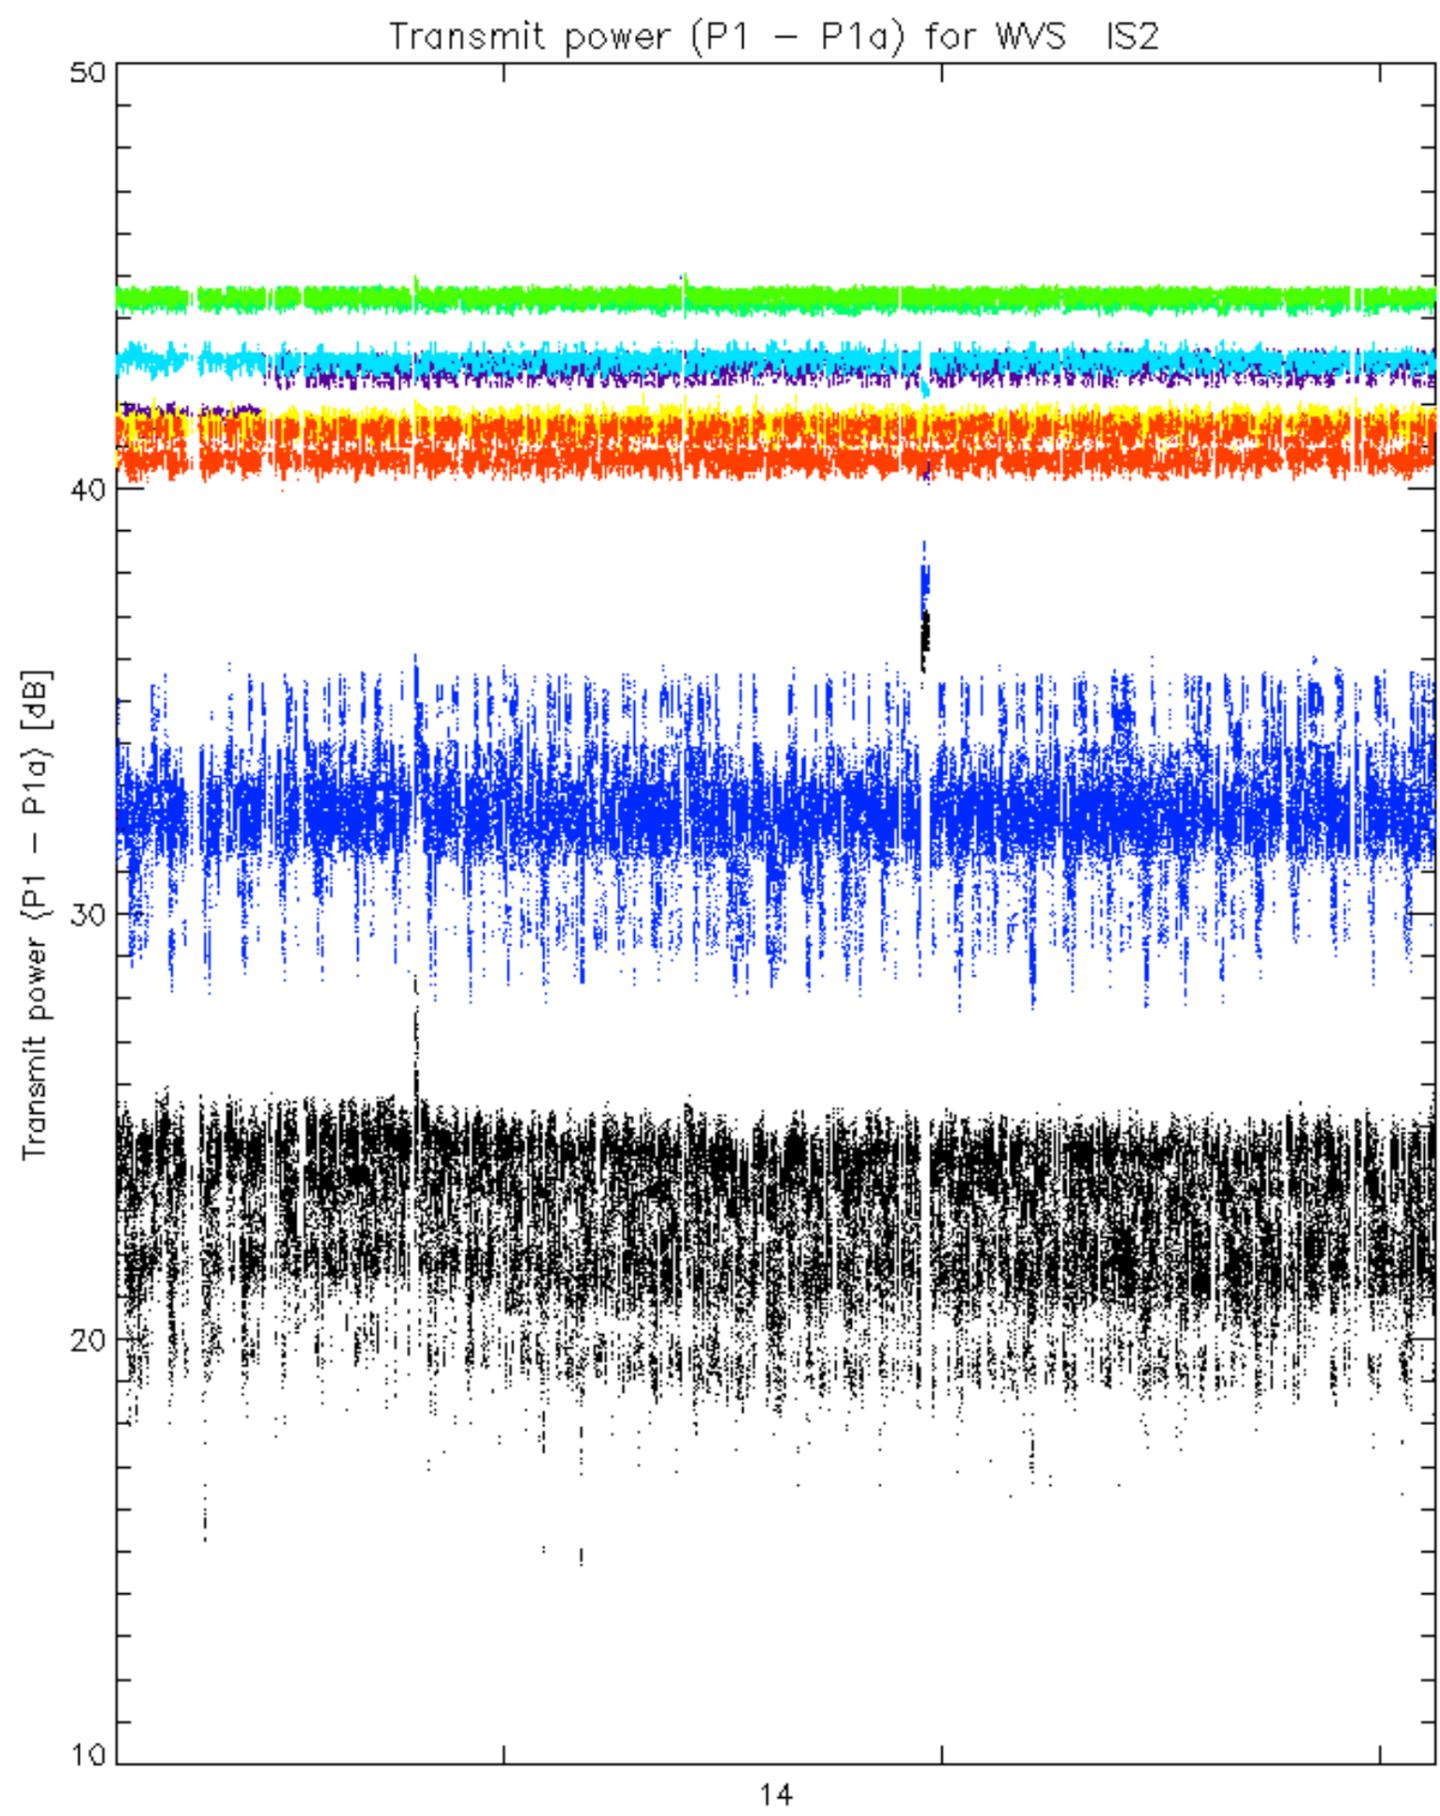

rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 26 _ 30

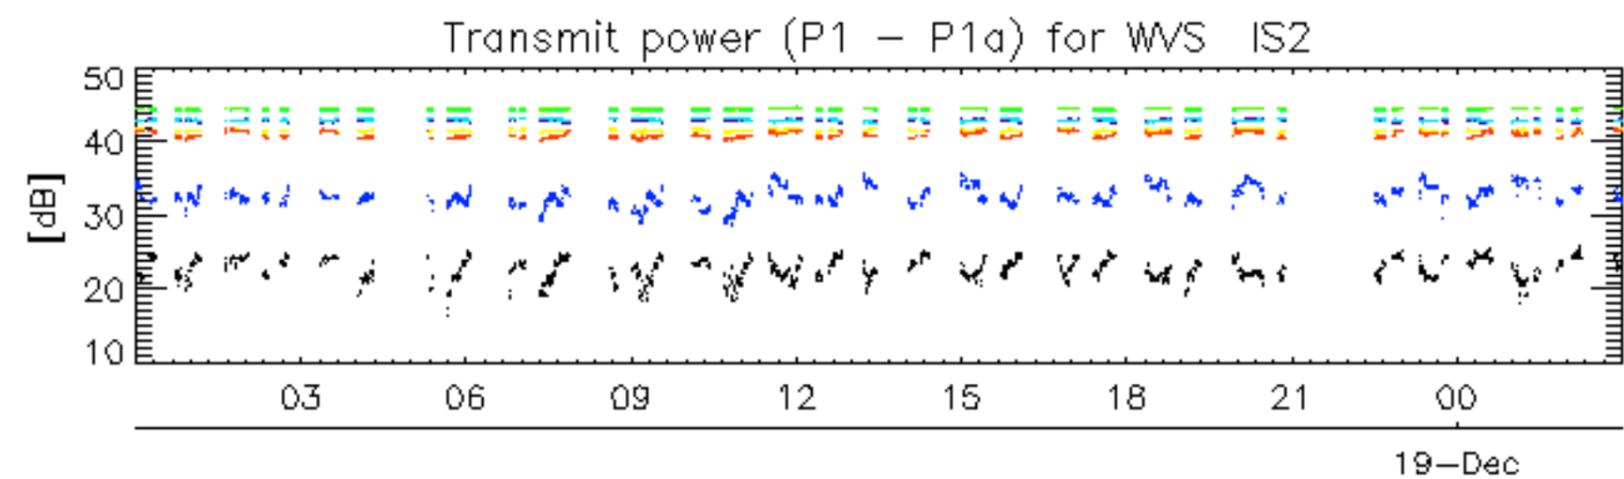

rows: _ 3 _ 7 _ 11 _ 15 _ 19 _ 22 _ 26 _ 30

No unavailabilities during the reported period.