

document title/ titre du document

ENVISAT CYCLIC ALTIMETRIC REPORT



CYCLE 29 from **27-07-2004** to **30-08-2004**

Quality Assessment Report

prepared by / préparé par	EOP-GOQ and PCF team
reference / référence	ENVI-GSOP-EOPG-03-0011
issue / édition	1
revision / révision	0
date of issue / date d'édition	1 December 2004
status / état	
Document type / type de document	Technical Note
Distribution / distribution	

TABLE OF CONTENTS

1	INTRODUCTION	1
2	DISTRIBUTION LIST	1
3	ACRONYMS.....	1
4	REFERENCE DOCUMENTS	2
5	GENERAL QUALITY ASSESSMENT.....	3
5.1	Instruments status.....	3
5.2	Cycle quality	3
5.3	Orbit quality	4
5.4	Ground Segment Processing Chain Status.....	4
5.4.1	IPF Processing Chain	4
5.4.2	F-PAC Processing Chain	4
5.4.3	Auxiliary Data File.....	4
5.4.4	Planned upgrades	5
6	ENVISAT PAYLOAD STATUS	6
6.1	Altimeter Events	6
6.1.1	RA-2 instrument planning.....	6
6.2	MWR Events.....	7
6.3	DORIS Events.....	7
7	INSTRUMENT PERFORMANCES.....	7
7.1	RA-2 Performances.....	7
7.1.1	IF Filter MASK	7
7.1.2	USO.....	8
7.1.3	Tracking capability	9
7.1.4	Sigma0 Transponder	11
7.1.5	Datation.....	12
7.1.6	Mispointing	13
7.1.7	S-Band anomaly	13
7.2	MWR Performances.....	14
7.3	DORIS Performances.....	14
8	PRODUCT PERFORMANCES.....	14
8.1	Availability of data.....	14
8.2	RA-2 Altimeter Parameters.....	18

8.2.1	Altimeter range	19
8.2.2	Significant Wave Height.....	19
8.2.3	Backscatter coefficient – Wind Speed	20
8.3	Edited measurements	22
8.4	Product disclaimer.....	22
8.5	Data handling recommendations.....	23
8.5.1	Sea-Ice flag	23
8.5.2	Ocean S-Band anomalies detection.....	23
8.5.3	Warning on IPF 4.56 Version Identification field	23
8.5.4	S-Band Backscattering Coefficient.....	23
8.5.5	USO Range Correction	24
8.5.6	Ku-Band Backscattering Coefficient calibration	24
8.6	Wind & Wave quality assessment	24
9	LONG TERM MONITORING	24
9.1	RA-2 Instrument monitoring.....	24
9.1.1	IF Filter Mask.....	24
9.1.2	Use	25
9.1.3	Tracking Capability.....	26
9.1.4	Datation.....	28
9.1.5	mispointing.....	29
9.1.6	S-Band Anomaly.....	30
9.2	Products Monitoring	31
9.2.1	Availability of Data.....	31
9.2.2	RA-2 Altimeter Parameters.....	32
9.2.2.1	Altimeter range	32
9.2.2.2	Significant Wave Height.....	33
9.2.2.3	Backscatter coefficient – Wind Speed	33
10	PARTICULAR INVESTIGATIONS	35

1 INTRODUCTION

This documents aims at reporting on the performances of the EnviSat Radar Altimeter, Microwave Radiometer and DORIS sensors, on the data quality of the corresponding Fast Delivery products (RA2_FGD_2P) as well as on the main events occurred during cycle 29.

This reports covers the period from the 27th of July and the 30th of August 2004.

2 DISTRIBUTION LIST

This report is available in PDF format at the internet address <http://earth.esa.int/pcs/envisat>

3 ACRONYMS

AGC	Automatic Gain Control
DORIS	Doppler Orbitography and Radiopositioning Integrated by Satellite
DSR	Data Set Record
EPC	Electronic Power Converter
ERS	European Remote Sensing satellite
ESRIN	European Space Research Institute
ESOC	European Space Operations Centre
FD	Fast Delivery products
GS	Ground Segment
GTS	Global Telecommunication System
HTL	Height Tracking Loop
ICU	Instrument Control Unit
IECF	Instrument Engineering Calibration Facility
IF	Intermediate Frequency
IE	Individual Echoes
IPF	Instrument Processing Facility
LUT	Look Up Table
MCMD	MacroCommand
MPH	Main Product Header
MSS	Mean Sea Surface
MWR	MicroWave Radiometer
MPS	Mission Planning System
OBT	On-Board Time
OCM	Orbit Control Mode/Manoeuvres
PCS	ERS Products Control Service
PCF	EnviSat Product Control Facility
PDHS-E	ESRIN Processing and Data Handling Station
PDHS-K	Kiruna Processing and Data Handling Station
PLSOL	Payload Switch-Off Line

PMC	Payload Main Computer
PTR	Point Target Response
RA-2	EnviSat Radar Altimeter bi-frequency
RSL	Resolution Selection Logic
SAD	Static Auxiliary Files
SBT	Satellite Binary Time
SEU	Single Event
SFCM	Stellar Fine Control Mode
SPH	Specific Product header
SPSA	Signal Processing Sub-Assembly
SYSM	Stellar Yaw Steering Mode
S/W	Software
TM	Telemetry
TRP	Transponder
TWT	Traveling Wave Tube
UTC	Coordinated Universal Time
YSM	Yaw Stellar Mode

4 REFERENCE DOCUMENTS

- [R – 1] F-PAC MONTHLY REPORT, SALP-RP-M-OP-15315-CN, August 2004
- [R – 2] ENVISAT Microwave Radiometer Assessment Report Cycle 029, CLS.DOS/04.199,
<http://earth.esa.int/pcs/envisat/mwr/reports/>
- [R – 3] Envisat RA-2 IF Mask weird behavior: Investigation Report
- [R – 4] Instrument Performance Evaluation and Analysis Summary, PO-TR-ALS-RA-0042
- [R – 5] Instrument Corrections Applied on RA-2 Level 1b products, Paper presented at the ENVISAT Calibration Review in September 2002
- [R – 6] ENVISAT Phase E Cal/Val Acquisition Plan, ENVI-SPPA-EOPG-TN-03-0008
- [R – 7] RA-2 S-Band Anomaly Investigation, PO-TN-ESA-RA-1331,
<http://earth.esa.int/pcs/envisat/ra2/articles/>
- [R – 8] RA-2 Performance Results, Paper presented at the ENVISAT Calibration Review in September 2002
- [R – 9] ECMWF Report on ENVISAT RA- 2 for August 2004, Report on ENVISAT Radar Altimeter - 2 (RA- 2), Wind/ Wave Product with Height Information (RA2_ WWV_ 2P),
<http://earth.esa.int/pcs/envisat/ra2/reports/ecmwf/>
- [R – 10] Envisat GDR Quality Assessment Report, SALP-RP-P2-EX-21121-CLS015
- [R – 11] Envisat RA-2 Range Instrumental correction: USO clock period variations and associated auxiliary file, ENVI-GSEG-EOPG-TN-03-0009
- [R – 12] Defining a Rain flag for the Envisat altimeter, G. Quartly, study presented to the final CCVT plenary meeting, <http://earth.esa.int/pcs/envisat/ra2/articles/>
- [R – 13] ENVISAT Weekly Mission Operations Reports # 112-116, ENVI-ESOC-OPS-RP-1011-TOS-OF
- [R – 14] Envisat validation and cross calibration activities during the verification phase. Synthesis Report ESTEC contract No. 16243/02/NL/FF WP6, <http://earth.esa.int/pcs/envisat/ra2/articles/>

[R – 15] ENVISAT-1 Products Specifications - Vol. 14: RA-2 Products Specifications, PO-RS-MDA-GS-2009, Iss 3, Rev. K, 24/05/2004

[R – 16] Algorithm for Flag identification and waveforms reconstruction of RA-2 data affected by “S-Band anomaly”, ENVI-GSEG-TN-04-0004, Issue 1.4

5 GENERAL QUALITY ASSESSMENT

5.1 Instruments status

The RA-2 instrument, during this cycle underwent one instrument anomaly as given in par. 6.1.

The two known causes of random on-board anomalies are still present. In particular we refer to the so-called S-Band anomaly and the IF mask weird behavior described respectively in [R – 7] and [R – 3]. Only the S-Band anomaly partially affects a low number of Envisat data products as given in par. 7.1.7.

MWR sensor assessment report: refer to [R – 2].

DORIS sensor assessment report: refer to [R – 1].

5.2 Cycle quality

The summary of the RA-2 data products availability for this cycle is given in .

Start orbit	Stop orbit	Time instrum. unavailability	Time L0 gaps	Time L1b gaps	Time L2 (FGD) gaps	% instrum. avail.	% L0 avail.	% L1b avail.	% L2 (FGD) avail.
12580	12680.2	32232.26	780.586	773.899	783.345	94.67059	94.54152	94.54263	94.54106
12680.2	12780.4	1077.688	4863.841	10663.89	4869.699	99.82181	99.0176	98.0586	99.01663
12780.4	12880.6	72845.52	556.296	4632.104	6581.483	87.95541	87.86343	87.18952	86.8672
12880.6	12980.8	1047.381	547.488	544.817	553.355	99.82682	99.7363	99.73674	99.73533
12980.8	13081	1089.384	3222.624	3218.911	3231.174	99.81988	99.28704	99.28765	99.28562

Table 1: RA-2 L0, L1b and L2 FGD Data products availability summary for cycle 29

The summary of the MWR L0 data products availability for this cycle is given in Table 2.

Start orbit	Stop orbit	Time instrum. unavailability	Time L0 gaps	% instrum. avail.	% L0 avail.
12580	12680.2	31220.233	347.767	94.837918	94.780417
12680.2	12780.4	0	4440	100	99.265872
12780.4	12880.6	0.001	4319.999	100	99.285713
12880.6	12980.8	0.001	0	100	100
12980.8	13081	0	2759.999	100	99.543651

Table 2: MWR L0 Data products availability summary for cycle 29

The summary of the DORIS L0 data products availability for this cycle is given in Table 3.

Start orbit	Stop orbit	Time instrum. unavailability	Time L0 gaps	% instrum. avail.	% L0 avail.
12580	12680.2	62440.46	5844.536	94.83792	94.35474
12680.2	12780.4	0	4440	100	99.26587
12780.4	12880.6	0	13068	100	98.91964
12880.6	12980.8	0	3312	100	99.72619
12980.8	13081	0	11475	100	99.05134

Table 3: DORIS L0 Data products availability summary for cycle 29

5.3 Orbit quality

During cycle 29 the orbit was maintained within the +/- 1km to the reference ground track. On the 17-August-2004, a 1-burn SFCM orbit maintenance manoeuvre was executed as planned. The following table summarises the SFCM observed performance:

	Burn Start Time	Nominal Delta-V	Calibrated Delta-V	Mode
First burn	2004/08/17-03:03:51	0.0111 m/sec	0.0109 m/sec	SFCM

5.4 Ground Segment Processing Chain Status

5.4.1 IPF PROCESSING CHAIN

Current version of the IPF processing chain is V4.58, installed in both PDHS-E and PDHS-K on July the 16th. This is equivalent to the previous version for what regards all the algorithms and auxiliary files, only a new parameter has been added in the SPH that is the pass number which, for NRT data is nominally set to 0. This was done in order to be compliant with the off-line products version that indeed includes the pass number.

Previous IPF version V4.57 was operational at the Envisat PDHS-K and PDHS-E since April 29th and 28th 2004 respectively.

5.4.2 F-PAC PROCESSING CHAIN

Current version of CMA is V6.3 operational since Apr. 29, 2004.

F-PAC CMA anomalies: anomalies are detailed in the F-PAC Monthly Report [R - 1].

5.4.3 AUXILIARY DATA FILE

Hereafter all the Auxiliary files used actually used by the IPF ground processing are listed:

```
RA2_CHD_AXVIEC20030402_094243_20030407_000000_20200101_000000
RA2_CON_AXVIEC20020606_164228_20020101_000000_20200101_000000
RA2_CST_AXVIEC20020621_135858_20020101_000000_20200101_000000
```

RA2_DIP_AXVIEC20020122_134206_20020101_000000_20200101_000000
RA2_GEO_AXVIEC20020314_093428_20020101_000000_20200101_000000
RA2_ICT_AXVIEC20031208_143628_20020101_000000_20200101_000000
RA2_IFA_AXVIEC20020313_174755_20020101_000000_20200101_000000
RA2_IFB_AXVIEC20020313_174959_20020101_000000_20200101_000000
RA2_IFF_AXVIEC20031208_151817_20030602_215929_20100101_000000
RA2_IOC_AXVIEC20020122_141121_20020101_000000_20200101_000000
RA2_MET_AXVIEC20020204_073357_20020101_000000_20200101_000000
RA2_MSS_AXVIEC20031208_145545_20020101_000000_20200101_000000
RA2_OT1_AXVIEC20040120_082051_20020101_000000_20200101_000000
RA2_OT2_AXVIEC20031208_150159_20020101_000000_20200101_000000
RA2_SET_AXVIEC20020122_150917_20020101_000000_20200101_000000
RA2_SL1_AXVIEC20030131_100228_20020101_000000_20200101_000000
RA2_SL2_AXVIEC20030131_101757_20020101_000000_20200101_000000
RA2_SOI_AXVIEC20031208_150608_20020101_000000_20200101_000000
RA2_SSB_AXVIEC20031208_150749_20020101_000000_20200101_000000
RA2_TLD_AXVIEC20031208_151137_20020101_000000_20200101_000000
RA2_USO_AXVIEC20020122_162920_20020101_000000_20200101_000000

The RA2_POL_AX, the RA2_SOL_AX and the RA2_PLA_AX have been regularly updated every week without problems.

The RA-2 Auxiliary Data Files (ADF) are accessible from the Envisat Web pages under http://envisat.esa.int/services/tools_table.html.

5.4.4 PLANNED UPGRADES

Evolution of the IPF Level 1B and Level 2 processing chain is currently planned. The next IPF version release shall nominally contain the following:

1. USO instrumental correction within the RA-2 L1b processor.
2. New MWR Side Lobes correction algorithm within MWR L1b processor
3. Correction of the mispointing evaluation algorithm within the RA-2 L2 processor
4. Inclusion of the loading tide for the GOT2000.2 model.
5. Addition of the peakiness fields in Ku and S band to the RA-2 and MWR FD/I/MAR meteorological products
6. Inclusion of the square of the significant wave height in Ku and S band
7. Inclusion of an S-band anomaly flag, see [R – 16]
8. Upgrade of the Level 1B and Level 2 processing for DORIS NRT orbital information computation.

Evolutions 3, 5 and 6 shall be reflected too in the F-PAC CMA processing chain.

6 ENVISAT PAYLOAD STATUS

6.1 *Altimeter Events*

The Radar Altimeter 2, during cycle 29, was unavailable once, in the following time period:
Start: 10 Aug 2004 15:00:39 Orbit = 12790 RA-2 in Suspend/Reset-Wait due to due to reporting of
Stop: 11 Aug 2004 10:59:30 Orbit = 12802 too many SEUs.

The HSU1 fuse problem (Ref anomaly occurrence during cycle 22) is still present. This problem does not affect nominal operations since the RA-2 instrument is heated by the nearby hardware.

The cause of the problem is still unknown. The heater fuses as well as the hardware used to report on the status of the fuses are presently under examination.

6.1.1 RA-2 INSTRUMENT PLANNING

The RA-2 instrument planning was performed as follows:

- IF Calibration Mode according the nominal operational acquisition scheme: 100 seconds of data per day over Himalayan region.
- Preset Loop Output mode for GAVDOS Range transponders, located in Creta.
- Preset Loop Output acquisition over ESA transponders, located near Rome; for both ascending and descending passes.
- Individual Echoes background planning: buffering of 20 Data block of individual Echoes and transmission of the in the following 160 Data Blocks. This repeated continuously.

Hereafter the map is reported showing the acquisition sites for both the Range and Sigma_0 transponders.

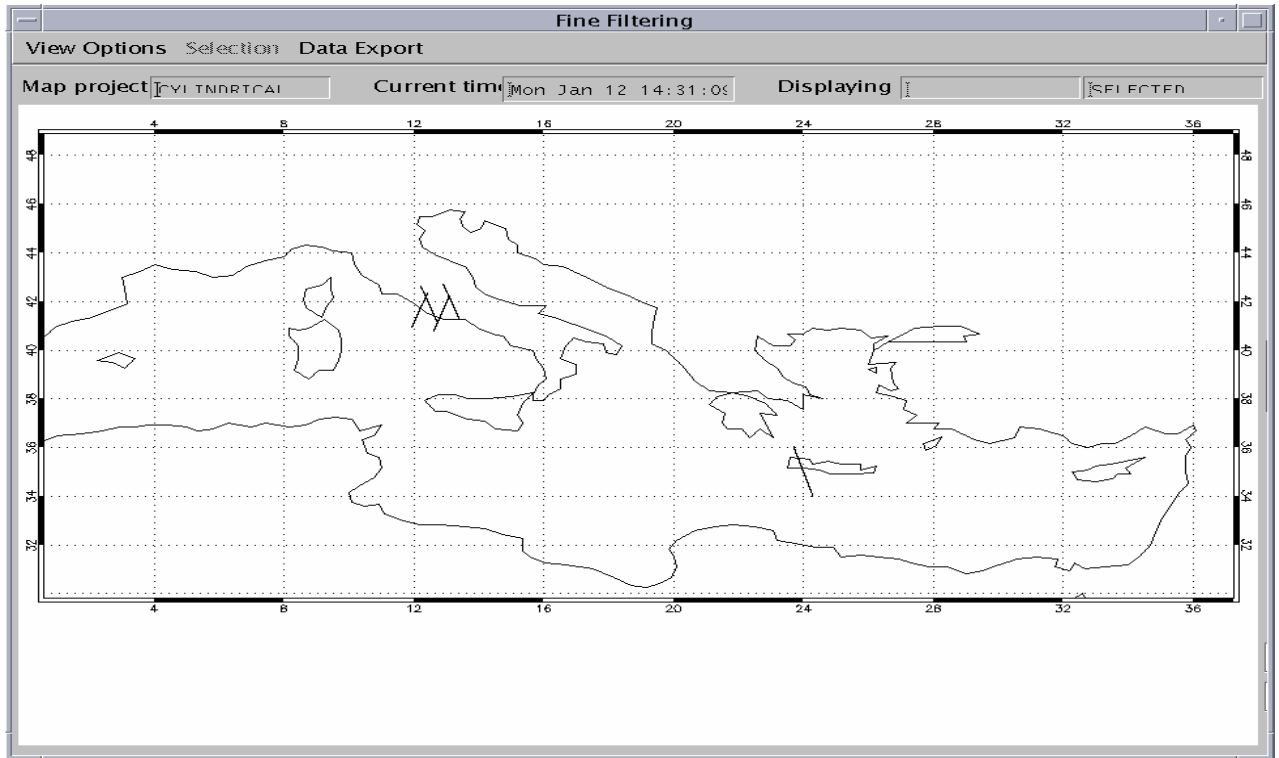


Figure 1: Transponder Acquisition sites for cycle 29

6.2 MWR Events

The MWR, during cycle 29 was never unavailable.

6.3 DORIS Events

The DORIS during cycle 29 was never unavailable.

Starting from June the 14th 2004 the DORIS USO was switched to the redundancy component and it is now working correctly.

7 INSTRUMENT PERFORMANCES

7.1 RA-2 Performances

7.1.1 IF FILTER MASK

In Figure 2 all valid IF masks retrieved by averaging the 100 seconds of data acquired daily during cycle 29 are plotted in the left panel. The on-ground measured IF mask (ref [R – 4]) is also plotted in that panel with a red solid line. In the right panel the difference of each of the calculated IF

masks with respect to the on-ground measured one is reported. During cycle 29 the number of valid IF masks has been of 9, representing about the 27% of the total available IF masks. Only valid IF masks are used to generate the final IF mask used in the Level 1B ground processing; the method used for editing the data is based on the comparison between each of the single IF masks and the reference one (on-ground).

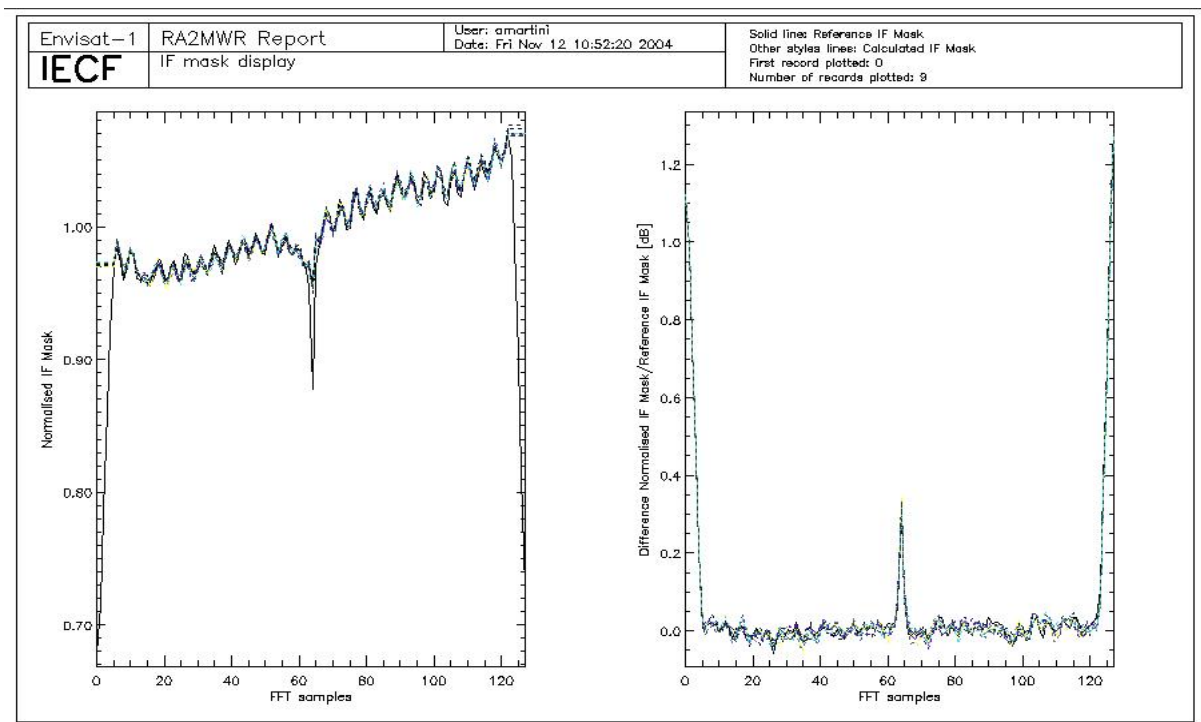


Figure 2: Valid IF masks retrieved daily during cycle 29 plotted together with the on-ground reference.

7.1.2 USO

In Figure 3 the USO clock period trend retrieved for cycle 29 is reported. In order to make the variability visible, the difference of the actual USO clock period with respect to the nominal one has been plotted, in the upper panel. In the lower panel the Range error due to the USO clock variability has been reported taking a satellite altitude of 800 Km as a nominal value.

Currently the nominal USO clock period (12500 ps) is used within the processing, this means that the data are not corrected for the bias and the drift correlated to the actual USO clock period.

A particular investigation has been performed regarding the USO clock trend and the associated auxiliary file; this is described in [R – 11]. The conclusion can be summarized as follows: the precision of 1ps available in the current USO auxiliary file is not enough to appreciate its trend and it is too rough for any altimetric application. A suitable resolution is considered to be of 10^{-6} ps. This problem will be corrected with the following upgrade of the IPF as described in par. 5.4.4.

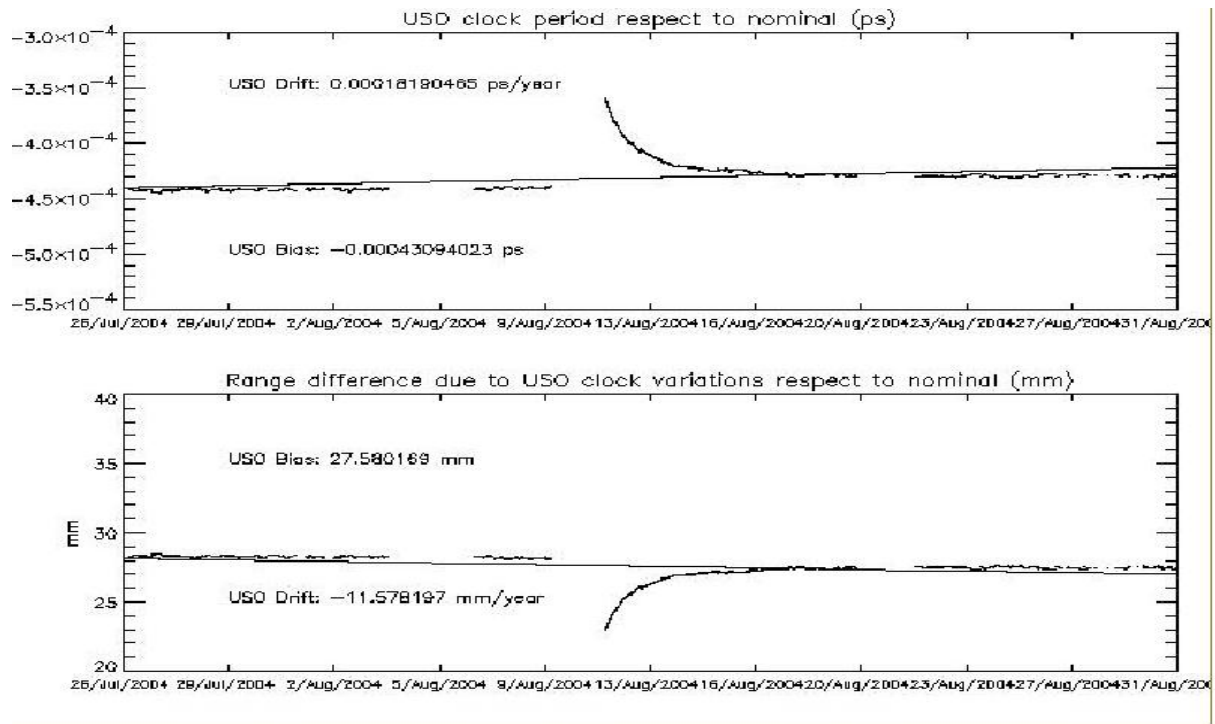


Figure 3: USO clock period for cycle 29

7.1.3 TRACKING CAPABILITY

In Figure 4 and Figure 5, the Chirp ID is plotted respectively for ascending and descending passes of cycle 29. The MDSRs acquired with 320MHz bandwidth are plotted in light gray (Chirp ID equal to 0), the ones acquired with 80MHz bandwidth are plotted in violet (Chirp ID equal to 1) and the ones acquired with the 20MH bandwidth are plotted in dark green (Chirp ID equal to 2).

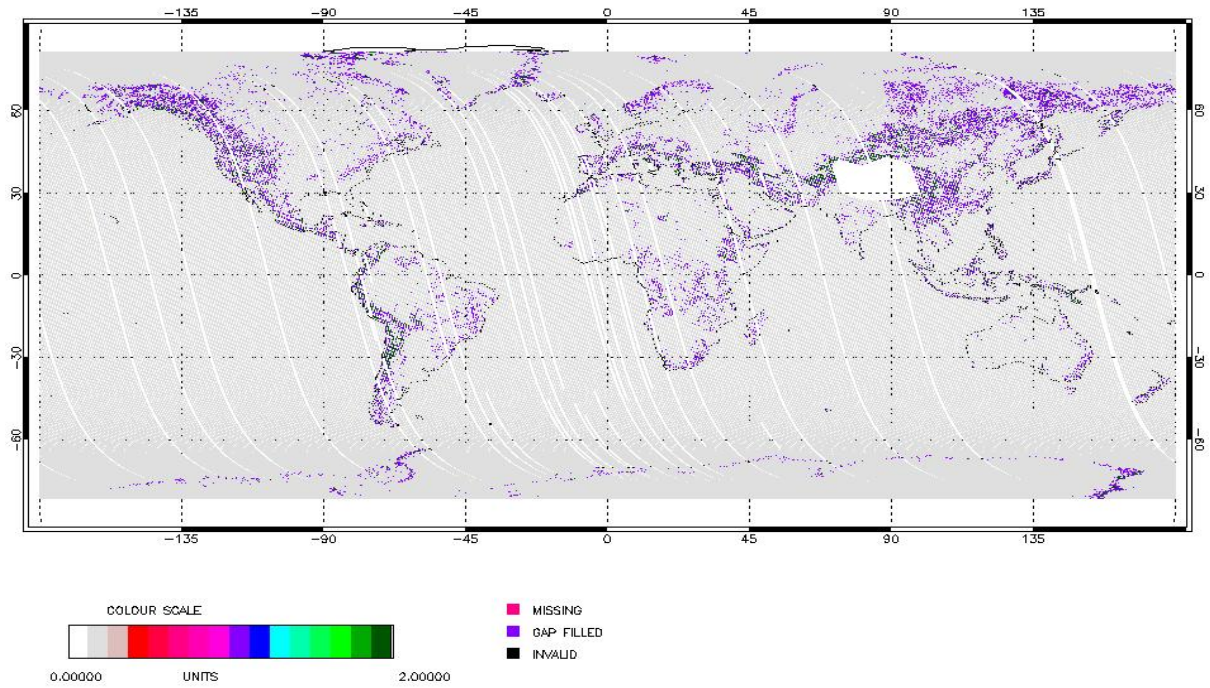


Figure 4: RA-2 Chirp ID for ascending passes during cycle 29

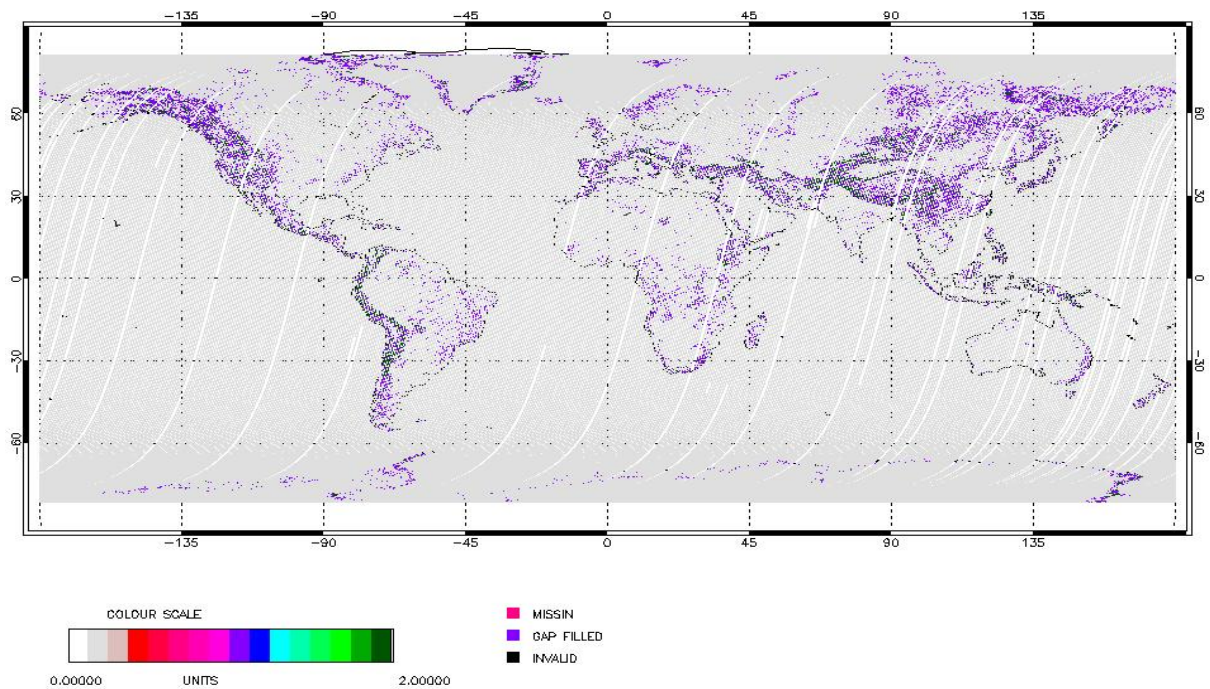


Figure 5: RA-2 Chirp ID for descending passes during cycle 29

The corresponding percentages of acquisition in the different resolutions subdivided by surface type are given in :

Surface type	320 MHz	80 MHz	20MHz
Open Ocean	99.956%	0.036%	0.008%
Costal Water (ocean depth < 200 m)	97.28%	2.27%	0.45%
Sea Ice	98.93%	0.97%	0.1%
Ice Sheet	96.54%	2.87%	0.59%
Land	81.79%	14.22%	3.99%
All world	94.90%	4.07%	1.03%

Table 4: RA-2 Tracking capability: Chirp ID percentages discriminated by surface type

The figures given for the RA-2 tracking performances during this cycle are very much in line with the ones recorded at the end of the Commissioning Phase and presented in [R – 8]. The slight differences are in part due to the different algorithms used to discriminate the surface types.

The objectives of the Commissioning Phase “RSL and Tracking optimization” are hereafter reported:

- 320MHz over Ocean > 99%
- 320 MHz within 15km of Land/Ocean boundary (Costal Water)
- 320 MHz over Sea Ice > 95%
- 320/80 MHz Fixed resolution at Ice Sheet Crossovers > 95%
- 320MHz over Ice Shelves > 95%

7.1.4 SIGMA0 TRANSPONDER

During cycle 29 none of the Sigma_0 Transponder planned acquisition were not performed due to a Transponder failure. The problem has already been identified and it will be solved as soon as possible.

On the other hand, all the measurements acquired until now have been processed giving the following results:

Orbit	Date	Location/Rel. Track	Coordinates	Resolution	Not Corrected Backscattering Bias [dB]	Wet Tropospheric Correction (one way) [dB]
10389	24-feb-04	Rome/315	41.8472, 12.4819	Low	1,552	0,0606
10511	04-mar-04	Valmontone/437	41.7673, 12.9247	Low	1,542	0,0519
10618	11-mar-04	Fiuggi/43	41.7875, 13.2212	Low	1,447	0,0578
10783	23-mar-04	Maccarese/208	41.8605, 12.2385	Low	1,54	0,0636
10890	30-mar-04	Rome/315	41.8472, 12.4819	Low	1,442	0,0789

11513	13-mag-04	Valmontone/437	41.7673, 12.9247	Low	1,353	0,0672
11620	20-mag-04	Fiuggi/43	41.7875, 13.2212	Low	1,417	0,0719
11892	08-giu-04	Rome/315	41.8472, 12.4819	Low	1,504	0,0772
12014	17-giu-04	Valmontone/437	41.7673, 12.9247	Low	1,448	0,2538
12121	24-giu-04	Fiuggi/43	41.7875, 13.2212	Low	1,576	0,0767
11119	15-apr-04	Fiuggi/43	41.7875, 13.2212	High	0,963	0,0588

Table 5: Absolute backscattering calibration results obtained with Transponder measurements

As it is possible to notice from Table 5 the values obtained at Low resolution are about 0.5 dB higher than the one obtained at High resolution, which is in agreement with the Commissioning Phase Transponder results.

7.1.5 DATATION

A significant part of an eventual error in the RA-2 products datation could be given by the not perfect synchronism between the Satellite Binary Time and the UTC Time due to a drift of the ICU clock period. A correlation between those two times is performed at every Kiruna orbit dump and then extrapolated for the four non-Kiruna orbits. In Figure 6 (upper panel) the differences between the extrapolated UTC values and the corresponding real UTC values measured at the next Kiruna dump, are reported. For the whole cycle they are well under the 20 microseconds warning threshold. In the lower panel the ICU clock step for the same period is shown.

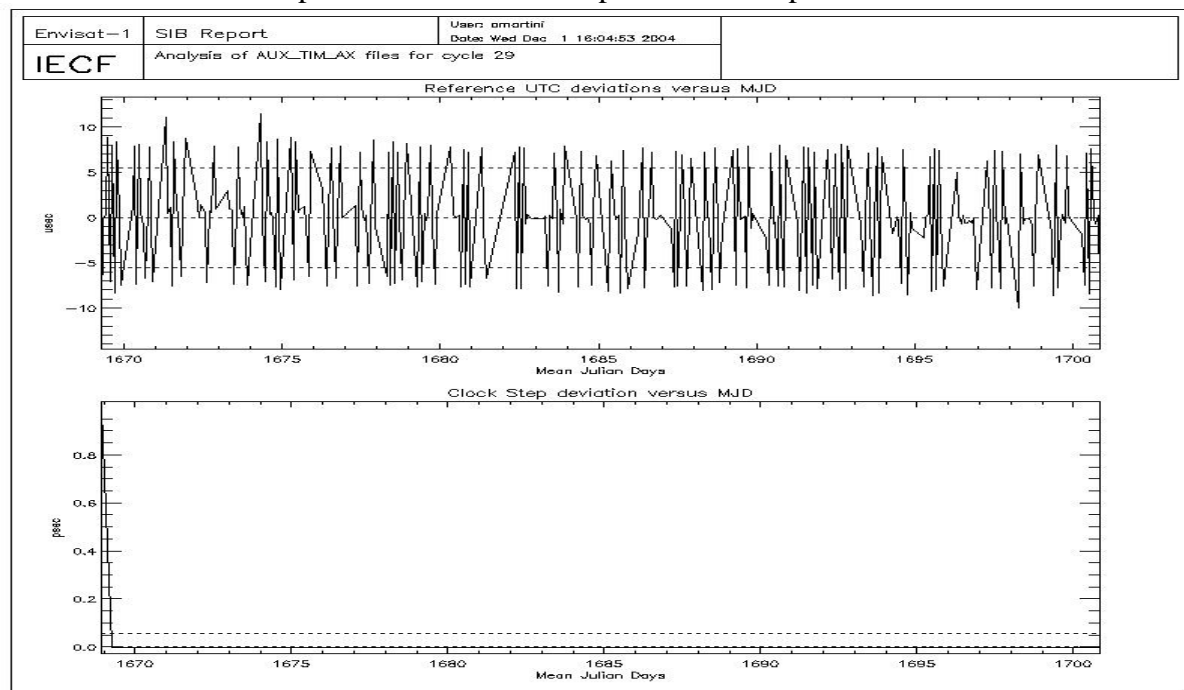


Figure 6: UTC deviations and ICU clock period for cycle 29

7.1.6 MISPOINTING

In Figure 7 the trend of the mispointing squared (averaged every orbit) is reported in $\text{deg}^2 \cdot 10^{-4}$. The average mispointing value, as extracted from the RA2_FGD_2P data products, is around 0.028 deg^2 , is known to be higher than the one reported at platform level [R – 13]. This is due to a not perfect tuning of the algorithm currently used to retrieve the mispointing value from the RA-2 waveform data. An optimization of this algorithm shall be part of the next Level 2 processors upgrade, planned for end-2004 (ref. 5.4.4).

In particular for this cycle one event of low mispointing values is visible in the plot in correlation with the occurrence of the instrument anomaly as reported in par. 6.1. The explanation of the anomalous mispointing behavior in correspondence to instrument switch-offs is given in par 7.1.6.

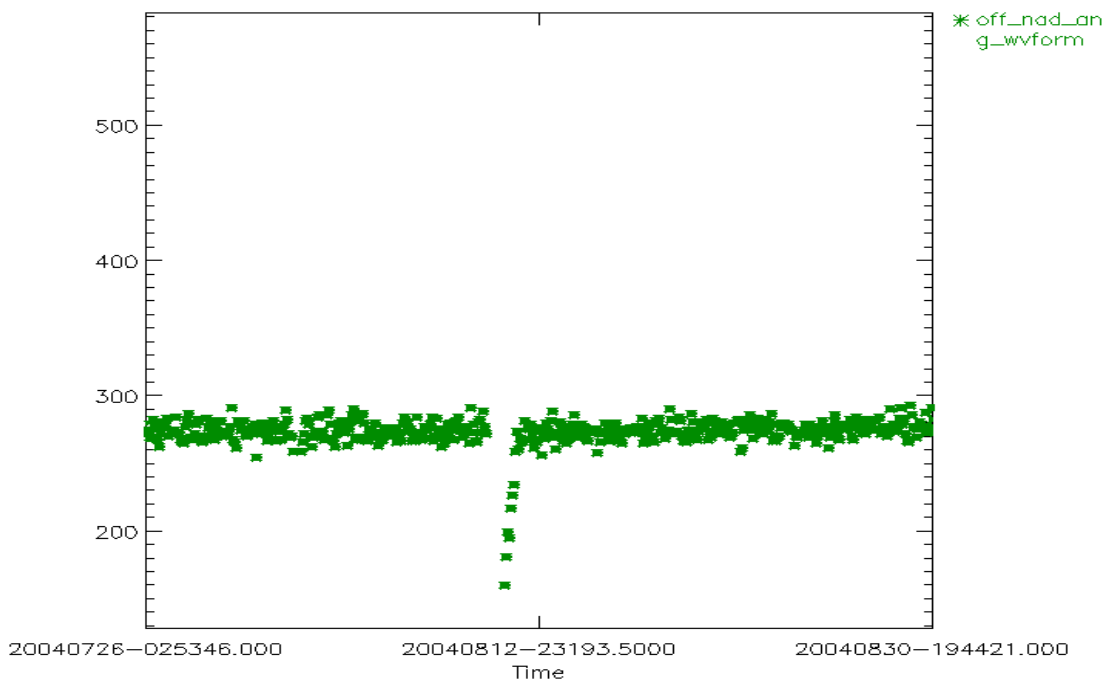


Figure 7: Smoothed mispointing squared trend for cycle 29 ($\text{deg}^2 \cdot 10^4$)

7.1.7 S-BAND ANOMALY

The so-called “S-Band anomaly” affects the RA-2 data products quality. Hereafter, the table lists the products files affected by the S-band anomaly problem during cycle 29. This corresponds to a total percentage of about 3 % of the acquired data.

Being the method used a statistical one working on ocean data; files containing less than 1000 seconds of data over ocean have not been considered. This choice is supported by the fact that the “S-Band anomaly” is associated to a particular instrumental behavior that cannot appear and disappear within a short time frame. (ref. [R – 7])

File name	Start date	Start time	Stop date	Stop time
RA2_FGD_2PNPDK20040807_110556_000060522029_00166_12745_0607.N1	07-AUG-2004	11:05:56.531637	07-AUG-2004	12:46:48.837723

RA2_FGD_2PNPDK20040807_124613_000058752029_00167_12746_0608.N1	07-AUG-2004	12:46:13.245425	07-AUG-2004	14:24:08.425519
RA2_FGD_2PNPDK20040807_142332_000050662029_00168_12747_0609.N1	07-AUG-2004	14:23:32.833218	07-AUG-2004	15:47:59.249301
RA2_FGD_2PNPDE20040812_053953_000060472029_00234_12813_0525.N1	12-AUG-2004	05:39:53.624680	12-AUG-2004	07:20:40.360796
RA2_FGD_2PNPDK20040812_071956_000040292029_00235_12814_0660.N1	12-AUG-2004	07:19:56.970486	12-AUG-2004	08:27:06.252659
RA2_FGD_2PNPDK20040812_082623_000061502029_00236_12815_0661.N1	12-AUG-2004	08:26:23.976361	12-AUG-2004	10:08:54.314470
RA2_FGD_2PNPDK20040812_100812_000061382029_00237_12816_0662.N1	12-AUG-2004	10:08:12.038173	12-AUG-2004	11:50:30.122280
RA2_FGD_2PNPDK20040812_114953_000059212029_00238_12817_0663.N1	12-AUG-2004	11:49:53.415988	12-AUG-2004	13:28:34.270104
RA2_FGD_2PNPDK20040812_132802_000059302029_00239_12818_0664.N1	12-AUG-2004	13:28:02.019805	12-AUG-2004	15:06:51.785920
RA2_FGD_2PNPDK20040812_150618_000051082029_00240_12819_0665.N1	12-AUG-2004	15:06:18.421620	12-AUG-2004	16:31:26.055727
RA2_FGD_2PNPDK20040814_104559_000060472029_00266_12845_0688.N1	14-AUG-2004	10:45:59.187771	14-AUG-2004	12:26:45.923867
RA2_FGD_2PNPDK20040814_122613_000059742029_00267_12846_0689.N1	14-AUG-2004	12:26:13.673575	14-AUG-2004	14:05:47.999675
RA2_FGD_2PNPDK20040814_140515_000049682029_00268_12847_0690.N1	14-AUG-2004	14:05:15.749370	14-AUG-2004	15:28:04.133469
RA2_FGD_2PNPDK20040822_131358_000059152029_00382_12961_0788.N1	22-AUG-2004	13:13:58.978885	22-AUG-2004	14:52:34.262983
RA2_FGD_2PNPDK20040822_145158_000050832029_00383_12962_0789.N1	22-AUG-2004	14:51:58.670676	22-AUG-2004	16:16:41.796770

Table 6: List of L2 FGD Files affected by S-Band anomaly during cycle 29

A valuable algorithm to detect the RA-2 DSRs affected by the S-Band anomaly within the L2 products can be found in [R- 12]. Note that the algorithm is only valid for data acquired over open-ocean.

7.2 MWR Performances

For MWR performances please refer to the Reference CLS Cyclic Report of the type of [R – 2].

7.3 DORIS Performances

For DORIS performances refer to the Reference F-PAC Monthly Report of the type of [R - 1].

8 PRODUCT PERFORMANCES

8.1 Availability of data

In Figure 8 and Table 7 the summary of unavailable RA-2 L0 products is given.

It is easy to notice that close to the Himalayan region a small gap in the data is present. This is due to the daily instrument switch-off (Heater 2 mode) performed to prevent the S-Band anomaly to last more than one day when it occurs

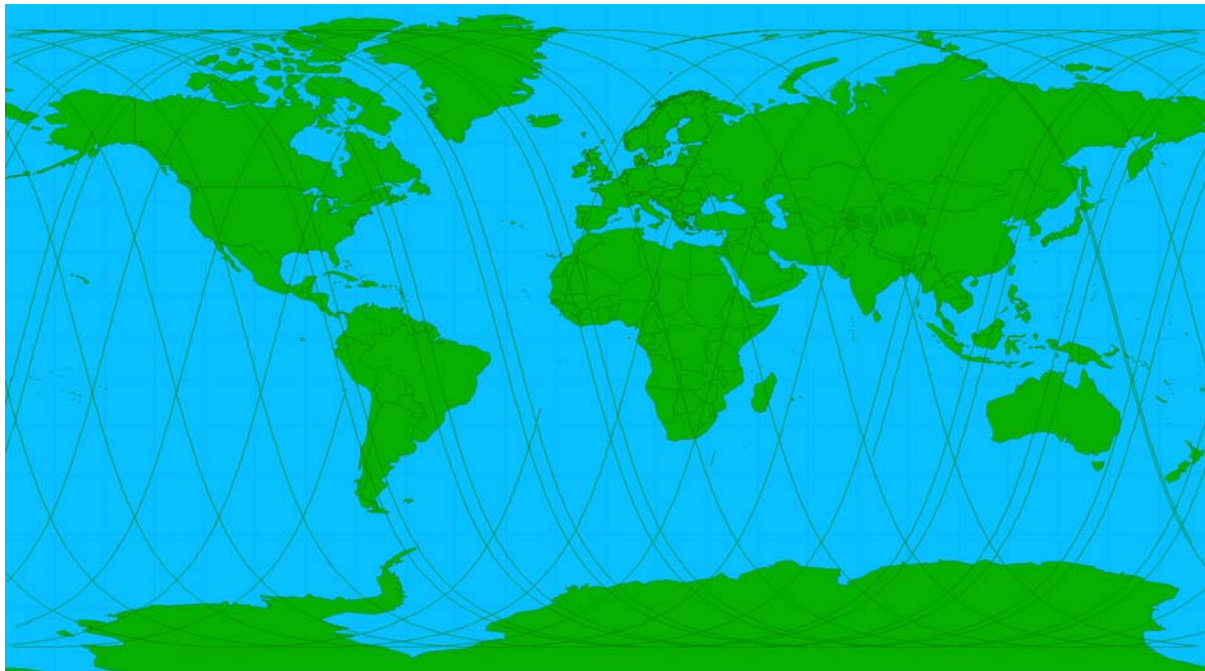


Figure 8: RA-2 L0 unavailable products for first part of cycle 29

Start date	Start time	Stop date	Stop time	Duration (s)	Start orbit	Stop orbit	Reason
27-Jul-04	07:23:32	27-Jul-04	07:24:44	72	12585	12585	PDS_UNKNOWN_FAILURE
27-Jul-04	16:36:47	27-Jul-04	16:38:05	78	12591	12591	PDS_UNKNOWN_FAILURE
28-Jul-04	16:04:44	28-Jul-04	16:06:02	78	12605	12605	PDS_UNKNOWN_FAILURE
29-Jul-04	15:30:55	29-Jul-04	15:30:57	2	12619	12619	PDS_UNKNOWN_FAILURE
29-Jul-04	15:33:59	29-Jul-04	15:35:17	78	12619	12619	PDS_UNKNOWN_FAILURE
30-Jul-04	16:42:11	30-Jul-04	16:43:29	78	12634	12634	PDS_UNKNOWN_FAILURE
31-Jul-04	16:10:26	31-Jul-04	16:11:44	78	12648	12648	PDS_UNKNOWN_FAILURE
01-Aug-04	15:39:34	01-Aug-04	15:40:52	78	12662	12662	PDS_UNKNOWN_FAILURE
01-Aug-04	20:47:27	02-Aug-04	04:14:11	26804	12665	12669	PDS_UNKNOWN_FAILURE
03-Aug-04	16:16:21	03-Aug-04	16:17:38	77	12691	12691	PDS_UNKNOWN_FAILURE
04-Aug-04	15:42:11	04-Aug-04	15:42:14	3	12705	12705	PDS_UNKNOWN_FAILURE
04-Aug-04	15:45:09	04-Aug-04	15:46:27	78	12705	12705	PDS_UNKNOWN_FAILURE
05-Aug-04	12:06:58	05-Aug-04	12:08:01	63	12717	12717	PDS_UNKNOWN_FAILURE
05-Aug-04	15:13:20	05-Aug-04	15:14:37	77	12719	12719	PDS_UNKNOWN_FAILURE
06-Aug-04	16:22:15	06-Aug-04	16:23:32	77	12734	12734	PDS_UNKNOWN_FAILURE
07-Aug-04	15:50:44	07-Aug-04	15:52:02	78	12748	12748	PDS_UNKNOWN_FAILURE
08-Aug-04	11:03:51	08-Aug-04	12:14:45	4254	12759	12760	PDS_UNKNOWN_FAILURE
08-Aug-04	15:19:14	08-Aug-04	15:20:32	78	12762	12762	PDS_UNKNOWN_FAILURE
10-Aug-04	15:00:29	10-Aug-04	15:00:39	10	12790	12790	PDS_UNKNOWN_FAILURE
11-Aug-04	10:59:30	11-Aug-04	11:00:36	66	12802	12802	PDS_UNKNOWN_FAILURE
11-Aug-04	15:22:25	11-Aug-04	15:22:28	3	12805	12805	PDS_UNKNOWN_FAILURE
11-Aug-04	15:25:08	11-Aug-04	15:26:26	78	12805	12805	PDS_UNKNOWN_FAILURE
12-Aug-04	16:34:03	12-Aug-04	16:35:20	77	12820	12820	PDS_UNKNOWN_FAILURE

13-Aug-04	06:48:42	13-Aug-04	06:48:51	9	12828	12828	PDS_UNKNOWN_FAILURE
13-Aug-04	16:01:54	13-Aug-04	16:03:12	78	12834	12834	PDS_UNKNOWN_FAILURE
14-Aug-04	15:28:03	14-Aug-04	15:28:06	3	12848	12848	PDS_UNKNOWN_FAILURE
14-Aug-04	15:31:02	14-Aug-04	15:32:20	78	12848	12848	PDS_UNKNOWN_FAILURE
15-Aug-04	16:39:26	15-Aug-04	16:40:44	78	12863	12863	PDS_UNKNOWN_FAILURE
10-Aug-04	15:00:39	10-Aug-04	15:53:43	3184	12790	12791	UNAV_RA2
10-Aug-04	15:56:19	11-Aug-04	10:59:30	68591	12791	12802	UNAV_RA2
17-Aug-04	15:33:41	17-Aug-04	15:33:44	3	12891	12891	PDS_UNKNOWN_FAILURE
17-Aug-04	15:36:44	17-Aug-04	15:38:01	77	12891	12891	PDS_UNKNOWN_FAILURE
18-Aug-04	16:44:50	18-Aug-04	16:46:08	78	12906	12906	PDS_UNKNOWN_FAILURE
19-Aug-04	16:13:21	19-Aug-04	16:14:39	78	12920	12920	PDS_UNKNOWN_FAILURE
20-Aug-04	15:42:19	20-Aug-04	15:43:37	78	12934	12934	PDS_UNKNOWN_FAILURE
21-Aug-04	15:10:20	21-Aug-04	15:11:38	78	12948	12948	PDS_UNKNOWN_FAILURE
22-Aug-04	16:19:16	22-Aug-04	16:20:34	78	12963	12963	PDS_UNKNOWN_FAILURE
24-Aug-04	11:26:44	24-Aug-04	12:11:20	2676	12988	12989	PDS_UNKNOWN_FAILURE
24-Aug-04	15:16:15	24-Aug-04	15:17:33	78	12991	12991	PDS_UNKNOWN_FAILURE
25-Aug-04	16:25:11	25-Aug-04	16:26:28	77	13006	13006	PDS_UNKNOWN_FAILURE
26-Aug-04	15:53:31	26-Aug-04	15:54:48	77	13020	13020	PDS_UNKNOWN_FAILURE
27-Aug-04	15:19:35	27-Aug-04	15:19:38	3	13034	13034	PDS_UNKNOWN_FAILURE
27-Aug-04	15:22:10	27-Aug-04	15:23:28	78	13034	13034	PDS_UNKNOWN_FAILURE
28-Aug-04	16:31:05	28-Aug-04	16:32:23	78	13049	13049	PDS_UNKNOWN_FAILURE
29-Aug-04	15:59:06	29-Aug-04	16:00:24	78	13063	13063	PDS_UNKNOWN_FAILURE

Table 7: List of gaps for RA-2 L0 products during cycle 29

In Figure 9 and Table 8 the summary of unavailable MWR L0 products is given.

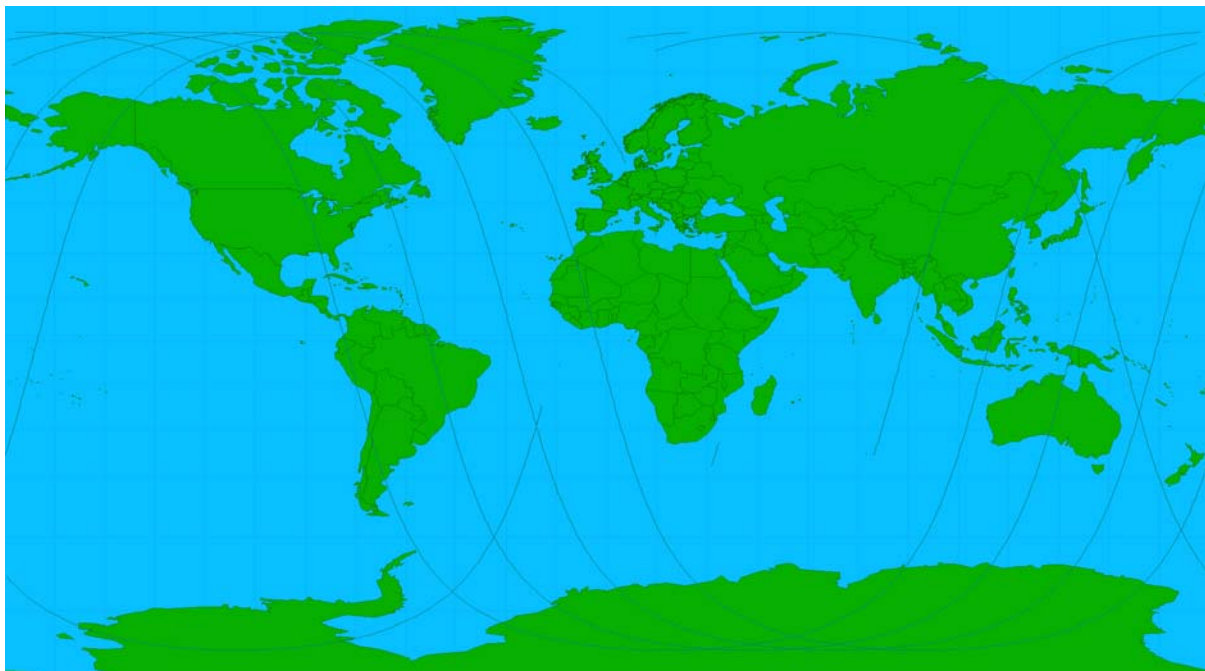


Figure 9: MWR L0 unavailable products for cycle 29

Start date	Start time	Stop date	Stop time	Duration (s)	Start orbit	Stop orbit	Reason
27-Jul-04	07:22:30	27-Jul-04	07:24:30	120	12585	12585	PDS_UNKNOWN_FAILURE
01-Aug-04	20:46:18	01-Aug-04	20:50:06	228	12665	12665	PDS_UNKNOWN_FAILURE
01-Aug-04	20:50:06	02-Aug-04	04:13:55	26629	12665	12669	UNAV_ARTEMIS
03-Aug-04	11:30:46	03-Aug-04	11:31:34	48	12688	12688	PDS_UNKNOWN_FAILURE
05-Aug-04	12:06:26	05-Aug-04	12:07:38	72	12717	12717	PDS_UNKNOWN_FAILURE
05-Aug-04	13:47:39	05-Aug-04	13:48:27	48	12718	12718	PDS_UNKNOWN_FAILURE
08-Aug-04	11:03:21	08-Aug-04	12:14:33	4272	12759	12760	PDS_UNKNOWN_FAILURE
10-Aug-04	21:03:02	10-Aug-04	22:14:14	4272	12794	12794	PDS_UNKNOWN_FAILURE
13-Aug-04	06:47:56	13-Aug-04	06:48:44	48	12828	12828	PDS_UNKNOWN_FAILURE

Table 8: List of gaps for MWR L0 products during cycle 29

In Figure 10 and Table 9 the summary of unavailable RA-2 L1b products is given. Please note that in this case, only the gaps due to problems with the PDS are reported.

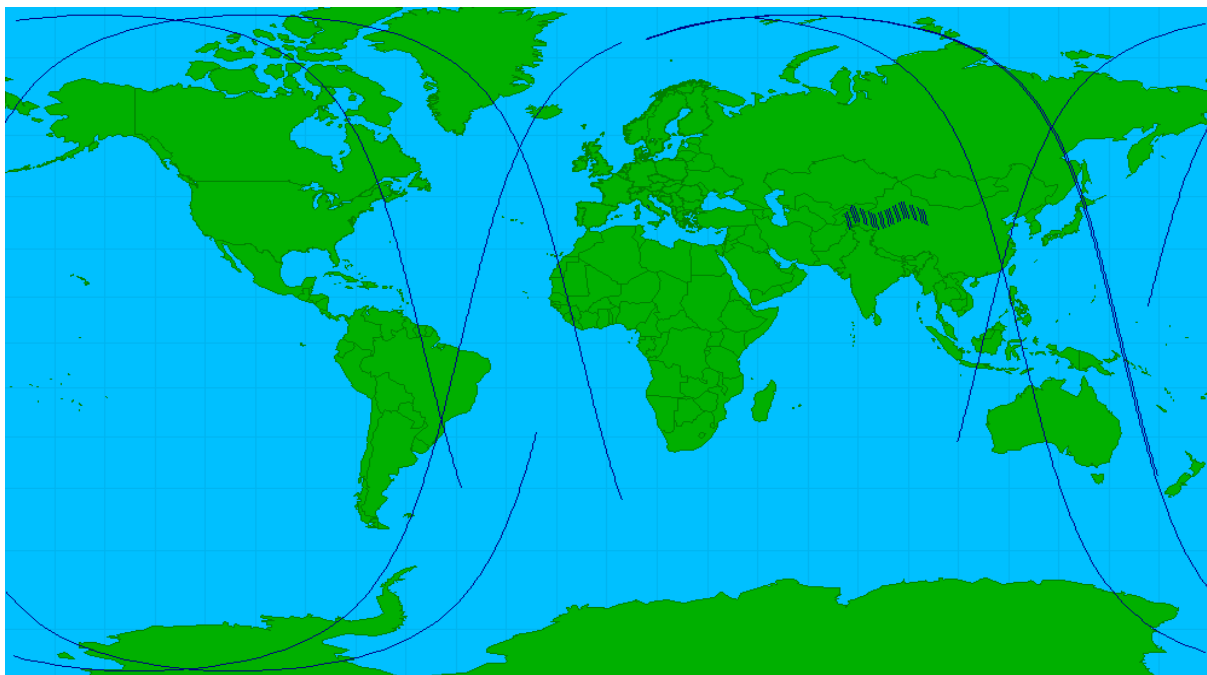


Figure 10: RA-2 L1b unavailable products for cycle 29

Start date	Start time	Stop date	Stop time	Duration (s)	Start orbit	Stop orbit	Reason
27-Jul-04	07:23:33	27-Jul-04	07:24:44	71	12585	12585	PDS_UNKNOWN_FAILURE
27-Jul-04	16:36:47	27-Jul-04	16:38:05	78	12591	12591	PDS_UNKNOWN_FAILURE
28-Jul-04	16:04:44	28-Jul-04	16:06:02	78	12605	12605	PDS_UNKNOWN_FAILURE
29-Jul-04	15:33:59	29-Jul-04	15:35:17	78	12619	12619	PDS_UNKNOWN_FAILURE
30-Jul-04	16:42:11	30-Jul-04	16:43:29	78	12634	12634	PDS_UNKNOWN_FAILURE
31-Jul-04	16:10:26	31-Jul-04	16:11:44	78	12648	12648	PDS_UNKNOWN_FAILURE
03-Aug-04	16:16:21	03-Aug-04	16:17:38	77	12691	12691	PDS_UNKNOWN_FAILURE

04-Aug-04	15:45:09	04-Aug-04	15:46:27	78	12705	12705	PDS_UNKNOWN_FAILURE
05-Aug-04	12:06:59	05-Aug-04	12:08:01	62	12717	12717	PDS_UNKNOWN_FAILURE
05-Aug-04	15:13:20	05-Aug-04	15:14:37	77	12719	12719	PDS_UNKNOWN_FAILURE
06-Aug-04	16:22:15	06-Aug-04	16:23:32	77	12734	12734	PDS_UNKNOWN_FAILURE
06-Aug-04	16:23:32	06-Aug-04	16:23:33	1	12734	12734	PDS_UNKNOWN_FAILURE
07-Aug-04	12:46:48	07-Aug-04	14:23:32	5804	12746	12747	PDS_UNKNOWN_FAILURE
07-Aug-04	15:50:44	07-Aug-04	15:52:02	78	12748	12748	PDS_UNKNOWN_FAILURE
08-Aug-04	11:03:52	08-Aug-04	12:14:45	4253	12759	12760	PDS_UNKNOWN_FAILURE
10-Aug-04	15:00:30	10-Aug-04	15:00:39	9	12790	12790	PDS_UNKNOWN_FAILURE
11-Aug-04	10:59:30	11-Aug-04	11:00:36	66	12802	12802	PDS_UNKNOWN_FAILURE
11-Aug-04	15:25:08	11-Aug-04	15:26:26	78	12805	12805	PDS_UNKNOWN_FAILURE
12-Aug-04	16:34:03	12-Aug-04	16:35:20	77	12820	12820	PDS_UNKNOWN_FAILURE
13-Aug-04	06:48:43	13-Aug-04	06:48:51	8	12828	12828	PDS_UNKNOWN_FAILURE
13-Aug-04	06:48:56	13-Aug-04	07:56:58	4082	12828	12829	PDS_UNKNOWN_FAILURE
13-Aug-04	16:01:54	13-Aug-04	16:03:12	78	12834	12834	PDS_UNKNOWN_FAILURE
14-Aug-04	15:31:02	14-Aug-04	15:32:20	78	12848	12848	PDS_UNKNOWN_FAILURE
15-Aug-04	16:39:26	15-Aug-04	16:40:44	78	12863	12863	PDS_UNKNOWN_FAILURE
16-Aug-04	16:07:29	16-Aug-04	16:08:46	77	12877	12877	PDS_UNKNOWN_FAILURE
16-Aug-04	16:08:46	16-Aug-04	16:08:47	1	12877	12877	PDS_UNKNOWN_FAILURE
17-Aug-04	15:36:44	17-Aug-04	15:38:01	77	12891	12891	PDS_UNKNOWN_FAILURE
18-Aug-04	16:44:50	18-Aug-04	16:46:08	78	12906	12906	PDS_UNKNOWN_FAILURE
19-Aug-04	16:13:21	19-Aug-04	16:14:39	78	12920	12920	PDS_UNKNOWN_FAILURE
20-Aug-04	15:42:19	20-Aug-04	15:43:37	78	12934	12934	PDS_UNKNOWN_FAILURE
21-Aug-04	15:10:20	21-Aug-04	15:11:38	78	12948	12948	PDS_UNKNOWN_FAILURE
22-Aug-04	16:19:16	22-Aug-04	16:20:34	78	12963	12963	PDS_UNKNOWN_FAILURE
24-Aug-04	11:26:45	24-Aug-04	12:11:20	2675	12988	12989	PDS_UNKNOWN_FAILURE
24-Aug-04	15:16:15	24-Aug-04	15:17:33	78	12991	12991	PDS_UNKNOWN_FAILURE
25-Aug-04	16:25:11	25-Aug-04	16:26:28	77	13006	13006	PDS_UNKNOWN_FAILURE
26-Aug-04	15:53:31	26-Aug-04	15:54:48	77	13020	13020	PDS_UNKNOWN_FAILURE
27-Aug-04	15:22:10	27-Aug-04	15:23:28	78	13034	13034	PDS_UNKNOWN_FAILURE
28-Aug-04	16:31:05	28-Aug-04	16:32:23	78	13049	13049	PDS_UNKNOWN_FAILURE
29-Aug-04	15:59:06	29-Aug-04	16:00:24	78	13063	13063	PDS_UNKNOWN_FAILURE

Table 9: List of gaps for RA-2 L1b products during cycle 29

8.2 RA-2 Altimeter Parameters

Hereafter a summary of the main Altimetric parameters performances is reported; these results have been obtained with the editing criteria mentioned in par. 8.3.

8.2.1 ALTIMETER RANGE

No current results for the time being. The monitoring of the RA-2 FD altimetric range shall be done once the NRT products shall be upgraded with the DORIS navigator NRT orbital information.

8.2.2 SIGNIFICANT WAVE HEIGHT

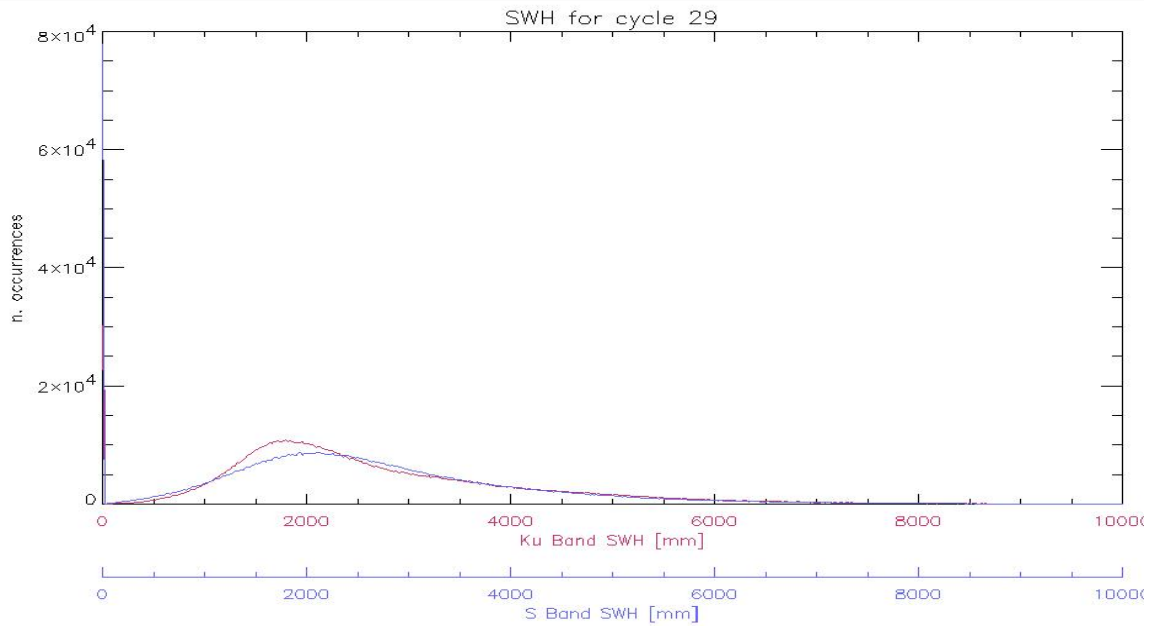


Figure 11: Histogram of Ku and S Band SWH for cycle 29 (mm)

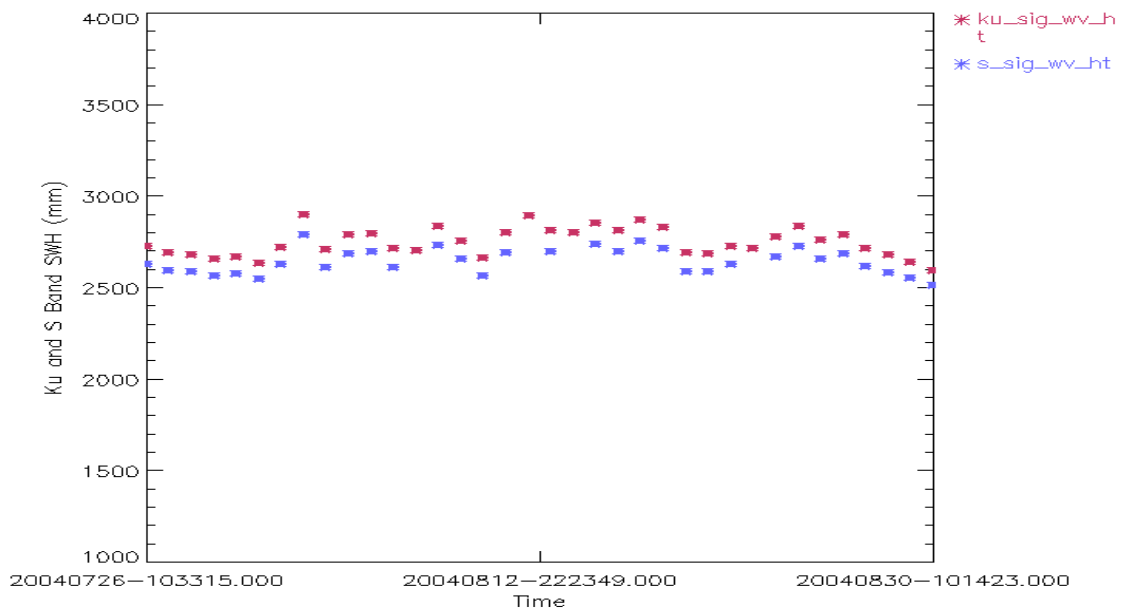


Figure 12: Ku and S SWH daily average for cycle 29 (mm)

The histogram of the SWH shows a nominal behavior for this cycle. The trend goes on in following the behavior as detected for the previous cycle. On July the 2nd the SWH value in the two bands dropped of about 10 cm in average. The reason of this behavior is not yet clear since an investigation on this issue has been just initiated.

The high daily means (sometimes plotted outside the figure range) reported for the S-Band values are due to the so-called S-Band anomaly (ref. par.7.1.7).

8.2.3 BACKSCATTER COEFFICIENT – WIND SPEED

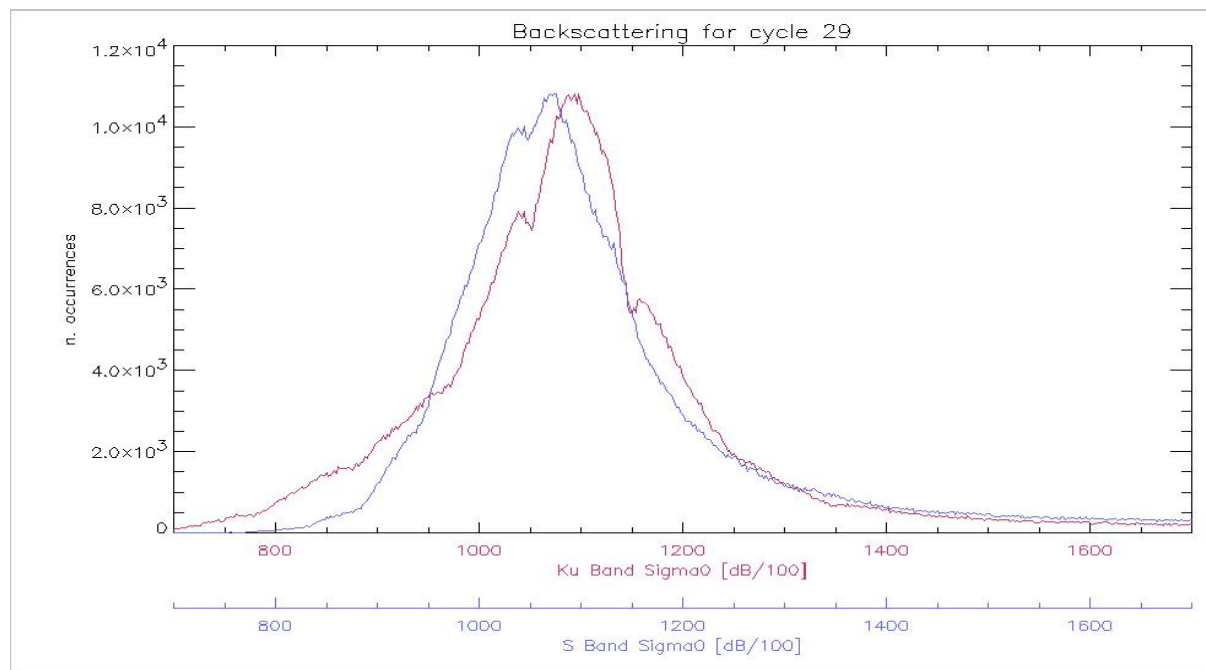


Figure 13: Histogram of Ku and S Band Backscattering Coefficient for cycle 29 (dB/100)

The Sigma₀ histogram both in Ku and S Band shows secondary peaks. A small investigation on this problem, performed on the data of cycle 28, demonstrated that the backscattering distribution assumes a different behavior for different sea conditions. Indeed, for both the bands, the majority of the data is concentrated on lower values for rough sea state (southern hemisphere, winter conditions) and on higher values for calm sea state (northern hemisphere, summer conditions). This demonstrates that the instrument has a non-linear behavior respect to the backscattered power; one of the most probable causes of this has been thought to be the non perfect characterization of the on-board step attenuator.

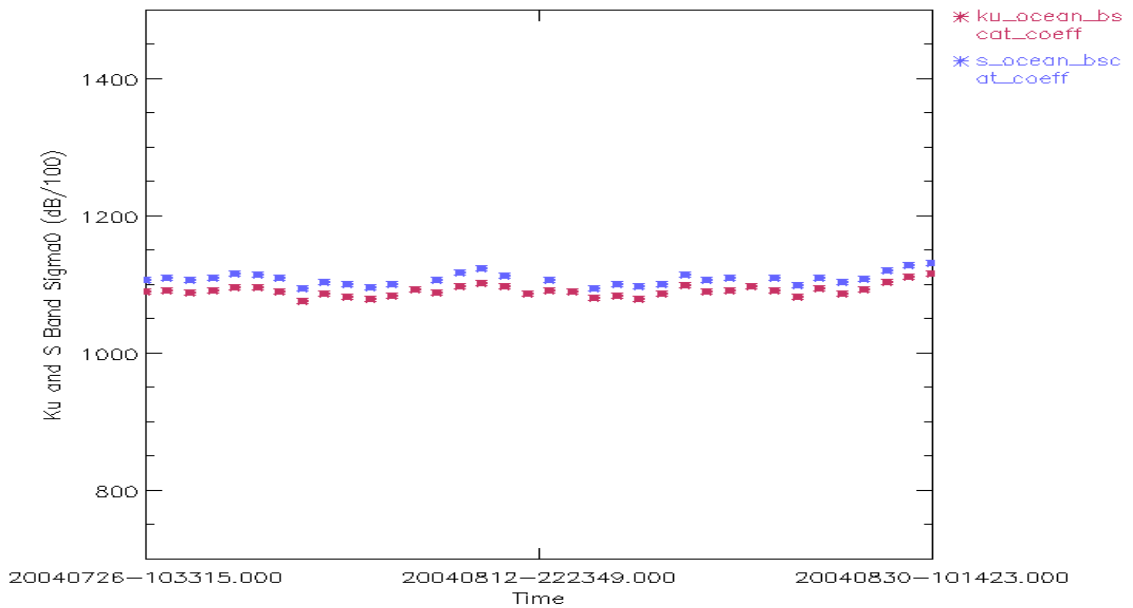


Figure 14: Ku and S Sigma_0 daily average for cycle 29 (dB/100)

The backscattering coefficient daily average trend shows, for both bands, a nominal behavior. The high daily means (sometimes plotted outside the figure range) reported for the S-Band Sigma_0 trend are due to the so-called S-Band anomaly (ref. par. 7.1.7).

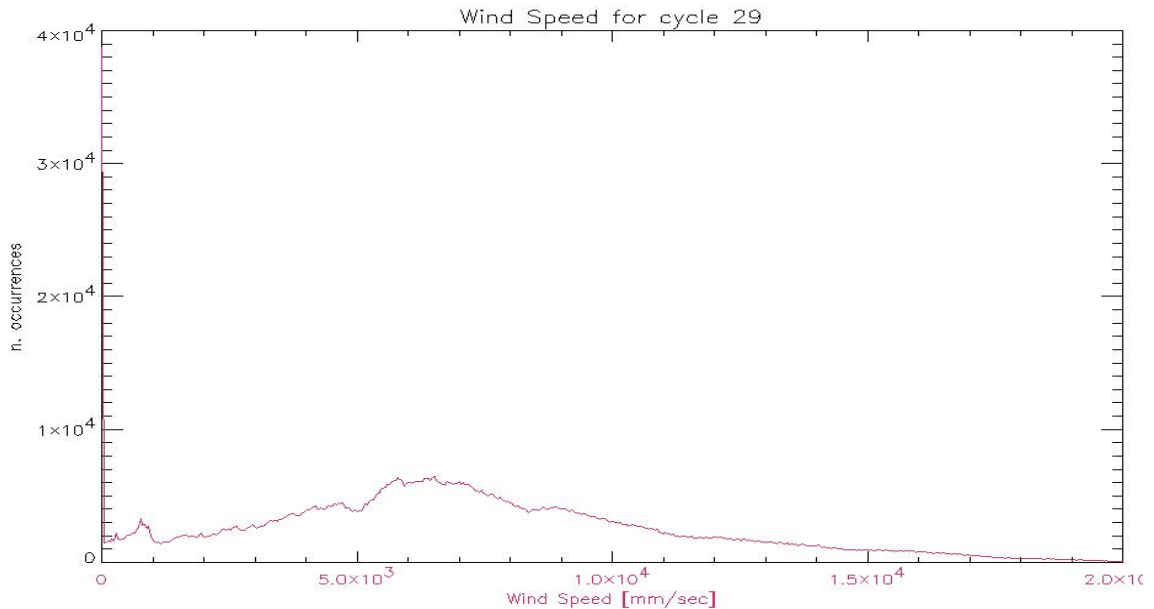


Figure 15: Histogram of Ku Wind Speed for cycle 29 (mm/s)

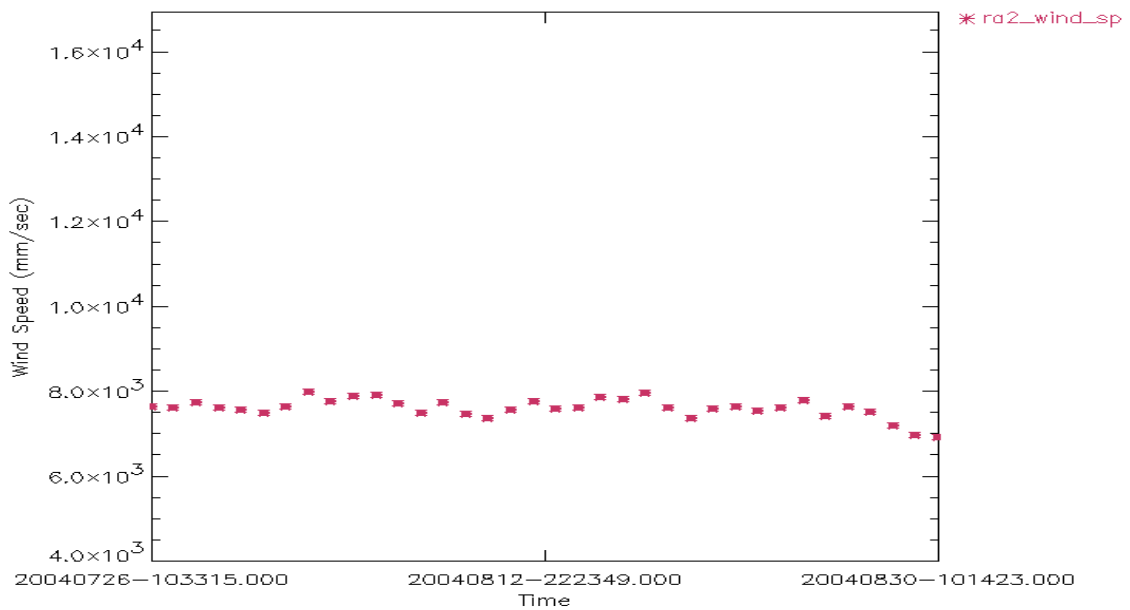


Figure 16: Wind Speed daily average for cycle 29 (mm/s)

8.3 Edited measurements

In order to produce the statistics reported in 8.2 the following editing criteria have been used before using RA2_FGD products:

Parameter	Surface type	Zone	Range
Ku SWH	Open Ocean	All world	[0, 10] (m)
Ku Backscattering Coeff.	Open ocean	All world	[7, 17] (dBs)
Ku Wind Speed	Open ocean	All world	[0, 20] (m/s)

Table 8: Editing criteria for RA-2 parameters statistics

8.4 Product disclaimer

For the product disclaimers please refer to the following web link:

<http://envisat.esa.int/dataproducts/availability/>

8.5 *Data handling recommendations*

8.5.1 SEA-ICE FLAG

The following algorithm is proposed for the determination of a sea-ice flag, presently missing in the Level 2 Ra-2 and MWR data products. (See [R – 14]):

$|\text{Latitude (lat: field\#4 of L2 data)}| > 50 \text{ deg}$
AND
The number of 20Hz valid data (*num_18hz_ku_ocean: field\#23 of L2 data*)
< 17
OR
 $|\text{MWR Wet Tropospheric Correction (mwr_wet_tropo_corr: field\#42 of L2 data)} - \text{ECMWF Wet Tropospheric Correction (mod_wet_tropo_corr: field\#41 of L2 data)}| > 10 \text{ cm}$
OR
 $\text{Peakiness (Ku_peak: field\#139 of L2 data)} > 2$

8.5.2 OCEAN S-BAND ANOMALIES DETECTION

A valuable algorithm to detect the Level 2 DSR affected by the RA-2 S-Band anomaly is proposed in [R- 12]. Note that its validity is limited to the data acquired over open-ocean.

8.5.3 WARNING ON IPF 4.56 VERSION IDENTIFICATION FIELD

All RA-2 and MWR level 1B and NRT Level 2 products generated after November 26, 2003 report a software version as being 4.54 (available in MPH field 8).

Nevertheless those products have been generated with the IPF V4.56 operational since November 26, 2003. The first nominal generated product, using the new SW version, will be the one relevant to the absolute orbit number 9094.

The software version ID is correct since December 4, 2003.

8.5.4 S-BAND BACKSCATTERING COEFFICIENT

For the data processed with IPF version 4.56 on, the S-Band Backscattering coefficient has been demonstrated to be in average about 0.65 dBs higher than for the previous versions of the processor. This is due to the algorithm used for the retrieval of the AGC in S-Band, corrected in IPF version 4.56 to be more coherent with the real functioning of the instrument.

An average value of 0.65 dBs is suggested to be added to the old software versions S-Band Sigma0 in order to be in line with the new IPF V4.56 version.

As a consequence of the IPF V4.56 s/w version installation, the rain flag validity is currently affected. This shall be corrected with the loading of a new ADF table.

8.5.5 USO RANGE CORRECTION

The actual data of cycle 29 have to be corrected to compensate for the Ultra Stable Oscillator drift shown in Figure 3. The measured Range shall be corrected considering a drift of -11.58 mm per year. Eventually it could also be corrected for the cyclic average given bias (27.58 mm) that has to be added to the measured value.

8.5.6 KU-BAND BACKSCATTERING COEFFICIENT CALIBRATION

The results of the Ku-Band Sigma0 absolute calibration performed with a transponder have been presented in par. 7.1.4. Those results are still not conclusive since some problems have still to be solved, in any case, in order to absolutely calibrate the backscattering coefficient given in the RA2 L2 products the following shall be used by the end user to get to the real Sigma0 measurement:

$$\text{Sigma}_0_true = \text{Sigma}_0_prod + G_tx_rx_prod - G_tx_rx_real - \text{Bias} \text{ [dB]}$$

Where:

Bias: Bias retrieved from the Sigma0 Absolute Calibration

G_tx_rx_prod: Current effective Tx-Rx Gain value used in the operational ground processing chain (ADF file RA2_CHD_AX). The value nominally used since IPF V4.54 (for configuration RFSS=A and HPA=A) is 170.70 dB

G_tx_rx_real: Pre-launch characterization value (configuration value RFSS=A and HPA=A is 167.46 dB)

8.6 *Wind & Wave quality assessment*

Refer to the ECMWF report given in [R – 9].

9 LONG TERM MONITORING

9.1 *RA-2 Instrument monitoring*

9.1.1 IF FILTER MASK

In Figure 17 the evolution of the IF mask quality parameters evaluated as in [R – 4] is reported only for valid data. It can be observed that the difference with respect to the on-ground reference stays quite constant around 0.07 dBs. Three peaks are visible on the plot that correspond to the data acquired on September the 27th 2003 at 15:48, on October the 29th 2003 at 15:42 and on May the 10th 2004 at 15:45. The reason of this could be found in the instrument warming up considering that the IF Cal acquisition has been made, in all the cases, only a couple of hours after an anomaly

recovery. The residual noise and the accuracy show a very constant behavior over the whole period.

Despite the quite constant IF mask trend, a weird behavior has been observed during the validation of several newly created IF mask correction auxiliary files. This phenomenon is currently under investigation but in the meantime the decision has been taken to avoid updating the auxiliary file in question.

During cycle 29 the IF Calibration Mode still shows the weird behavior described in [R – 3]. This problem, present since the beginning of the mission, is under investigation. The anomaly directly affects the number of valid RA-2 IF masks obtained per cycle, but does not refrain from the generation of the IF mask correction file, used in input to the Level 1 B ground processing.

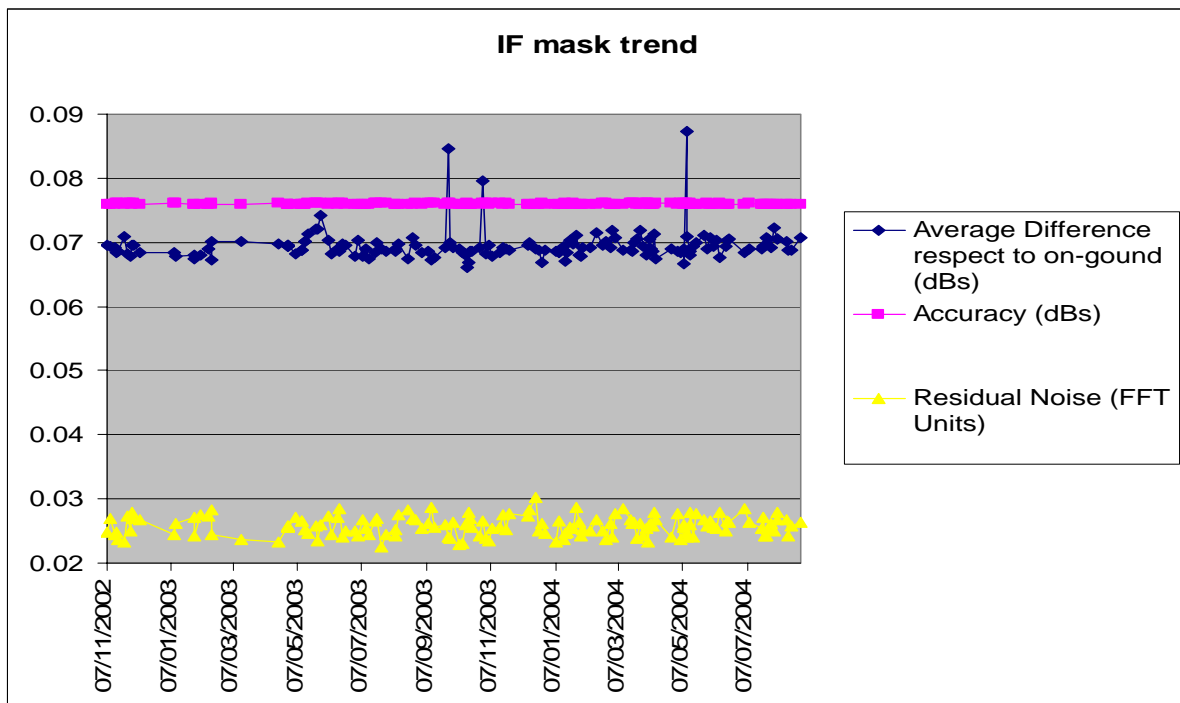


Figure 17: Evolution of the IF mask related parameters for valid IF masks retrieved up to cycle 29

9.1.2 USO

In Figure 18 the USO clock period trend retrieved until the end of cycle 29 is reported. In order to make the variability visible, the difference of the actual USO clock period with respect to the nominal one has been plotted, in the upper panel. In the lower panel the Range error due to the USO clock variability has been reported taking a satellite altitude of 800 Km as a nominal value.

Currently the nominal USO clock period (12500 ps) is used within the processing, this means that the data are not corrected for the bias and the drift correlated to the actual USO clock period. Those values, translated into altimetric range figures, are respectively of 32.33 mm and -4.62 mm/year as

calculated with data covering the period 13 June 2003 to 30 August 2004. The given bias and drift have to be added to the original altimetric range.

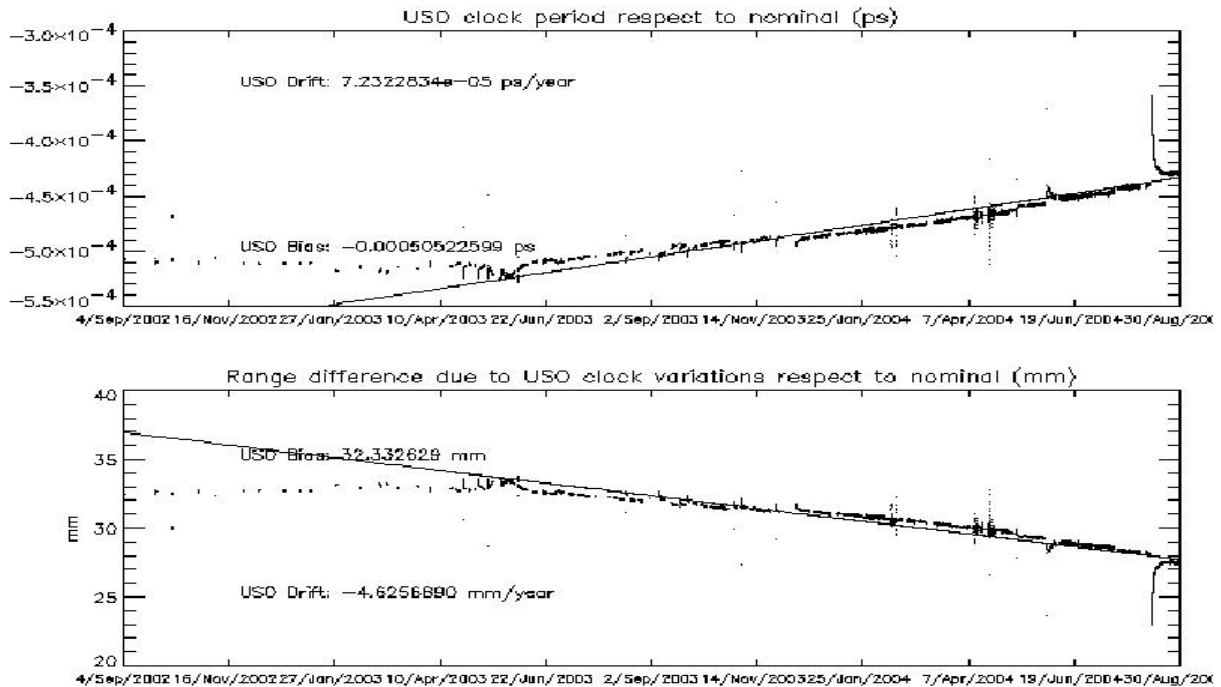


Figure 18: USO clock period until end of cycle 29

9.1.3 TRACKING CAPABILITY

In Figure 19, Figure 20 and Figure 21 the cyclic tracking percentages for the three RA-2 bandwidths are reported.

The worsening in performances noticeable for cycle 20 was due to the up-load of wrong on-board software parameters for the lasted for about three days.

In general, even if a tiny evolution can be observed, the tracking performances are well in line with the output figures and objectives of the Commissioning Phase as given in par. 7.1.3.

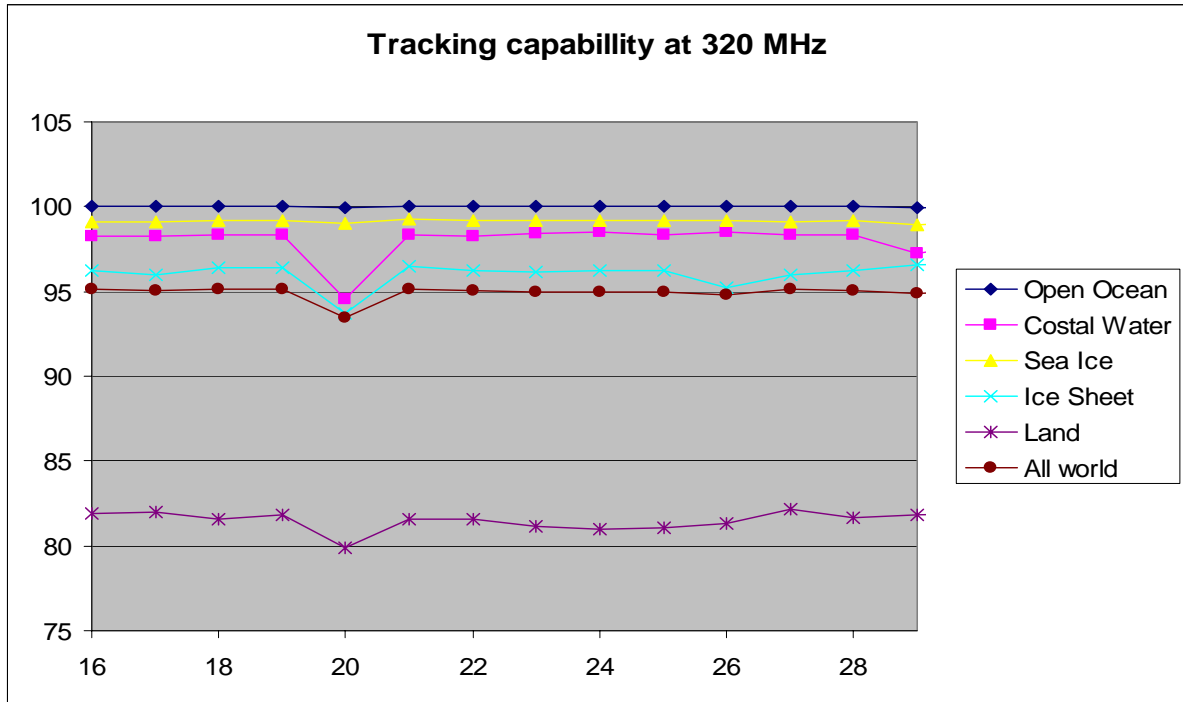


Figure 19: RA-2 Tracking percentage at 320MHz for different surfaces

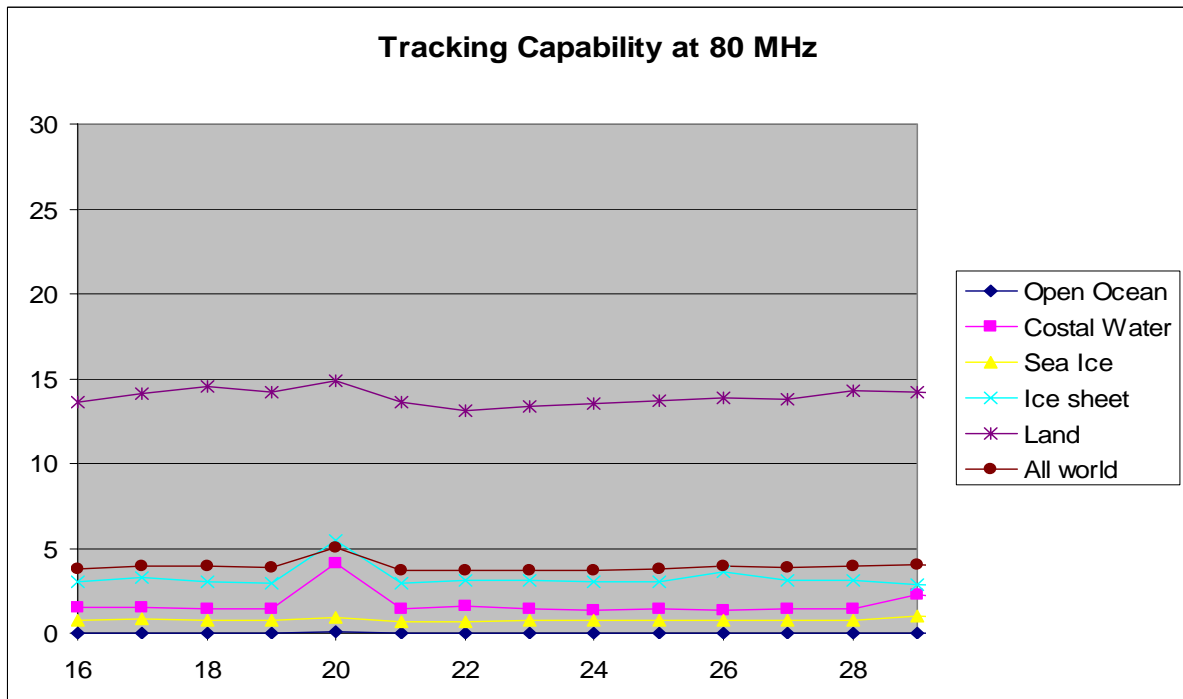


Figure 20: RA-2 Tracking percentage at 80MHz for different surfaces

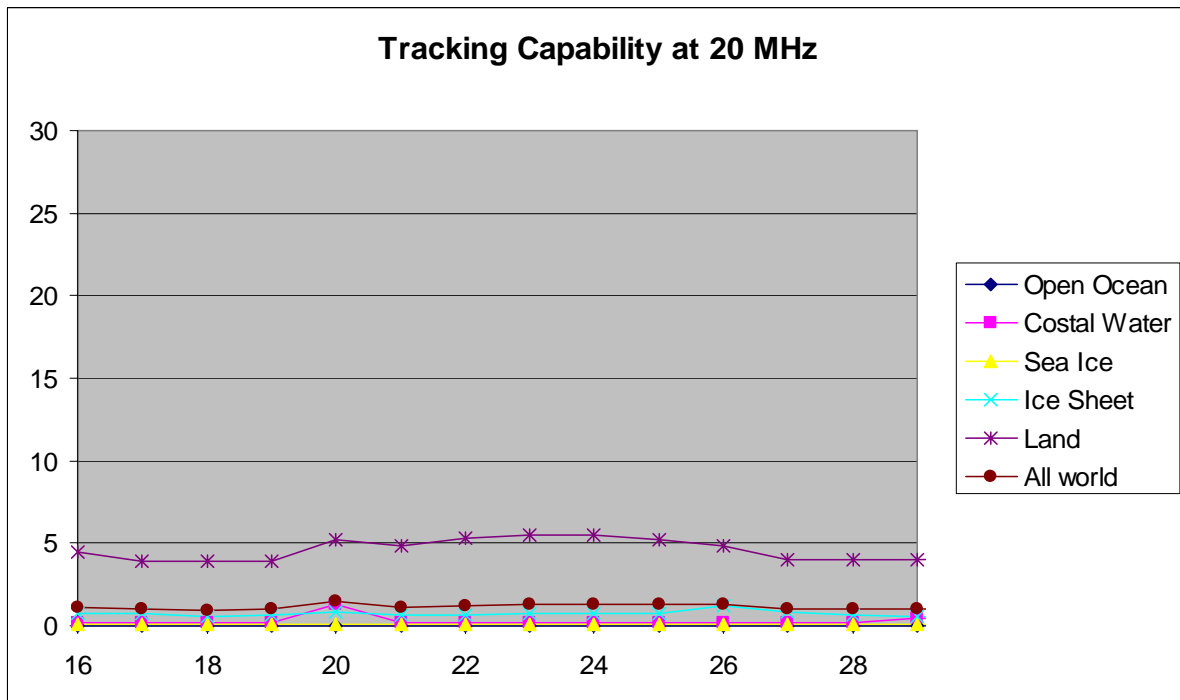


Figure 21: RA-2 Tracking percentage at 20MHz for different surfaces

9.1.4 DATATION

In Figure 22 (upper panel) the differences between the extrapolated UTC values and the corresponding real UTC values measured at the next Kiruna dump, are reported. Only few anomalous events can be observed at the beginning of the period (cycles 16/17) for which the difference rises above the 20 microseconds warning threshold. However, starting from cycles 22/23, the number of small differences (10 microseconds plus or minus) has increased a lot; this problem is currently under investigation.

In the lower panel the ICU clock step for the same period is shown where big variations are reported. This is however not a problem because the ICU clock period variations are included in the algorithm for the SBT/UTC correlation evaluation.

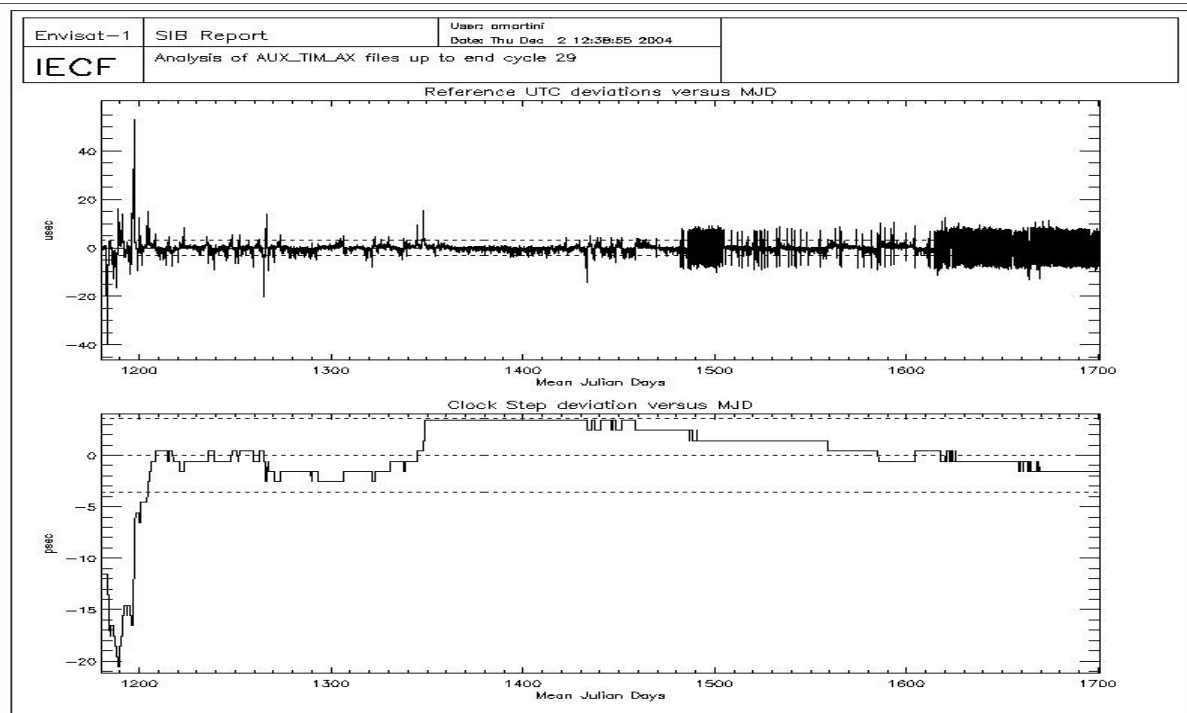


Figure 22: UTC deviations and ICU clock period up to cycle 29

9.1.5 MISPOINTING

In Figure 23 the overall mispointing squared trend (averaged over each orbit) is plotted for cycles 16 to 29. The jump occurred on November the 26th 2003 is correlated to the upload of IPF version 4.56; the abrupt decreasing of the mispointing squared value is due to the usage of a new RA2_IFF_AX IF mask auxiliary file.

On the other hand, it can be noticed that the mispointing squared assumes lower values just after an instrument anomaly; showing an increasing trend until it reaches back a standard mispointing value. This particular behavior can be explained by the different shape that the over-ocean average waveform has before and after an anomalous event as visible in Figure 24. Observe, in particular, the disappearance of the small dip in the waveforms acquired after the anomaly. This problem will be solved with the introduction of an updated mispointing retrieval algorithm with the next version of the processing software as described in par. 5.4.4.

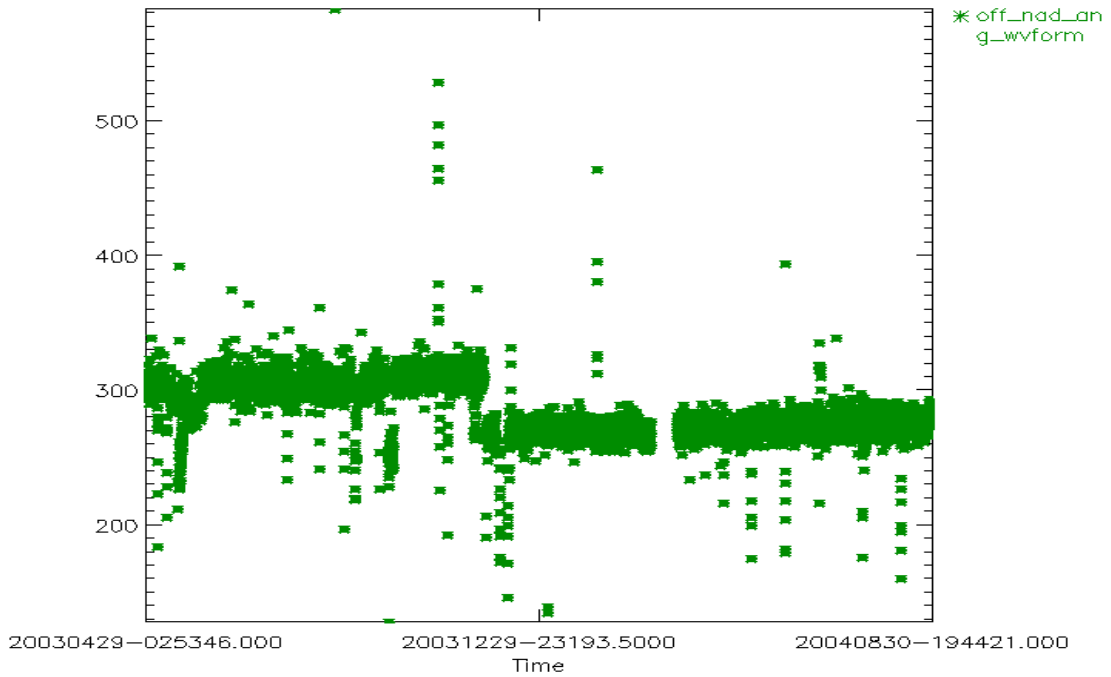


Figure 23: Smoothed mispointing squared trend until end of cycle 29 ($\text{deg}^2 \cdot 10e-4$)

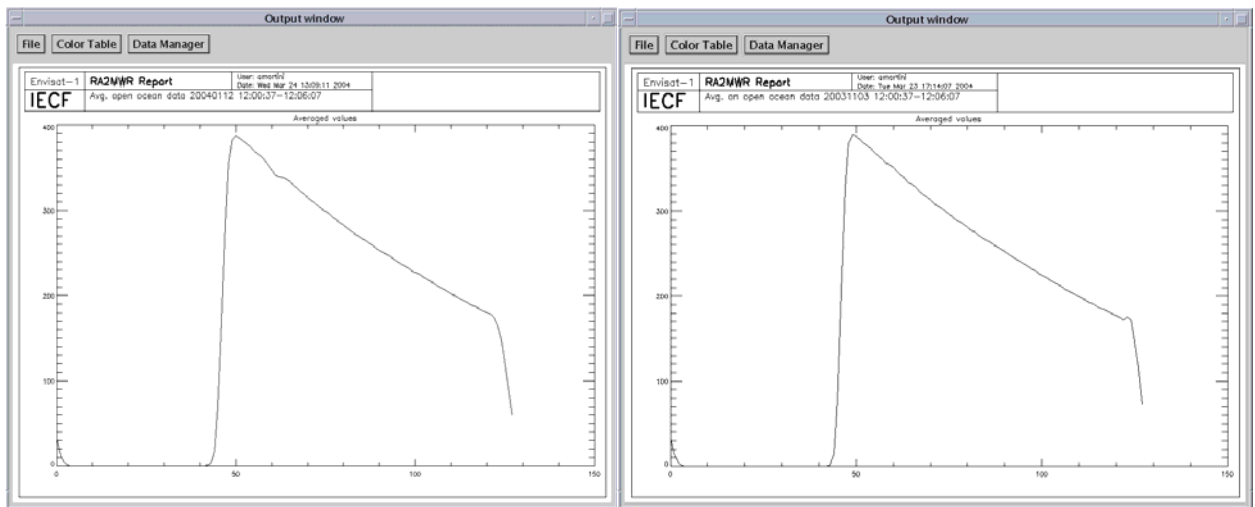


Figure 24: Open Ocean average waveforms before (left) and after an anomaly (right)

9.1.6 S-BAND ANOMALY

In the percentage of data per cycle that are affected by the so-called “S-Band” anomaly is reported. The figures are quite stable between 2.5% and 8.1%.

The relatively high value recorded for cycle 27 is due to the fact that on the day 1st of June, the S-band anomaly started at around 14:30 while the instrument didn’t switch to mode Heater 2 when

foreseen (at about 15:50). For this reason the S-Band anomaly continued for the next 24 hours until the next Heater 2 mode on June the 2nd.

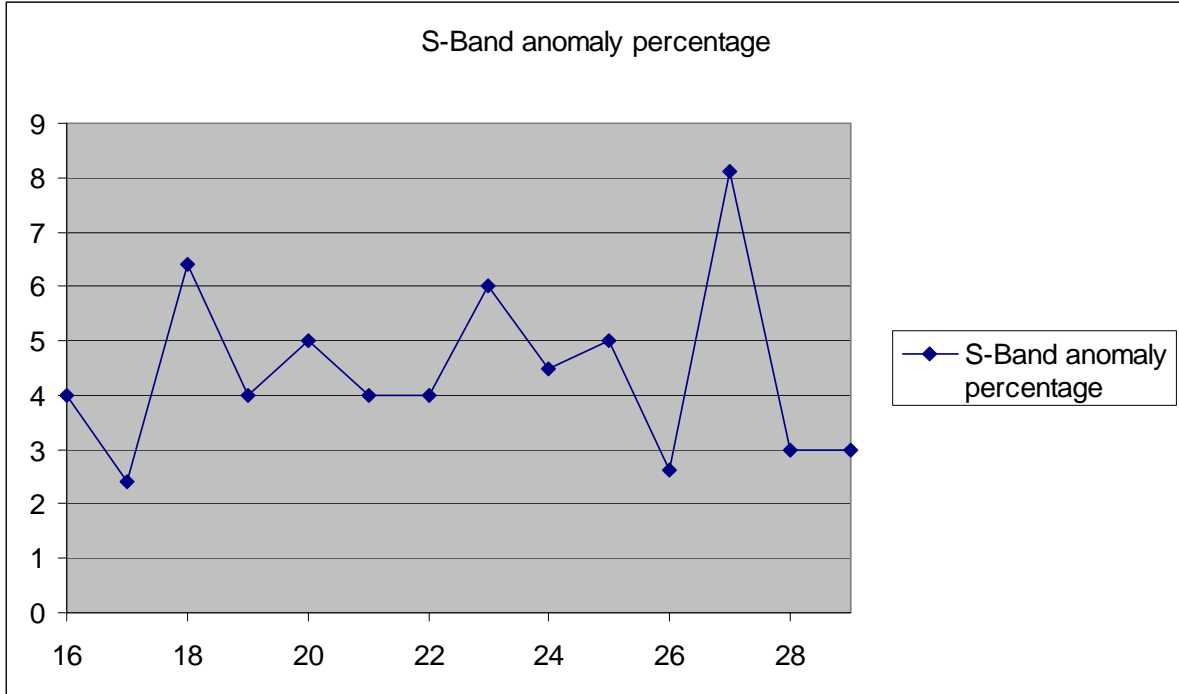


Figure 25: Percentage of data affected by the “S-Band Anomaly” for cycles 16-29

9.2 Products Monitoring

9.2.1 AVAILABILITY OF DATA

Hereafter the percentage of the different levels of products unavailability is reported for different cycles up to number 29. Considering as reference the instrument unavailability, it is possible to notice that in the last four months the situation is greatly improved for all levels of products.

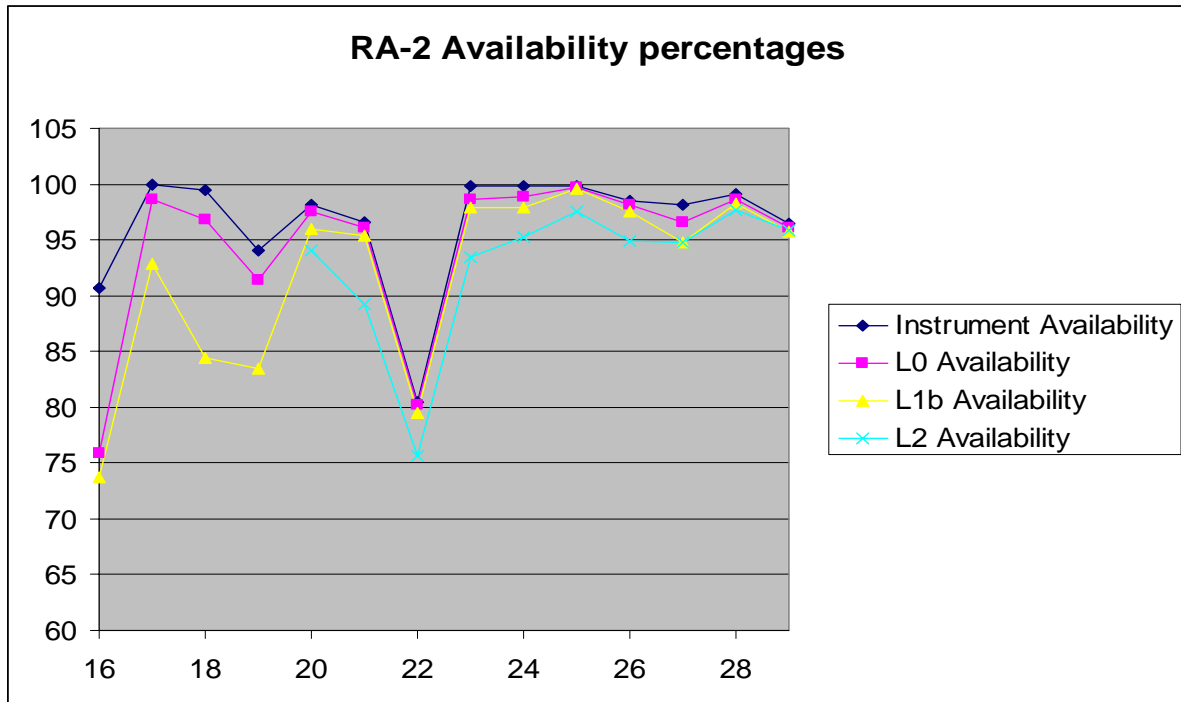


Figure 26: Percentage of Products unavailability up to cycle 29

9.2.2 RA-2 ALTIMETER PARAMETERS

Hereafter a summary of the main Altimetric parameters performances is reported; these results have been obtained with the editing criteria mentioned in par. 8.3.

9.2.2.1 Altimeter range

No current results for the time being. The monitoring of the RA-2 FD altimetric range shall be done once the NRT products shall be upgraded with the DORIS navigator NRT orbital information.

9.2.2.2 Significant Wave Height

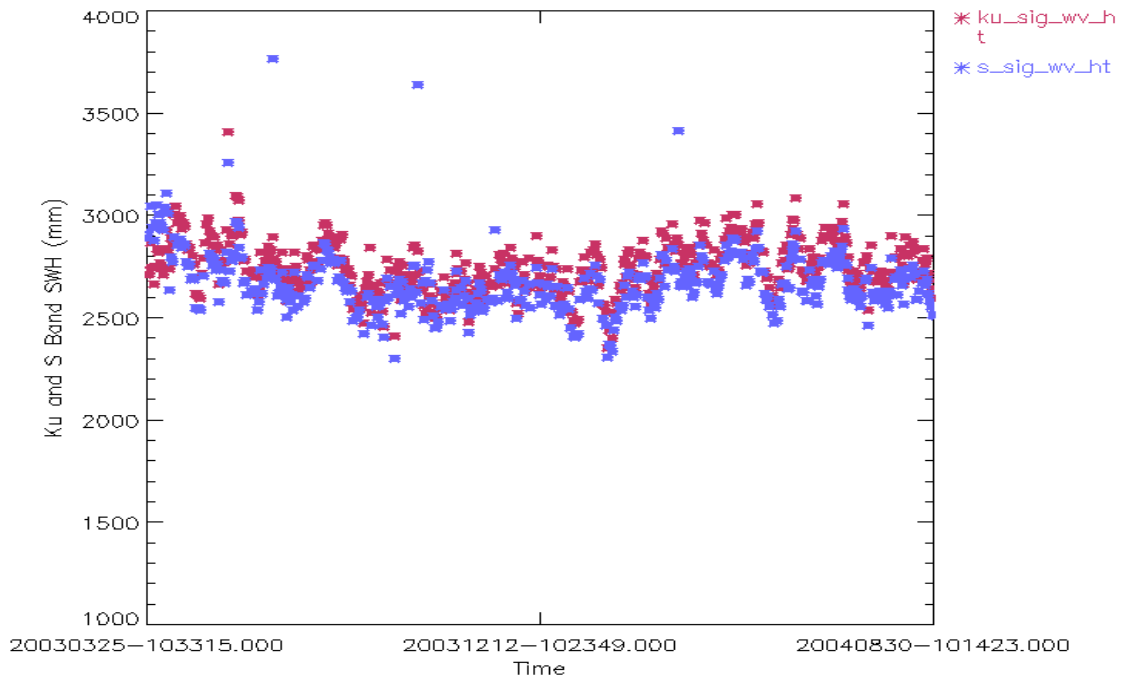


Figure 27: Ku and S SWH daily average up to cycle 29 (mm)

The SWH in both bands shows a small drop at the end of the time series which has been already mentioned in par. 8.2.2, this problem is currently under investigation. On the other hand, the S-Band SWH shows a drop on April the 9th 2003 corresponding to the operational up-load of IPF version 4.54; furthermore the high daily means reported (sometimes plotted outside the figure range) are due to the so-called S-Band anomaly (ref. par.7.1.7).

9.2.2.3 Backscatter coefficient – Wind Speed

The Ku-Band Sigma₀ trend, reported hereafter, is characterized by a jump of in average 3.24 dBs concomitant with the operational up-load of IPF version 4.54 occurred on the 9th of April 2004. To be said that this change is due to the upload of a new RA2_CHD_AX ADF file that artificially shifted the RA-2 real Sigma₀ in order to align it with ERS-2 Sigma₀ and make it coherent with the Witter and Chelton empirical wind model. A similar change in trend, but in the opposite direction, is also visible in the Wind Speed trend reported afterwards.

Beyond the huge jump occurred in April 2003, the S-Band Sigma₀ reports a smaller jump occurring on November the 26th 2003. Following the installation of the IPF processing chain V4.56, the average values of the RA-2 S-Band backscattering parameter, shows an increase of ~0.65 dBs, the new S-band sigma₀ being higher with respect to the previous versions. See chapter 8.5.4.

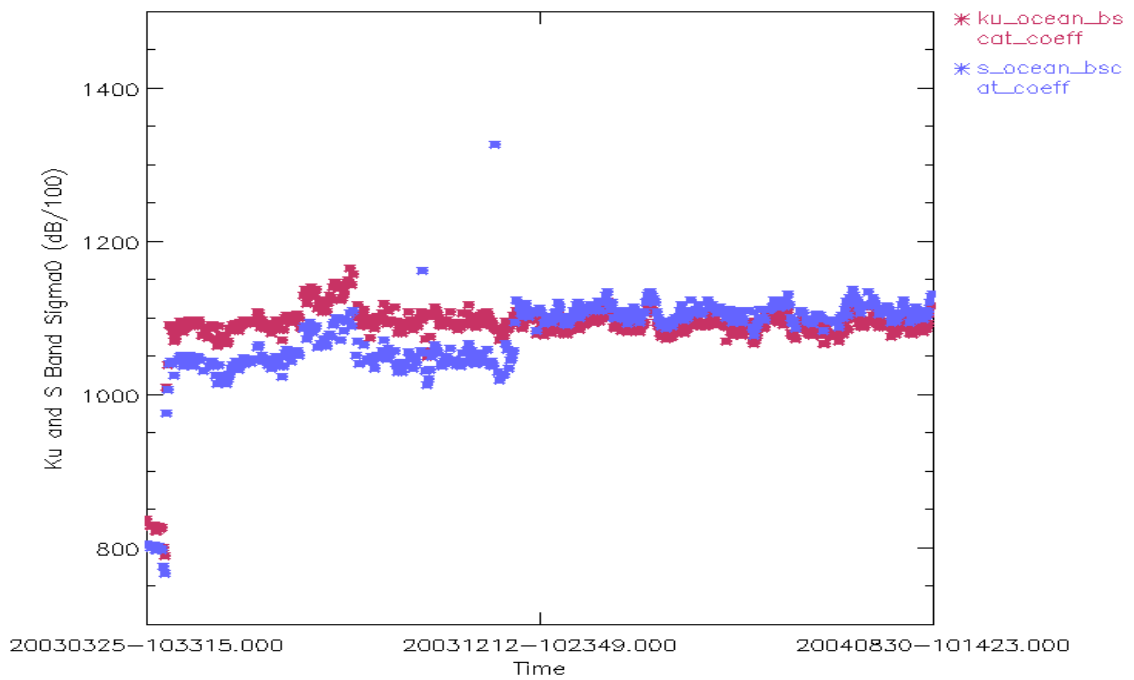


Figure 28: Ku and S band Backscattering daily averages up to cycle 29 (dB/100)

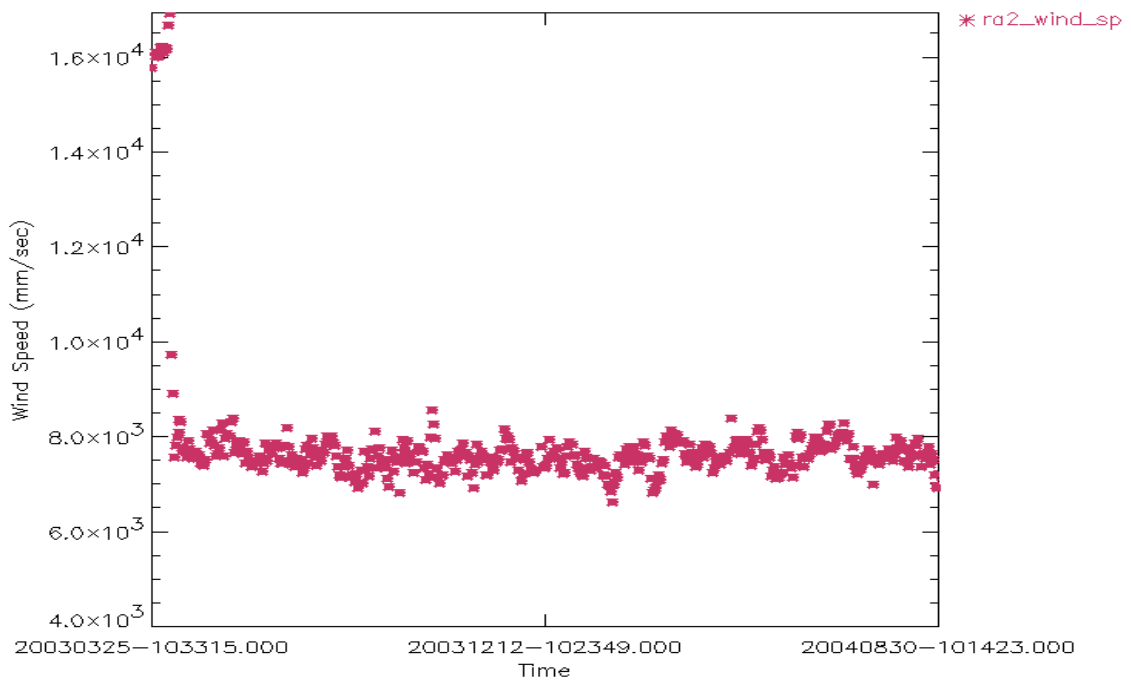


Figure 29: Wind Speed daily averages up to cycle 29 (mm/s)

10 PARTICULAR INVESTIGATIONS

During cycle 29 no special investigation has been performed.