
/document title/ titre du document

SCIAMACHY BI-MONTHLY REPORT: JULY - AUGUST 2008

prepared by/ <i>préparé par</i>	Angelika Dehn
reference/ <i>référence</i>	ENVI-SPPA-EOPG-TN-08-0048
issue/ <i>édition</i>	1
revision/ <i>révision</i>	0
date of issue/ <i>date d'édition</i>	30 September 2008
status/ <i>état</i>	
Document type/ <i>type de document</i>	Technical Note
Distribution/ <i>distribution</i>	

APPROVAL

Title <i>titre</i>	SCIAMACHY Bi-Monthly Report: July - August 2008	issue 1 <i>issue</i>	revision 0 <i>revision</i>
------------------------------	---	--------------------------------	--------------------------------------

author <i>auteur</i>	Angelika Dehn, IDEAS-SERCO, Manfred Gottwald, SOST-DLR, Stefan Noël, SOST-IFE, Richard von Hees, SRON	date 19/09/2008 <i>date</i>
--------------------------------	--	---------------------------------------

approved by <i>approuvé by</i>	T. Fehr ESA/ESRIN, D/EOP-GQ G. Lichtenberg, IDEAS-DLR	date 30/09/2008 <i>date</i>
--	--	---------------------------------------

CHANGE LOG

<i>reason for change /raison du changement</i>	<i>issue/issue</i>	<i>revision/revision</i>	<i>date/date</i>

CHANGE RECORD

Issue: 1 Revision: 0

<i>reason for change/raison du changement</i>	<i>page(s)/page(s)</i>	<i>paragraph(s)/paragraph(s)</i>

TABLE OF CONTENTS

1	INTRODUCTION.....	5
1.1	Scope.....	5
1.2	References.....	5
1.3	Acronyms and Abbreviations.....	7
2	SUMMARY	9
3	INSTRUMENT CONFIGURATION AND PERFORMANCE.....	10
3.1	In-Flight Status and Performance	10
3.1.1	Planned Operations and Measurements (SOST-DLR)	10
3.1.2	Instrument Measurement Status (SOST-DLR)	11
3.1.3	Executed Operations and Measurements (SOST-DLR)	11
3.1.4	Performance Monitoring - System (SOST-DLR)	12
3.1.5	Performance Monitoring - Light Path (SOST-IFE)	19
3.1.5.1	Science Channel Averages.....	19
3.1.5.2	Science Channel Averages.....	20
3.1.5.3	Spectral light path monitoring results	23
3.1.5.4	PMD monitoring results.....	28
4	DATA AVAILABILITY STATISTICS	30
4.1	Downlink/Acquisition Performance	30
4.2	Statistics on unconsolidated data (SCI_NL__0P, SCI_NL__1P)	30
4.3	Statistics on consolidated data	31
4.3.1	Anomalies on level 0 consolidated data products	31
4.3.2	Availability of consolidated SCI_NL__1P products	31
4.4	Statistics on reprocessed data.....	32
4.4.1	Level 1b re-processing IPF 6.03	32
4.4.2	Level 2 re-processing processor version 3.01	32
5	LEVEL 1 PRODUCT QUALITY MONITORING	34
5.1	Processor Configuration.....	34
5.1.1	Version	34
5.1.2	Anomalies	35
5.2	Auxiliary Data Files	36
5.2.1	Auxiliary Data File quality analysis.....	37
5.2.1.1	SMR analysis	37
5.2.1.2	LK1 analysis	42
5.2.1.2.1	Leakage Constant part.....	42
5.2.1.2.2	Leakage Variable part	45

5.3	Bad and Dead Pixel Mask.....	46
5.4	Pointing Performance.....	47
5.5	SciaL1c tool	47
6	LEVEL 2 NRT PRODUCT QUALITY MONITORING	48
6.1	Processor Configuration.....	48
6.1.1	Version	48
6.1.2	Auxiliary Data Files	48
7	LEVEL 2 OFF-LINE PRODUCT QUALITY MONITORING.....	49
7.1	Processor Configuration.....	49
7.1.1	Version	49
7.1.2	Anomalies	50
7.1.3	Auxiliary Data Files	50
7.2	Monitoring results	51
7.2.1	Nadir: NO ₂ consistency checking	51
7.2.1.1	Nadir: VCD NO ₂ map July 2008.....	52
7.2.1.2	Nadir: VCD NO ₂ map August 2008.....	53
7.2.2	Nadir: O ₃ consistency checking	54
7.2.2.1	Nadir: VCD O ₃ map July 2008.....	55
7.2.2.2	Nadir: VCD O ₃ map August 2008.....	56
7.2.3	Limb: Ozone profile averages	57
7.2.3.1	Ozone limb profiles July 2008	58
7.2.3.2	Ozone limb profiles August 2008	59
7.2.4	Limb: NO ₂ profile averages	60
8	VALIDATION ACTIVITIES AND RESULTS.....	62

SCIAMACHY BI-MONTHLY REPORT JULY - AUGUST 2008

1 INTRODUCTION

The SCIAMACHY Bi-Monthly report documents the current status and recent changes to the SCIAMACHY instrument, its data processing chain, and its data products.

The Bi-Monthly Report (hereafter BMR) is composed of analysis results obtained by the DPQC, combined with inputs received from the different groups working on SCIAMACHY operation, calibration, product validation and data quality.

The first part of the report is dedicated to Instrument Configuration and Performance. It is composed of contributions from SOST-DLR, SOST-IFE and SRON.

The remainder of the report is dedicated to level 1b and level 2 performance assessment and is generated by ESA/ESRIN IDEAS with contributions from ESA/ESTEC PLSO and DLR-IMF.

The structure of the report will be in constant evolution through the ENVISAT mission, as experience with SCIAMACHY data and quality control grows.

1.1 Scope

The main objective of the BMR is to give, on a regular basis, the status of SCIAMACHY instrument performance, data acquisition, results of anomaly investigations, calibration activities and validation campaigns. The BMR is composed of the following six sections:

- Summary;
- Instrument Configuration and Performance;
- Data Availability Statistics;
- Level 1 Product Quality Monitoring;
- Level 2 Product Quality Monitoring;
- Validation Activities and Results.

1.2 References

- [1] 'Instrument Operation Manual', MA-SCIA-0000DO/01, Issue F R2, 16 Dec. 2004
- [2] 'ENVISAT-1 Products Specifications Volume 15: SCIAMACHY Products Specifications', PO-RS-MDA-GS-2009, Issue 3, Rev: K, Gianni Sotis, 06 May 2006
- [3] 'SCIAMACHY cL0 Statistics, PO-TN-DLR-SH-0012, Issue 1, Rev. 1 14 April 2005'

-
- [4] SCIAMACHY cL0 Statistics 2003, PO-TN-DLR-SH-0013, Issue 1, Rev. 0 14 April 2005
- [5] 'SCIAMACHY Consolidated Level 0: Statistics for the Year 2005', PO-TN-DLR-SH-0014, Issue 1, Rev. 0 11 July 2006
- [6] 'Summary of the Atmospheric Chemistry Instrument Validation results as presented at the ACVE-3 Workshop', Paul Snoeij, Ankie Pitters, Herbert Fischer, Yasjka Meijer, Jean-Christopher Lambert, Thorsten Fehr
- [7] 'SCIAMACHY Extra Misalignment Model', PO-TN-DLR-SH-0016 Issue 1, M. Gottwald, E. Krieg, DLR-IMF, C. von Savigny, S. Noël, K. Bramstedt IUP-IFE, 07 March 2007
- [8] 'Verification of the extra misalignment correction in the SCIAMACHY IPF 6.03 processor', TN-IUP/IFE-2007-cvs-02, C. von Savigny, A. Dehn, H. Bovensmann, J. Steinwagner IUP-IFE, 05 July 2007
- [9] 'SCIAMACHY SciCal Tool Change of Leakage ADF generation' ENV-TN-DLR-SCIA-0094, Issue 1.0, Bernd Aberle, Günter Lichtenberg, 08 November 2007



esa



DLR



ife

serco

SCIAMACHY BI-MONTHLY



page 7 of 62

1.3 *Acronyms and Abbreviations*

ADC	Analogue to Digital Converter
ADF	Auxiliary Data File
ANX	Ascending Node Crossing
AOCS	Attitude and Orbit Control System
APSM	Aperture Stop Mechanism
ASM	Azimuth Scan Mechanism
ATC	Active Thermal Control
BMR	Bi-Monthly Report
CA	Corrective Action
CCA	Communication Area
CTI	Configurable Transfer Item
DAC	Digital Analogue Converter
DLR-IMF	Deutsches Zentrum fuer Luft- und Raumfahrt
DPQC	Data Processing Quality Control
EOL	End of Life
ESM	Elevation Scan Mechanism
FPN	Fixed Pattern Noise
HK	Housekeeping
HSM	High Speed Multiplexer
ICE	Instrument Control Electronics
ICU	Instrument Control Unit
IDEAS	Instrument Data quality Evaluation and Analysis Service
IECF	Instrument Engineering and Calibration Facilities
IOM	Instrument Operation Manual
LK1	Leakage Current Auxiliary File (SCI_LK1_AX)
LLI	Life Limited Item
LOS	Line of Sight
MCMD	Macro Command
MPH	Main Product Header
MPS	Mission Planning Schedule
MR	Monthly Report
NCWM	Nadir Calibration Window Mechanism
NDFM	Neutral Density Filter Mechanism
NIVR	Netherlands Agency for Aerospace Programmes
NNDEC	Non-nominal Decontamination
NRT	Near Real Time
OAR	Observation Anomaly Report
OBM	Optical Bench Module
OCR	Operations Change Request
OSDF	Orbit Sequence Definition File
OSV	Orbit State Vector
PCF	Product Control Facility



esa



DLR



ife

serco

SCIAMACHY Bi-MONTHI



page 8 of 62

PDHS	Payload Data Handling Station (PDS)
PDHS-E	Payload Data Handling Station – ESRIN
PDHS-K	Payload Data Handling Station – Kiruna
PDS	Payload Data Segment
PE1	Pixel to Pixel/ Etalon Auxiliary File (SCI_PE1_AX)
PLSO	Payload Switch OFF
PMD	Polarization Measurement Device
QUADAS	Quality Analysis of Data from Atmospheric Sounders
QWG	Quality Working Group
SAA	South Atlantic Anomaly
SCIAMACHY	Scanning Imaging Absorption Spectrometer for Atmospheric Chartography
SCICAL	SCIAMACHY Calibration tool
SEU	Single Event Upset
SLS	Spectral Line Source
SM	Service Module
SMR	Sun Mean Reference
SOST	SCIAMACHY Operations Support Team
SP1	Spectral Calibration Auxiliary File (SCI_SP1_AX)
SU1	Sun Reference Auxiliary File (SCI_SU1_AX)
SZA	Sun Zenith Angle
TC	Thermal Control
TCFoV	Total Clear Field of View
TOA	Top of Atmosphere
TRUE	Tangent height Retrieval by UV-B Exploitation
VCD	Vertical Column Density
WLS	White Light Source
WUR	Wageningen University and Research
YSM	Yaw Steering Mode

2 SUMMARY

- During the reported period SCIAMACHY measurements were nominal with respect to planning, besides two unavailability period during following orbits:
 - 33121 - 33129 (30 June - 01 July 2008) ENVISAT planned OCM manoeuvre
 - 33870 – 33890 (22-23 August 2008) SCIAMACHY in Standby
- Monthly Calibration was executed during Orbits:
 - 33362-33366 (17/18-Jul-2008)
 - 33777-33781 (15/16-Aug-2008)
- No occultation measurements with the moon rising on night side were executed as the moonrise occurred on the dayside during the reporting period.
- Two OCRs were implemented:
 - 33108 - 33309 (30 Jun – 13 Jul 2008)
(OCR_34: Improved limb coverage for the Teresina balloon campaign)
 - 33481 - 33493 (26 July 2008)
(OCR_36: measurements in the mesosphere and lower thermosphere)
- No TC adjustments was required
- Light Path monitoring:
 - Channel 1&2: degradation in UV for all light paths involving ESM increases with a rate of about 1 % per month. The average throughput loss in channel 1 is currently ca. 48%.
 - Channel 3 small throughput loss (about 4%)
 - Channels 4-7 small throughput loss (sub percent level)
 - Channel 8 throughput remains stable at about 65-66%
- PMD monitoring:
 - UV degradation visible in science channels is also visible in PMD 1 to 3
 - PMD 4 and 7 show a large decrease in throughput
 - PMD 6 results still under investigation



esa



DLR



ife

serco

SCIAMACHY Bi-MONTHLY



3 INSTRUMENT CONFIGURATION AND PERFORMANCE

3.1 In-Flight Status and Performance

Detailed operations, planning and instrument status information can be found on the website of the *SCIAMACHY Operations Support (SOST)* under <http://atmos.caf.dlr.de/projects/scops/>. These pages are maintained on a daily basis and show the history and actual progress of the SCIAMACHY mission.

3.1.1 Planned Operations and Measurements (SOST-DLR)

The reporting period covers the orbits 33123 (ANX = 01-July-2008, 01:20:41.088) to 34009 (ANX = 31-Aug-2008, 22:51:13.423). Two OSDFs specified the planning baseline.

Orbit		ANX		OSDF
Start	Stop	Start	Stop	
33123	33565	01-July-2008 01:20:41.088	31-July-2008 22:25:21.328	MPL_OSD_SHVSH_20080605_010101_00000000_34220001_20080701_012042_20080801_000555.N1
33566	34009	01-Aug-2008 00:05:57.256	31-Aug-2008 22:51:13.423	MPL_OSD_SHVSH_20080625_010101_00000000_34230001_20080801_000559_20080901_003147.N1

Table 3-1: SCIAMACHY OSDF planning file from July – August 2008

Measurements were nominal, i.e. timelines executed limb/nadir sequences with wide swath settings on the dayside of the orbit. In-flight calibration and monitoring measurements occurred on daily, weekly and monthly timescales according to the mission scenarios. Regular monthly calibration was scheduled between orbits

- 33362-33366 (17/18-Jul-2008)
- 33777-33781 (15/16-Aug-2008)

The moon was in the limb TCFoV between orbits

- 33292-33389 (12-Jul-2008 until 19-Jul-2008)
- 33714-33808 (11-Aug-2008 until 17-Aug-2008)

No moon occultation measurements could be executed since moonrise occurred on the dayside throughout the July/August period.

Two OCRs were successfully implemented. These were

- OCR_033 (*Improved limb coverage during ECOMA4 campaign*): Started in orbit 33108 (30-Jun-2008) this OCR ended in orbit 33309 (13-Jul-2008). The planning optimized limb coverage over Andoya. In addition selected PET and co-adding parameters were changed to improve the spatial resolution.



esa



serco

SCIAMACHY Bi-MONTHI



- OCR_036 (*SCIAMACHY measurements in the mesosphere and lower thermosphere*): Between orbits 33481-33493 (26-Jul-2008) a modified limb state scanned the upper atmosphere between about 150 km and 60 km. These measurements were tests to check the correct functioning of the state and timeline modifications prior to permanently modify the final flight configuration for regular executions at a rate of 2 days/month. The date for the test was synchronized with MIPAS operating in Upper Atmosphere mode.

3.1.2 Instrument Measurement Status (SOST-DLR)

The final flight status for states and timelines remained unchanged.

3.1.3 Executed Operations and Measurements (SOST-DLR)

Measurements and instrument availability

The OSDF planning files have been scheduled as requested except for the periods:

- Orbit 33123-33129 (01-Jul-2008): Due to a planned orbit control manoeuvre (OCM) a transfer to MEASUREMENT IDLE occurred.
- Orbit 33870-33890 (22- Aug-2008 until 23-Aug-2008): transfer to STANDBY due to a *SDPU_HK data timeout* (likely SEU) followed by a *SDPU_Tx buffer overflow* anomaly.

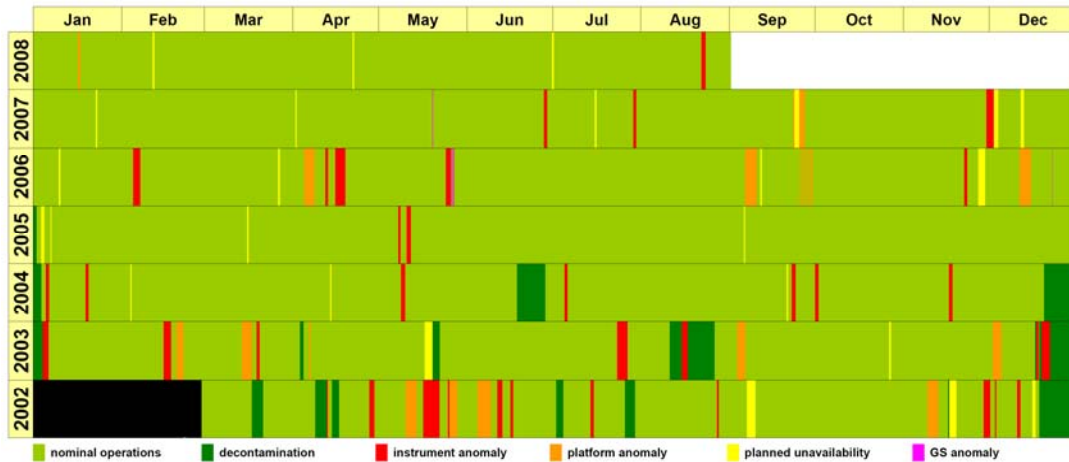


Fig. 3-1: Current instrument availability status including the reporting period

Detector thermal adjustment

No TC adjustment was required. The TC settings remained at

- DAC1 = 0.53 W
- DAC2 = 0.50 W



esa



serco

SCIAMACHY BI-MONTHLY



- DAC3 = 0.00 W

APSM/NDFM health checks & PMD ADC cal

In the reporting period 1 APSM/NDFM health check and 2 PMD ADC calibrations were executed. All showed nominal results.

APSM/NDFM			PMD ADC	
Orbit	ANX	Result	Orbit	ANX
33956	28-Aug-2008 07:23:58	ok	33957	28-Aug-2008 09:00:28
n.a.	n.a.	n.a.	33527	29-Jul-2008 08:00:02

Table 3-2: APSM/NDFM health check and PMD ADC calibration

Anomalies

One major instrument anomaly had occurred triggering a transfer to a mode lower than MEASUREMENT. This was the twin anomaly (*SDPU_HK data timeout* and *SDPU_Tx buffer overflow*) caused by a suspected SEU in orbit 33870 (22-Aug-2008, 06:43:54 UTC). The recovery was started after an ARB and the MPS timeline continued in orbit 33890 (23-Aug-2008, 16:42:10 UTC).

Orbit	Date	Entry - UTC	Level	Entry Type	ID Content/Transition	Mode	Remark
33870	22-AUG-2008	2008.235.06.43.54.847	INSTRUMENT	AUTONOMOUS SWITCHING	ID161 / goto HEATER/REFUSE	HTR/RF	SDPU_HK_Data_Timeout
33870	22-AUG-2008	2008.235.06.43.54.902	INSTRUMENT	AUTONOMOUS SWITCHING	ID406 / goto STANDBY/REFUSE-I	STDBY/REF-I	SDPU_Tx_buffer_Overflow
33870	22-Aug-2008	2008.235.07.10.02.238	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	---	---	Complementary Failure
33870	22-Aug-2008	2008.235.07.10.02.249	INSTRUMENT	COMPLEMENTARY FAILURES	360	STB/RF-I	Complementary Failure
33870	22-Aug-2008	2008.235.07.10.02.253	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	---	---	Complementary Failure
in total 16 Complementary Failures until 2008.235.12.43.36.041							
33874	22-Aug-2008	2008.235.12.43.36.029	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	---	---	Complementary Failure
33874	22-Aug-2008	2008.235.12.43.36.037	INSTRUMENT	COMPLEMENTARY FAILURES	360	STB/RF-I	Complementary Failure
33874	22-Aug-2008	2008.235.12.43.36.041	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	---	---	Complementary Failure

Table 3-3: Instrument anomalies between July and August 2008

3.1.4 Performance Monitoring - System (SOST-DLR)

Detector and OBM temperatures are monitored according to the requirements of the IOM [1]. It requests to ensure that the average temperature per orbit remains within the specified limits.

Detector temperatures

For each detector the average temperatures per orbit are determined from HK telemetry parameters. Fig. 3-2 displays the temperatures of all 8 detectors. Colour coding is as on the operational monitoring website, i.e. data from orbits with HK telemetry coverage > 90% are shown in red, for < 90% in green. Minimum/maximum values per orbit are indicated as vertical bars. The temperature limits of each detector are shown as horizontal lines.



esa



DLR



serco

SCIAMACHY Bi-MONTHLY



page 13 of 62

The short dip on 01-Aug-2008 in the detector temperatures is caused by the total solar eclipse which occurred the same day.

It has to be noted that the detector temperature curves since 2002 clearly indicate a degrading TC system with constantly rising temperatures (0.2-0.3 K/year for detectors 1-6 and 1 K/year for detectors 7 & 8). This is however a predicted behaviour.

OBM temperatures

The average OBM temperature per orbit is determined from specific HK telemetry parameters. In addition power readings for the ATC heaters are monitored. Temperatures and ATC heater powers are given in Fig. 3-3 and 3-4. Colour coding is as in Fig. 3-2.

OBM temperatures and ATC heater powers remained within limits.

PMD ADC status

The status of the PMD ADC is monitored according to the requirements of the IOM [1]. It requests to ensure that no glitches occur caused by an SEU.

No PMD ADC glitches have been detected.





esa





serco

SCIAMACHY BI-MONTHLY

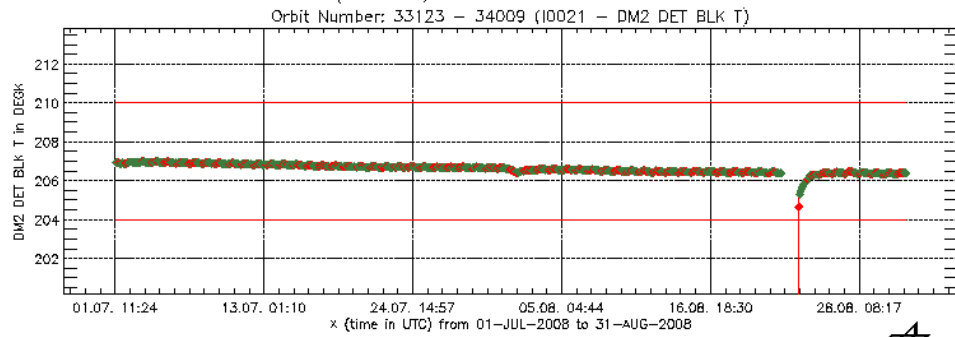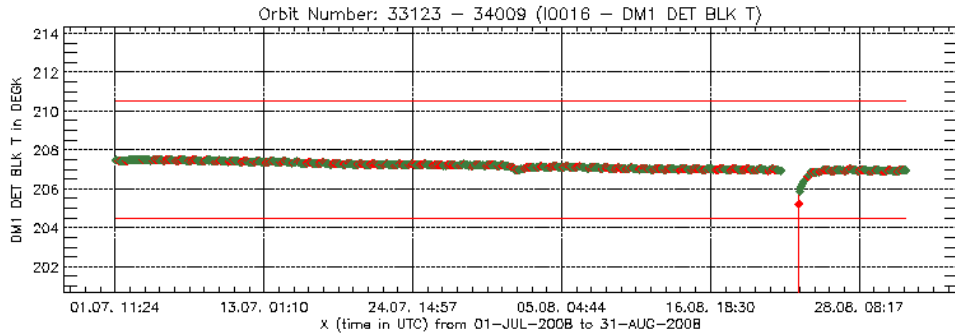

Filename: PIN_401_33123_34009
Date : 11-09-2008 Page : 1

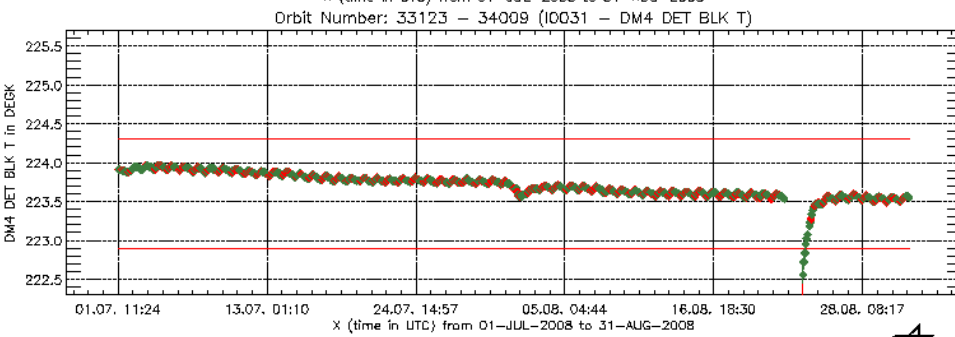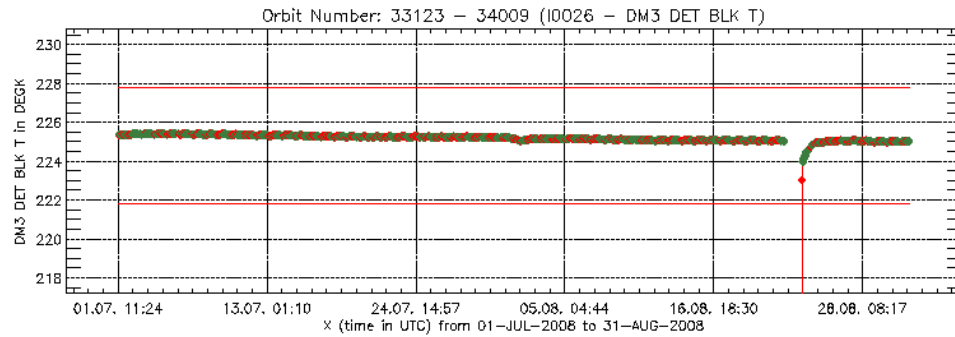

Filename: PIN_401_33123_34009
Date : 11-09-2008 Page : 1





esa



serco

SCIAMACHY BI-MONTHLY

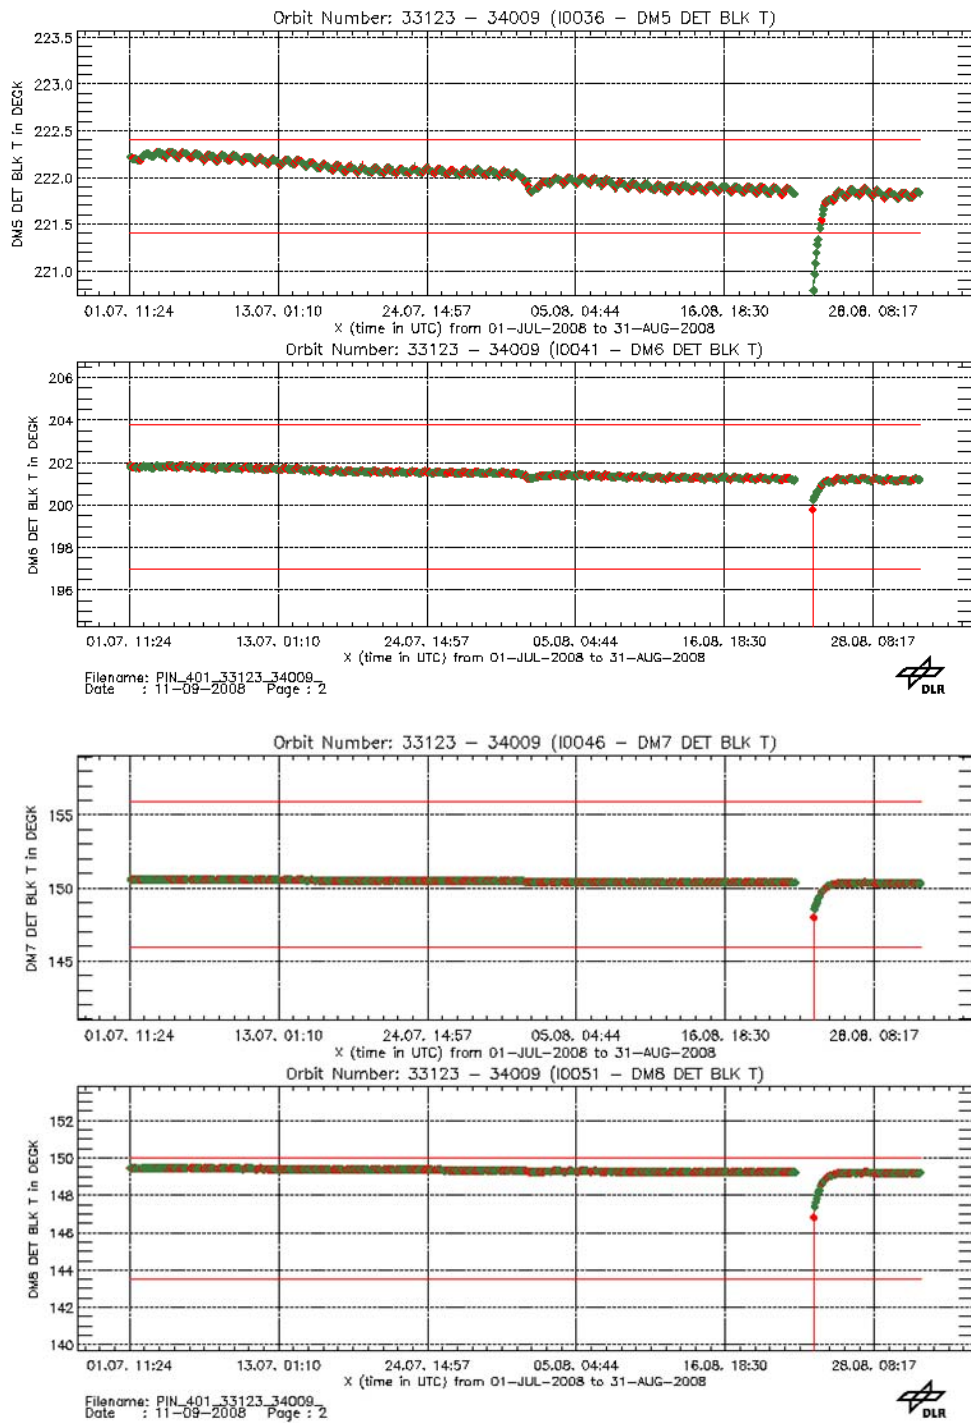


Fig. 3-2: Detector temperatures



esa



serco

SCIAMACHY BI-MONTHLY

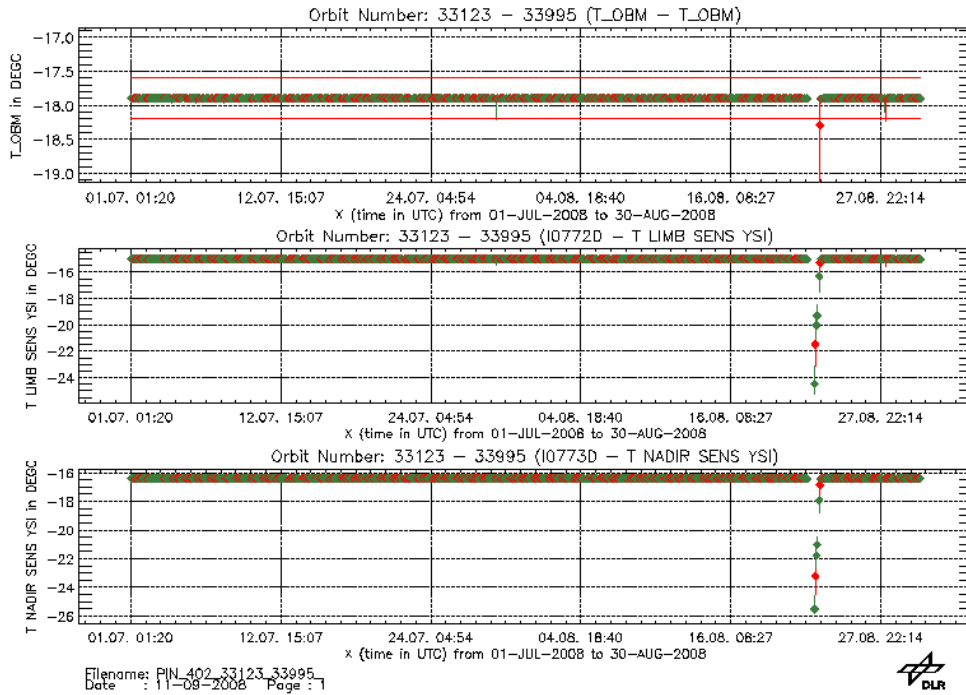


Fig. 3-3: OBM temperatures (top: derived OBM, middle: limb sensor, bottom: nadir sensor)


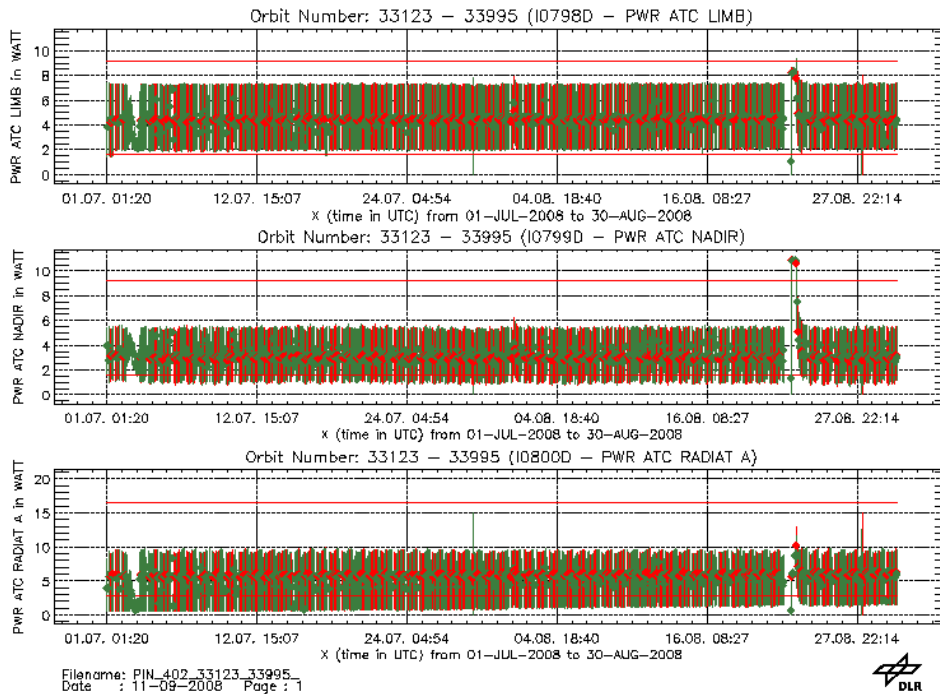


Fig. 3-4: ATC heater power (top: ATC limb, middle: ATC nadir, bottom: ATC Rad A)



esa



serco

SCIAMACHY BI-MONTHLY



LLI status

Life Limited Items are monitored based on analysis of the

- OSDF: This yields a predicted LLI usage.
- Report format: This counts the actual LLI switches or used LLI cycles. No WLS/SLS burning times can be derived thereof.

In addition, the in-flight usage of the cryogenic heat pipe is recorded. This subsystem has a limited number of cycles. Each decontamination increases the accumulated number of cycles by 1.

At the end of the reporting period the fractional usage of the LLI relative to the allowed in-flight budget was (based on OSDF prediction)

- NDFM: 0.44
- APSM: 0.40
- NCWM (sub-solar port): 0.77
- WLS (switches): 0.14
- WLS (burning time): 0.27
- SLS (switches): 0.06
- SLS (burning time): 0.01

For the NDFM and APSM the safety margin factor of 2 was no longer applied in the calculation of the fractional usage since it was found acceptable to stay below the figures of the lifetests. How the relative LLI usage has accumulated since launch can be seen in fig. 3-5. 'EOL' assumes a total mission lifetime until end of 2010.

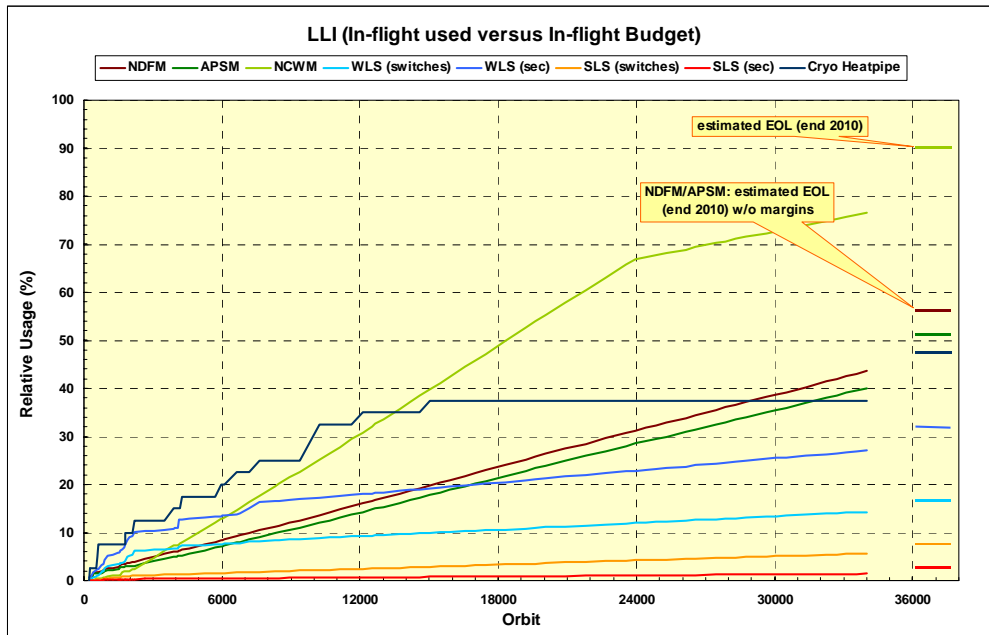


Fig. 3-5: Relative usage of LLIs. 'EOL' is derived for a mission lifetime until 2010. For the NDFM and APSM no margin factors have been applied to derive the EOL relative usage.



esa



serco

SCIAMACHY Bi-MONTHI



The number of cryogenic heatpipe cycles did not increase (no decontamination). The budget used remained at 38% of the allowed in-flight budget.

Time reference

The times quoted in all planning files refer to the reference orbit. Since the actual orbit differs from the reference orbit (e.g. orbit drift), the times given w.r.t. the reference orbit also do not reflect exactly the actual absolute times of events along the orbit (e.g. ANX, sunrise, sub-solar, moonrise, eclipse). The requirements for orbit maintenance may result in time differences of usually $< \pm 10$ sec. In some cases this value may even reach ± 1 min, however.

SOST monitors how the reference time deviates from the actual time. This is done by using the predicted time which comes very close to the actual = restituted time. If the predicted times are delayed w.r.t. the reference orbit, then the difference *predicted – reference time* is > 0 sec; in the other case it is < 0 sec.

Fig. 3-6 displays the time difference *predicted – reference*. Orbit manoeuvres cause distinct discontinuities.

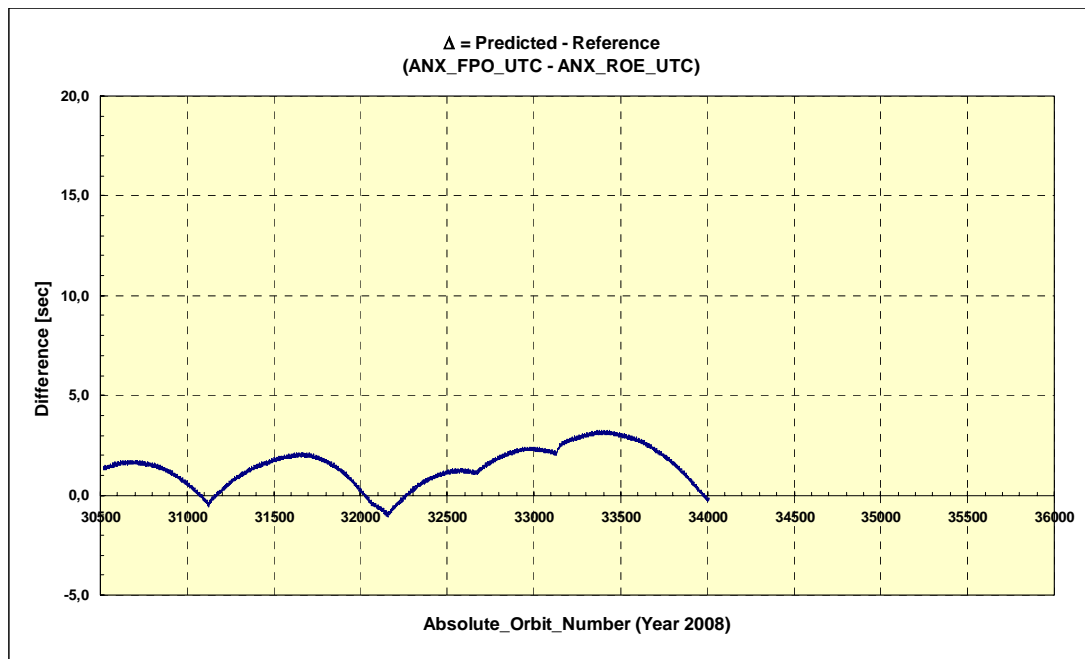


Fig. 3-6: Time difference between predicted and reference time.



esa



DLR



serco

SCIAMACHY Bi-MONTHLY



page 19 of 62

3.1.5 Performance Monitoring - Light Path (SOST-IFE)

3.1.5.1 Science Channel Averages

This section summarises the performance monitoring results for the two months time interval covered by this report.

A more detailed description of the performance monitoring activities is given in the SCIAMACHY Bi-Monthly Report May-June 2008.



esa



serco

SCIAMACHY BI-MONTHLY



page 20 of 62

3.1.5.2 Science Channel Averages

One part of the SOST long-term monitoring activities is the trend analysis of measurements with the internal White Light Source (WLS) and of observations of the unobscured Sun above the atmosphere. In order to monitor the different SCIAMACHY light paths solar measurements are taken in various viewing geometries: In limb/occultation geometry (via ASM and ESM mirrors), in nadir geometry (via the ESM mirror through the subsolar port), and via the so-called calibration light path involving the ASM mirror and the ESM diffuser. SCIAMACHY long-term monitoring comprises a regular analysis of these measurements. The plots displayed in Fig. 3.7 show results of these monitoring activities for the time interval July to August 2008.

Note that the reported arithmetical channel averages are medians.

The light path monitoring results presented in this section may be regarded as a first step towards spectrally resolved monitoring factors (m-factors) which will be produced based on fully calibrated data.

Daily updated light path monitoring results can be found on the SOST or IUP web site (<http://www.iup.uni-bremen.de/sciamachy/LTM/LTM.html>).

The following specific features can be identified from the light path monitoring results during the time interval of this report:

- Overall, the instrument throughput changes were close to expectation.
- A signal drop is visible in the limb light path during the partial solar eclipse on 1 August 2008.
- The data gap around 23 August 2008 is caused by the instrument switch-off during this time. Note that it takes some days after this event for the channel 1 throughput to recover.
- For all light paths involving the ESM mirror the degradation in the UV (channels 1 and 2) increases with a rate of about 1% per month. The maximum average throughput loss in channel 1 lies currently around 48% (for the limb light path). The throughput of the calibration light path is currently at about 87% in channel 1 and 86% in channel 2, showing a decrease of about 1% over the two months of this report.
- The overall degradation of channel 3 is very small (still about 4%) compared to channels 1 and 2. A small decrease in throughput of much less than 0.5% is observed for the limb and nadir/WLS light paths within the two months of this report.
- A slight decrease of throughput (also less than 0.5%) is visible in all channel 4 light paths.
- Channel 5 remains stable on a sub-percent level.
- All channel 6 throughputs shows a small decrease of less than 0.5%.
- The throughput in channel 7 slightly increases by about 0.5% in two months, somewhat smaller than observed during the last reporting period.



esa



DLR

ife



serco

SCIAMACHY Bi-MONTHLY



-
- A throughput decrease of about 0.5% in two months for all, light paths is visible in channel 8 transmission. Currently, the throughput lies for all light paths at around 65-66%.



esa



serco

SCIAMACHY BI-MONTHLY

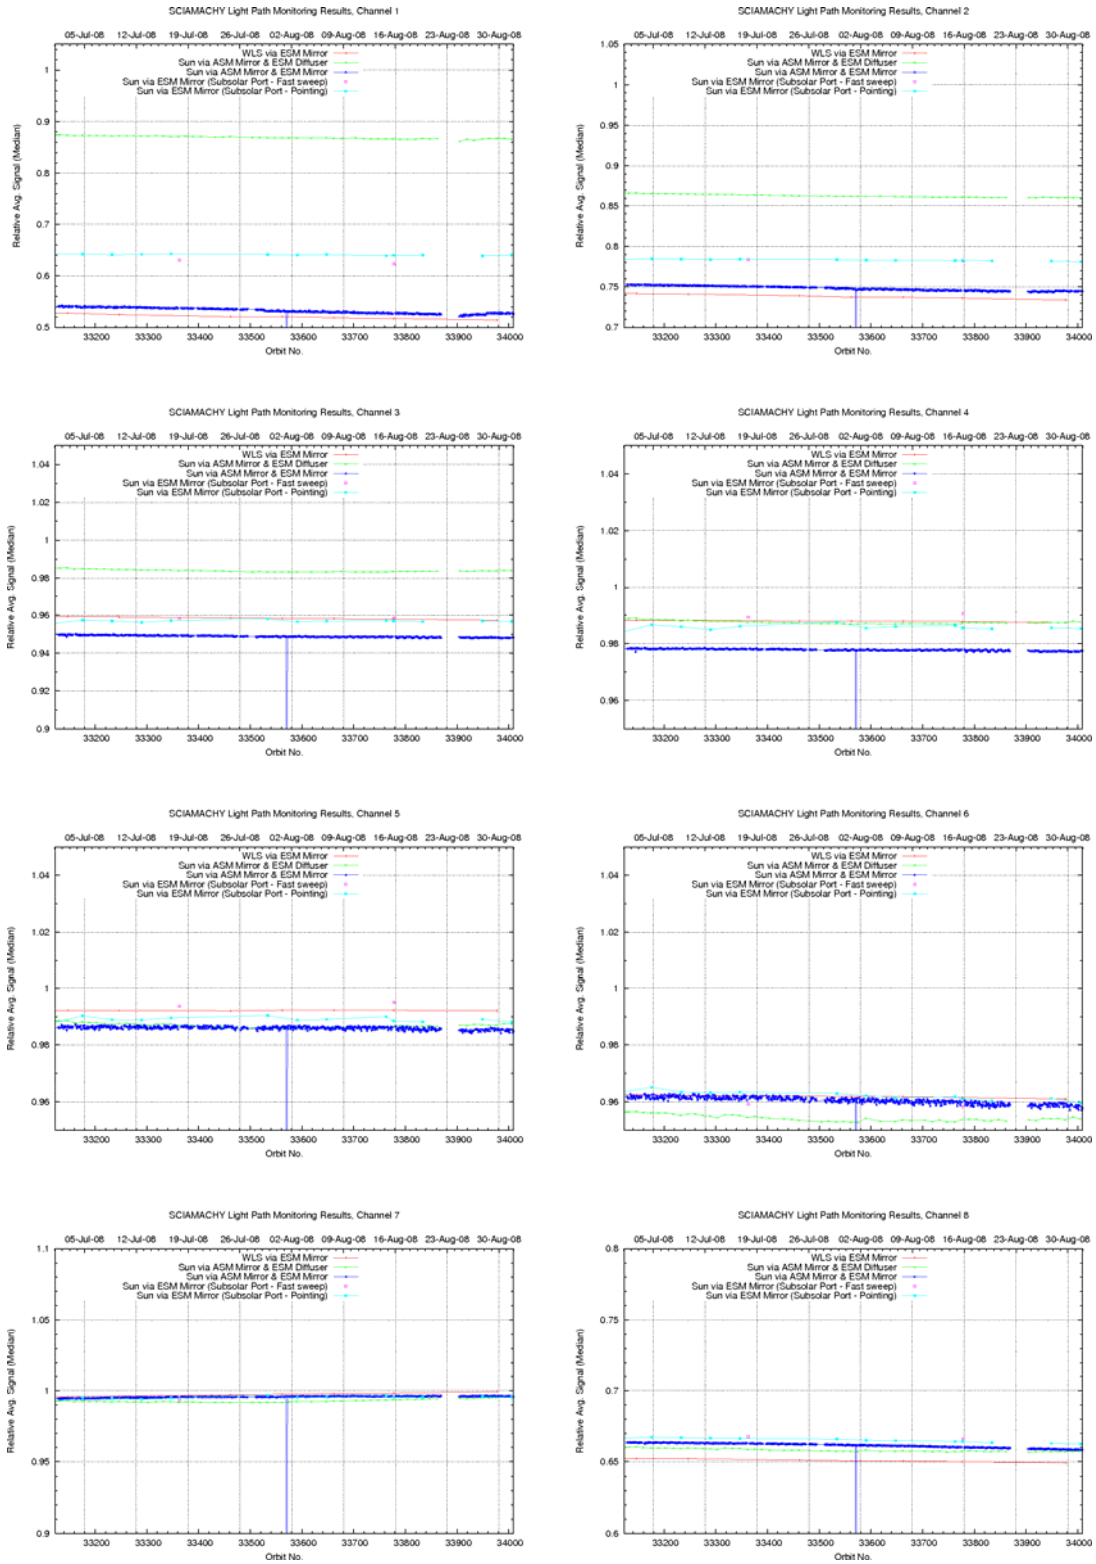


Fig. 3.7: Light path monitoring results July to August 2008 (medians).



esa



DLR



serco

SCIAMACHY BI-MONTHLY



page 23 of 62

3.1.5.3 Spectral light path monitoring results

Fig. 3.8 – 3.11 show results of spectral throughput monitoring performed by SOST-IFE for the different light paths (nadir, limb, calibration, and WLS). These results have been derived from Level 0 data analysed in a similar way as for the channel averaged throughput data (but of course without spectral averaging). Because the variation in spectral direction is very small within two months, Fig. 3.8 – 3.11 show the complete time series from 2 August 2002 to the end of August 2008.

The underlying data for the spectral monitoring are available via the SOST-IFE web site (see http://www.iup.uni-bremen.de/sciamachy/LTM/LTM_spectral/LTM_spectral.html). As for the plotted results, these data are regularly updated one to two times per month.

The current status of the degradation is as follows:

- The minimum throughput is below 50% for the limb and WLS (nadir) light paths at the short wavelength edge of channel 1 (i.e. below about 270-280 nm).
- The minimum throughput at the degradation peak around 350 nm in channel 2 is currently about 60%.
- The minimum throughput at the lower wavelength edge of channel 3 is currently at about 90% (not considering the overlaps).
- Channel 4 and 5 are still stable over the whole spectral range (except for the overlaps).
- The channel 6 degradation at the lower wavelength edge is still below 10%.
- Degradation in channels 7 and 8 is as expected.

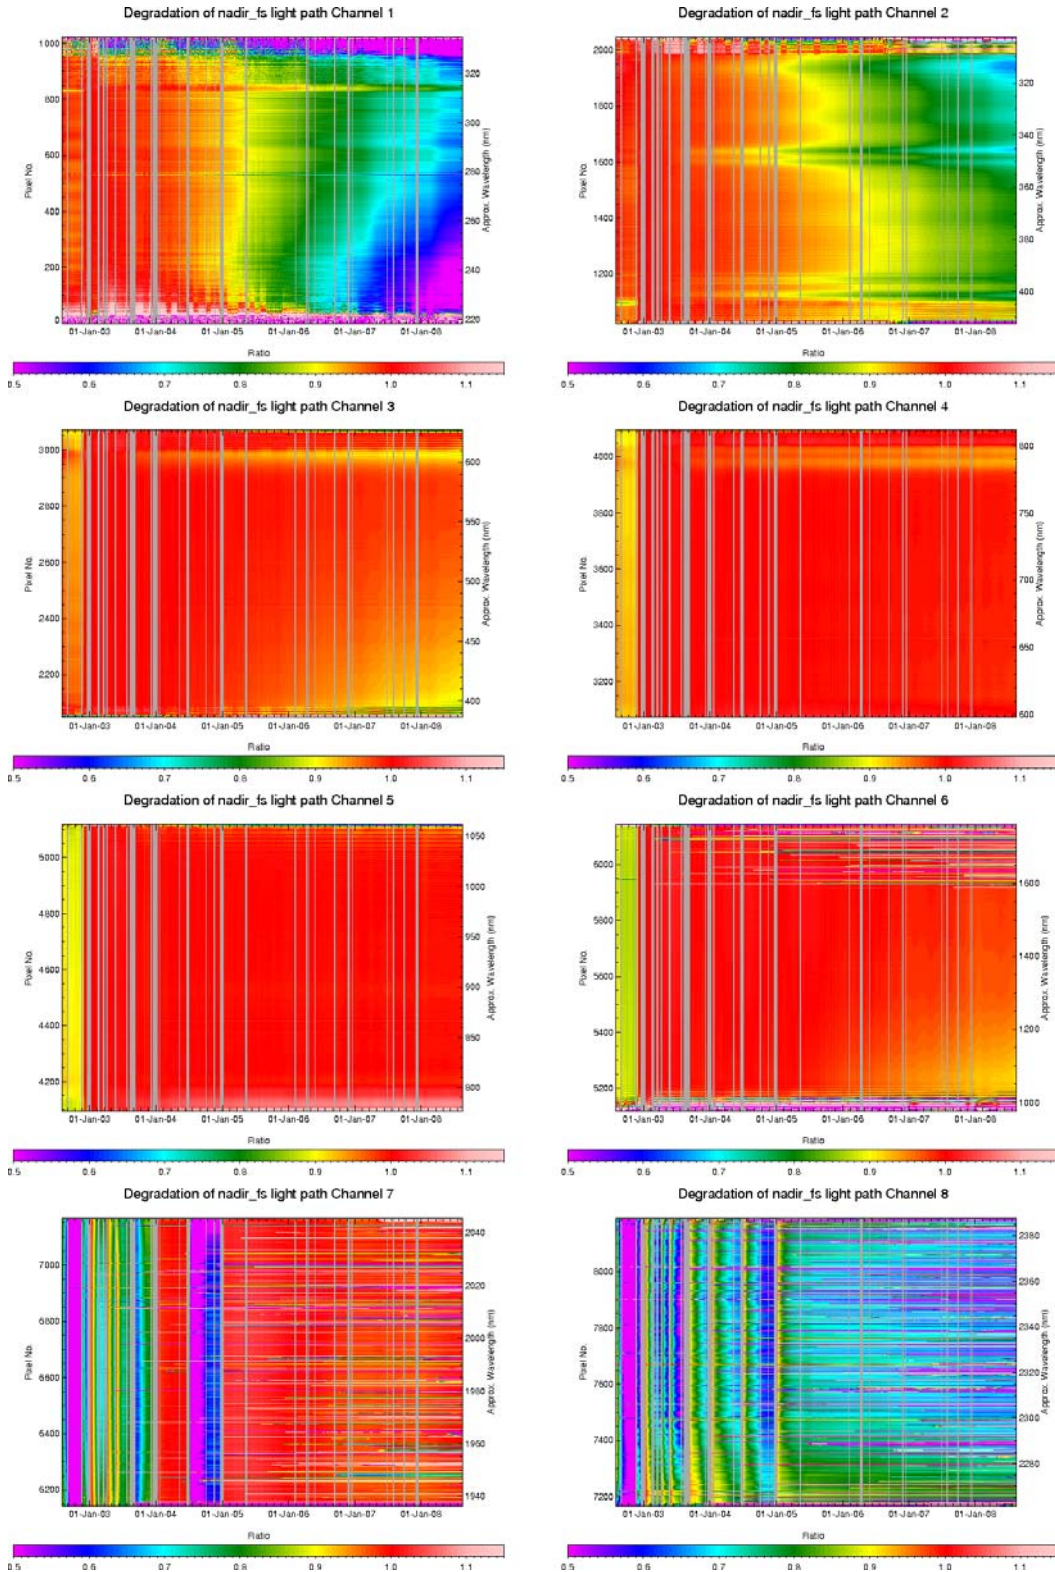


Fig. 3.8: Spectral light path monitoring results August 2002 to August 2008 (nadir light path)

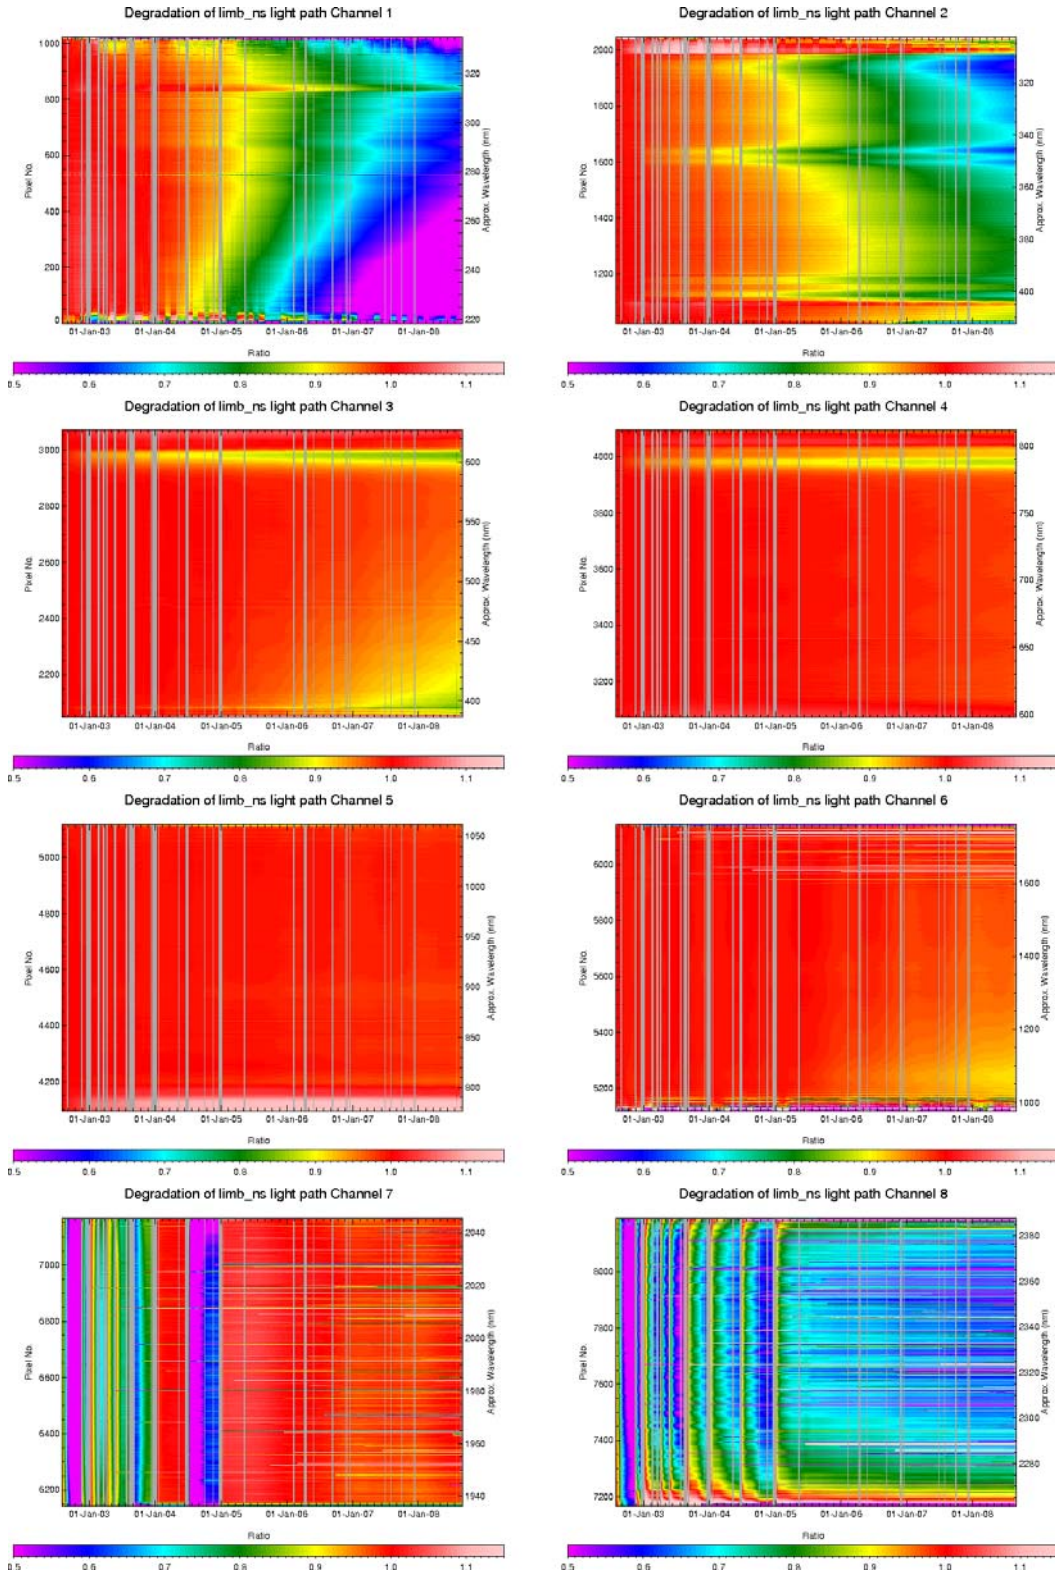


Fig. 3.9: Spectral light path monitoring results August 2002 to August 2008 (limb light path)



esa



serco

SCIAMACHY BI-MONTHLY

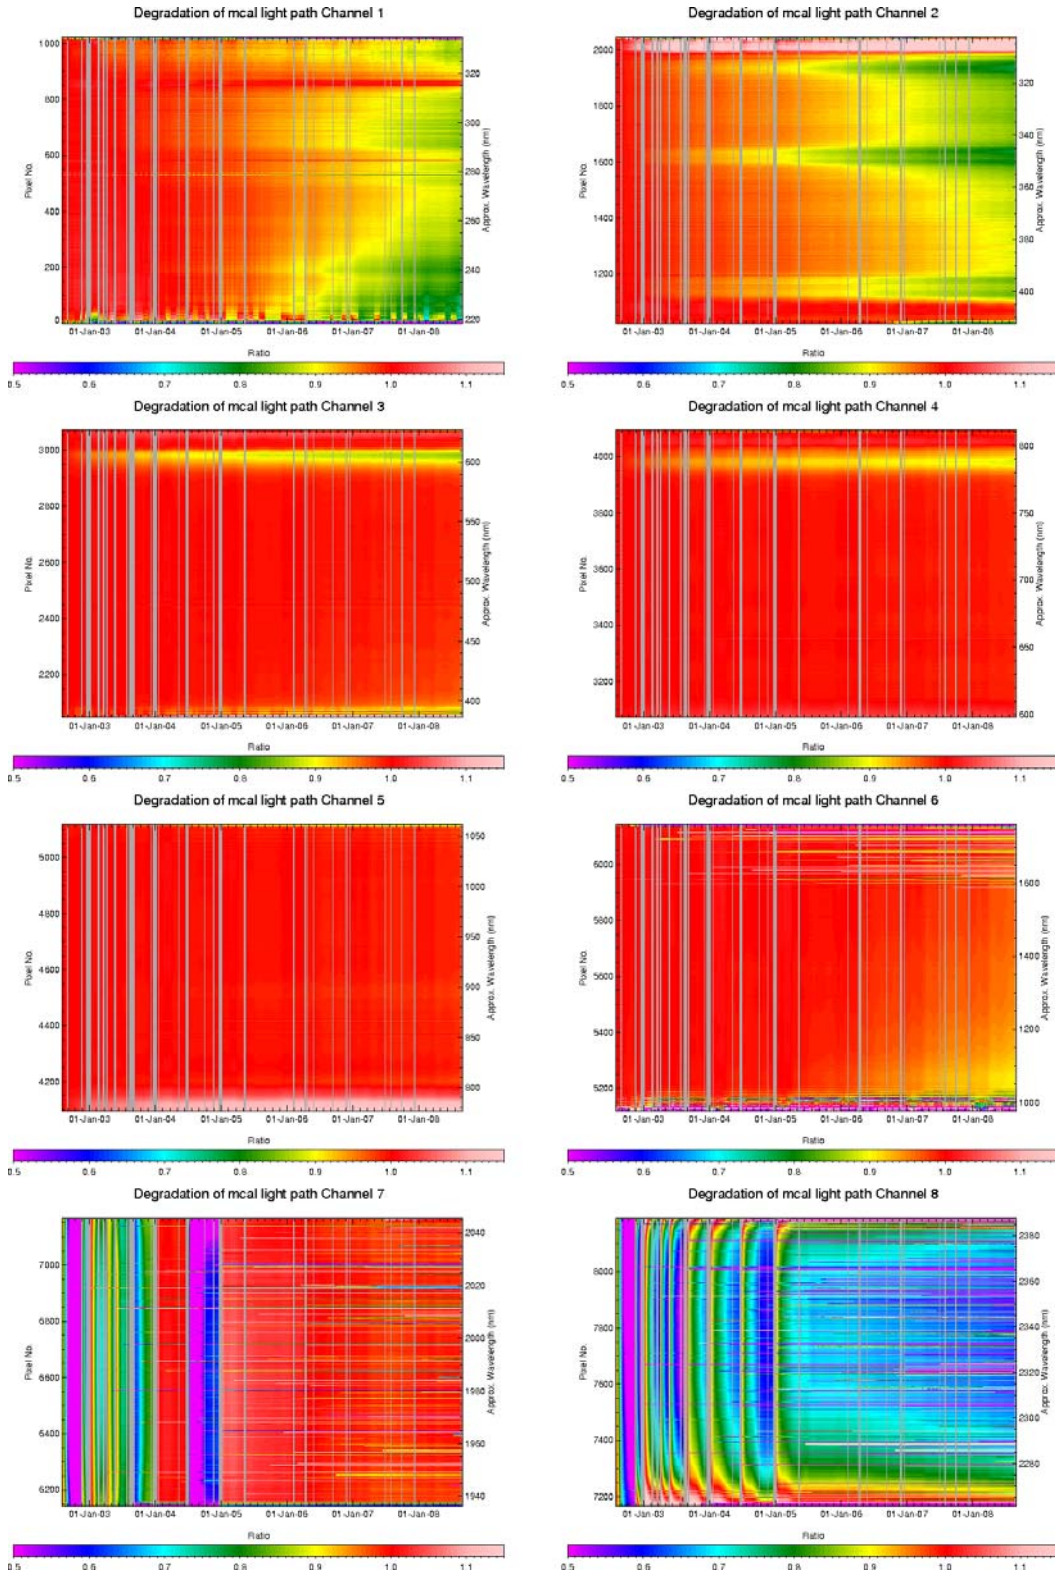


Fig. 3.10: Spectral light path monitoring results August 2002 to August 2008 (calibration light path)



esa



serco

SCIAMACHY BI-MONTHLY

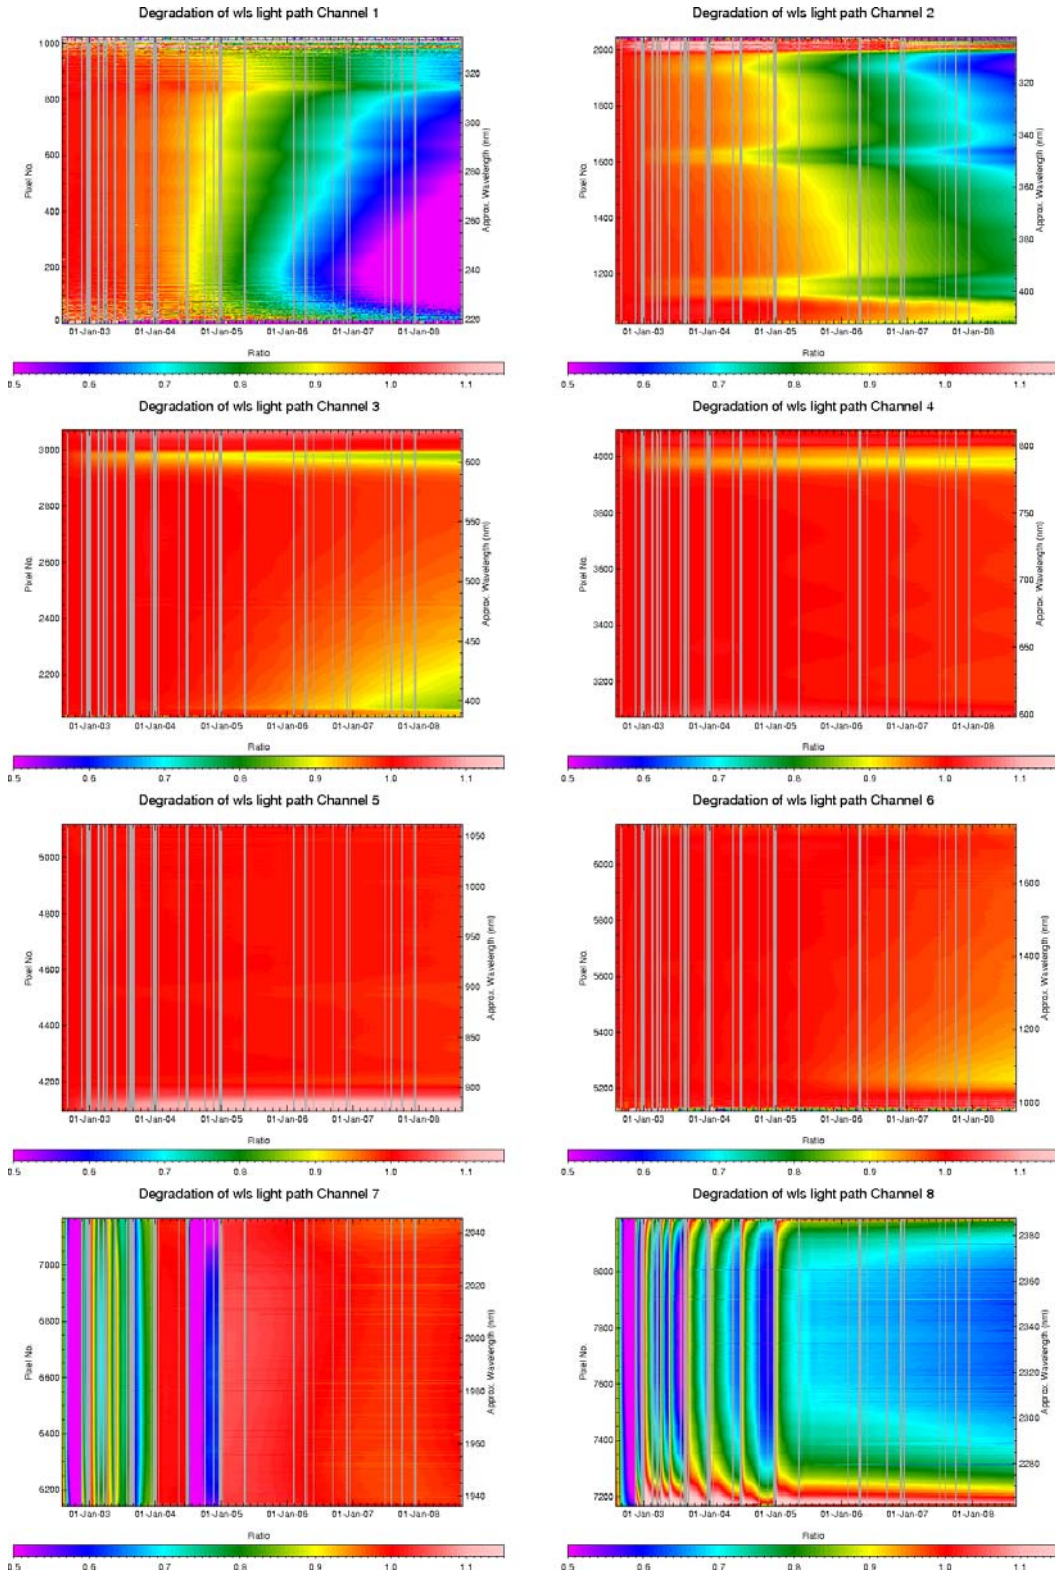


Fig. 3.11: Spectral light path monitoring results August 2002 to August 2008 (WLS light path)



esa



DLR



serco

SCIAMACHY Bi-MONTHLY



page 28 of 62

3.1.5.4 PMD monitoring results

The SCIAMACHY PMDs are monitored in a similar way as the science channels, but of course no channel averaging is performed. However, the results presented here are based on the same measurements as the science channel results (but using the PMD low gain signal), and they have been normalized to the same reference times as the spectral results. Fig. 3.12 shows the PMD throughput variation for the whole time period between 2 August 2002 and 31 August 2008. Note that a constant dark signal for each of the PMDs has been assumed. To verify this assumption, Fig. 3.12 also shows the variation of the PMD dark signal over time, which is usually quite low.

Considering the broadband character of the PMDs, the observed PMD throughput changes are (except for PMD 4 and 7) very similar to those of the science channels.

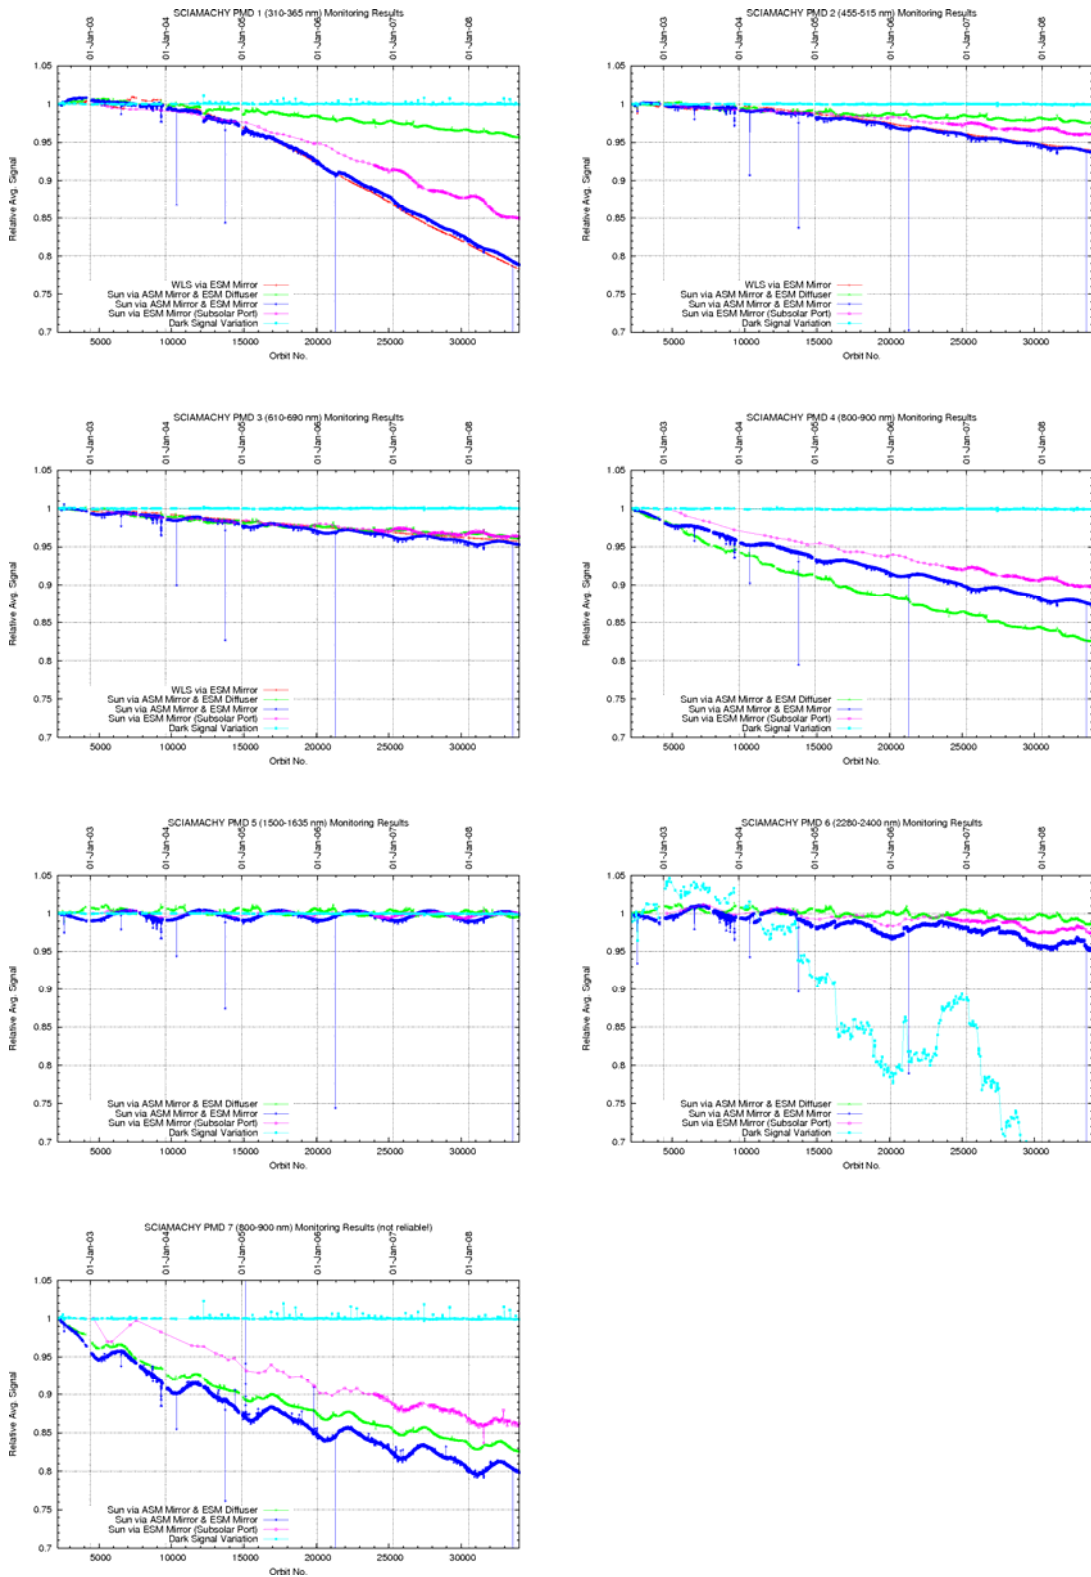


Fig. 3.12: PMD monitoring results August 2002 to August 2008



esa



serco

SCIAMACHY BI-MONTHLY



4 DATA AVAILABILITY STATISTICS

4.1 Downlink/Acquisition Performance

Problems are known for the products listed in Tab. 4.1:

Product	Day	Filename	description
SCI_NL__0P	12-JUL-2008	SCI_NL__0PNPDK20080712_074450_000061602070_00164_33284_8745.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	03-AUG-2008	SCI_NL__0PNPDK20080803_075233_000061612070_00479_33599_8936.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	05-AUG-2008	SCI_NL__0PNPDK20080805_164556_000058612071_00012_33633_8961.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	27-AUG-2008	SCI_NL__0PNPDK20080827_115952_000059802071_00324_33945_9141.N1	Data format error – probably related to Kiruna antenna anomaly
SCI_NL__0P	30-AUG-2008	SCI_NL__0PNPDK20080830_055547_000042262071_00363_33984_9172.N1 SCI_NL__0PNPDK20080830_161555_000027382071_00369_33990_9179.N1 SCI_NL__0PNPDK20080830_183628_000061482071_00371_33992_9184.N1	Data format error – probably related to Kiruna antenna anomaly

Table 4-1 Products containing format errors

These occurrences of data corruptions are currently under investigation. Between 27 and 31 August a Kiruna antenna problem occurred, coinciding with the switch between the two Kiruna antennas for data acquisition. This anomaly is currently being analyzed.

4.2 Statistics on unconsolidated data (SCI_NL__0P, SCI_NL__1P)

This paragraph reports the availability of NRT data on a monthly basis. The statistics are based on level 0 data and level 1 data inventoried in the ground segment. Unavailability periods due to instrument anomalies or Satellite switch-offs are excluded. The gaps considered are only interfile gaps.

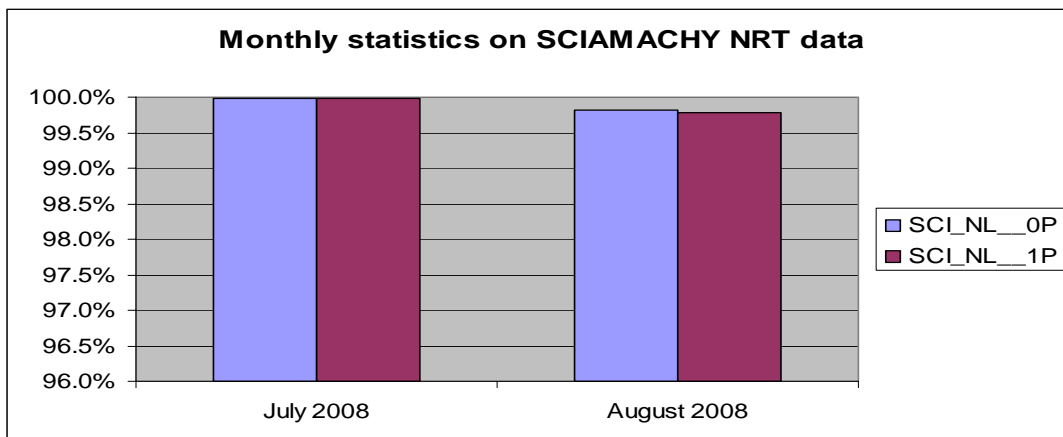


Fig. 4-1: Statistics on available unconsolidated level 0 and level 1b products



esa



DLR



serco

SCIAMACHY Bi-MONTHI



page 31 of 62

4.3 *Statistics on consolidated data*

In this chapter an overview about operational off-line data (consolidated data) is provided.

4.3.1 *Anomalies on level 0 consolidated data products*

In the past it had been reported by SOST-DLR that the SCIAMACHY consolidated level 0 data contain errors and are not complete. Following specific problems have been identified and are reported in detail in the technical notes [3], [4] for years 2003 and 2004 as well as for products of 2005 [5]:

- For one orbit there can be more than one consolidated level 0 product. These products may be identical or different in content (disregarding the product type file counter).
- Some orbits are not covered by consolidated level 0 products although SCIAMACHY was operational.
- Some orbits are covered by consolidated level 0 products but the product duration does not comply with the actually planned and executed instrument operations in that particular orbit.
- Some consolidated level 0 products exceed the Reed Solomon correction threshold and are flagged accordingly. The occurrence of Reed Solomon errors is non-uniform.
- Until late October / early November 2003 consolidated level 0 data are hampered by an incorrect orbit number.

More details on consolidated level 0 anomalies can be found on the SOST web page, which contains a catalogue of available level 0 consolidated data and description of errors.

http://atmos.caf.dlr.de/projects/scops/data_availability/availability.html

A recovery plan was initiated in order to reprocess erroneous data 2002 - 2006. This activity has been completed. For the year 2007 the recovery is currently being performed.

The overall goal is to achieve a level 0 consolidated data ‘master set’ that allows data reprocessing of improved data quality.

4.3.2 *Availability of consolidated SCI_NL__1P products*

SCIAMACHY level 1b consolidated data are generated at D-PAC using the consolidated level 0 products as input for processing. The available level 1b off-line products on the D-PAC ftp-server are checked for completeness and an overview for the months July to August 2008 is summarised here, considering flight segment and ground segment



esa



serco

SCIAMACHY BI-MONTHLY



anomalies. Note that also interfile gaps are considered, but no data gaps inside the products. The missing data from period 14-19 April, orbits 32009 – 32090 reported in the previous report need to be recovered still.

The FTP address accessing the data server at D-PAC is 195.37.183.37.

Month/Year	Planned orbit range	Number of orbits unavailable due to anomalies	Number of unique orbits available at D-PAC	Expected number of orbits (considering anomalies)	Availability in percentage during month
07/2008	33123 - 33565	6	434	437	99.3%
08/2008	33566 - 34009	21	421	423	99.4%

Table 4-2 Consolidated level 1b statistics

4.4 Statistics on reprocessed data

4.4.1 Level 1b re-processing IPF 6.03

The second reprocessing cycle had been completed between September and December 2007 using the level 1b IPF version 6.03 at D-PAC.

A new reprocessing flag was introduced in the filename and MPH, which is the letter “R” replacing the Processing Stage flag “P” for off-line level 1b products that was valid for IPF 5.04 and IPF 6.02 products.

Data is available at the D-PAC server (FTP address 195.37.183.37, ftp-ops-dp.eo.esa.int). Monthly mean availability lies at about 94% with respect to the instrument availability. Progress on the missing data to be processed is still on-going as well as the quality check on the whole dataset. Preparations for this major monitoring activity are currently being implemented.

More details see previous BMR (January - February 2008).

Detailed statistics will be provided in the next BMR considering the reprocessing round filling the data gaps.

4.4.2 Level 2 re-processing processor version 3.01

Level 2 off-line re-processing has been performed at D-PAC with processor version 3.01. As for the level 1b, the level 2 off-line reprocessed data set contains the new processing flag “R” in the filename and MPH.



esa



DLR



serco

SCIAMACHY Bi-MONTHLY



page 33 of 62

The level 2 off-line products have been successfully validated by the SCIAVALIG team and results have been presented during a validation workshop at the end of March 2008 (see chapter 8). Data are now available to the users at the D-PAC server (FTP address 195.37.183.37, ftp-ops-dp.eo.esa.int).

The first round of reprocessing for level 2 data for the period 02 August 2002 – September 2007 had been completed in January 2008.

As well as for the level 1b, consolidation of the data set is on-going with respect to completeness and duplicates. Monitoring activities have been initiated by generation of daily level 2 reports that are made available at http://earth.esa.int/pcs/envisat/sciamachy/reports/daily/Level_2/

Daily reports were generated so far for the time span 02 August 2002 to October 2004.

Besides a few exceptions the mean monthly availability lies at about 91% with respect to the total availability of SCIAMACHY.



esa



serco

SCIAMACHY BI-MONTHLY



5 LEVEL 1 PRODUCT QUALITY MONITORING

5.1 Processor Configuration

5.1.1 Version

The operational IPF version used for processing of near real-time SCIAMACHY level 1b data is 6.03 at Kiruna and ESRIN. The same IPF is used for level 1b off-line processing at D-PAC for forward processing and the second SCIAMACHY full mission re-processing cycle.

The corresponding product specification is Volume 15 issue 3/k [2]. It is available at http://earth.esa.int/pub/ESA_DOC/ENVISAT/Vol15_Sciamachy_3k.pdf

The disclaimer at http://envisat.esa.int/dataproducts/availability/disclaimers/SCI_NL_1P_Disclaimers.pdf describes known artefacts as well as major improvements with respect to the previous IPF version.

Currently the new baseline 7.00 is prepared for industrial implementation. Table 5.1 gives a brief overview of changes implemented with processor versions IPF 6.03, 6.02, 6.01 and 5.04/5.01.

IPF Version	Description	Proc Centre	Date	Start Orbit
6.03	Following changes are implemented with IPF 6.03 <ul style="list-style-type: none"> • New pointing correction (new SCI_LI1_AX) • Updated of the ESA CFI (5.6) software • Correction of a non compliancy report, impacting the Leakage GADS in the consolidated data processing chain (channels 6-8) 	D-PAC	04-JUL-2007	27937
		PDHS-E	19-JUL-2007	28153
		PDHS-K	19-JUL-2007	28145
6.02	No algorithm specification changes were implemented, but following non compliances of version 6.01 have been corrected, to get <ul style="list-style-type: none"> • Polarisation correction factors different from 0 • Correct order of SMR spectra in Sun Reference ADS 	D-PAC	05-MAY-2006	21843
		PDHS-E	07-JUN-2006	22327
		PDHS-K	07-JUN-2006	22318

	<ul style="list-style-type: none"> Solar mean reference spectra in New Sun Reference Data set with positive sign (was negative in IPF 6.01) 			
6.01	<ul style="list-style-type: none"> Improved parameterization of the Memory effect for channels 1 to 5 New correction for the Non-Linearity effect in the infrared channels Usage of improved key data for the radiometric calibration of all channels Each solar spectrum is provided in a calibrated and un-calibrated manner for all channels Orbital dependency of channel 6 to 8 leakage calculated; currently applied only to channel 8 Improvement of the pointing accuracy through the usage of the ENVISAT Restituted Attitude auxiliary files for the off-line processing decontamination flag added to the SPH 	D-PAC	No operations activated	-
		PDHS-E	22-MAY-2006	22098
		PDHS-K	22-MAY-2006	22090
		PDHS-E PDHS-K LRAC	24-MAR-2004	

Tab. 5-1: Processor Version and main changes

5.1.2 Anomalies

During analysis of the reprocessed data set Level 1b version IPF 6.03, it was found that for limited data sets

- January 2005, orbits 15154 – 15166
- December 2005, orbits 19752-19762
- January 2006, orbits 20224-20235, 20352-20363
- April 2006, orbits 21356-21512

The D1 solar reference spectra were not updated in the SCI_SU1_AX files and within in the Level 1b products. Analysis of this problem could confirm that the spectra were measured, though. Detailed analysis of this processing problem is still on-going. Please note, that for operational Level 1b – level 2 offline processing the D1 spectrum is not used. The outcome of further analysis will be reported in the next BMR.



esa



DLR



ife

serco

SCIAMACHY Bi-MONTHI



5.2 Auxiliary Data Files

For operation of the SCIAMACHY level 1 processor, a set of auxiliary files as input is required.

One subset of these auxiliary files usually changes only in correspondence with a new IPF version, namely the Initialisation file (SCI_LI1_AX), the Key Data File (SCI_KD1_AX).

In addition there is the m-factor file (SCI_MF1_AX), which shall describe the degradation of the instrument during its stay in orbit. Note that the m-factor file has not been changed so far.

Another subset of auxiliary files is the In-flight calibration data files, which are generated when calibration measurements are included in the set of level 0 data to be processed. Four types of In-flight calibration auxiliary files exist:

- Leakage Current Calibration (SCI_LK1_AX - updated on orbital basis)
- Solar Reference Spectrum (SCI_SU1_AX - updated on daily basis)
- Spectral Calibration Parameters (SCI_SP1_AX - updated on a weekly basis)
- Pixel-to-Pixel Gain and Etalon Parameters (SCI_PE1_AX - updated on a weekly basis)

Table 5-2 lists the actual Key Data File and Initialisation File used with IPF 6.02 and IPF 6.03. The SCI_LI1_AX was updated with IPF 6.03 in order to improve the instrument pointing correction.

Table 5-2 Key data and Initialisation configuration

SCI_LI1_AXVIEC20060523_182643_20020701_000000_20991231_235959 (until 18/07/2007)
SCI_LI1_AXVIEC20070628_134108_20020701_000000_20991231_235959 (from 18/07/2007)
SCI_KD1_AXVIEC20060523_182626_20020301_000000_20991231_235959

Fig. 5.1 shows statistics of the SU1 and LK1 ADFs generated operationally with SCICAL. It has to be noted that unavailability periods are excluded from statistics. Generation of SU1 ADFs for July 2008 was 96.7% and for August 2008 it was 100%. The SU1 ADF for 26 July was not generated.

The LK1 ADF statistic is calculated by dividing the number of all LK1 ADFs by number of all available (to SCICAL) level 0 products. The statistics on available LK1 ADFs during July 2008 (83.8%) and August 2008 (62.7%) are on a nominal level considering that during August also in previous years the percentage was at a ~65% level, which might indicate a seasonal effect.

The statistic does not exclude dark measurements that cannot be used for ADF generation due to SAA and orbit phase constraints leading to an over-estimation of missing files.

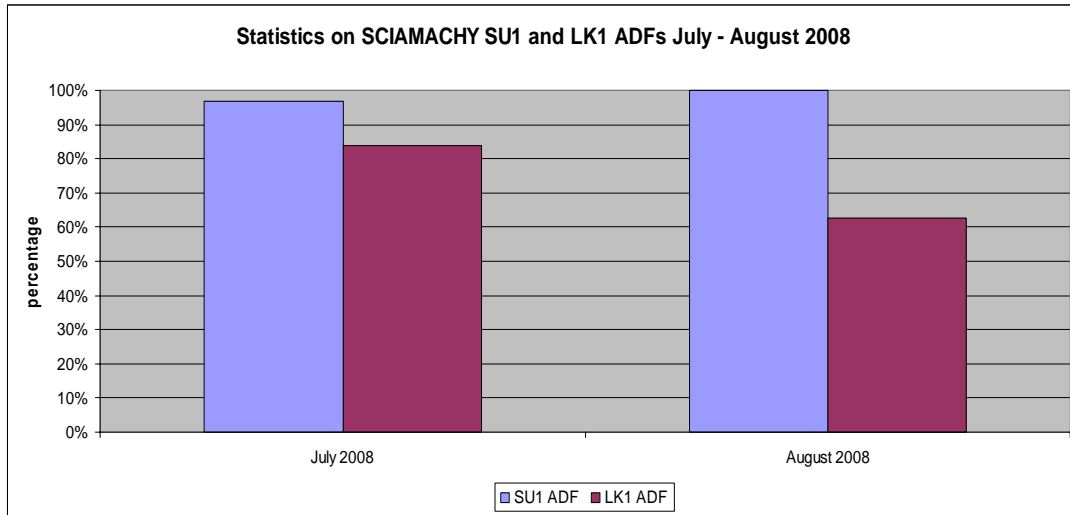


Fig. 5-1: Statistics on SU1 and LK1 processing

5.2.1 Auxiliary Data File quality analysis

5.2.1.1 SMR analysis

SCICAL generates daily SU1 Auxiliary Files. Solar spectra obtained from ESM and ASM calibration measurements are provided in two ways:

- fully calibrated
- not radiometrically calibrated.

The different types of spectra can be recognized by the so called identifier in the solar reference global annotation data set record.

Note the following recommendation:

- Use a not radiometrically calibrated ASM diffuser spectrum (A0) for DOAS type applications.
- All retrieval methods requiring absolute calibrated radiance and irradiance are obliged to use the calibrated ESM diffuser spectrum (D0) (see also disclaimer).

Fig. 5-2 to Fig. 5-5 show the ratios of SMR spectra derived from calibrated SMR/ESM (D0) during the months July - August 2008. The ratios were determined by dividing the spectra of the beginning of each month to a set of days during each month. Ratios are not corrected for variation of distance earth/sun.

In detail the spectra used for the ratios of each month are the following:

- **July 2008**
Reference SMR - 01 July 2008
SMR used for ratios: 02, 03, 04, 05, 06, 07, 08, 09, 10, 14, 21, 31 July 2008



esa



DLR



ife

serco

SCIAMACHY Bi-MONTHLY



- **August 2008**
Reference SMR - 01 August 2008
SMR used for ratios: 02, 03, 04, 05, 07, 08, 09, 10, 11, 14, 21, 31 August 2008

The overall changes lie at about 1-2 % during one month for all channels, which is at least partially caused by the decreasing distance between sun and earth. In channel 1 around pixel 550 (at 282 nm) some strong features can be noticed, as well as in channel 2 near pixel 840 (near 393 nm). These strong features coincide with the Mg II and Ca Fraunhofer lines respectively. These lines are partially formed in the solar chromosphere and are known to change with solar variability.

The weaker spectral features in channel 2 (e.g. near pixels 550, 650,750), on the other hand, correlate with strong Fraunhofer lines, which are not chromospheric. These features probably arise from small wavelength shifts (order of 1/100 of a pixel).

Generally a spectral feature could have significant impact on the product quality, especially when the affected spectral parts are used for DOAS retrieval.

The large features in the end of channel 6 (channel 6+) and channels 7 and 8 are due to bad pixels.

Note that the bad pixel mask used is still from the on ground calibration.

A regular update of the bad pixel mask is implemented starting with IPF 6.02. However a bad pixel correction will not be applied to the SMR spectra, but only to PMD out-of-band factors, in order to enable the user to apply a different mask from the one provided by the ADF.

Fig. 5-6 and Fig. 5-7 show SMR ratios on a long term trend dividing the ESM spectra from days 29 July 2003 and 29 July 2008, respectively 31 August 2002 and 31 August 2008.

The first spectrum available exists for 18-Jul-2002. However to consider sun/earth distance, the ratio was performed with spectra from same calendar days. All SCI_SU1_AX files used were generated with SCICAL.

What can be concluded is that for channels 1-2 an average degradation in 5 years of about 7-10% is observed, channels 3 degrades by about 2% and channels 4-5 degrade by less than 1%, channel 6 by about 4-5%. The signal in channel 7 has increased with respect to the SMR of year 2003. This is due to the impact of the icing of the IR detectors.

This is consistent with the Light Path monitoring at SOST-IFE.



esa



serco

SCIAMACHY BI-MONTHLY



ratio of smrs as a function of pixel, July 2008

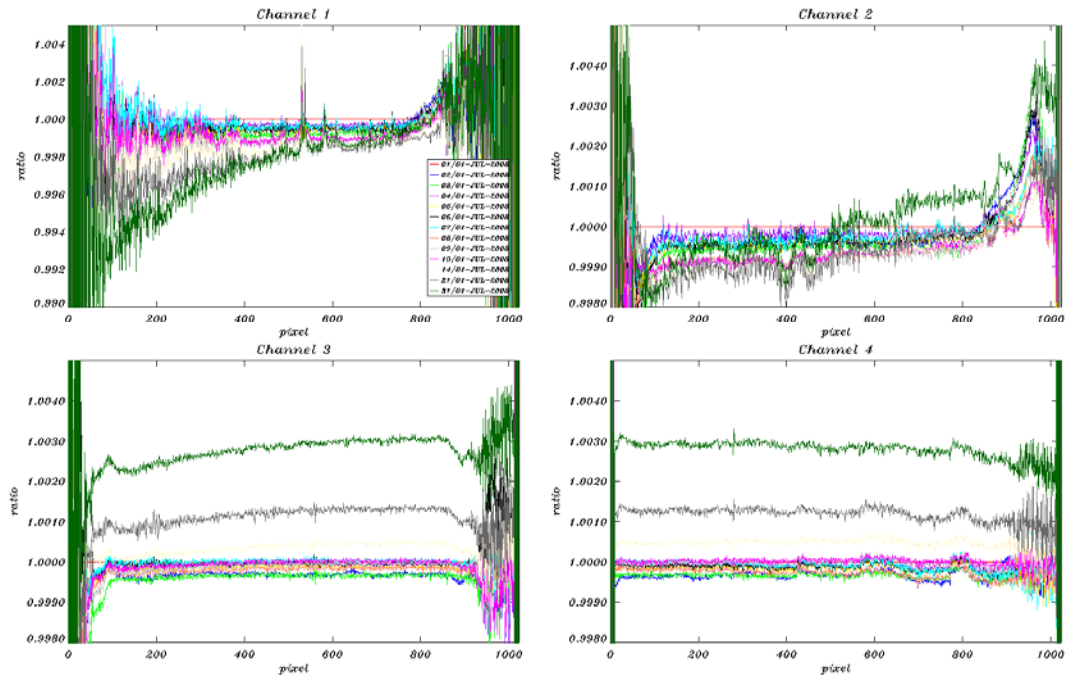


Fig. 5-2: SMR ratios per detector channel 1-4 (changes during July 2008)

ratio of smrs as a function of pixel, July 2008

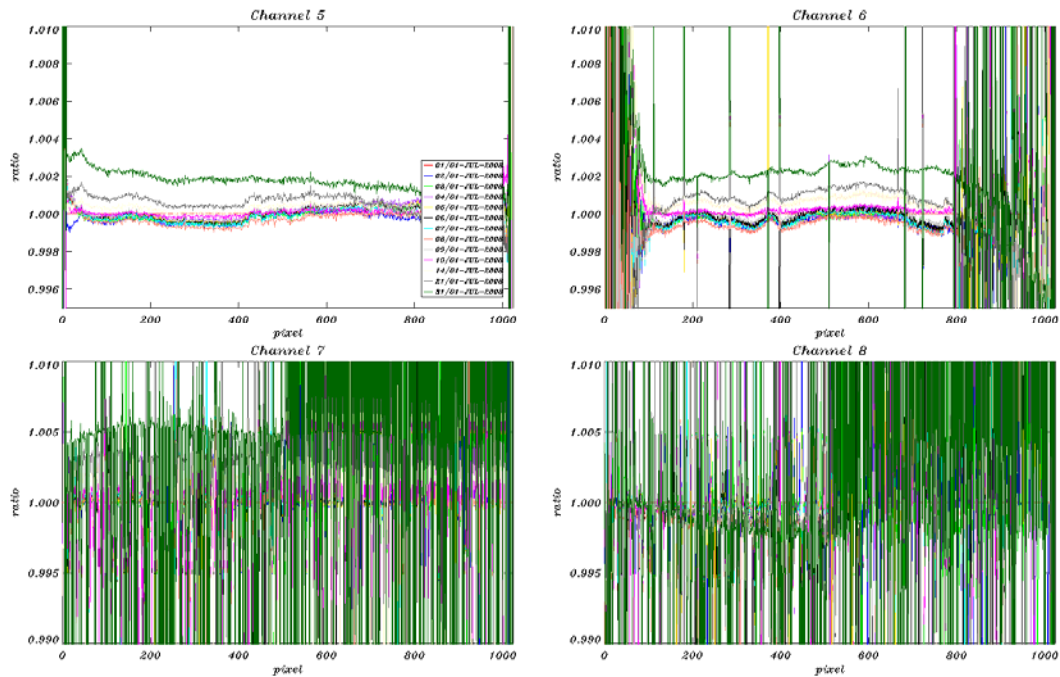


Fig. 5-3: SMR ratios per detector channel 5-8 (changes during July 2008)



esa



serco

SCIAMACHY BI-MONTHI



ratio of smrs as a function of pixel, August 2008

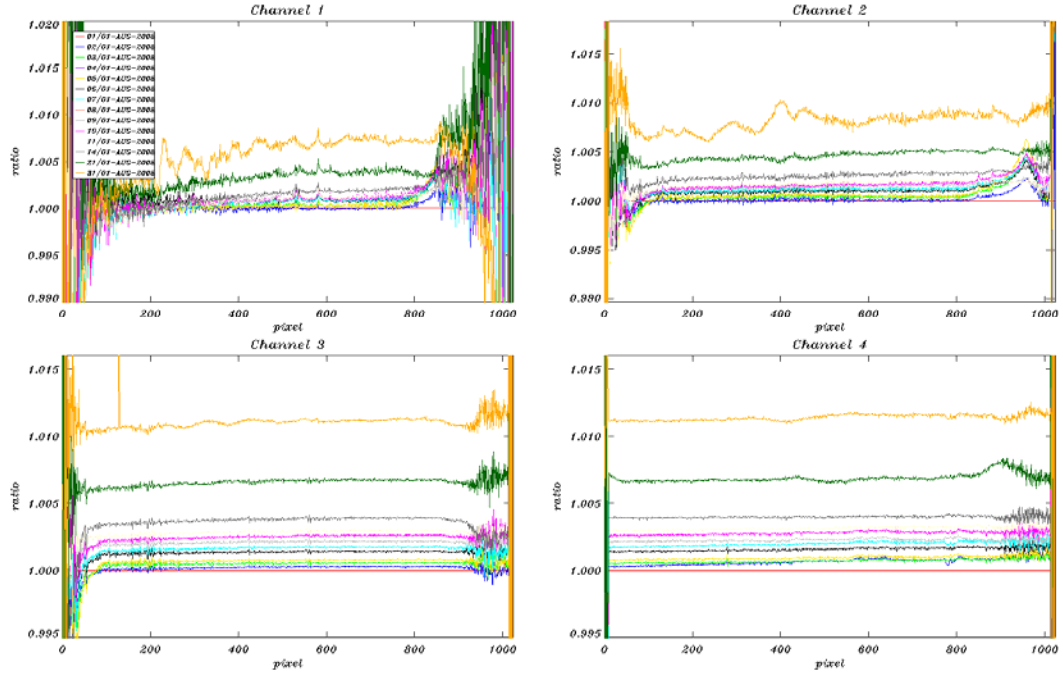


Fig. 5-4: SMR ratios per detector channel 1-4 (changes during August 2008)

ratio of smrs as a function of pixel, August 2008

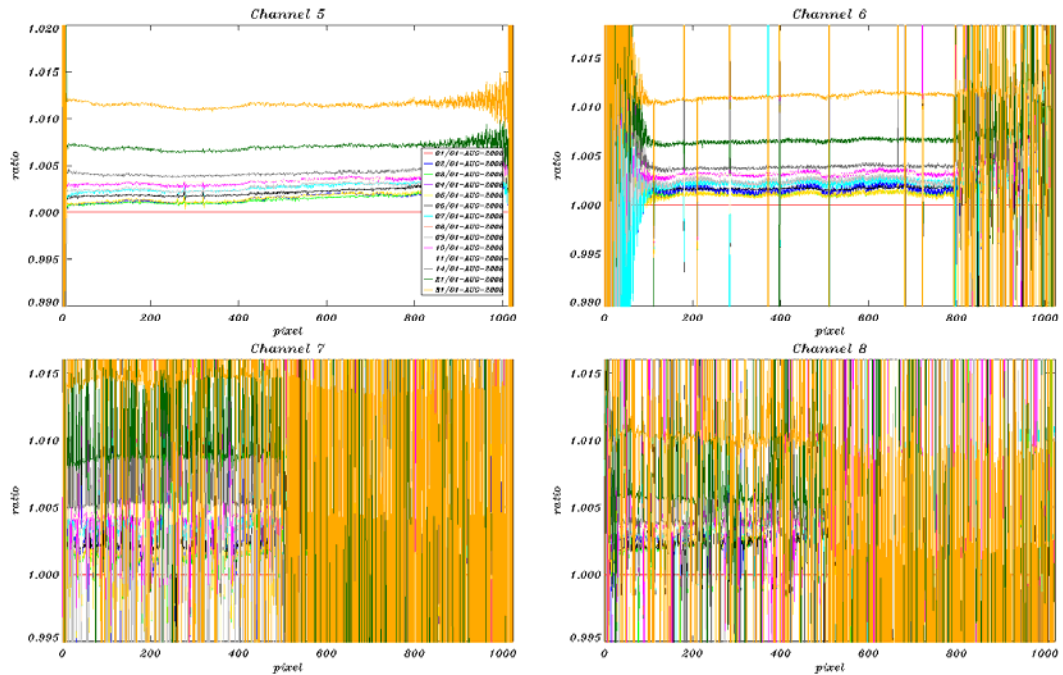


Fig. 5-5: SMR ratios per detector channel 5-8 (changes during August 2008)



smr ratio, D0 29/07/2008 divided by 29/07/2003

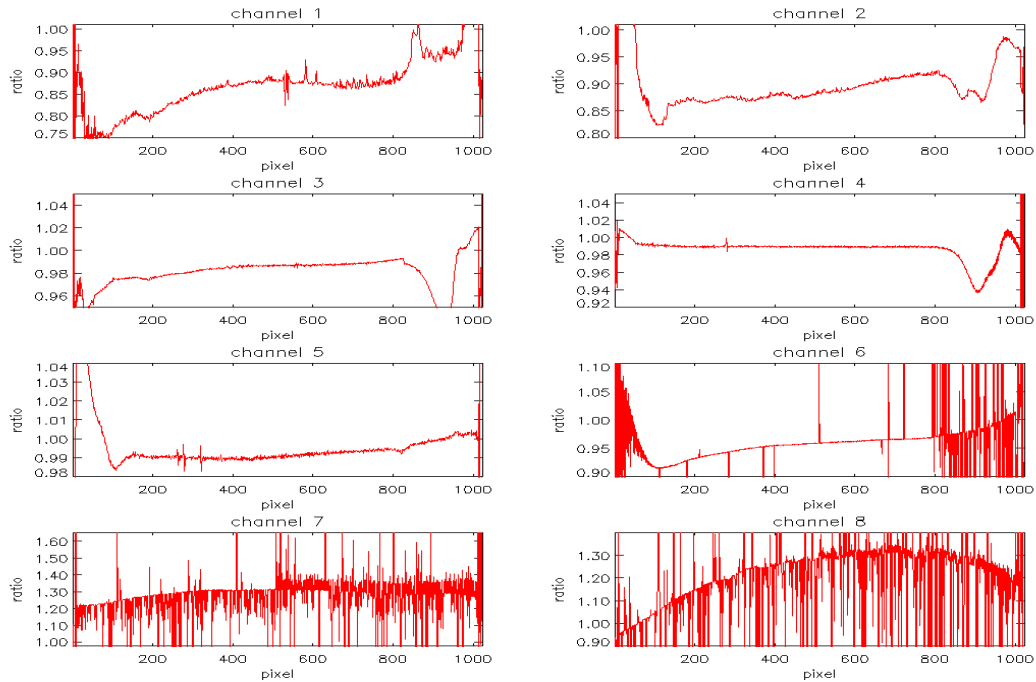


Fig. 5-6: SMR ratios per detector channel on Long Term Trend

smr ratio, D0 31/08/2008 divided by 31/08/2002

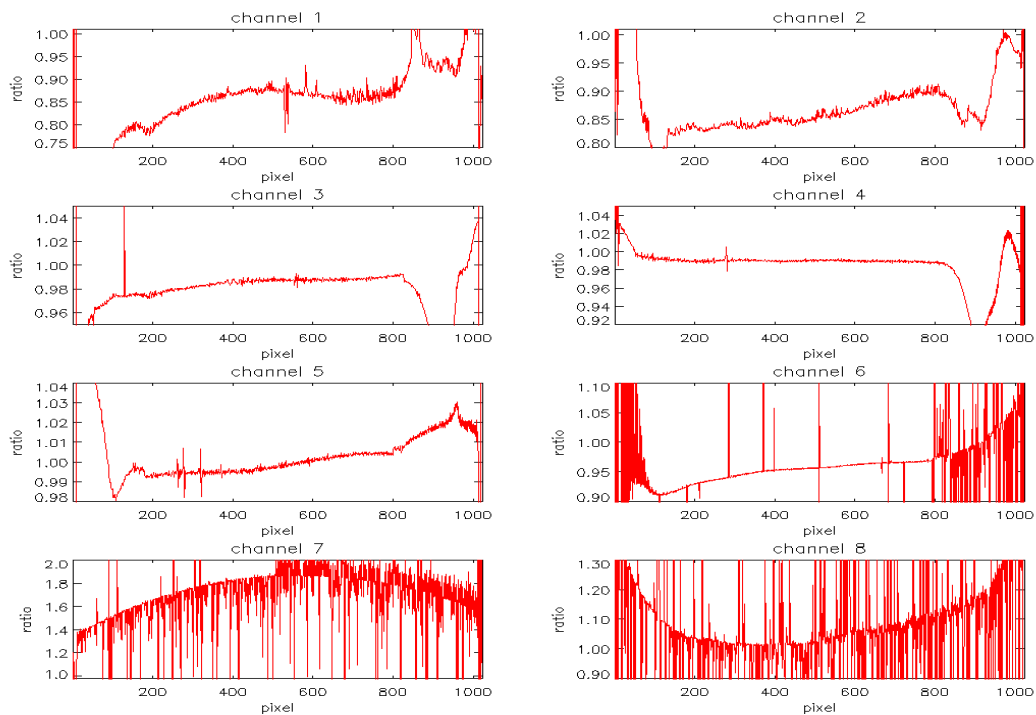


Fig. 5-7: SMR ratios per detector channel on Long Term Trend



esa



DLR



ife

serco

SCIAMACHY Bi-MONTHI



page 42 of 62

5.2.1.2 LK1 analysis

5.2.1.2.1 Leakage Constant part

On an orbital basis a leakage current calibration is performed, if measurement data do not lie in the South Atlantic Anomaly region.

In Fig. 5-8 to Fig. 5-11 the leakage constant part FPN (fixed pattern noise) of the LK1 ADFs are analysed by determining the ratios of the FPN of each month with a time distance of one orbit, one day, one week, two weeks, three weeks and a month.

For channels 1-5 and the first part of channel 6, during up to three weeks nearly no changes can be noticed. Sudden jumps however between the different dark current ratios can be seen for channels 1, 2, 4 and 5 between 4 weeks. They are very small but above the noise level.

The IR channels show a lot of noise. Note that since the processor version IPF 6.02, the time dependent part of the leakage current is considered (see 5.2.3.2.2).



esa



serco

SCIAMACHY Bi-MONTHLY



LK1 ADF analysis, ratios of fpn const July 2008

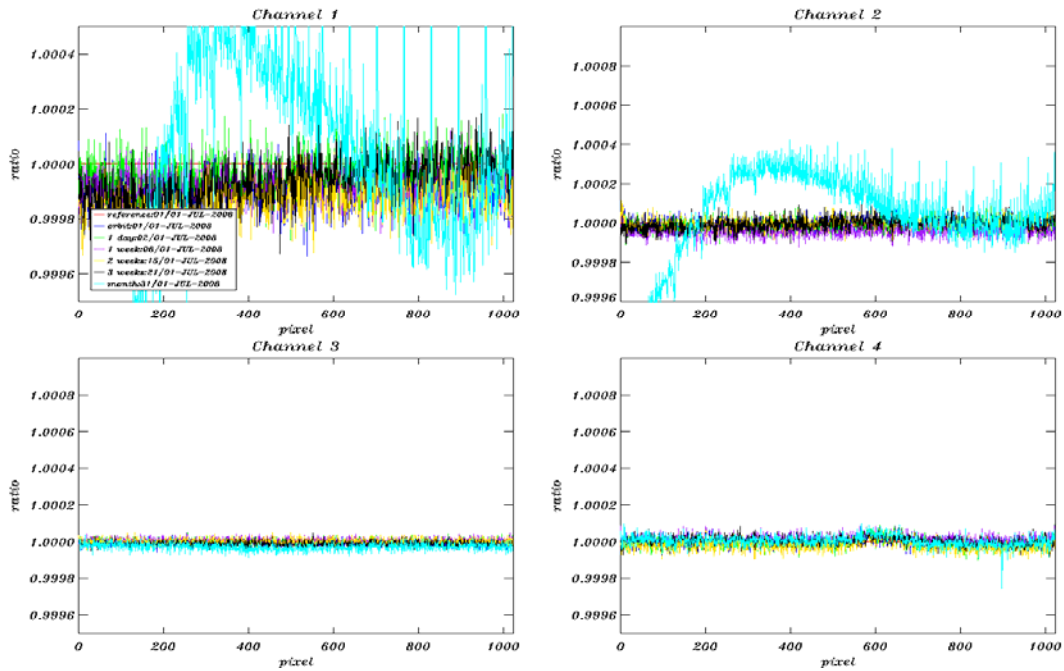


Fig. 5-8: dark current ratios (constant part) channel 1-4 during July 2008, Reference Spectrum used: Orbit 33129, 01-July-2008

LK1 ADF analysis, ratios of fpn const July 2008

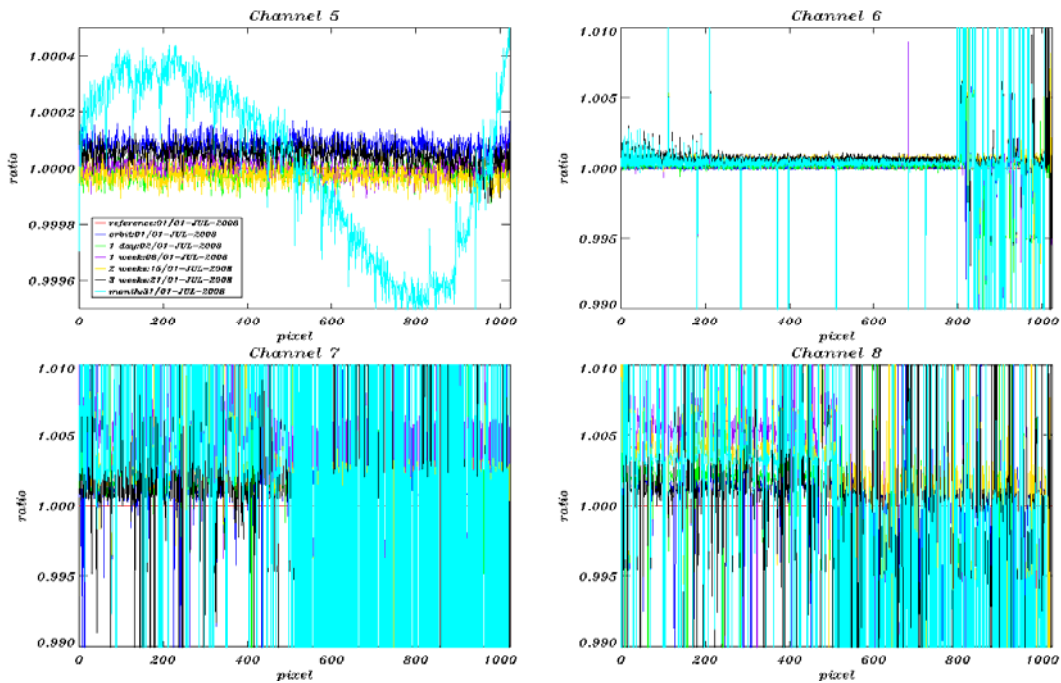


Fig. 5-9: dark current ratios (constant part) channel 5-8 during July 2008, Reference Spectrum used: Orbit 33129, 01-July-2008



esa



serco

SCIAMACHY BI-MONTHI



LK1 ADF analysis, ratios of f_{pn} const August 2008

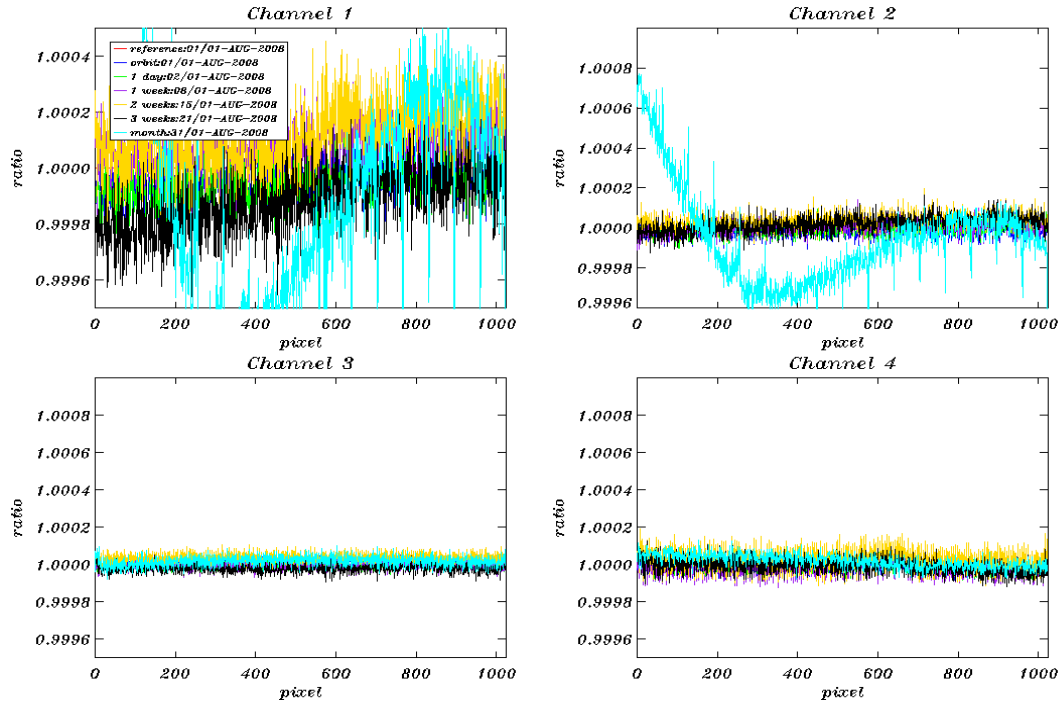


Fig. 5-10: dark current ratios (constant part) channel 1-4 during August 2008, Reference Spectrum used: Orbit 33570, 01-August 2008

LK1 ADF analysis, ratios of f_{pn} const August 2008


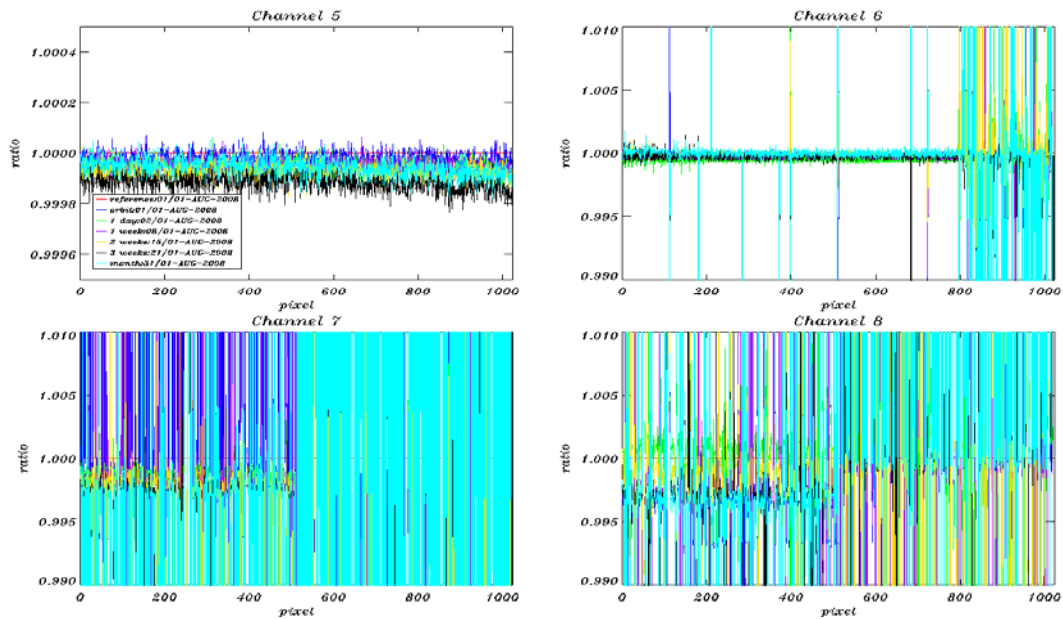


Fig. 5-11: dark current ratios (constant part) channel 5-8 during August 2008, Reference Spectrum used: Orbit 33570, 01-August-2008



esa



serco

SCIAMACHY Bi-MONTHI



5.2.1.2.2 Leakage Variable part

With IPF 6.03 the orbital dependency of channel 6 to 8 leakage current is considered. SCIAMACHY detector channels 6 – 8 have a time dependent leakage dark signal that consists of two components, the leakage current of the detector pixel and second a component due to thermal background that varies along the orbit. The implementation of the orbital variation of the leakage current is expected to improve retrieval especially in detector channel 8 for infrared products.

Figure 5-12 shows the evolution of the leakage variable part of the SCI_LK1_ADF during the time span 01 July 2008 to 31 August 2008. The leakage variation for a selected pixel (222) in channel 7 corresponding to orbit phase 5 is shown.

Updates of the leakage variable are expected after the processing of the monthly calibration orbits, i.e. once per month. During this period Monthly Calibration sequences were scheduled for:

- 17 July 2008
- 15 August 2008

For both dates the change of the Leakage Variable value can be clearly seen, demonstrating that the calibration was performed successfully.

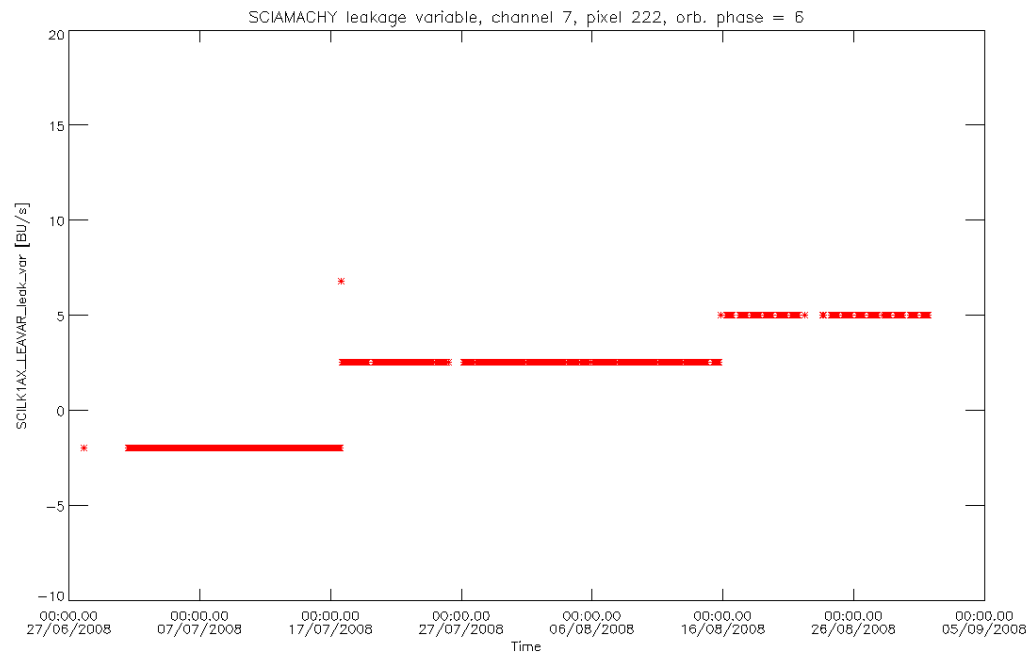


Figure 5-12: Leakage VARIABLE, SCI_LK1_AX, 01 July – 31 August 2008, channel 7, Orbit phase=6 pixel 222



esa



serco

SCIAMACHY Bi-MONTHLY



5.3 Bad and Dead Pixel Mask

SRON performs routinely analysis on the SCIAMACHY Bad and Dead Pixel Mask. Within this analysis bad pixels of the detector arrays are identified by the SCIAMACHY Detector Monitoring Facility (SDMF) using 11 flagging criteria. These criteria are based on the dark signal model, transmission, gain and noise of a pixel. Bad pixel masks are calculated on an orbital basis and combined into a "smoothmask" that combines the masks of about 50 orbits. In Fig. 5.13 we show the number/fraction of pixels that is flagged as bad for channels 6, 6+, 7 and 8. Note that channel 6 consists of two parts employing different detector materials. Channel 6+ starts at pixel 794. The rate at which the number of pixels that is flagged is increasing is similar for the IR channels 6+, 7 and 8. The fraction of flagged pixels in channel 6 is much lower and almost constant over the mission, because of the different detector materials used in this part of the channel. The mask currently provided in the level 1b product must be regarded experimental. It uses a different algorithm and is not identical to the mask provided by SRON. It is planned to align the two masks in future processor versions.

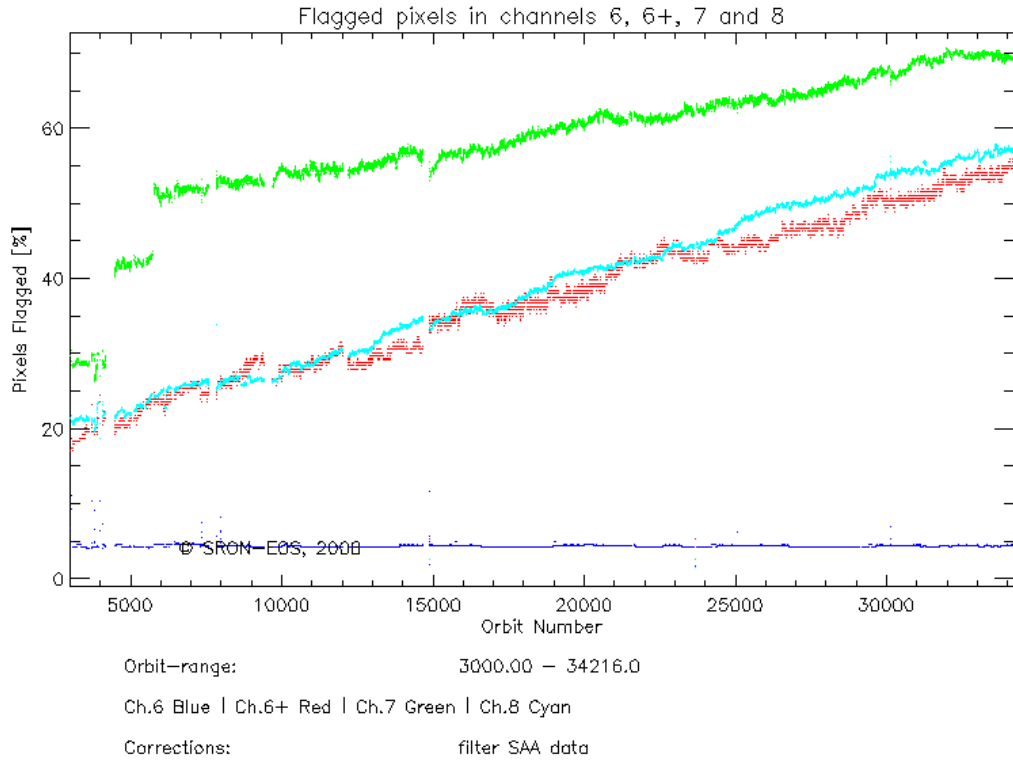


Figure 5-13: Number/Fraction of pixels that is flagged as bad by the SDMF smoothmask for channels 6 (blue), 6+ (red), 7 (green) and 8 (dark yellow). Orbits during SODAP or decontaminations have been removed.



esa



DLR



serco

SCIAMACHY Bi-MONTHLY



page 47 of 62

5.4 *Pointing Performance*

No upgrade with respect to the pointing performance during this reporting period. See BMR September-October 2007 for the last status.

5.5 *SciaL1c tool*

The SciaL1c tool is an application provided to the users of SCIAMACHY Level 1b products. This application allows selecting specific calibrations to apply to Level 1b data, which are in case of SCIAMACHY defined as not fully calibrated Level 0 channel information in combination with calculated calibration data. The generated Level 1c products are suitable for the user's particular applications.

The SciaL1C Calibration and Extraction Software was upgraded to be compatible with IPF 6.02 data. It is downward compatible, i.e. it can also be used with data from older IPF versions.

SciaL1c can be downloaded at:

<http://envisat.esa.int/scial1c>

LINUX, Sun Solaris, LINUX on DEC-Alpha and HP-UX on IA64 versions are available.

A new updated version of the SciaL1c tool is currently under testing and will be delivered to the users in October 2008.



esa



DLR



serco

SCIAMACHY Bi-MONTHLY



page 48 of 62

6 LEVEL 2 NRT PRODUCT QUALITY MONITORING

6.1 *Processor Configuration*

6.1.1 *Version*

Since 08 May 2006 the near real time processing of SCIAMACHY level 2 data has been suspended, evolution is currently restricted to the level 2 Off-line processor (see chapter 7).

The last IPF version used was 5.04. The corresponding product specification is [2]. The disclaimer at

http://envisat.esa.int/dataproducts/availability/disclaimers/SCI_NL__2P_Disclaimers.pdf describes known artefacts.

An overview on the implementation dates of the IPF at the different PDS processing centres and the main modifications implemented can be found in previous BMR (June-May 2007).

6.1.2 *Auxiliary Data Files*

An overview of Auxiliary Files being used as input for SCI_NL__2P products can be found in BMR May-June 2007.

7 LEVEL 2 OFF-LINE PRODUCT QUALITY MONITORING

7.1 Processor Configuration

7.1.1 Version

The Level 2 Off-line processing version is 3.01.

The product specification corresponding to the level 2 off-line processor 3.01 is Volume 15, issue 3/k [2] and can be found at

http://earth.esa.int/pub/ESA_DOC/ENVISAT/Vol15_Sciamachy_3k.pdf

The disclaimer at

http://envisat.esa.int/dataproducts/availability/disclaimers/SCI_OL_2P_Disclaimers.pdf describes known artefacts.

SCI_OL__2P products contain geo-located vertical column amounts of O₃ and NO₂ Nadir measurements, as well as stratospheric Limb profiles of O₃ and NO₂. Additionally the fractional cloud coverage, the cloud-top height, and the cloud optical thickness are derived and provided as product to the user. The major upgrades are summarised in table 7.1.

Currently the new baseline leading to the operational processor 4.00 is under acceptance review by the agencies.

Processor Version	Description	Proc Centre	Date	Start Orbit
3.01	<p>Main processor changes:</p> <ul style="list-style-type: none"> • Updated SACURA cloud algorithm • Offset applied in NO₂ slant column processing was removed • Number of retrieved profiles per state was set from one to four (4) • Cloud and Aerosol MDS are filled with the next valid value instead of being set to zero • Molecular Ring correction applied on NADIR O₃ slant column density <p>Non-compliance corrections:</p> <ul style="list-style-type: none"> • Inter change of Pressure and Temperature values in LIMB MDS • Erroneous Cloud and Aerosol 	D-PAC	23-SEP-2007	29092



esa



DLR



ife

serco

SCIAMACHY Bi-MONTHI



	<p>Quality Flags</p> <ul style="list-style-type: none"> • AAI erroneously set to zero in Cloud and Aerosol MDS • Scaling of too large NO₂ error estimate 			
3.00	<ul style="list-style-type: none"> • Nadir UV/Visible algorithm for ozone and NO₂ is based on the GDP (GOME Data Processor) Version 4.0 • Nadir UV/Visible algorithm for cloud-top height and cloud optical thickness based on the SACURA algorithm • Limb UV/Visible products: Stratospheric Ozone and NO₂ profiles • Improved pointing performance through the use of the ENVISAT Restituted Attitude information in the consolidated Level 1b product 	D-PAC	03-MAY-2006	21824

Table 7-1: Level 2 off-line Processor Configuration

7.1.2 Anomalies

During this reporting period no anomalies in level 2 offline processing were identified.

7.1.3 Auxiliary Data Files

Input for level 2 Off-line processing is the so-called Initialization File. For processor version 3.01 a new Initialization file became active which is SCI_IN__AXNPDE20070629_092400_20070720_000000_20991231_235959 This ADF is usually changed only in case of a processor upgrade.



esa



DLR



ife

serco

SCIAMACHY Bi-MONTHI



page 51 of 62

7.2 *Monitoring results*

7.2.1 *Nadir: NO₂ consistency checking*

The world map plots of nadir NO₂ vertical column density (VCD) values averaged over one month are generated from the SCI_OL__2P nadir products. Fig 7.1 and 7.3 show the monthly world map plots for July and August 2008.

Figures 7.2 and 7.4 show the VCD errors for the monthly average plots. The errors are given in relative fraction. Generally the equator region has NO₂ values with higher errors.

High concentration of NO₂ is expected over industrial regions, as over North America, especially the East coast, over central Europe, China and South Africa, which is reflected in the world maps.



esa



serco

SCIAMACHY Bi-MONTHI



7.2.1.1 Nadir: VCD NO2 map July 2008

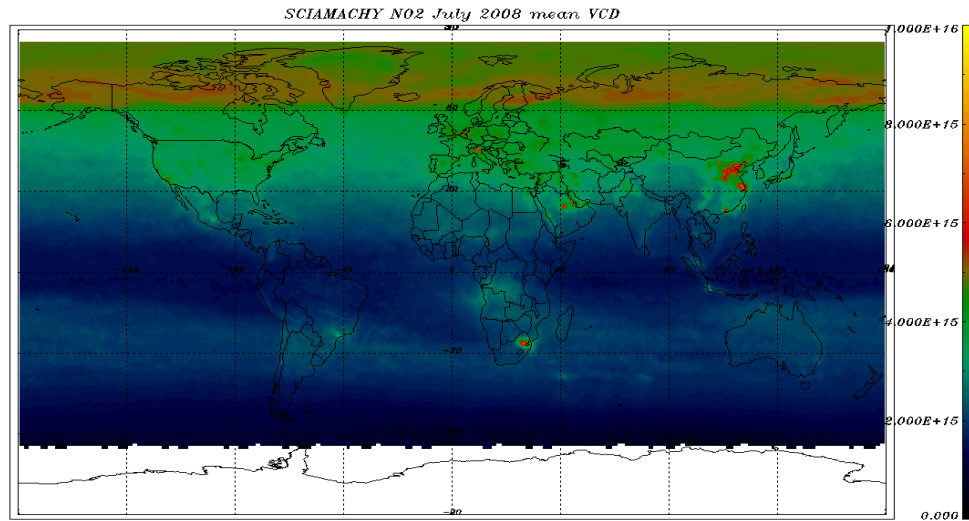


Figure 7-1: NO2 VCD world map 01 - 31 July 2008 – monthly average

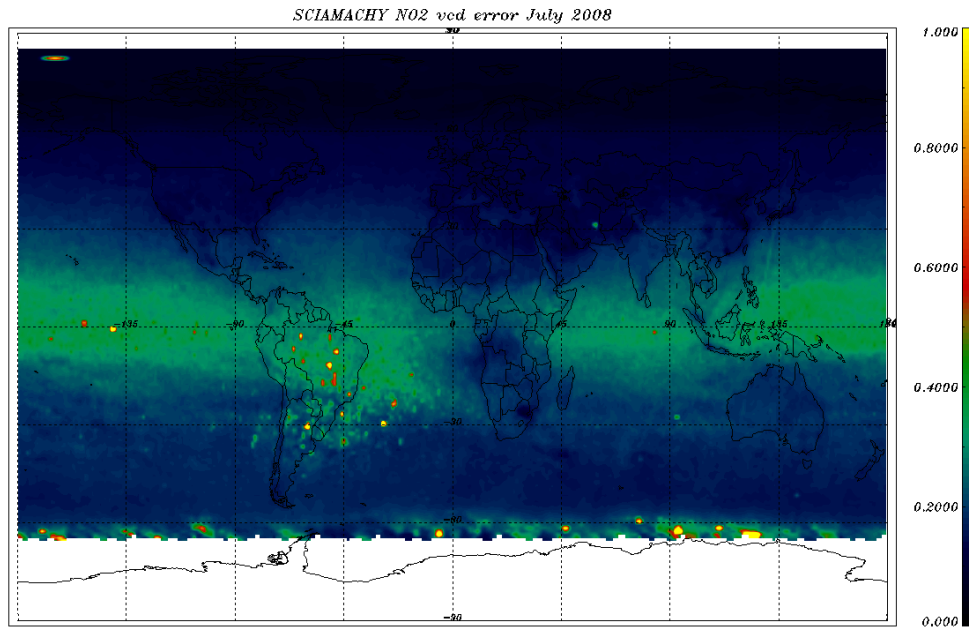


Figure 7-2: NO2 VCD error 01-31 July 2008

7.2.1.2 Nadir: VCD NO₂ map August 2008

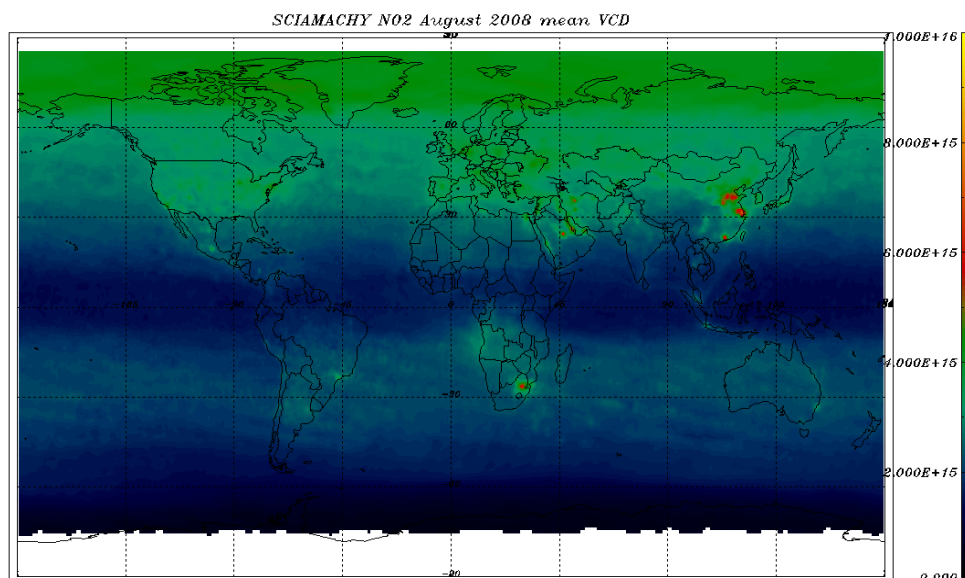


Figure 7-3: NO₂ VCD world map 01 – 31 August 2008 – monthly average

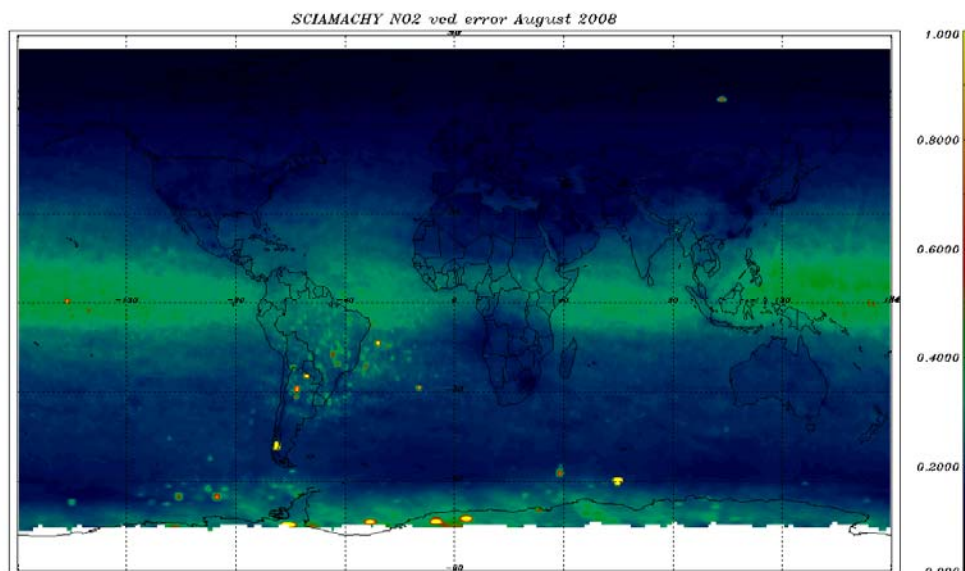


Figure 7-4: NO₂ VCD error 01 – 31 August 2008



esa



DLR



serco

SCIAMACHY Bi-MONTHI



page 54 of 62


7.2.2 Nadir: O₃ consistency checking

Analogous to the NO₂ world maps, O₃ vertical column density (VCD) values averaged over one month are generated from the SCI_OL__2P nadir products and plotted on a world map. Fig 7.5 and 7.7 show the ozone distribution converted in Dobson units for July and August 2008. Corresponding to the seasonal evolution the Ozone Hole over the Antarctica is not visible during these two months.

The VCD errors as monthly average plots are shown in Figures 7.6 and 7.8. The errors are given in relative fraction. Systematically higher error values at the North Pole area are visible.



esa



serco

SCIAMACHY Bi-MONTHI



7.2.2.1 Nadir: VCD O3 map July 2008

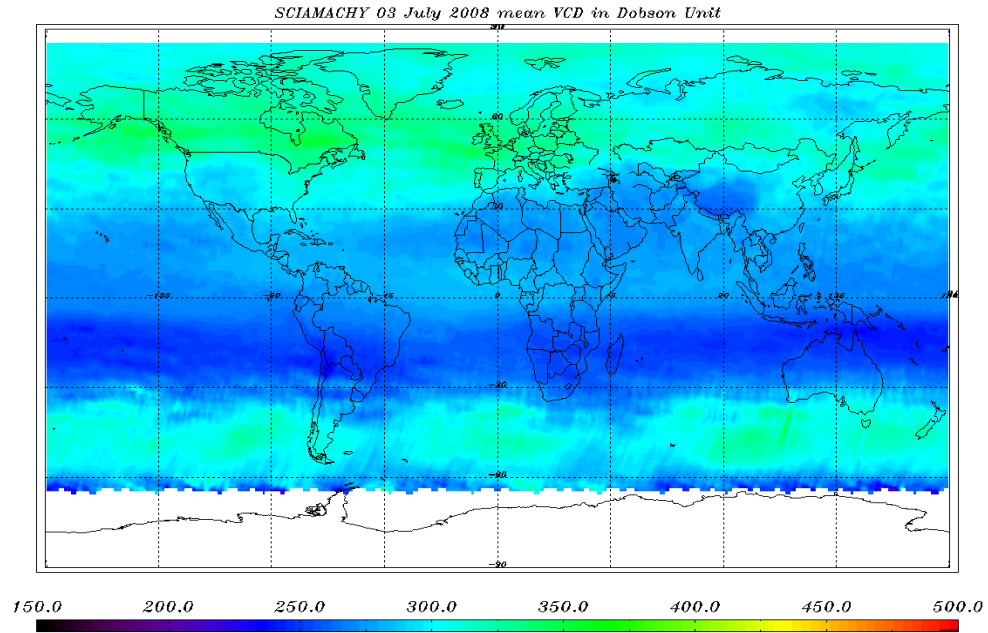


Figure 7-5: O₃ VCD world map 01-31 July 2008 – monthly average

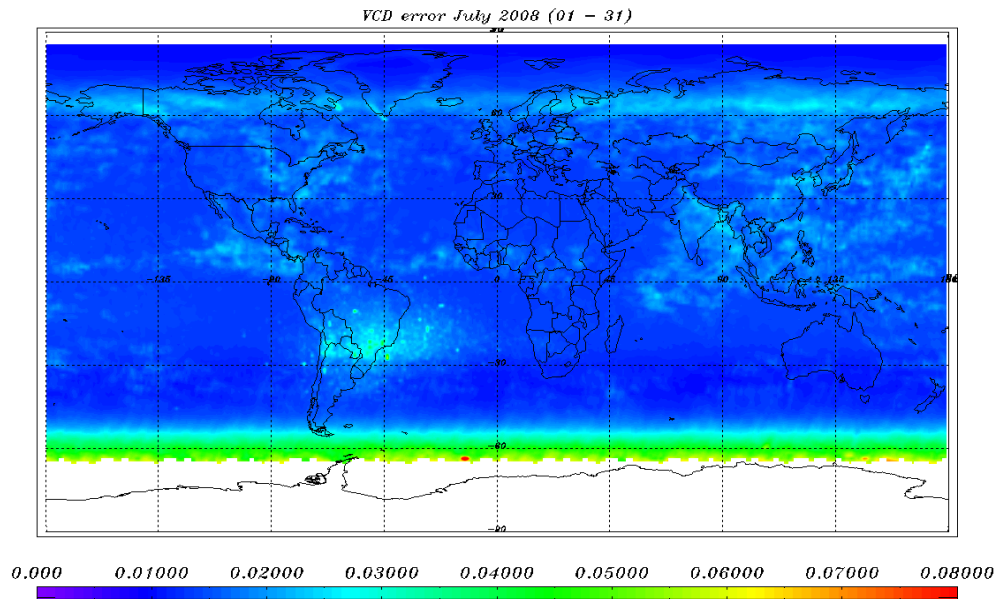


Figure 7-6: O₃ VCD error 01-31 July 2008



esa



serco

SCIAMACHY BI-MONTHLY



7.2.2.2 Nadir: VCD O3 map August 2008

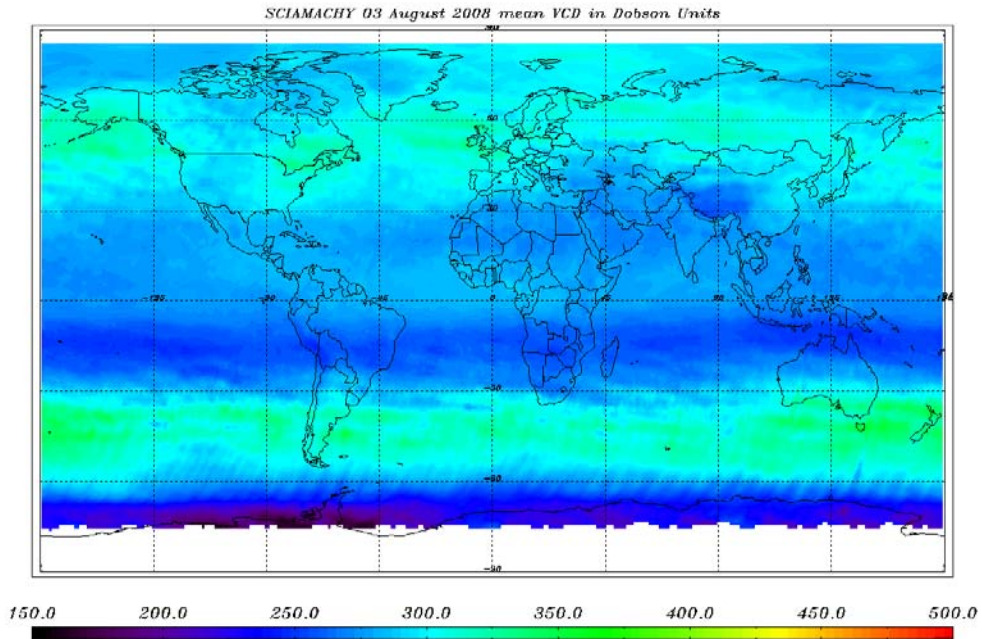


Figure 7-7: O₃ VCD world map 01 - 31 August 2008 – monthly average

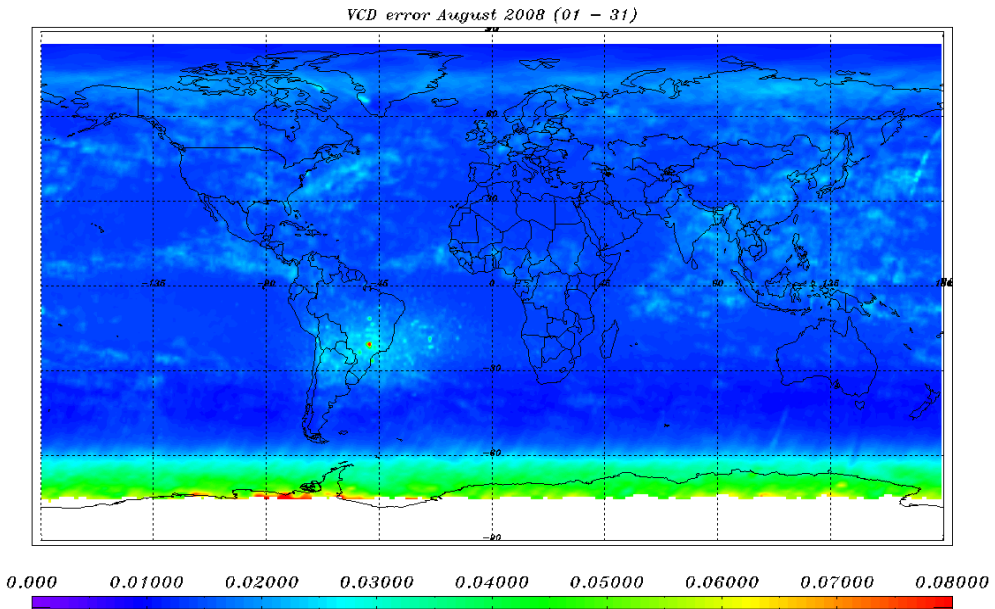


Figure 7-8: O₃ VCD error 01-31 August 2008



esa



DLR



serco

SCIAMACHY Bi-MONTHLY



page 57 of 62

7.2.3 Limb: Ozone profile averages

This paragraph reports on the quality check of SCIAMACHY limb profiles on a monthly basis, showing the results for Ozone limb profiles binned for two tangent height regions bins:

- 21.0 – 24.5 km (17th bin, bin index=16).
- 35.0 – 38.5 km (13th bin, bin index=12).

The data of the first half of each month (calendar days 1 - 15) and the second half (calendar days 16 - 31) are averaged for selected tangent heights into geolocation bins of 10 degrees longitude and 5 degrees latitude. The binning algorithm uses a single longitude and latitude value for the entire profile, being the value for the middle of the integration time as reported in the Geolocation Limb Dataset. The corresponding error is averaged as well.

The world maps of the averaged Ozone values show comparably low errors over the SAA region, which is not as expected. Investigation showed that the low SAA errors result from irregular conditions of the LIMB retrieval in that region. This issue will be included into the level 2 off-line disclaimer.

Figures 7.9 – 7.12 show the results for the months of July and August 2008 and for the two different tangent height regions.



esa



serco

SCIAMACHY BI-MONTHLY



7.2.3.1 Ozone limb profiles July 2008

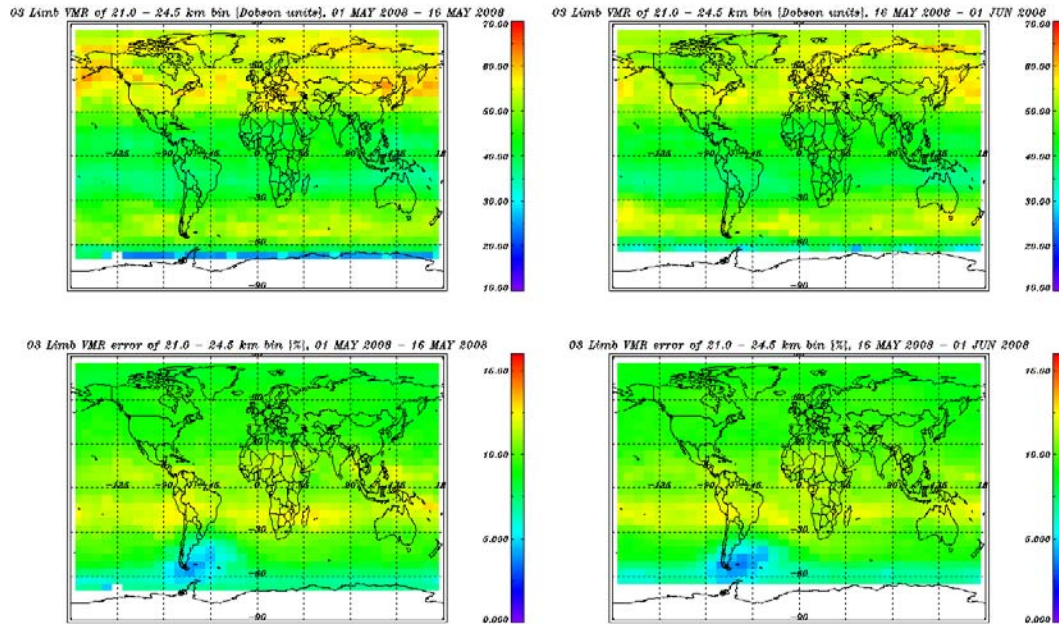


Figure 7-9 Limb Ozone profiles, binned over 21.0 - 24.5 km

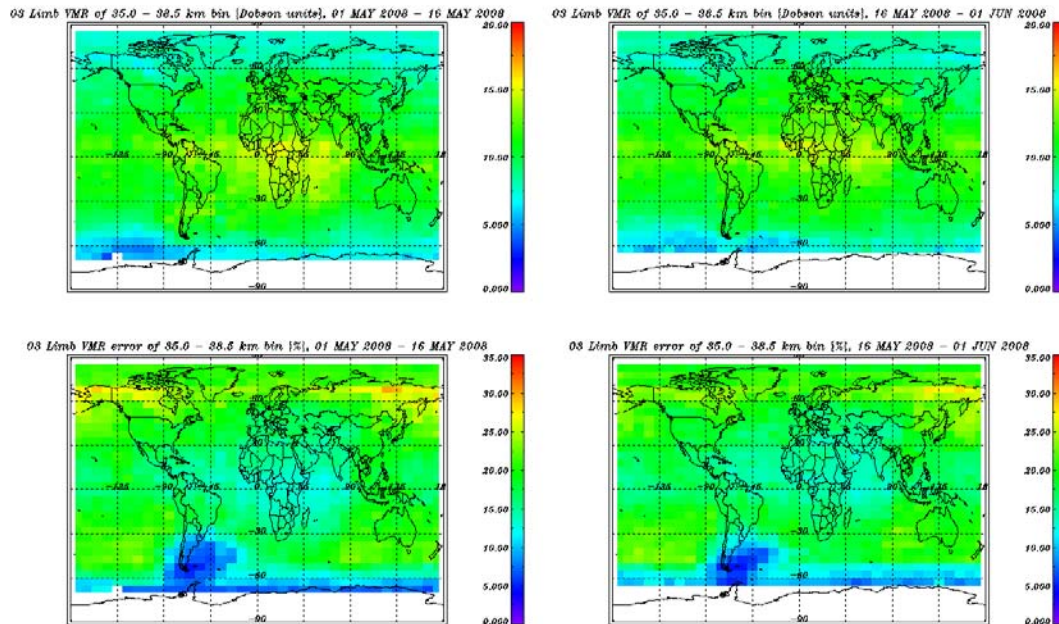


Figure 7-10 Limb Ozone profiles, binned over 35.0 - 38.5 km



esa



serco

SCIAMACHY BI-MONTHLY



7.2.3.2 Ozone limb profiles August 2008

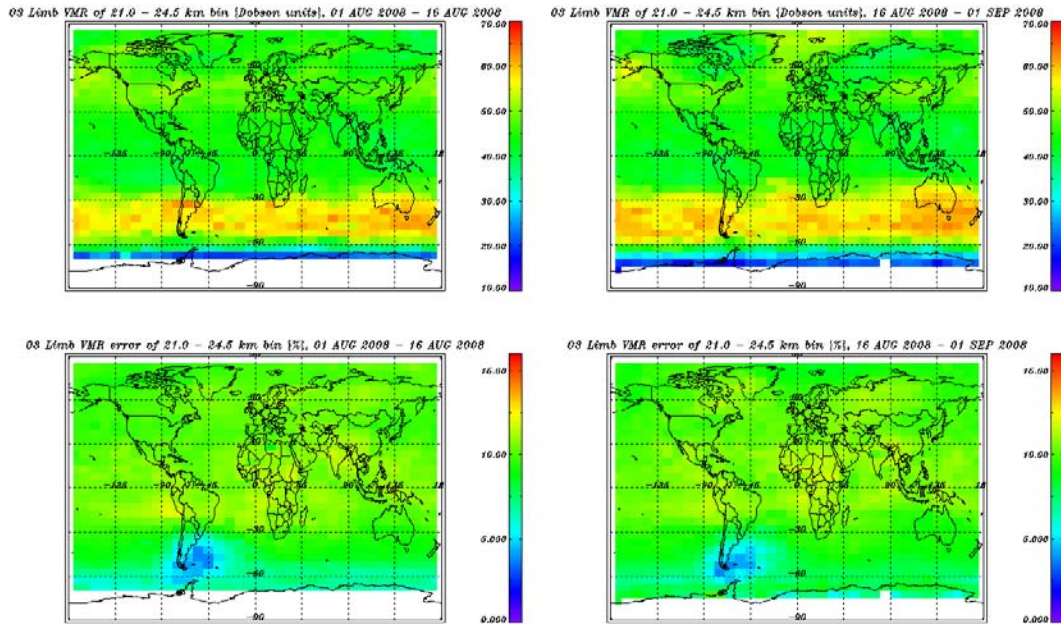


Figure 7-11: Limb Ozone profiles binned over 21.0 – 24.5 km

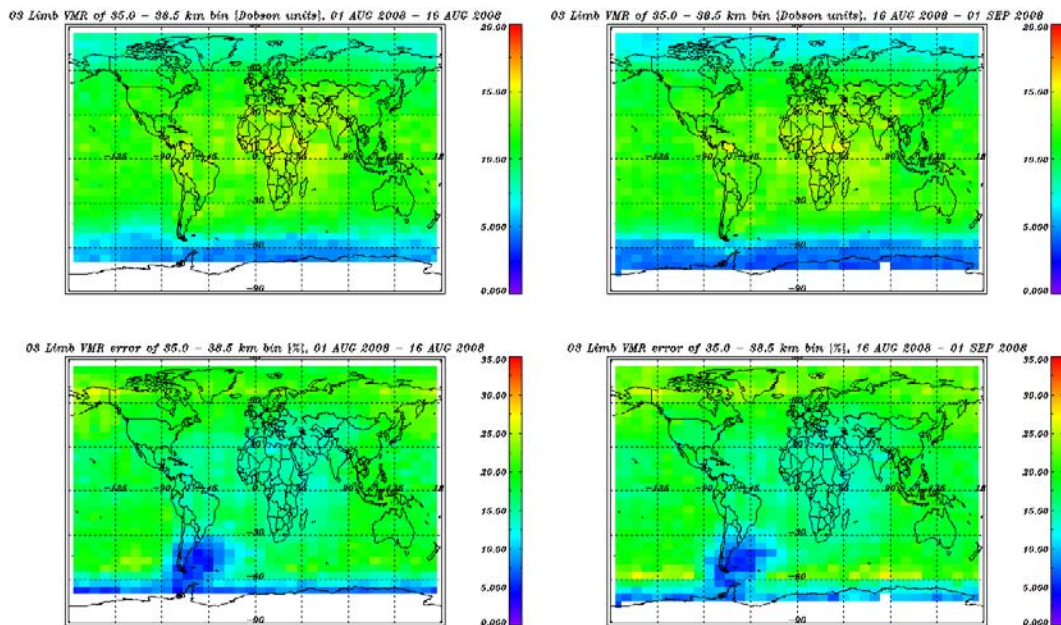


Figure 7-12: Limb Ozone profiles binned over 35.0 – 38.5 km



esa



DLR



serco

SCIAMACHY Bi-MONTHI



page 60 of 62

7.2.4 *Limb: NO₂ profile averages*

Analogous as for the limb Ozone profiles monthly averages for NO₂ limb averages were generated. The tangent height region chosen is:

- 24.5 – 28.0 km (15th bin, bin index=14).

As for the ozone averages the data of the first half of each month (calendar days 1 - 15) and the second half (calendar days 16 - 31) are averaged for selected tangent heights into geolocation bins of 10 degrees longitude and 5 degrees latitude. The binning algorithm used is the same as the described in 7.2.3. The corresponding error is averaged as well. Figures 7.13 – 7.14 show the results for the months of July and August 2008.



esa



serco

SCIAMACHY BI-MONTHLY

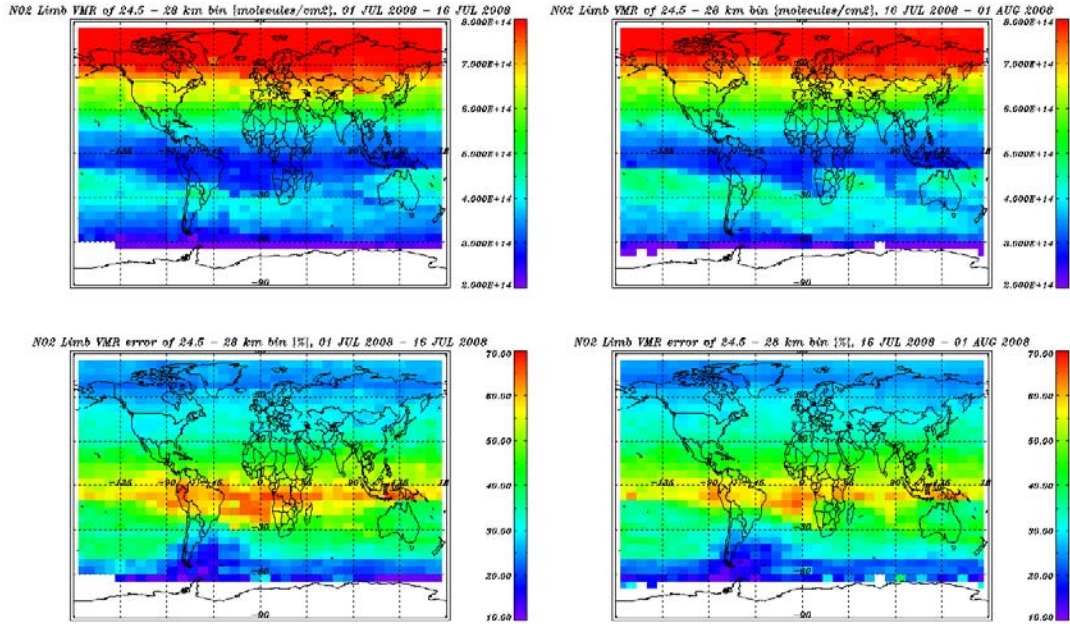


Figure 7-13 Limb NO₂ profiles binned over 24.5 - 28 km, July 2008

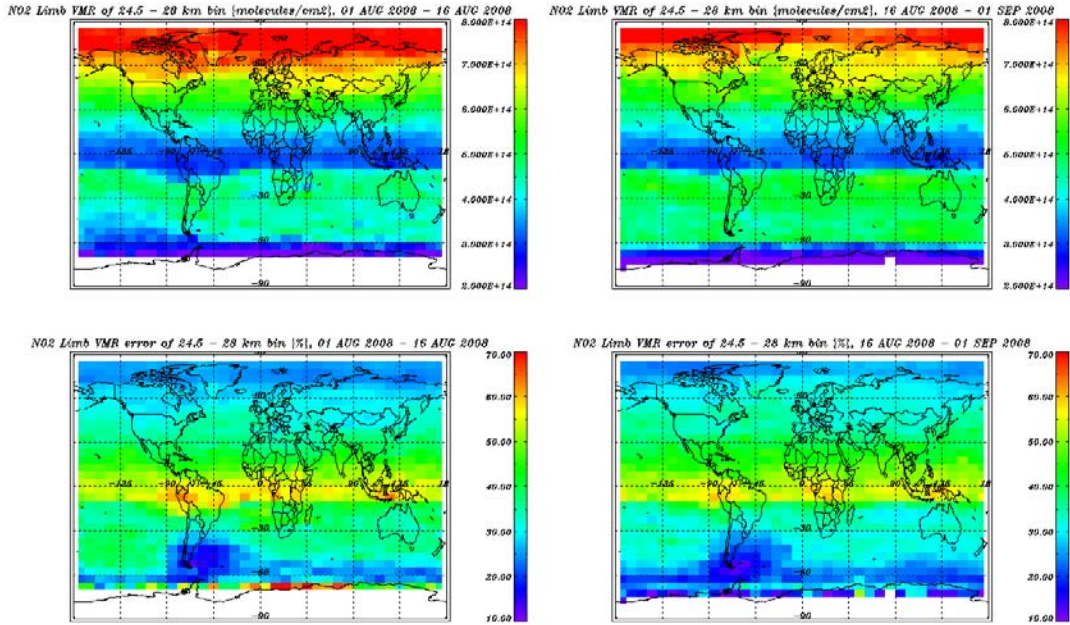


Figure 7-14 Limb NO₂ profiles binned over 24.5 - 28 km, August 2008



esa



DLR



serco

SCIAMACHY Bi-MONTHLY



page 62 of 62

8 VALIDATION ACTIVITIES AND RESULTS

Validation activities of products from re-processing, level 1 IPF 6.03 and level 2 off-line processor 3.01 have been performed. A preliminary validation meeting took place on 22 January 2008 at SRON and a second meeting at 26th March 2008 in Bremen.

The SCIAVALIG group has published the results of the Product Quality at

http://www.sciamachy.org/validation/documentation/technotes/SCIAVALIG/Summary_operational_product_quality_20080326.pdf

The results of the validation activity on the level 2 column products and level 2 profile products were also summarized in the last BMR of March-April 2008.