
/document title/ titre du document

SCIAMACHY BI-MONTHLY REPORT: NOVEMBER - DECEMBER 2008

prepared by/ <i>préparé par</i>	Angelika Dehn
reference/ <i>référence</i>	ENVI-SPPA-EOPG-TN-09-0002
issue/ <i>édition</i>	1
revision/ <i>révision</i>	0
date of issue/ <i>date d'édition</i>	22 January 2009
status/ <i>état</i>	
Document type/ <i>type de document</i>	Technical Note
Distribution/ <i>distribution</i>	

APPROVAL

Title <i>titre</i>	SCIAMACHY Bi-Monthly Report: November - December 2008	issue 1 <i>issue</i>	revision 0 <i>revision</i>
------------------------------	---	--------------------------------	--------------------------------------

author <i>auteur</i>	Angelika Dehn, IDEAS-SERCO, Manfred Gottwald, SOST-DLR, Stefan Noël, SOST-IFE, Richard von Hees, SRON	date <i>date</i>	19/01/2009
--------------------------------	--	----------------------------	------------

approved by <i>approuvé by</i>	T. Fehr ESA/ESRIN, D/EOP-GQ G. Lichtenberg, IDEAS-DLR	date <i>date</i>	21/01/2009
--	--	----------------------------	------------

CHANGE LOG

<i>reason for change /raison du changement</i>	<i>issue/issue</i>	<i>revision/revision</i>	<i>date/date</i>

CHANGE RECORD

Issue: 1 Revision: 0

<i>reason for change/raison du changement</i>	<i>page(s)/page(s)</i>	<i>paragraph(s)/paragraph(s)</i>

TABLE OF CONTENTS

1	INTRODUCTION	5
1.1	Scope	5
1.2	References	5
1.3	Acronyms and Abbreviations.....	7
2	SUMMARY	9
3	INSTRUMENT CONFIGURATION AND PERFORMANCE	11
3.1	In-Flight Status and Performance	11
3.1.1	Planned Operations and Measurements (SOST-DLR)	11
3.1.2	Instrument Measurement Status (SOST-DLR)	12
3.1.3	Executed Operations and Measurements (SOST-DLR)	12
3.1.4	Performance Monitoring - System (SOST-DLR)	15
3.1.5	Performance Monitoring - Light Path (SOST-IFE)	22
3.1.5.1	Science Channel Averages	22
3.1.5.2	Spectral light path monitoring results	25
3.1.5.3	PMD monitoring results.....	30
4	DATA AVAILABILITY STATISTICS	32
4.1	Downlink/Acquisition Performance	32
4.2	Statistics on unconsolidated data (SCI_NL__0P, SCI_NL__1P)	32
4.3	Statistics on consolidated data	33
4.3.1	Anomalies on level 0 consolidated data products	33
4.3.2	Availability of consolidated SCI_NL__1P products	33
4.4	Statistics on reprocessed data.....	34
4.4.1	Level 1b re-processing	34
4.4.2	Level 2 re-processing	34
5	LEVEL 1 PRODUCT QUALITY MONITORING	36
5.1	Processor Configuration.....	36
5.1.1	Version	36
5.1.2	Anomalies	37
5.2	Auxiliary Data Files	38
5.2.1	Auxiliary Data File quality analysis.....	39
5.2.1.1	SMR analysis	39
5.2.1.2	LK1 analysis	44
5.2.1.2.1	Leakage Constant part.....	44
5.2.1.2.2	Leakage Variable part	47
5.3	Bad and Dead Pixel Mask	48

5.4	Pointing Performance.....	49
5.5	SciaL1c tool	49
6	LEVEL 2 NRT PRODUCT QUALITY MONITORING.....	50
6.1	Processor Configuration.....	50
6.1.1	Version	50
6.1.2	Auxiliary Data Files	50
7	LEVEL 2 OFF-LINE PRODUCT QUALITY MONITORING.....	51
7.1	Processor Configuration.....	51
7.1.1	Version	51
7.1.2	Anomalies	52
7.1.3	Auxiliary Data Files	52
7.2	Monitoring results	53
7.2.1	Nadir: NO ₂ consistency checking	53
7.2.1.1	Nadir: VCD NO ₂ map November 2008	54
7.2.1.2	Nadir: VCD NO ₂ map December 2008.....	55
7.2.2	Nadir: O ₃ consistency checking	56
7.2.2.1	Nadir: VCD O ₃ map November 2008	57
7.2.2.2	Nadir: VCD O ₃ map December 2008.....	58
7.2.3	Limb: Ozone profile averages	59
7.2.3.1	Ozone limb profiles November 2008.....	60
7.2.3.2	Ozone limb profiles December 2008	61
7.2.4	Limb: NO ₂ profile averages	62
8	VALIDATION ACTIVITIES AND RESULTS.....	64

-
- [4] SCIAMACHY cL0 Statistics 2003, PO-TN-DLR-SH-0013, Issue 1, Rev. 0 14 April 2005
- [5] 'SCIAMACHY Consolidated Level 0: Statistics for the Year 2005', PO-TN-DLR-SH-0014, Issue 1, Rev. 0 11 July 2006
- [6] 'Summary of the Atmospheric Chemistry Instrument Validation results as presented at the ACVE-3 Workshop', Paul Snoeij, Ankie Pitters, Herbert Fischer, Yasjka Meijer, Jean-Christopher Lambert, Thorsten Fehr
- [7] 'SCIAMACHY Extra Misalignment Model', PO-TN-DLR-SH-0016 Issue 1, M. Gottwald, E. Krieg, DLR-IMF, C. von Savigny, S. Noël, K. Bramstedt IUP-IFE, 07 March 2007
- [8] 'Verification of the extra misalignment correction in the SCIAMACHY IPF 6.03 processor', TN-IUP/IFE-2007-cvs-02, C. von Savigny, A. Dehn, H. Bovensmann, J. Steinwagner IUP-IFE, 05 July 2007
- [9] 'SCIAMACHY SciCal Tool Change of Leakage ADF generation' ENV-TN-DLR-SCIA-0094, Issue 1.0, Bernd Aberle, Günter Lichtenberg, 08 November 2007



esa



DLR



ife

serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 7 of 64

1.3 *Acronyms and Abbreviations*

ADC	Analogue to Digital Converter
ADF	Auxiliary Data File
ANX	Ascending Node Crossing
AOCS	Attitude and Orbit Control System
APSM	Aperture Stop Mechanism
ASM	Azimuth Scan Mechanism
ATC	Active Thermal Control
BMR	Bi-Monthly Report
CA	Corrective Action
CCA	Communication Area
CTI	Configurable Transfer Item
DAC	Digital Analogue Converter
DLR-IMF	Deutsches Zentrum fuer Luft- und Raumfahrt
DPQC	Data Processing Quality Control
EOL	End of Life
ESM	Elevation Scan Mechanism
FPN	Fixed Pattern Noise
HK	Housekeeping
HSM	High Speed Multiplexer
ICE	Instrument Control Electronics
ICU	Instrument Control Unit
IDEAS	Instrument Data quality Evaluation and Analysis Service
IECF	Instrument Engineering and Calibration Facilities
IOM	Instrument Operation Manual
LK1	Leakage Current Auxiliary File (SCI_LK1_AX)
LLI	Life Limited Item
LOS	Line of Sight
MCMD	Macro Command
MPH	Main Product Header
MPS	Mission Planning Schedule
MR	Monthly Report
NCWM	Nadir Calibration Window Mechanism
NDFM	Neutral Density Filter Mechanism
NIVR	Netherlands Agency for Aerospace Programmes
NNDEC	Non-nominal Decontamination
NRT	Near Real Time
OAR	Observation Anomaly Report
OBM	Optical Bench Module
OCR	Operations Change Request
OSDF	Orbit Sequence Definition File
OSV	Orbit State Vector
PCF	Product Control Facility



esa



DLR



ife

serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 8 of 64

PDHS	Payload Data Handling Station (PDS)
PDHS-E	Payload Data Handling Station – ESRIN
PDHS-K	Payload Data Handling Station – Kiruna
PDS	Payload Data Segment
PE1	Pixel to Pixel/ Etalon Auxiliary File (SCI_PE1_AX)
PLSO	Payload Switch OFF
PMD	Polarization Measurement Device
QUADAS	Quality Analysis of Data from Atmospheric Sounders
QWG	Quality Working Group
SAA	South Atlantic Anomaly
SCIAMACHY	Scanning Imaging Absorption Spectrometer for Atmospheric Chartography
SCICAL	SCIAMACHY Calibration tool
SEU	Single Event Upset
SLS	Spectral Line Source
SM	Service Module
SMR	Sun Mean Reference
SOST	SCIAMACHY Operations Support Team
SP1	Spectral Calibration Auxiliary File (SCI_SP1_AX)
SU1	Sun Reference Auxiliary File (SCI_SU1_AX)
SZA	Sun Zenith Angle
TC	Thermal Control
TCFoV	Total Clear Field of View
TOA	Top of Atmosphere
TRUE	Tangent height Retrieval by UV-B Exploitation
VCD	Vertical Column Density
WLS	White Light Source
WUR	Wageningen University and Research
YSM	Yaw Steering Mode

2 SUMMARY

- During the reported period SCIAMACHY measurements were nominal with respect to planning, besides two unavailability period during following orbits:
 - 34894 - 34906 (01-02 November 2008) SCIAMACHY HTR/RF
 - 35125 - 35133 (18-19 November 2008) ENVISAT planned OCM manoeuvre
- A non nominal decontamination has been performed during the period 19 December 2008 – 08 January 2009.
- Monthly Calibration was executed during Orbits:
 - 35051-35055 (12/13-Nov-2008)
 - 35466-35470 (11/12-Dec-2008)
- Occultation measurements with the moon rising on night side were executed as during:
 - 35047-35071 (12-Nov-2008 until 14-Nov-2008)
 - 35460-35481 (11-12-Dec-2008)
- Two OCRs were implemented successfully between orbits:
 - 35499-35505 (14-Dec-2008)
OCR_038 Full limb mode orbits
 - 34940-35341 (04-Nov – 03 Dec 2008)
(OCR_39: Cluster 16 and 18 short integration times)
- No TC adjustments was required
- Light Path monitoring:
 - Channel 1&2: degradation in UV for all light paths involving ESM increases with a rate of about 0.5 % per month. The average throughput loss in channel 1 is currently ca. 50%.
 - Channel 3 small throughput loss (about 4%)
 - Channel 4 remained stable
 - Channel 5-6 small decrease, less than 0.5%
 - Channel 7 shows a slight increase
 - Channel 8 throughput remains stable at about 64-66%



esa



DLR



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0-

page 10 of 64

- PMD monitoring:
 - UV degradation visible in science channels is also visible in PMD 1 to 3
 - PMD 4 and 7 show a large decrease in throughput
 - PMD 6 results still under investigation



3 INSTRUMENT CONFIGURATION AND PERFORMANCE

3.1 In-Flight Status and Performance

Detailed operations, planning and instrument status information can be found on the website of the *SCIAMACHY Operations Support (SOST)* under <http://atmos.caf.dlr.de/projects/scops/>. These pages are maintained on a daily basis and show the history and actual progress of the SCIAMACHY mission.

3.1.1 Planned Operations and Measurements (SOST-DLR)

The reporting period covers the orbits 34883 (ANX = 01-Nov-2008, 00:41:34.621) to 35756 (ANX = 31-Dec-2008, 23:57:19.891). Two OSDFs specified the planning baseline.

Orbit		ANX		OSDF
Start	Stop	Start	Stop	
34883	35312	01-Nov-2008 00:41:34.621	30-Nov-2008 23:31:27.795	MPL_OSD_SHVSH_20080926_010101_00000000_35010001_20081101_001436_20081201_011202.N1
35313	35756	01-Dec-2008 01:12:03.723	31-Dec-2008 23:57:19.891	MPL_OSD_SHVSH_20081029_010101_00000000_35020001_20081201_011205_20090101_013754.N1

Table 3-1: SCIAMACHY OSDF planning files from November – December 2008

Measurements were nominal, i.e. timelines executed limb/nadir sequences with wide swath settings on the dayside of the orbit. Each month they were interleaved with 2 blocks of 14-15 orbits each where the limb state was replaced by the *limb_mesosphere_thermosphere* state (see below). In-flight calibration and monitoring measurements occurred on daily, weekly and monthly timescales according to the mission scenarios. Regular monthly calibration was scheduled between orbits

- 35051-35055 (12/13-Nov-2008)
- 35466-35470 (11/12-Dec-2008)

The moon was in the limb TCFoV between orbits

- 34988-35071 (08-Nov-2008 until 14-Nov-2008)
- 35410-35488 (07-Dec-2008 until 13-Dec-2008)


Occultation measurements with the moon rising on the nightside could be executed between orbits

- 35047-35071 (12-Nov-2008 until 14-Nov-2008)
- 35460-35481 (11/12-Dec-2008)

Two OCR were successfully implemented. These were



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 12 of 64

- OCR_038 (*Full limb mode orbits*): Between orbits 35499-35505 (14-Dec-2008) limb only measurements (wide swath settings) were executed on the dayside of the orbit.
- OCR_039 (*Cluster 16 and 18 short integration times*): Execution started in orbit 34940 (04-Nov-2008) and ended in orbit 35341 (03-Dec-2008). Co-adding factors in channel 3 were modified as required. Some channel 6 and 7 co-adding factors needed modifications to compensate for the increased data rate.

In orbit 34922 the new *limb_mesosphere_thermosphere* state, which was previously tested several times in OCR_036 (*SCIAMACHY measurements in the mesosphere and lower thermosphere*) became permanent.

Orbit		UTC		Remark
Start	Stop	Start	Stop	
34965	34979	06-Nov-2008 17:43:40	07-Nov-2008 17:12:03	
35199	35213	23-Nov-2008 02:03:47	24-Nov-2008 01:32:10	MIPAS upper atmosphere mode
35341	35356	03-Dec-2008 00:08:49	04-Dec-2008 01:17:48	MIPAS upper atmosphere mode
35556	35571	18-Dec-2008 00:37:34	19-Dec-2008 01:46:43	

Table 3-2: Scheduled *limb_mesosphere_thermosphere* measurements in November – December 2008

3.1.2 Instrument Measurement Status (SOST-DLR)

The final flight status for states and timelines was changed in orbit 34922 (03-Nov-2008) with the upload of the settings of the new permanent state *limb_mesosphere_thermosphere* (lmt01 – ID 55, replacing the unused *moon_troposphere* state). In addition the new timeline set 35 replaced the set 34 since the lmt01 state required to modify the sequence of timelines in the on-board store.

3.1.3 Executed Operations and Measurements (SOST-DLR)

Measurements and instrument availability

The OSDF planning files have been scheduled as requested except for two periods:

- Orbit 34894-34906 (01/02-Nov-2008): Transfer to HTR/RF due to a *I0105 Out-of-Limit* (latch-up detection) anomaly, likely caused by a SEU.
- Orbit 35125-35133 (18/19-Nov-2008): Due to a planned orbit control manoeuvre (OCM) a transfer to MEASUREMENT IDLE occurred.



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 13 of 64

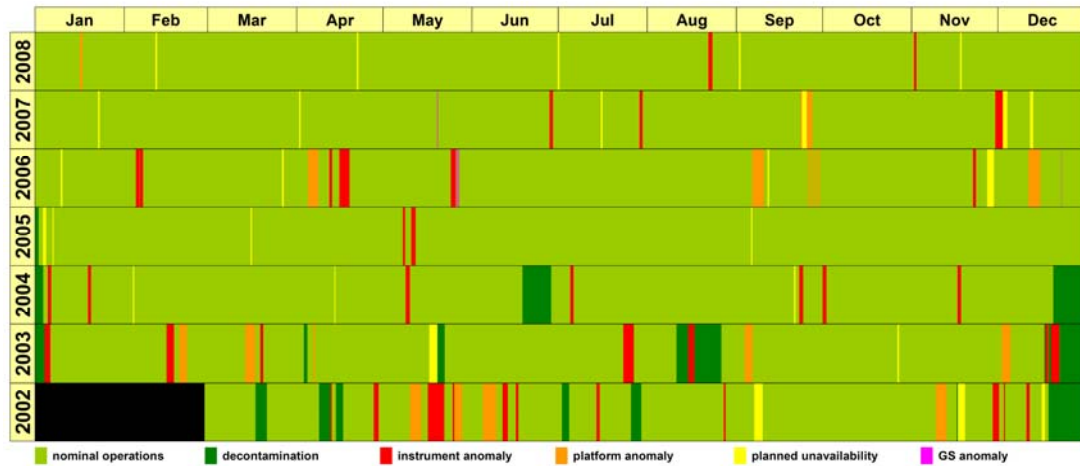


Fig. 3-1: Current instrument availability status including the reporting period

Detector thermal adjustment (TC)

No TC adjustment was required. The TC settings remained at

- DAC1 = 0.53 W
- DAC2 = 0.50 W
- DAC3 = 0.00 W

Decontamination

For the first time since 2004/2005 a non-nominal decontamination (NNDEC) was scheduled at the end of December. It started in orbit 35574 (19-Dec-2008, 08:20 UTC). End of the warmup phase and start of cooldown phase occurred on 03-Jan-2009 after a total warmup duration of 374 hr. The NNDEC implemented the approach with a transfer to STANDBY (37 hr after cooldown start) with subsequent transfer back to HEATER 8.5 hr later and finally to MEASUREMENT. This approach is intended to activate the suspected second cold-trap which is considered responsible for maintaining a relatively ice-free optical path in channels 7 & 8. Instrument warmup was nominal until the end of the reporting period.

Measurements continued throughout the NNDEC, except for the short period in STANDBY and HEATER modes during the cooldown phase. Due to the elevated temperatures of the detectors and the OBM the measurement data are of reduced quality.



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 14 of 64

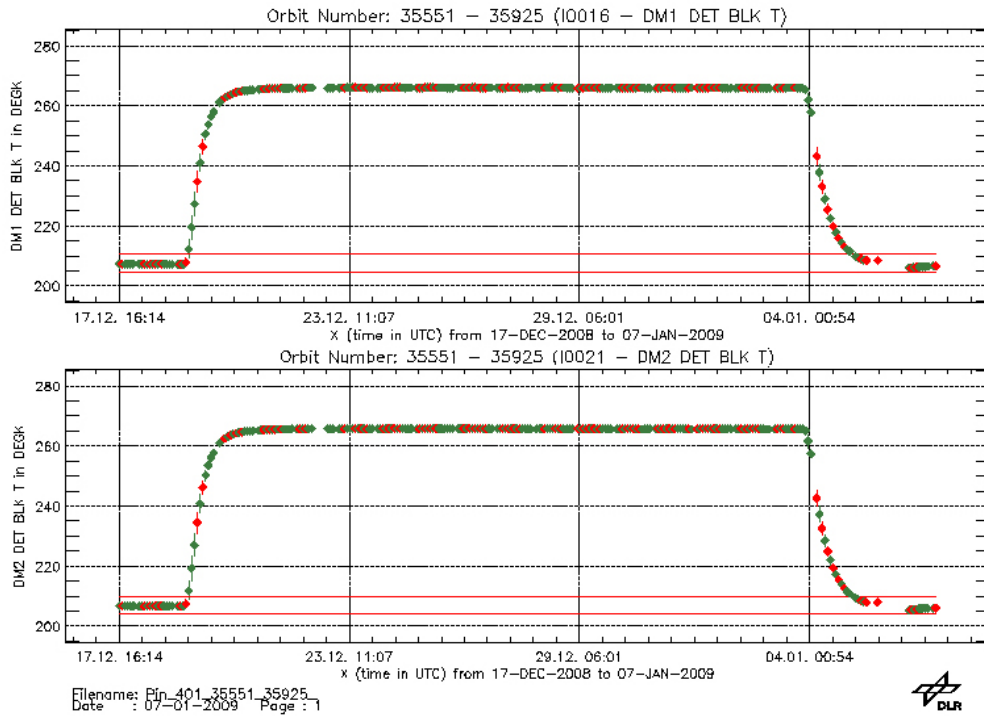


Fig. 3-2: Representative detector temperatures (detector 1 & 2) during warm-up of the NNDEC


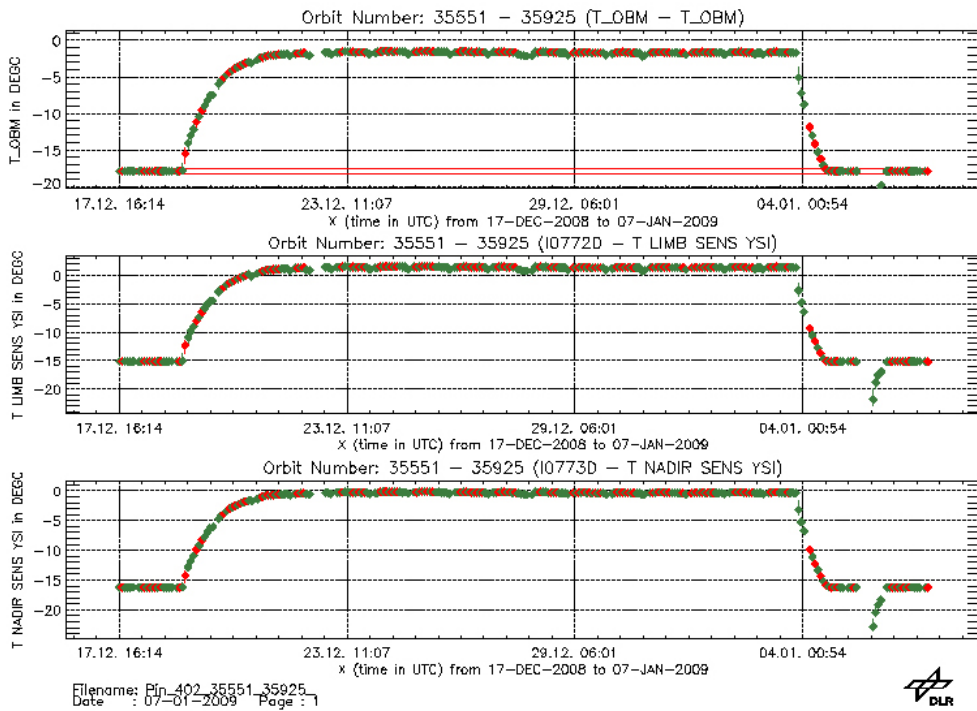


Fig. 3-3: OBM temperatures during warm-up of the NNDEC



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 15 of 64

APSM/NDFM health checks & PMD ADC cal

In the reporting period 1 APSM/NDFM health check and 2 PMD ADC calibrations were executed. All showed nominal results.

APSM/NDFM			PMD ADC	
Orbit	ANX	Result	Orbit	ANX
n.a.	n.a.	n.a.	35245	26-Nov-2008 08:43:41
35545	17-Dec-2008 07:46:15	ok	35546	17-Dec-2008 09:22:45

Table 3-3: APSM/NDFM health check and PMD ADC calibration

Anomalies

One major instrument anomaly had occurred triggering a transfer to a mode lower than MEASUREMENT. This was due to the I0105 Out-of-Limit (latch-up detection), most likely caused by a SEU in orbit 34894 (01-Nov-2008, 19:58:08 UTC). Because the anomaly is listed as 'expected', recovery was started immediately and the MPS timeline continued in orbit 34906 (02-Nov-2008, 16:18:52 UTC).

Orbit	Date	Entry - UTC	Level	Entry Type	ID Content/Transition	Mode	Remark
34894	01-NOV-2008	2008.306.19.58.08.464	Instrument	HK PARAMETER LIMIT EXCEEDING	84 (I0105)	HTR/RF	Single Event Upset (SEU)
34894	01-NOV-2008	2008.306.19.58.08.468	Instrument	AUTONOMOUS SWITCHING	goto HEATER/REFUSE	HTR/RF	Single Event Upset (SEU)
34894	01-NOV-2008	2008.306.20.11.36.996	Instrument	MACROCOMMAND EXECUTION ENTRY	START TIMELINE	HTR/RF	Complementary failure
34894	01-NOV-2008	2008.306.20.11.37.007	Instrument	COMPLEMENTARY FAILURES	---	HTR/RF	Complementary failure
34894	01-NOV-2008	2008.306.20.11.37.011	Instrument	MACROCOMMAND EXECUTION ENTRY	START TIMELINE	HTR/RF	Complementary failure
In total 7 Complementary Failures until 2008.306.22.17.58.754							
34896	01-NOV-2008	2008.306.22.17.58.743	Instrument	MACROCOMMAND EXECUTION ENTRY	START TIMELINE	HTR/RF	Complementary failure
34896	01-NOV-2008	2008.306.22.17.58.754	Instrument	MACROCOMMAND EXECUTION ENTRY	---	HTR/RF	Complementary failure
34896	01-NOV-2008	2008.306.22.17.58.754	Instrument	COMPLEMENTARY FAILURES	START TIMELINE	HTR/RF	Complementary failure

Table 3-4: Instrument anomalies between November and December 2008

3.1.4 Performance Monitoring - System (SOST-DLR)

Detector and OBM temperatures are monitored according to the requirements of the IOM [1]. It requests to ensure that the average temperature per orbit remains within the specified limits.

Detector temperatures

For each detector the average temperatures per orbit are determined from HK telemetry parameters. Fig. 3-4 displays the temperatures of all 8 detectors. Colour coding is as on the operational monitoring website, i.e. data from orbits with HK telemetry coverage > 90% are shown in red, for < 90% in green. Minimum/maximum values per orbit are indicated as vertical bars. The temperature limits of each detector are shown as horizontal lines.



esa



DLR



ife

serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 16 of 64

The very short gap around orbit 34900 is the reported SEU anomaly. The gap for orbits > 35574 is caused by the scale of the temperature axes. In the warmup phase of the NNDEC the detector temperatures were increased beyond the scale used.

OBM temperatures

The average OBM temperature per orbit is determined from specific HK telemetry parameters. In addition power readings for the ATC heaters are monitored. Temperatures and ATC heater powers are given in Fig. 3-5 and 3-6. Colour coding is as in Fig. 3-4.

OBM temperatures and ATC heater powers remained within limits. The gap for orbits > 35574 in the OBM temperature graph is caused by the scale of the temperature axes. In the heater power display the maximum commanded power during NNDEC is obvious.

PMD ADC status

The status of the PMD ADC is monitored according to the requirements of the IOM [1]. It requests to ensure that no glitches occur caused by an SEU.

No PMD ADC glitches have been detected.



esa





serco

SCIAMACHY Bi-MONTHLY R





issue 1 revision 0

page 17 of 64

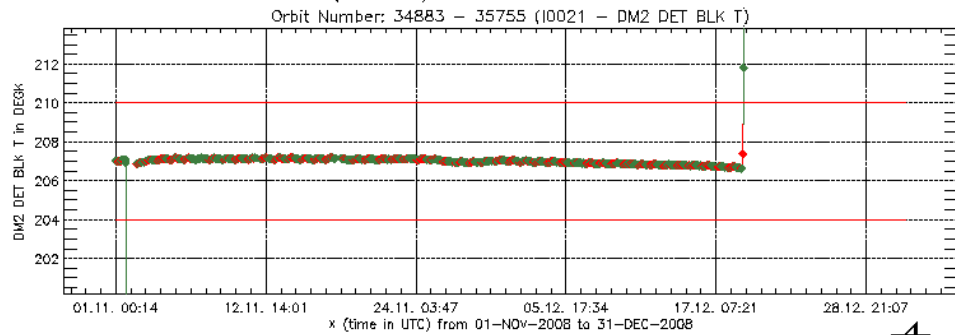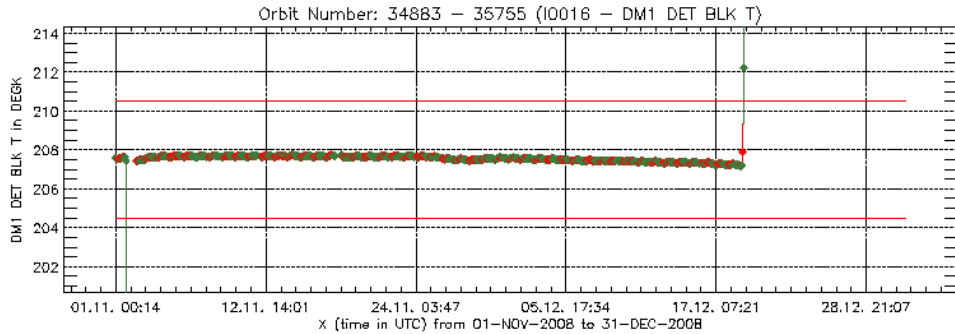

Filename: Pin_401_34883_35755_ Date : 08-01-2009 Page : 1

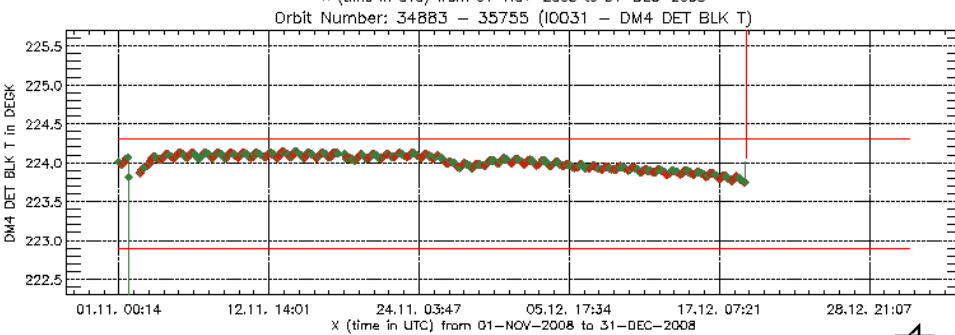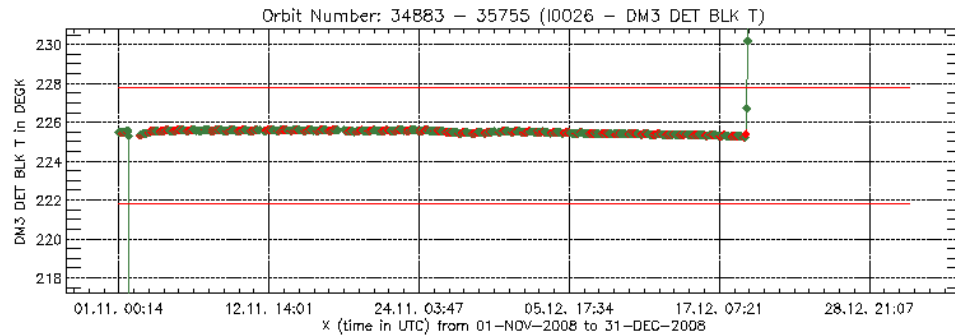

Filename: Pin_401_34883_35755_ Date : 08-01-2009 Page : 1





esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 18 of 64

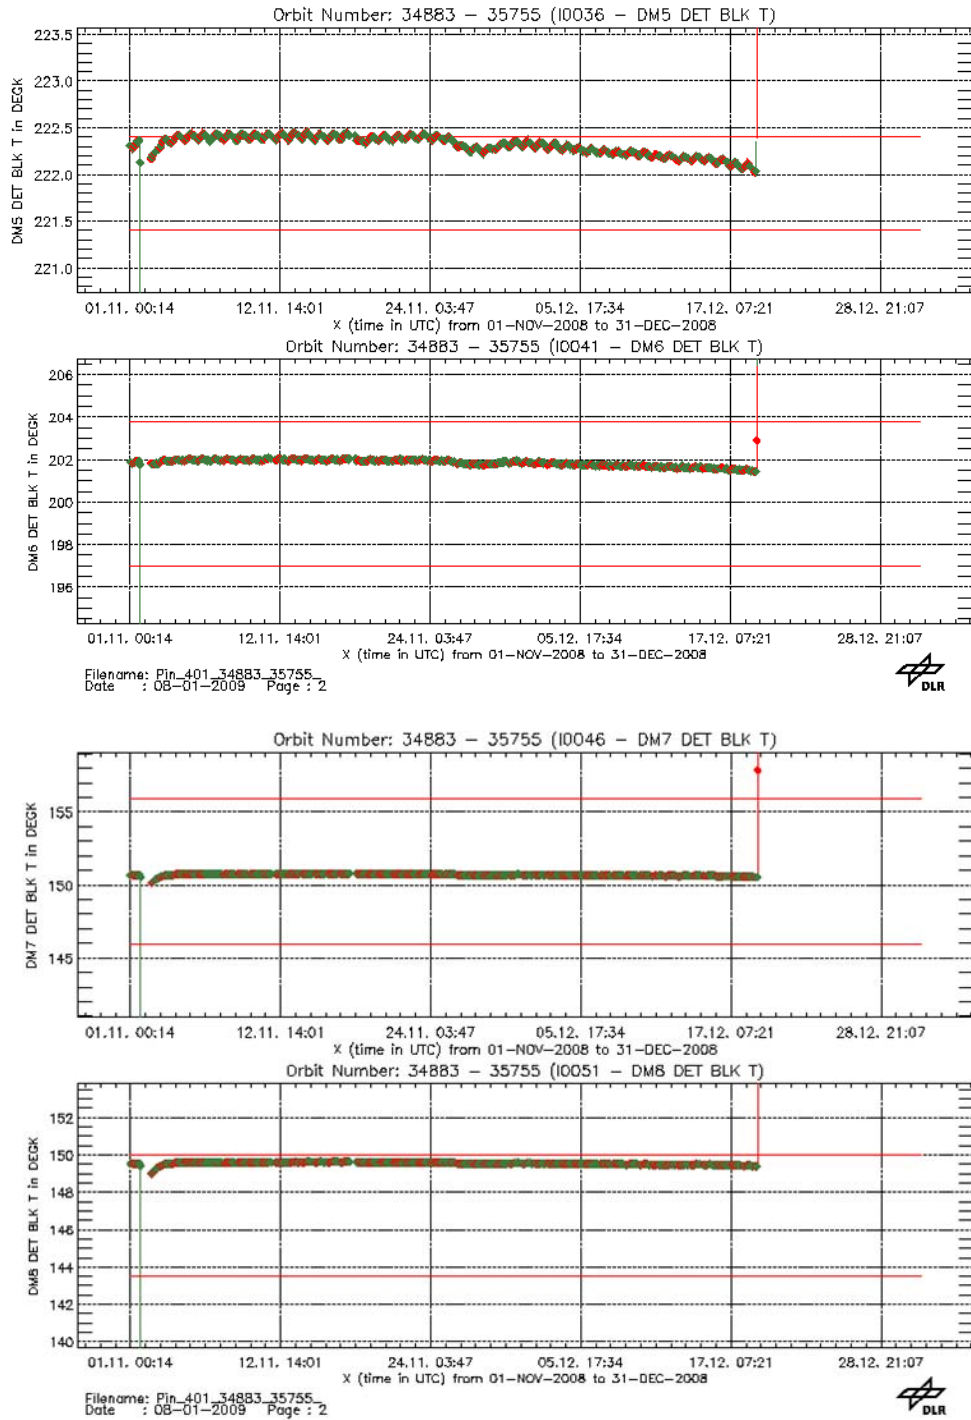


Fig. 3-4: Detector temperatures



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 19 of 64

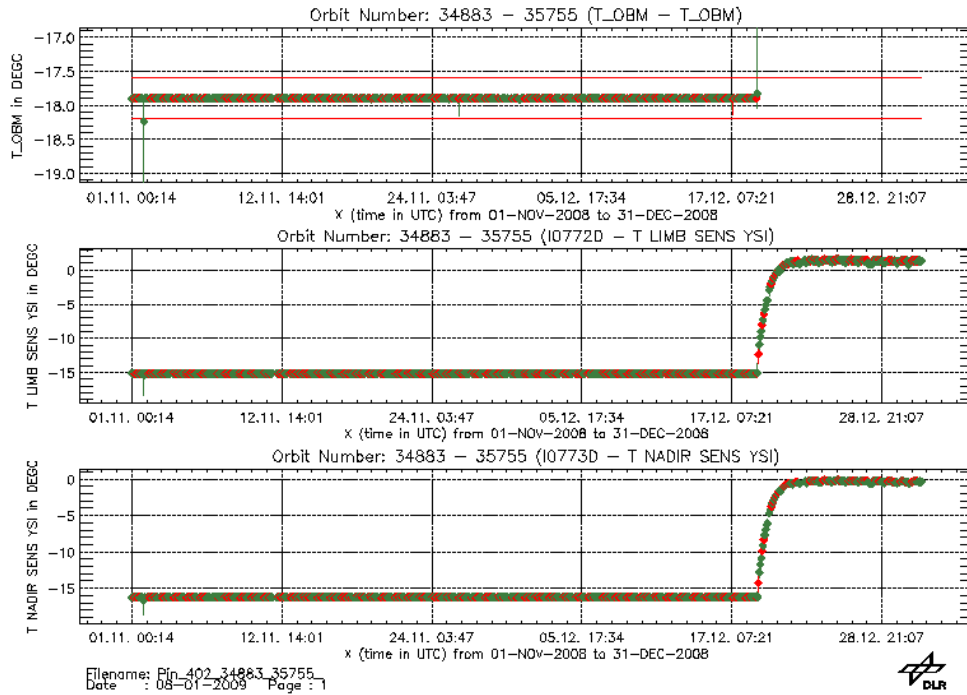


Fig. 3-5: OBM temperatures (top: derived OBM, middle: limb sensor, bottom: nadir sensor)

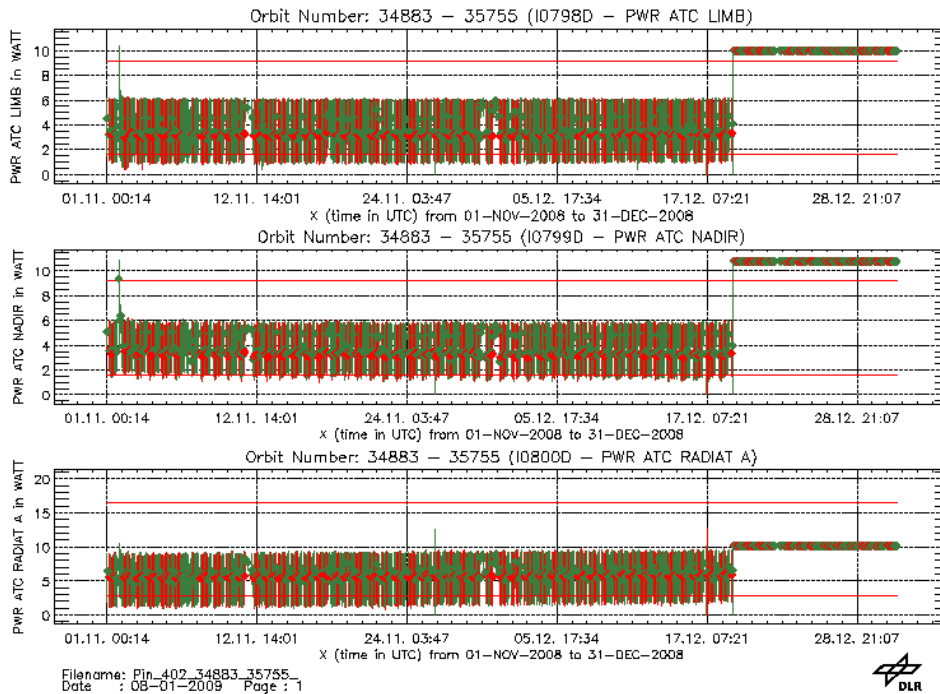


Fig. 3-6: ATC heater power (top: ATC limb, middle: ATC nadir, bottom: ATC Rad A)



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 20 of 64

LLI status

Life Limited Items are monitored based on analysis of the

- OSDF: This yields a predicted LLI usage.
- Report format: This counts the actual LLI switches or used LLI cycles. No WLS/SLS burning times can be derived thereof.

In addition, the in-flight usage of the cryogenic heat pipe is recorded. This subsystem has a limited number of cycles. Each decontamination increases the accumulated number of cycles by 1.

At the end of the reporting period the fractional usage of the LLI relative to the allowed in-flight budget was (based on OSDF prediction)

- NDFM: 0.46
- APSM: 0.42
- NCWM (sub-solar port): 0.78
- WLS (switches): 0.15
- WLS (burning time): 0.28
- SLS (switches): 0.06
- SLS (burning time): 0.01

For the NDFM and APSM the safety margin factor of 2 was no longer applied in the calculation of the fractional usage since it was found acceptable to stay below the figures of the lifetests. How the relative LLI usage has accumulated since launch can be seen in fig. 3-7. 'EOL' assumes a total mission lifetime until end of 2013.


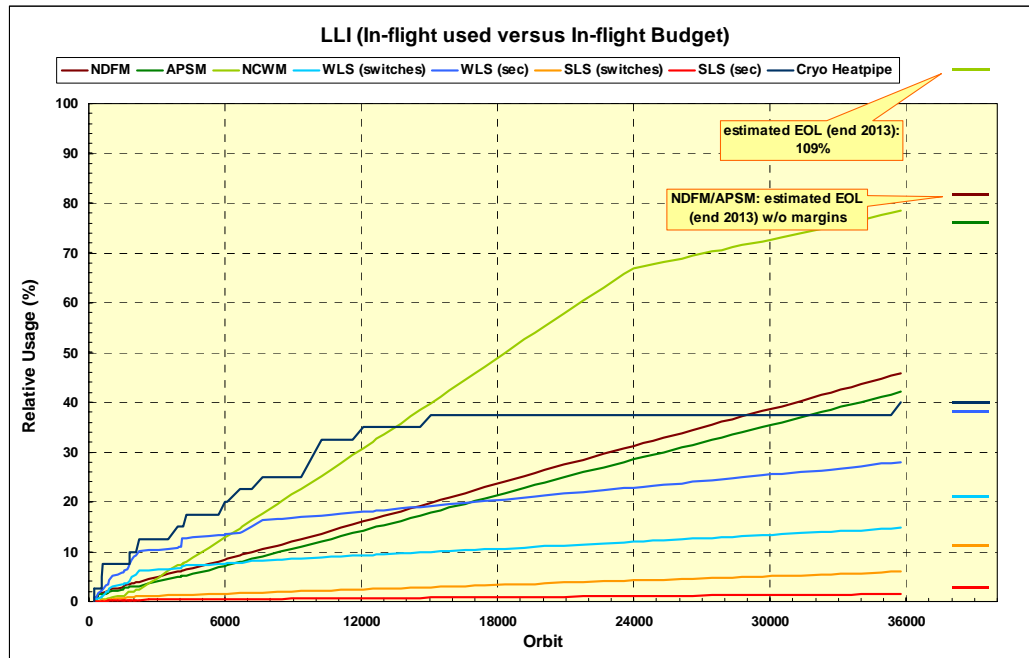


Fig. 3-7: Relative usage of LLI. 'EOL' is derived for a mission lifetime until 2013. For the NDFM and APSM no margin factors have been applied to derive the EOL relative usage.



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 21 of 64

Note that the NCWM usage exceeding 100% by the end of 2013 will be adjusted once the second phase of the mission extension has started in 2010.

The number of cryogenic heatpipe cycles increased by 1, i.e. the budget used increased to 40% of the allowed in-flight budget.

Time reference

The times quoted in all planning files refer to the reference orbit. Since the actual orbit differs from the reference orbit (e.g. orbit drift), the times given w.r.t. the reference orbit also do not reflect exactly the actual absolute times of events along the orbit (e.g. ANX, sunrise, sub-solar, moonrise, eclipse). The requirements for orbit maintenance may result in time differences of usually ± 10 sec. In some cases this value may even reach ± 1 min, however.

SOST monitors how the reference time deviates from the actual time. This is done by using the predicted time which comes very close to the actual = restituted time. If the predicted times are delayed w.r.t. the reference orbit, then the difference *predicted - reference time* is > 0 sec; in the other case it is < 0 sec.

Fig. 3-8 displays the time difference *predicted - reference*. Orbit manouevres cause distinct discontinuities.

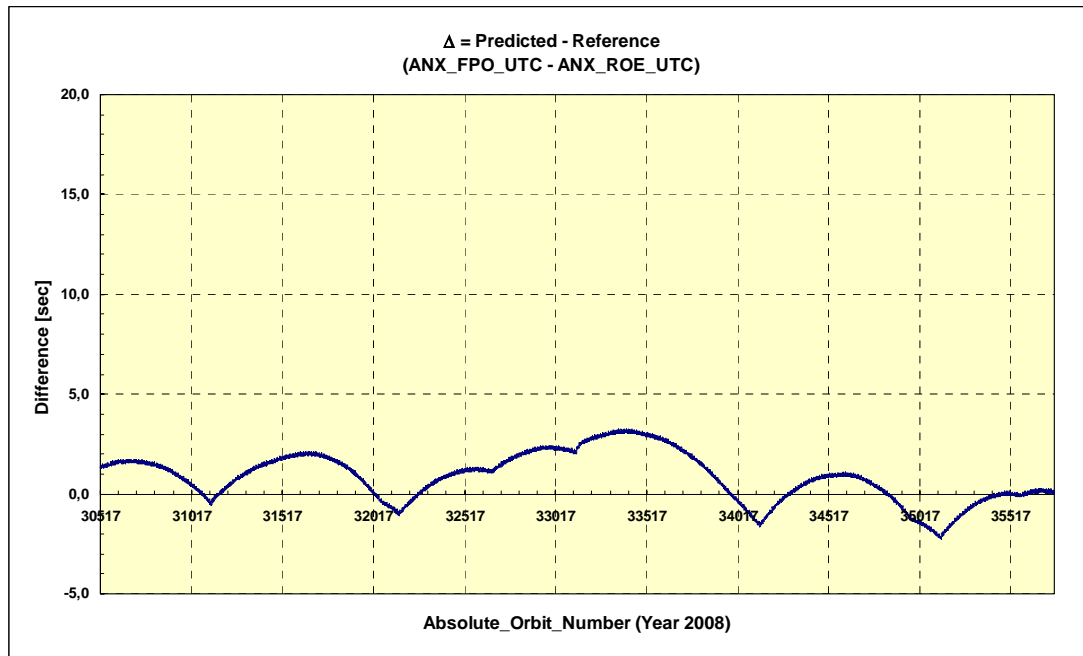


Fig. 3-8: Time difference between predicted and reference time.



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 22 of 64

3.1.5 Performance Monitoring - Light Path (SOST-IFE)

This section summarises the performance monitoring results for the two months time interval covered by this report.

A more detailed description of the performance monitoring activities is given in the SCIAMACHY Bi-Monthly Report May-June 2008.

3.1.5.1 Science Channel Averages

One part of the SOST long-term monitoring activities is the trend analysis of measurements with the internal White Light Source (WLS) and of observations of the unobscured Sun above the atmosphere. In order to monitor the different SCIAMACHY light paths solar measurements are taken in various viewing geometries: In limb/occultation geometry (via ASM and ESM mirrors), in nadir geometry (via the ESM mirror through the subsolar port), and via the so-called calibration light path involving the ASM mirror and the ESM diffuser. SCIAMACHY long-term monitoring comprises a regular analysis of these measurements. The plots displayed in Fig. 3.7 show results of these monitoring activities for the time interval November to December 2008.

Note that the reported channel averages are medians.

The light path monitoring results presented in this section may be regarded as a first step towards spectrally resolved monitoring factors (m-factors) which will be produced based on fully calibrated data.

Daily updated light path monitoring results can be found on the SOST or IUP web site (<http://www.iup.uni-bremen.de/sciamachy/LTM/LTM.html>).

The following specific features can be identified from the light path monitoring results during the time interval of this report:

- Overall, the instrument throughput changes were close to expectation.
- There are no data shown during the decontamination, i.e. after 19 December 2008.
- The increase (or missing decrease) in the throughput of the calibration light path is a seasonal effect.
- For all light paths involving the ESM mirror the degradation in the UV (channels 1 and 2) increases with a rate of about 0.5% per month, similar as in previous months. The maximum average throughput loss in channel 1 lies currently around 50% (for the limb light path). The throughput of the calibration light path is currently at about 86% in both channel 1 and channel 2, showing no decrease over the two months of this report.
- The overall degradation of channel 3 is very small (still about 4%) compared to channels 1 and 2. No significant decrease in throughput is observed within the two months of this report.
- Channel 4 remained stable.
- All channel 5 throughputs show a small decrease of less than 0.5%.



esa



DLR



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0-

page 23 of 64

-
- Channel 6 shows a throughput loss of less than 0.5% in two months; an increasing loss rate (as observed during the period of the previous report) can therefore not be confirmed.
 - The throughput in channel 7 shows a slight increase.
 - A throughput decrease of less than about 0.5% in two months for all light paths is visible in channel 8 transmission. Currently, the throughput lies for all light paths at around 64-66%.



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 24 of 64


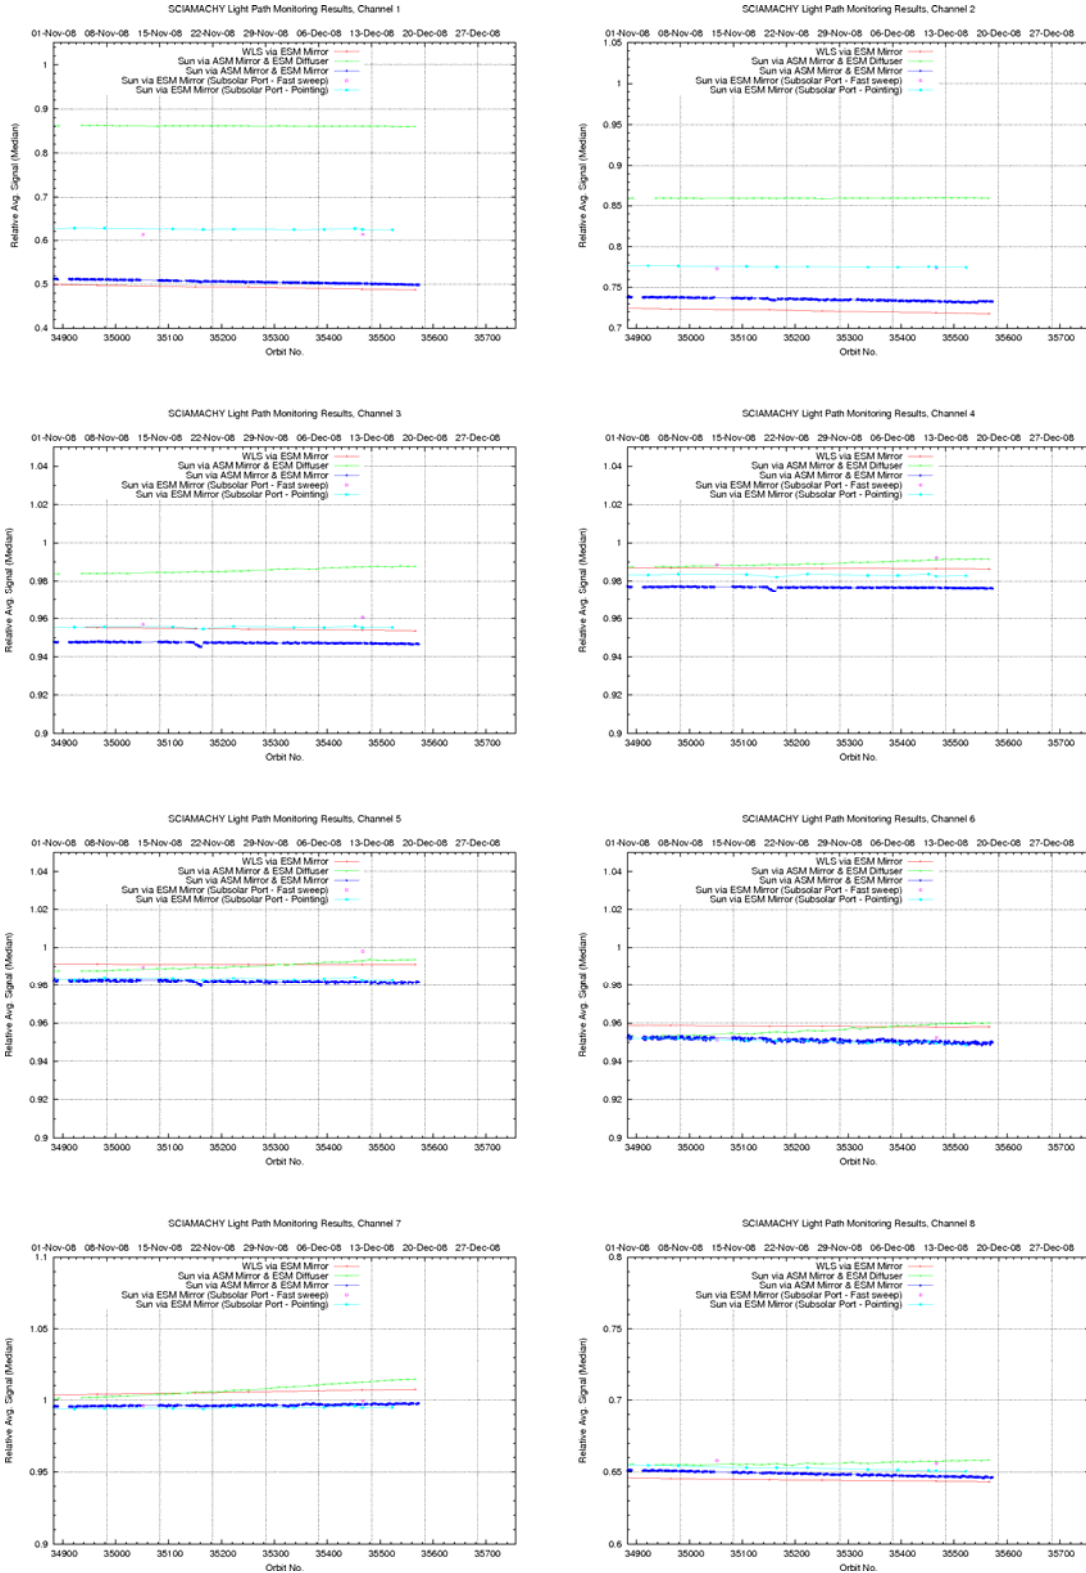


Fig. 3.7: Light path monitoring results November to December 2008 (medians).



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 25 of 64

3.1.5.2 Spectral light path monitoring results

Fig. 3.8 – 3.11 show results of spectral throughput monitoring performed by SOST-IFE for the different light paths (nadir, limb, calibration, and WLS). These results have been derived from Level 0 data analysed in a similar way as for the channel averaged throughput data (but of course without spectral averaging). Because the variation in spectral direction is very small within two months, Fig. 3.8 – 3.11 show the complete time series from 2 August 2002 to the end of December 2008.

The underlying data for the spectral monitoring are available via the SOST-IFE web site (see http://www.iup.uni-bremen.de/sciamachy/LTM/LTM_spectral/LTM_spectral.html). As for the plotted results, these data are regularly updated one to two times per month.

The current status of the degradation is as follows:

- The minimum throughput is below 50% for the limb and WLS (nadir) light paths at the short wavelength edge of channel 1 (i.e. below about 270-280 nm).
- The minimum throughput at the degradation peak around 350 nm in channel 2 is currently about 60%.
- The minimum throughput at the lower wavelength edge of channel 3 is currently at about 90% (not considering the overlaps).
- Channel 4 and 5 are still stable over the whole spectral range (except for the overlaps).
- The channel 6 degradation at the lower wavelength edge is about 10%.
- Degradation in channels 7 and 8 is as expected.



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 26 of 64

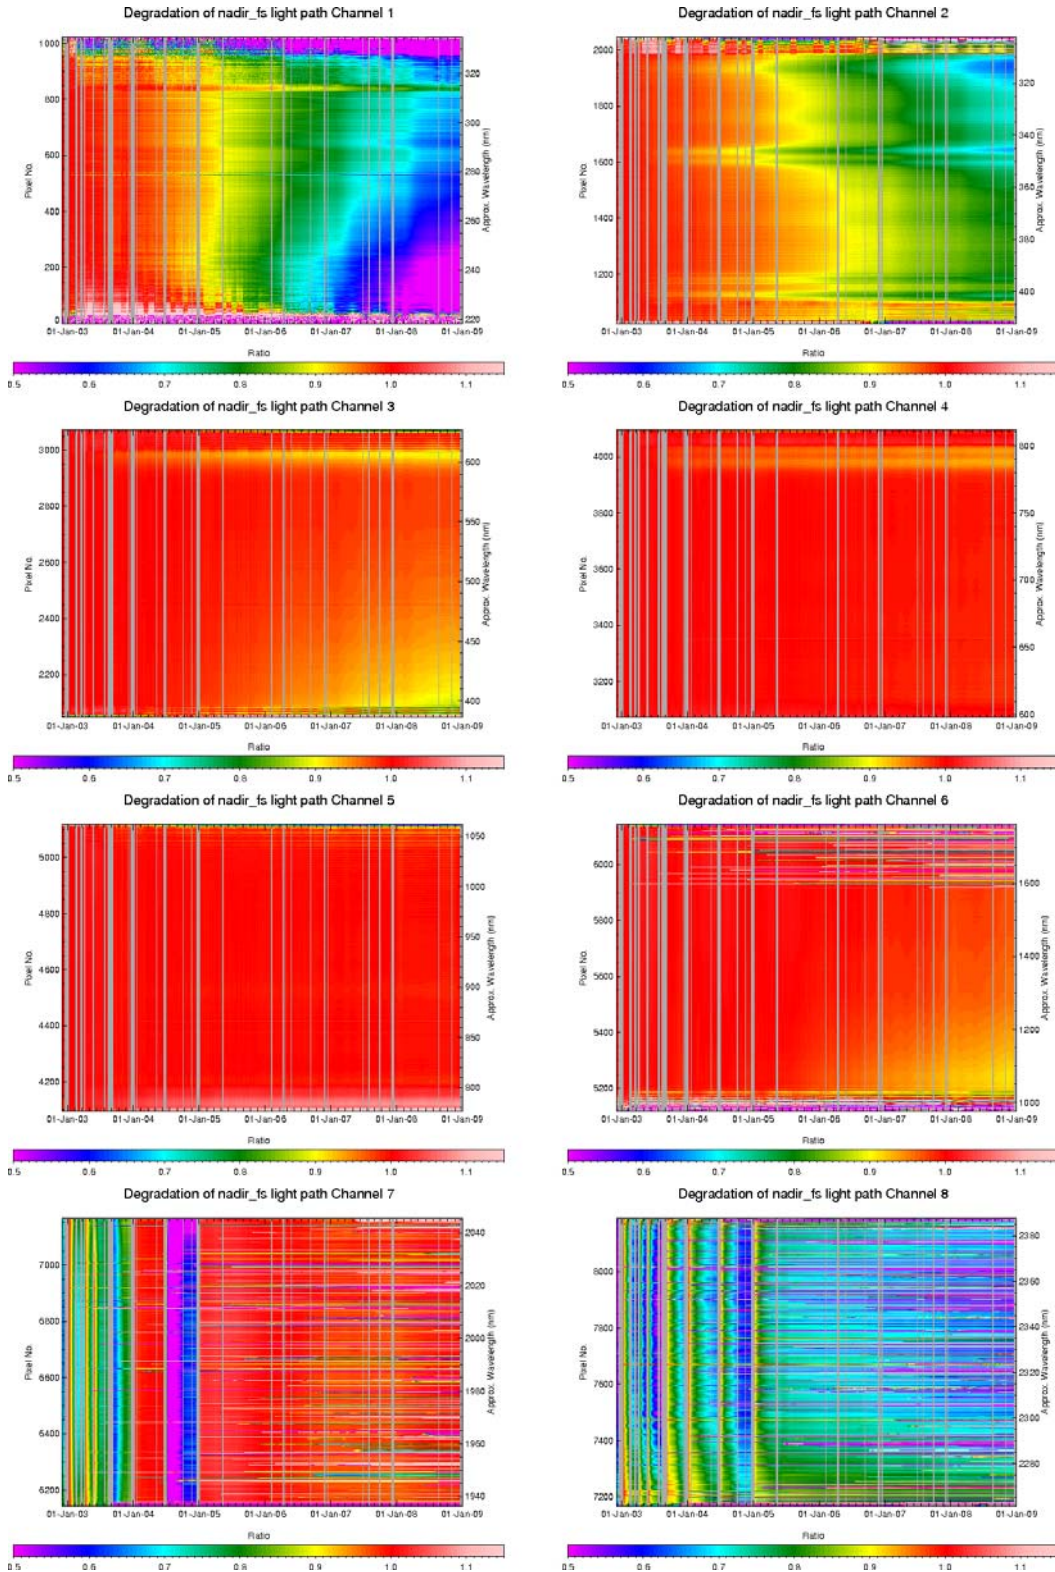


Fig. 3.8: Spectral light path monitoring results August 2002 to December 2008 (nadir light path)



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 27 of 64

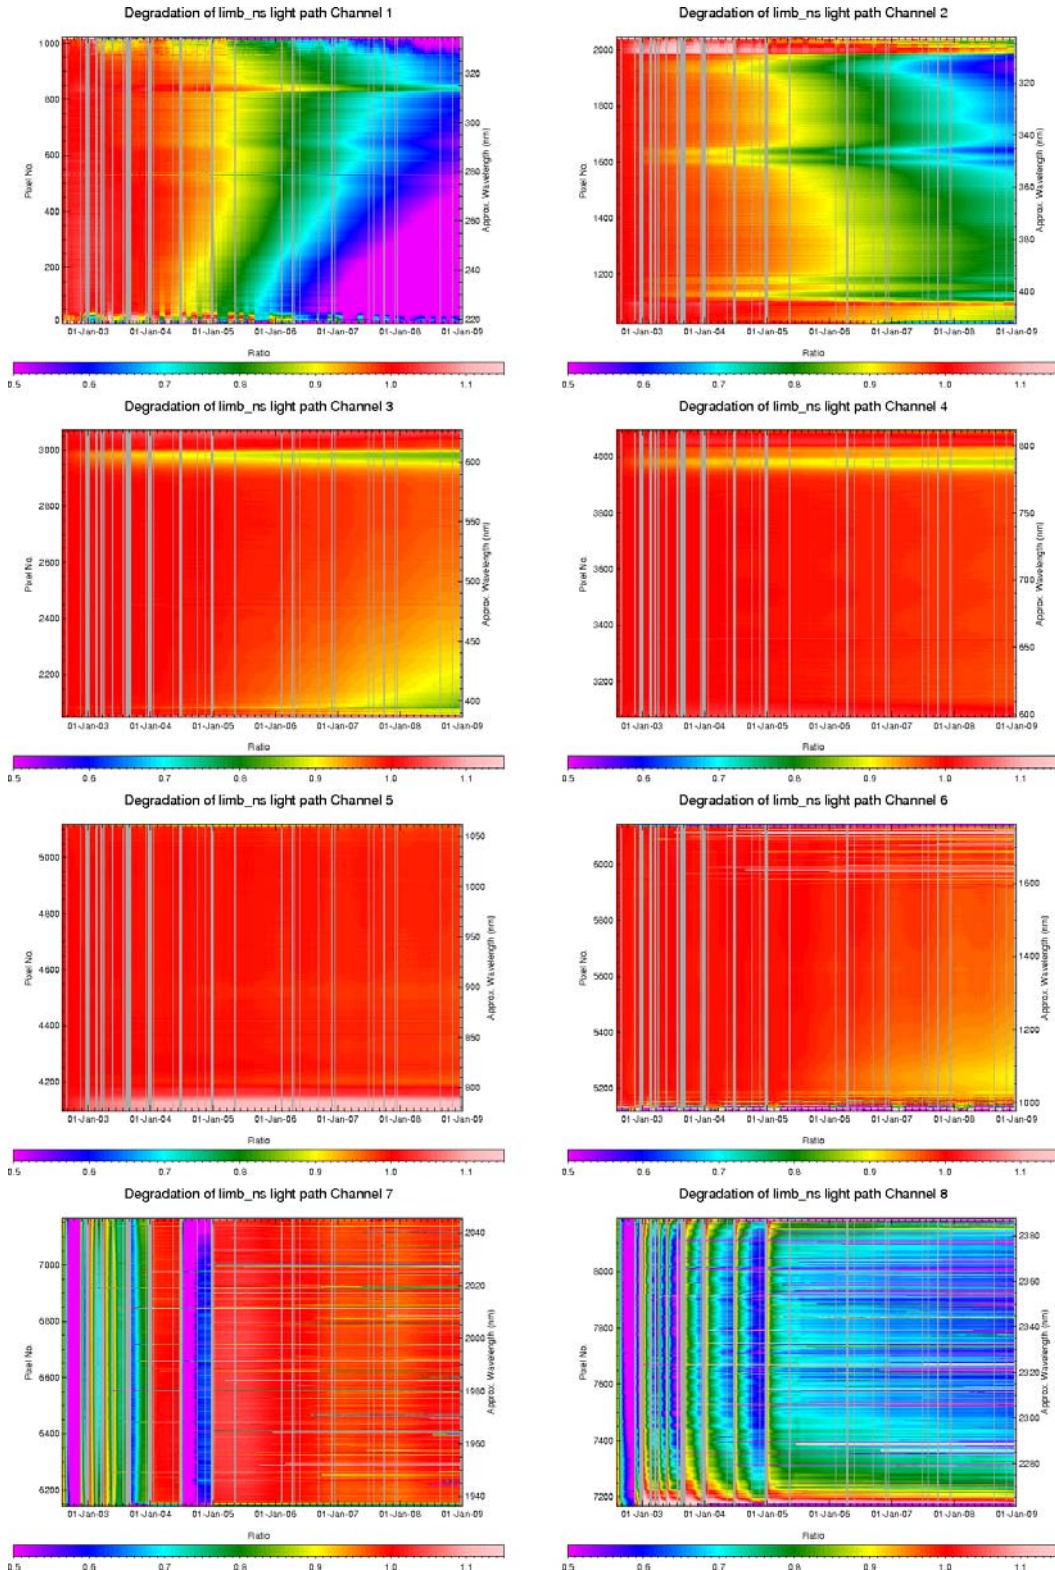


Fig. 3.9: Spectral light path monitoring results August 2002 to December 2008 (limb light path)



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 28 of 64

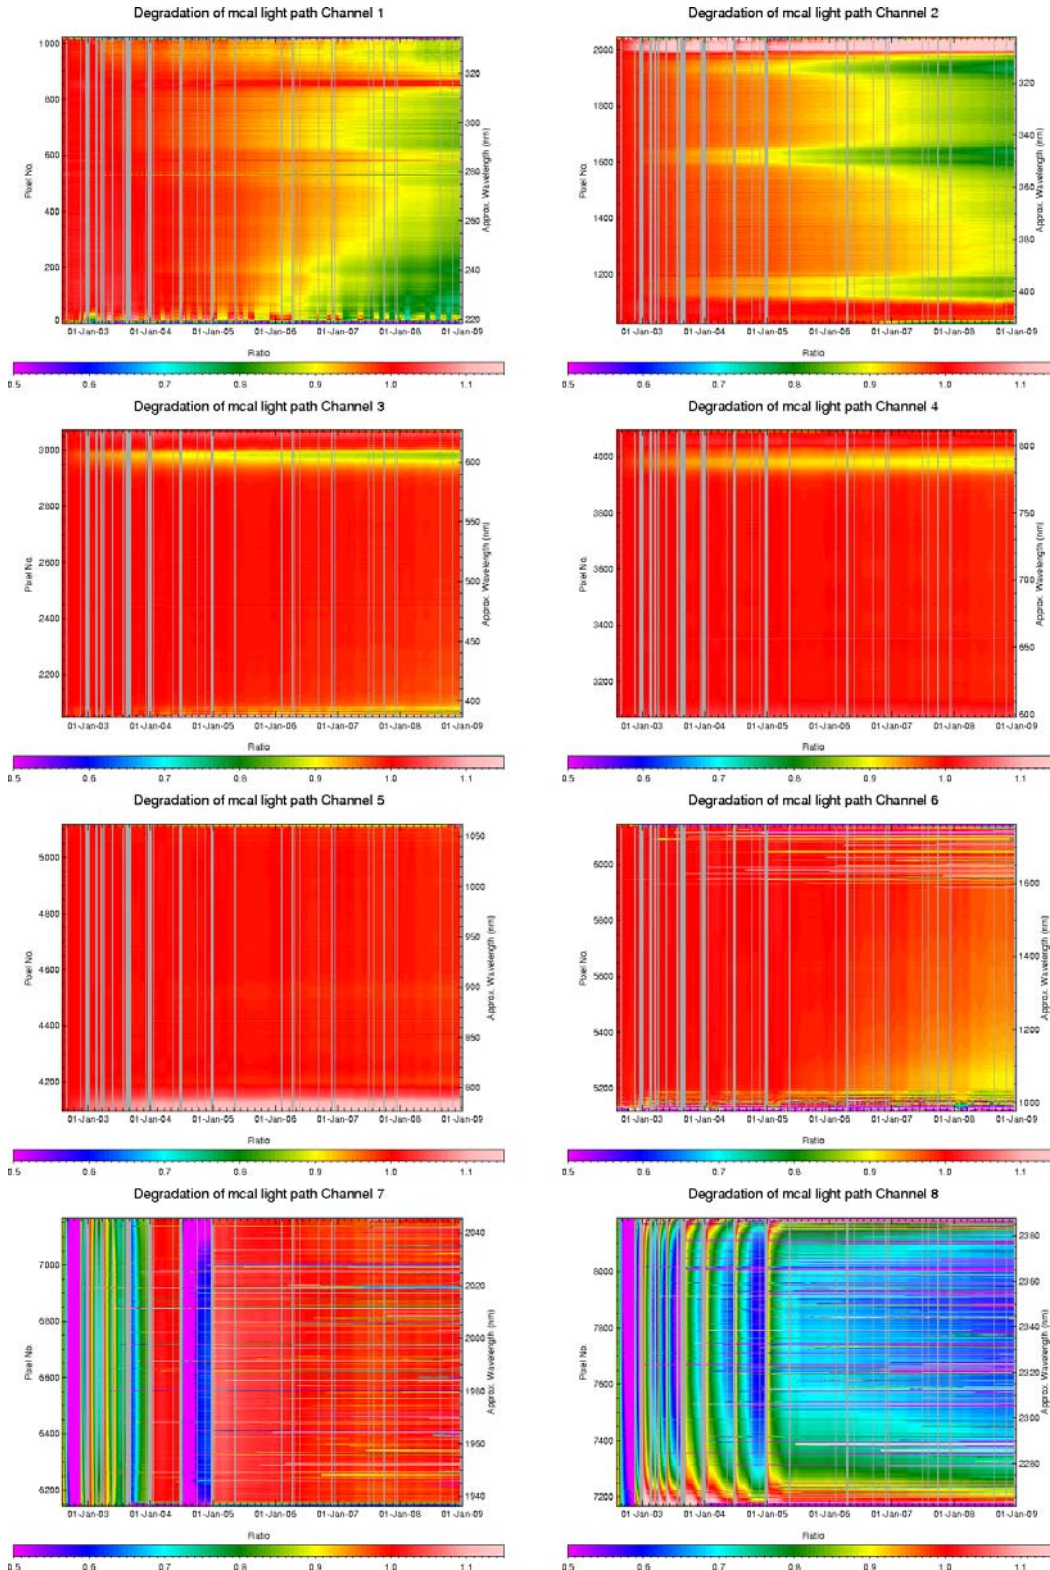


Fig. 3.10: Spectral light path monitoring results August 2002 to December 2008 (calibration light path)



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 29 of 64

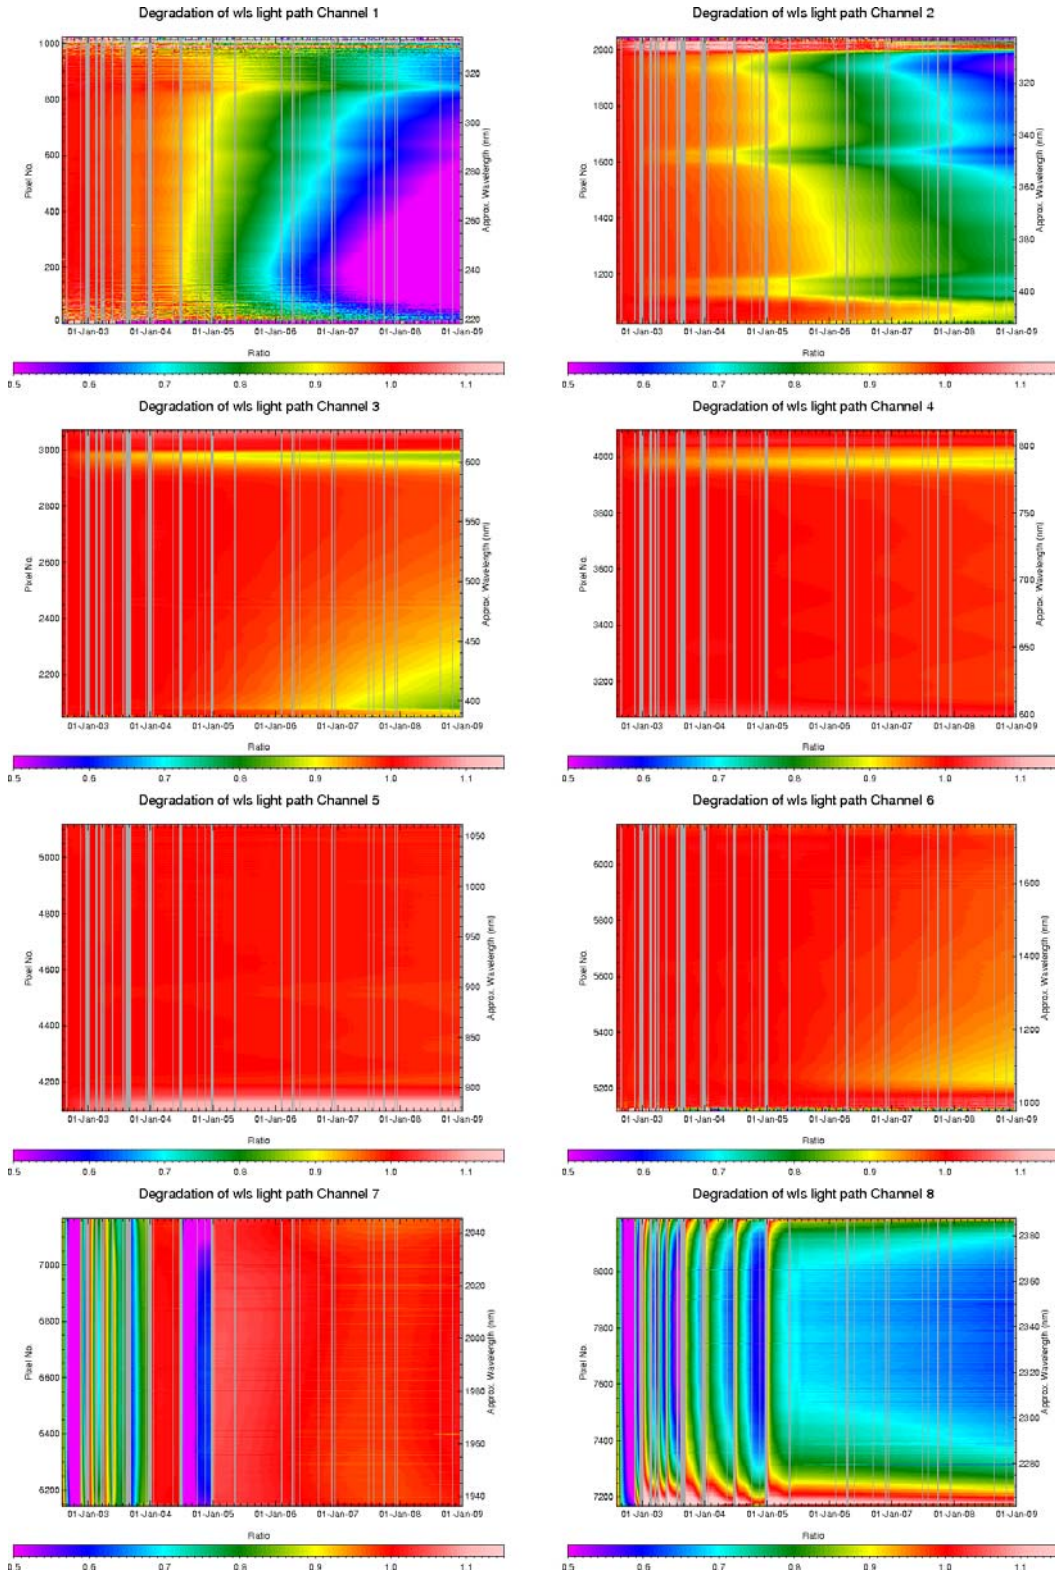


Fig. 3.11: Spectral light path monitoring results August 2002 to December 2008 (WLS light path)



esa



DLR



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 30 of 64

3.1.5.3 PMD monitoring results

The SCIAMACHY PMDs are monitored in a similar way as the science channels, but of course no channel averaging is performed. However, the results presented here are based on the same measurements as the science channel results (but using the PMD low gain signal), and they have been normalized to the same reference times as the spectral results. Fig. 3.12 shows the PMD throughput variation for the whole time period between 2 August 2002 and 31 December 2008. Note that a constant dark signal for each of the PMDs has been assumed. To verify this assumption, Fig. 3.12 also shows the variation of the PMD dark signal over time, which is usually quite low.

Considering the broadband character of the PMDs, the observed PMD throughput changes are (except for PMD 4 and 7) very similar to those of the science channels.

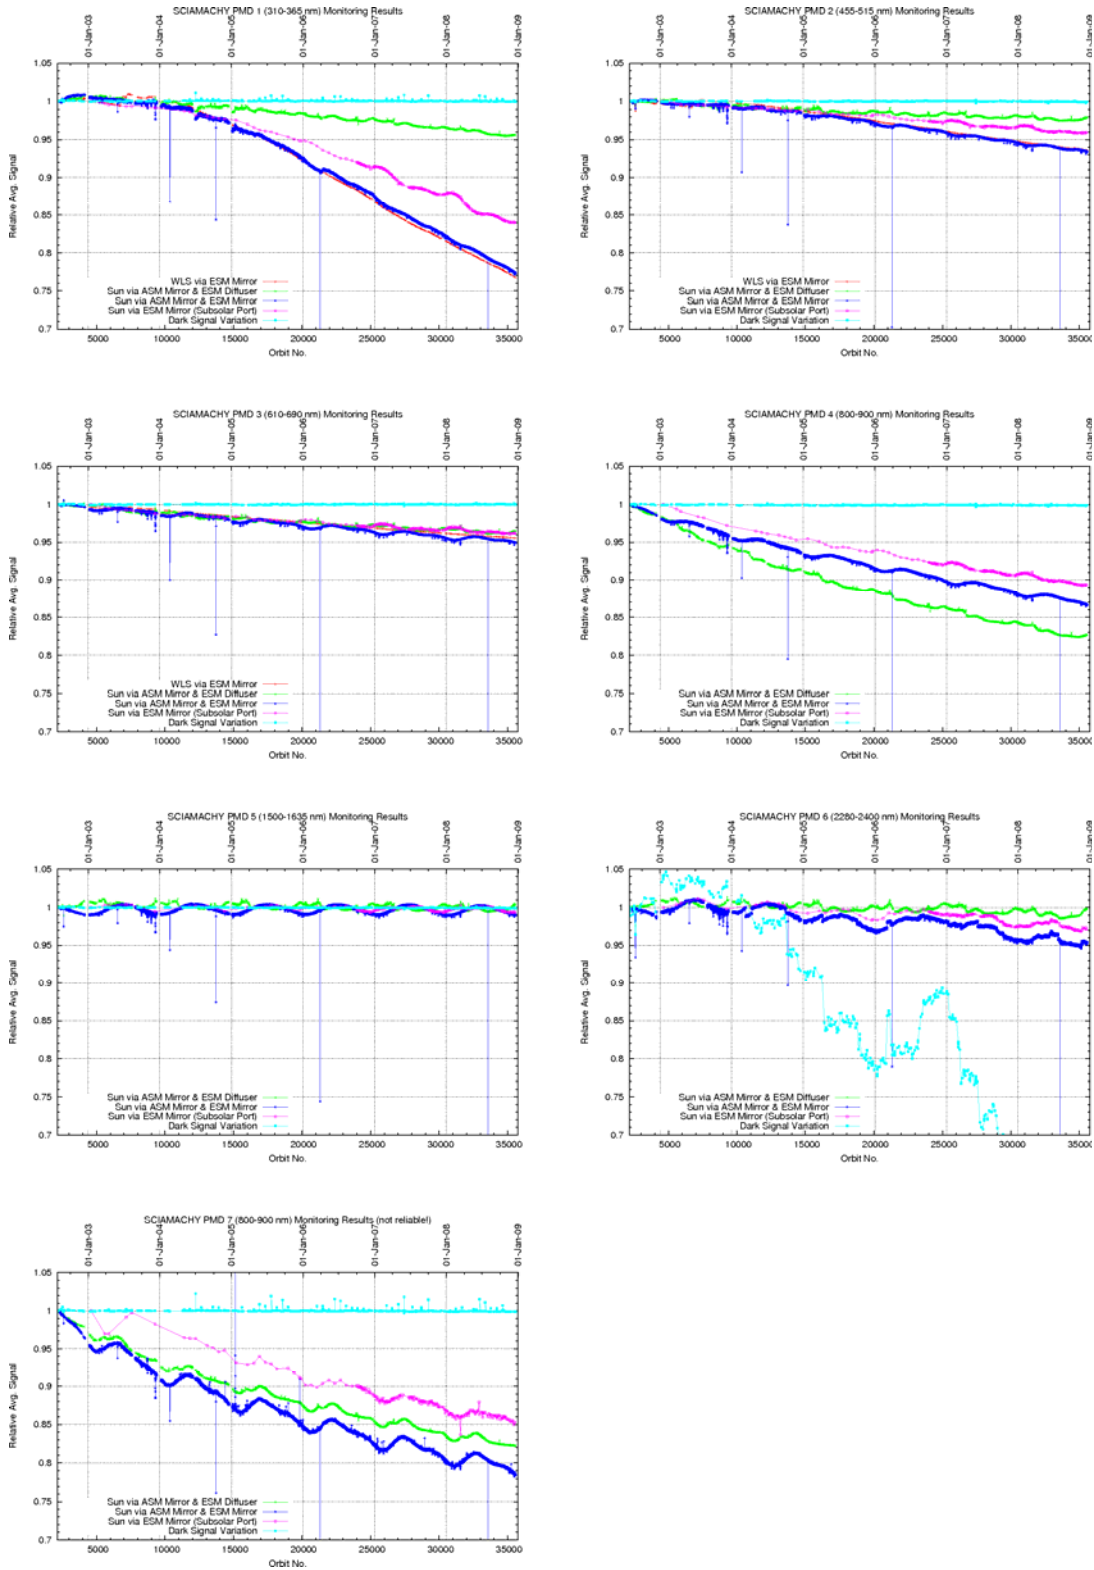


Fig. 3.12: PMD monitoring results August 2002 to December 2008



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 32 of 64

4 DATA AVAILABILITY STATISTICS

4.1 Downlink/Acquisition Performance

Problems are known for the products listed in Tab. 4.1:

Product	Day	Filename	description
		None this period	

Table 4-1 Products containing format errors

4.2 Statistics on unconsolidated data (SCI_NL__0P, SCI_NL__1P)

This paragraph reports the availability of NRT data on a monthly basis. The statistics are based on level 0 data and level 1 data inventoried in the ground segment. Unavailability periods due to instrument anomalies or Satellite switch-offs are excluded. The gaps considered are only interfile gaps.


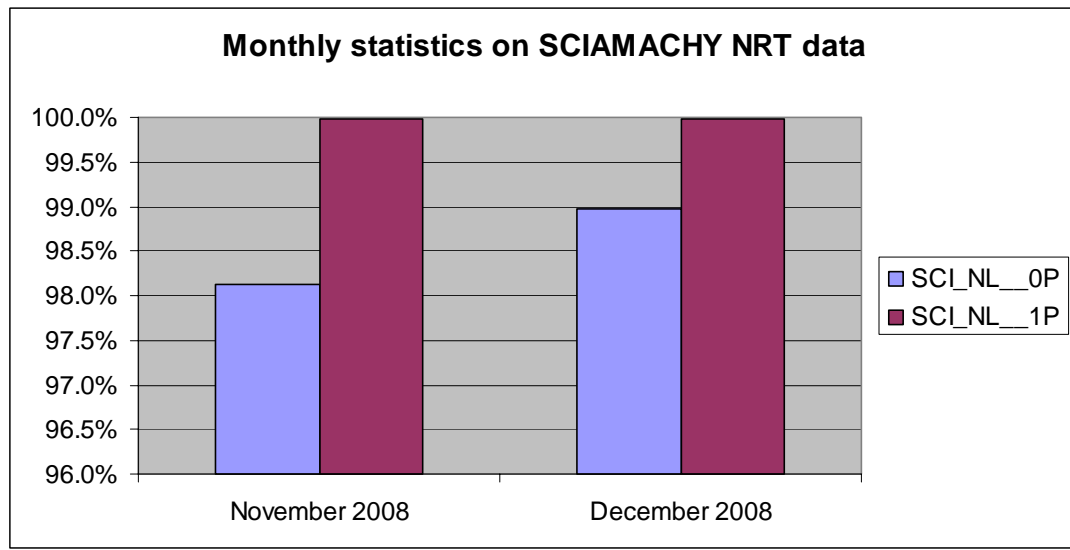


Fig. 4-1: Statistics on available unconsolidated level 0 and level 1b products



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 33 of 64

4.3 *Statistics on consolidated data*

In this chapter an overview about operational off-line data (consolidated data) is provided.

4.3.1 *Anomalies on level 0 consolidated data products*

In the past it had been reported by SOST-DLR that the SCIAMACHY consolidated level 0 data contain errors and are not complete. Following specific problems have been identified and are reported in detail in the technical notes [3], [4] for years 2003 and 2004 as well as for products of 2005 [5]:

- For one orbit there can be more than one consolidated level 0 product. These products may be identical or different in content (disregarding the product type file counter).
- Some orbits are not covered by consolidated level 0 products although SCIAMACHY was operational.
- Some orbits are covered by consolidated level 0 products but the product duration does not comply with the actually planned and executed instrument operations in that particular orbit.
- Some consolidated level 0 products exceed the Reed Solomon correction threshold and are flagged accordingly. The occurrence of Reed Solomon errors is non-uniform.
- Until late October / early November 2003 consolidated level 0 data are hampered by an incorrect orbit number.

More details on consolidated level 0 anomalies can be found on the SOST web page, which contains a catalogue of available level 0 consolidated data and description of errors.

http://atmos.caf.dlr.de/projects/scops/data_availability/availability.html

A recovery plan was initiated in order to reprocess erroneous data 2002 - 2006. This activity has been completed. For the year 2007 the recovery is currently being performed.

The overall goal is to achieve a level 0 consolidated data 'master set' that allows data reprocessing of improved data quality.

4.3.2 *Availability of consolidated SCI_NL__1P products*

SCIAMACHY level 1b consolidated data are generated at D-PAC using the consolidated level 0 products as input for processing. The available level 1b off-line products on the D-PAC ftp-server are checked for completeness and an overview for the months November to December 2008 is summarised here, considering flight segment and ground segment anomalies. Note that also interfile gaps are considered, but no data gaps inside the products.



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 34 of 64

The FTP address accessing the data server at D-PAC is 195.37.183.37.

Month/Year	Planned orbit range	Number of orbits unavailable due to anomalies	Number of unique orbits available at D-PAC	Expected number of orbits (considering anomalies)	Availability in percentage during month
11/2008	34883 - 35312	19	402	411	97.7 %
12/2008	35313 - 35756	0	437	444	98.1 %

Table 4-2 Consolidated level 1b statistics

4.4 Statistics on reprocessed data

4.4.1 Level 1b re-processing

The next re-processing is planned to be started in the second quarter of 2009 with the new IPF 7.00 (LINUX processor).

IPF 7.00 will include the following changes compared to the operational IPF 6.03:

- Straylight Matrix in Channel 2
- Limb mesosphere/thermosphere measurement written to Limb MDS
- Correction of the Scanner encoding values

4.4.2 Level 2 re-processing

The quality of the data reprocessed with off-line processor version 3.01 has been checked and can be viewed via the daily level 2 reports that are made available at http://earth.esa.int/pcs/envisat/sciamachy/reports/daily/Level_2/

The next re-processing cycle is planned to be started in the second quarter of 2009 with the new processor version 5.00 instead of version 4.00, as already significant progress on the new baseline has been made.

The new processor version introduces the following changes compared to the operational processor:

- M-Factors implemented in Level 1b-2 processing step
- Changes in the NO2 retrieval settings
- New AAI algorithm
- Improvements in Limb retrieval
- Nadir SO2 total columns
- Nadir BrO total columns
- Nadir H2O total columns
- Nadir xCO columns



esa



DLR



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0-

page 35 of 64

- Nadir OCIO slant columns
- Limb BrO profile
- Limb PSC/NLC product



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 36 of 64

5 LEVEL 1 PRODUCT QUALITY MONITORING

5.1 Processor Configuration

5.1.1 Version

The operational IPF version used for processing of near real-time SCIAMACHY level 1b data is 6.03 at Kiruna and ESRIN. The same IPF is used for level 1b off-line processing at D-PAC for forward processing.

The corresponding product specification is Volume 15 issue 3/k [2]. It is available at http://earth.esa.int/pub/ESA_DOC/ENVISAT/Vol15_Sciamachy_3k.pdf

The disclaimer at

http://envisat.esa.int/dataproducts/availability/disclaimers/SCI_NL_1P_Disclaimers.pdf describes known artefacts as well as major improvements with respect to the previous IPF version.

Currently the new baseline 7.00 is prepared for industrial implementation.

Table 5.1 gives a brief overview of changes implemented with processor versions IPF 6.03, 6.02, 6.01 and 5.04/5.01.

IPF Version	Description	Proc Centre	Date	Start Orbit
6.03	Following changes are implemented with IPF 6.03 <ul style="list-style-type: none"> • New pointing correction (new SCI_LI1_AX) • Updated of the ESA CFI (5.6) software • Correction of a non compliancy report, impacting the Leakage GADS in the consolidated data processing chain (channels 6-8) 	D-PAC	04-JUL-2007	27937
		PDHS-E	19-JUL-2007	28153
		PDHS-K	19-JUL-2007	28145
6.02	No algorithm specification changes were implemented, but following non compliances of version 6.01 have been corrected, to get <ul style="list-style-type: none"> • Polarisation correction factors different from 0 • Correct order of SMR spectra in Sun Reference ADS 	D-PAC	05-MAY-2006	21843
		PDHS-E	07-JUN-2006	22327
		PDHS-K	07-JUN-2006	22318



	<ul style="list-style-type: none"> Solar mean reference spectra in New Sun Reference Data set with positive sign (was negative in IPF 6.01) 			
6.01	<ul style="list-style-type: none"> Improved parameterization of the Memory effect for channels 1 to 5 New correction for the Non-Linearity effect in the infrared channels Usage of improved key data for the radiometric calibration of all channels Each solar spectrum is provided in a calibrated and un-calibrated manner for all channels Orbital dependency of channel 6 to 8 leakage calculated; currently applied only to channel 8 Improvement of the pointing accuracy through the usage of the ENVISAT Restituted Attitude auxiliary files for the off-line processing decontamination flag added to the SPH 	D-PAC	No operations activated	-
		PDHS-E	22-MAY-2006	22098
		PDHS-K	22-MAY-2006	22090
		PDHS-E PDHS-K LRAC	24-MAR-2004	

Tab. 5-1: Processor Version and main changes

5.1.2 Anomalies

During analysis of the reprocessed data set Level 1b version IPF 6.03, it was found that for limited data sets

- January 2005, orbits 15154 – 15166
- December 2005, orbits 19752-19762
- January 2006, orbits 20224-20235, 20352-20363
- April 2006, orbits 21356-21512

The D1 solar reference spectra were not updated in the SCI_SU1_AX files and within in the Level 1b products. Analysis of this problem could confirm that the spectra were measured, though. Detailed analysis of this processing problem is still on-going. Please note, that for operational Level 1b – level 2 offline processing the D1 spectrum is not used . The outcome of further analysis will be reported in the next BMR.



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 38 of 64

5.2 Auxiliary Data Files

For operation of the SCIAMACHY level 1 processor, a set of auxiliary files as input is required.

One subset of these auxiliary files usually changes only in correspondence with a new IPF version, namely the Initialisation file (SCI_LI1_AX), the Key Data File (SCI_KD1_AX).

In addition there is the m-factor file (SCI_MF1_AX), which shall describe the degradation of the instrument during its stay in orbit. Note that the m-factor file has not been changed so far.

Another subset of auxiliary files is the In-flight calibration data files, which are generated when calibration measurements are included in the set of level 0 data to be processed. Four types of In-flight calibration auxiliary files exist:

- Leakage Current Calibration (SCI_LK1_AX - updated on orbital basis)
- Solar Reference Spectrum (SCI_SU1_AX - updated on daily basis)
- Spectral Calibration Parameters (SCI_SP1_AX - updated on a weekly basis)
- Pixel-to-Pixel Gain and Etalon Parameters (SCI_PE1_AX - updated on a weekly basis)

Table 5-2 lists the actual Key Data File and Initialisation File used with IPF 6.02 and IPF 6.03. The SCI_LI1_AX was updated with IPF 6.03 in order to improve the instrument pointing correction.

Table 5-2 Key data and Initialisation configuration

SCI_LI1_AXVIEC20060523_182643_20020701_000000_20991231_235959 (until 18/07/2007)
SCI_LI1_AXVIEC20070628_134108_20020701_000000_20991231_235959 (from 18/07/2007)
SCI_KD1_AXVIEC20060523_182626_20020301_000000_20991231_235959

Fig. 5.1 shows statistics of the SU1 and LK1 ADFs generated operationally with SCICAL. It has to be noted that unavailability periods are excluded from statistics. Generation of SU1 ADFs for November and December 2008 was 100 %.

The LK1 ADF statistic is calculated by dividing the number of all LK1 ADFs by number of all available (to SCICAL) level 0 products. The statistics on available LK1 ADFs during November 2008 (82.7%) and December 2008 (92.2%) are on a nominal level.

The statistic does not exclude dark measurements that cannot be used for ADF generation due to SAA and orbit phase constraints leading to an over-estimation of missing files.

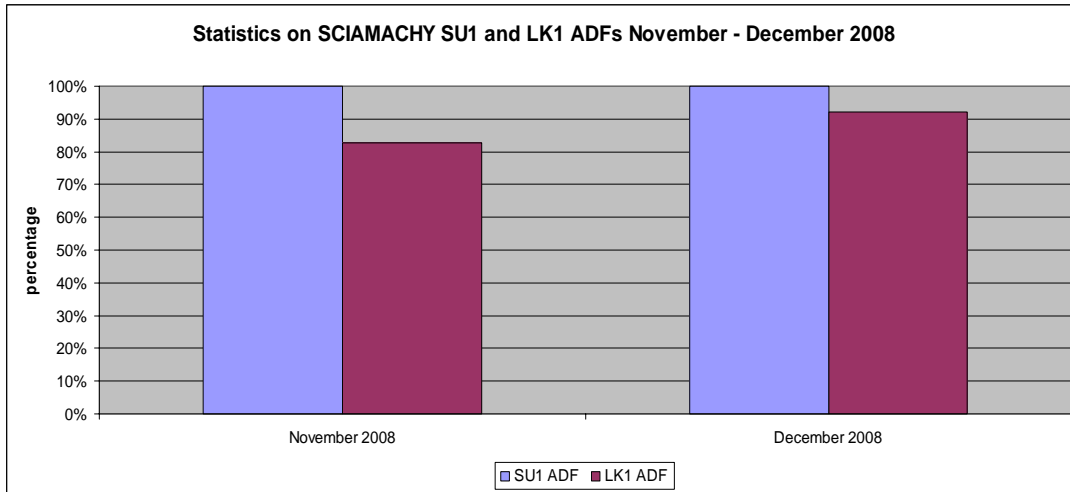


Fig. 5-1: Statistics on SU1 and LK1 processing

5.2.1 Auxiliary Data File quality analysis

5.2.1.1 SMR analysis

SCICAL generates daily SU1 Auxiliary Files. Solar spectra obtained from ESM and ASM calibration measurements are provided in two ways:

- fully calibrated
- not radiometrically calibrated.

The different types of spectra can be recognized by the so called identifier in the solar reference global annotation data set record.

Note the following recommendation:

- Use a not radiometrically calibrated ASM diffuser spectrum (A0) for DOAS type applications.
- All retrieval methods requiring absolute calibrated radiance and irradiance are obliged to use the calibrated ESM diffuser spectrum (D0) (see also disclaimer).


Fig. 5-2 to Fig. 5-5 show the ratios of SMR spectra derived from calibrated SMR/ESM (D0) during the months November - December 2008. The ratios were determined by dividing the spectra of the beginning of each month to a set of days during each month. Ratios are not corrected for variation of distance earth/sun.

In detail the spectra used for the ratios of each month are the following:

- **November 2008**
Reference SMR - 01 November 2008
SMR used for ratios: 02, 03, 04, 05, 06, 07, 08, 09, 10, 14, 21, 30 November 2008
- **December 2008**



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 40 of 64

Reference SMR - 01 December 2008

SMR used for ratios: 02, 03, 04, 05, 07, 08, 09, 10, 11, 14, 21, 31 December 2008

The overall changes lie at about 1-2 % during one month for all channels, which is at least partially caused by the decreasing distance between sun and earth. In channel 1 around pixel 550 (at 282 nm) some strong features can be noticed, as well as in channel 2 near pixel 840 (near 393 nm). These strong features coincide with the Mg II and Ca Fraunhofer lines respectively. These lines are partially formed in the solar chromosphere and are known to change with solar variability.

The weaker spectral features in channel 2 (e.g. near pixels 550, 650,750), on the other hand, correlate with strong Fraunhofer lines, which are not chromospheric. These features probably arise from small wavelength shifts (order of 1/100 of a pixel).

The December plots show the impact of the warming up of the detectors during the non nominal decontamination, for the last two ratios (days 21 and 31 December).

Generally a spectral feature could have significant impact on the product quality, especially when the affected spectral parts are used for DOAS retrieval.

The large features in the end of channel 6 (channel 6+) and channels 7 and 8 are due to bad pixels.

Note that the bad pixel mask used is still from the on ground calibration.

A regular update of the bad pixel mask is implemented starting with IPF 6.02. However a bad pixel correction will not be applied to the SMR spectra, but only to PMD out-of-band factors, in order to enable the user to apply a different mask from the one provided by the ADF.

Fig. 5-6 and Fig. 5-7 show SMR ratios on a long term trend dividing the ESM spectra from days 29 November 2002 and 29 November 2008, respectively 16 December 2002 and 16 December 2008. The ratio for the December SMR was performed with data before the non nominal decontamination started.

The first spectrum available exists for 18-Jul-2002. However to consider sun/earth distance, the ratio was performed with spectra from same calendar days. All SCI_SU1_AX files used were generated with SCICAL.

What can be concluded is that for channels 1-2 an average degradation in 6 years of about 10-15% is observed, channels 3 degrades by about 2% and channels 4-5 degrade by less than 1%, channel 6 by about 4-5%. The signal in channel 7 has increased with respect to the SMR of year 2002. This is due to the impact of the icing of the IR detectors.

This is consistent with the Light Path monitoring at SOST-IFE.



ratio of smrs as a function of pixel, November 2008

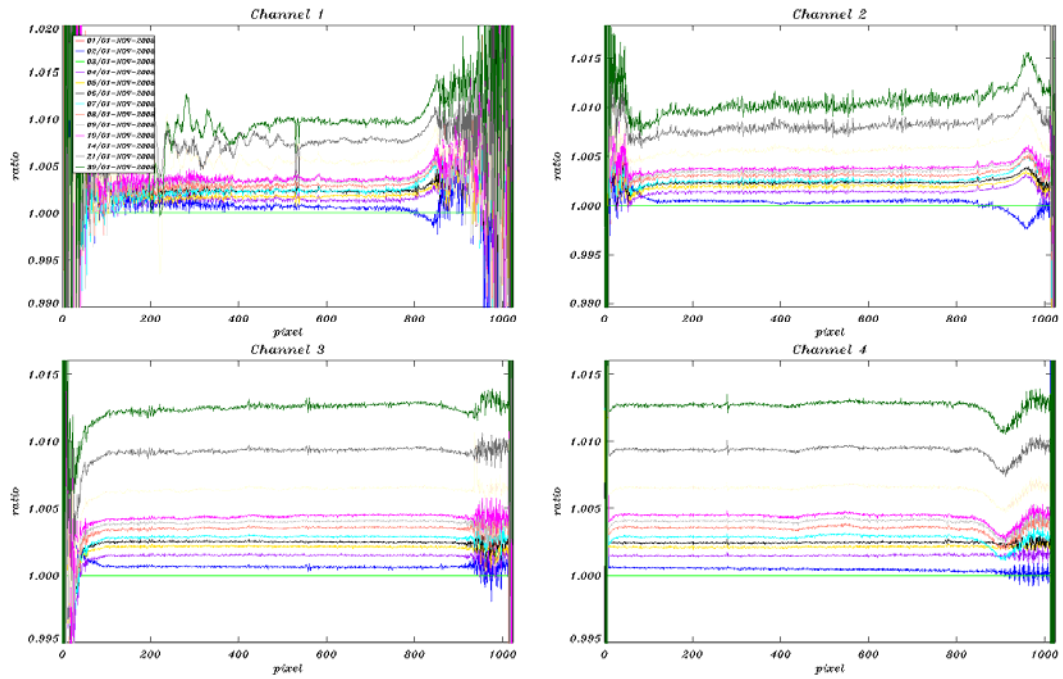


Fig. 5-2: SMR ratios per detector channel 1-4 (changes during November 2008)

ratio of smrs as a function of pixel, November 2008

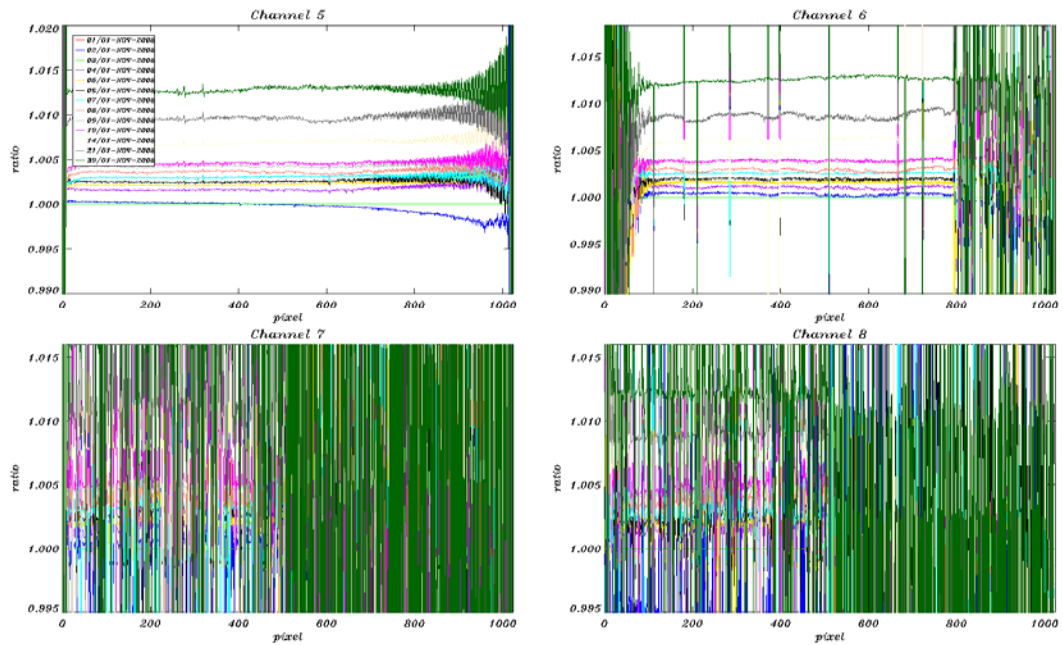


Fig. 5-3: SMR ratios per detector channel 5-8 (changes during November 2008)



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 42 of 64

ratio of smrs as a function of pixel, December 2008

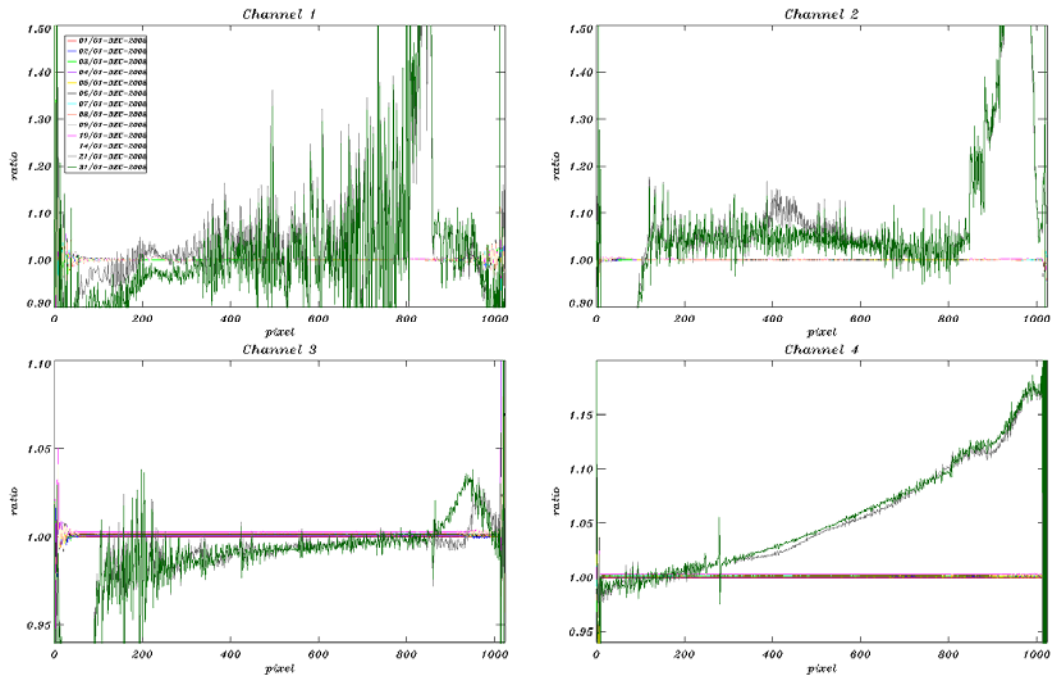


Fig. 5-4: SMR ratios per detector channel 1-4 (changes during December 2008)

ratio of smrs as a function of pixel, December 2008

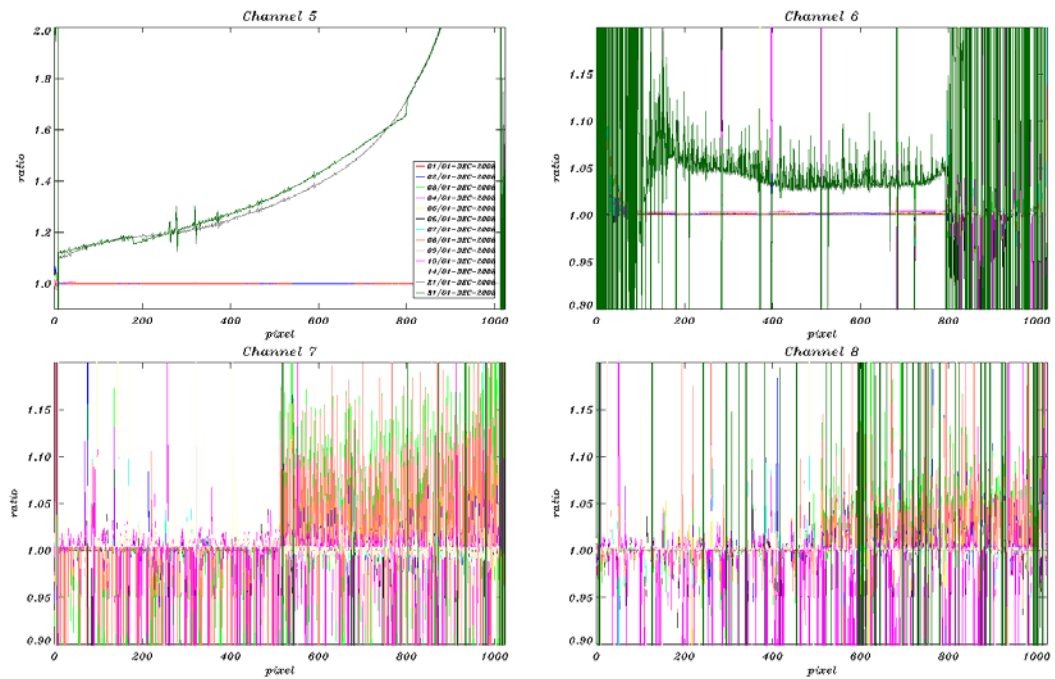


Fig. 5-5: SMR ratios per detector channel 5-8 (changes during December 2008)



smr ratio, D0 29/11/2008 divided by 29/11/2002

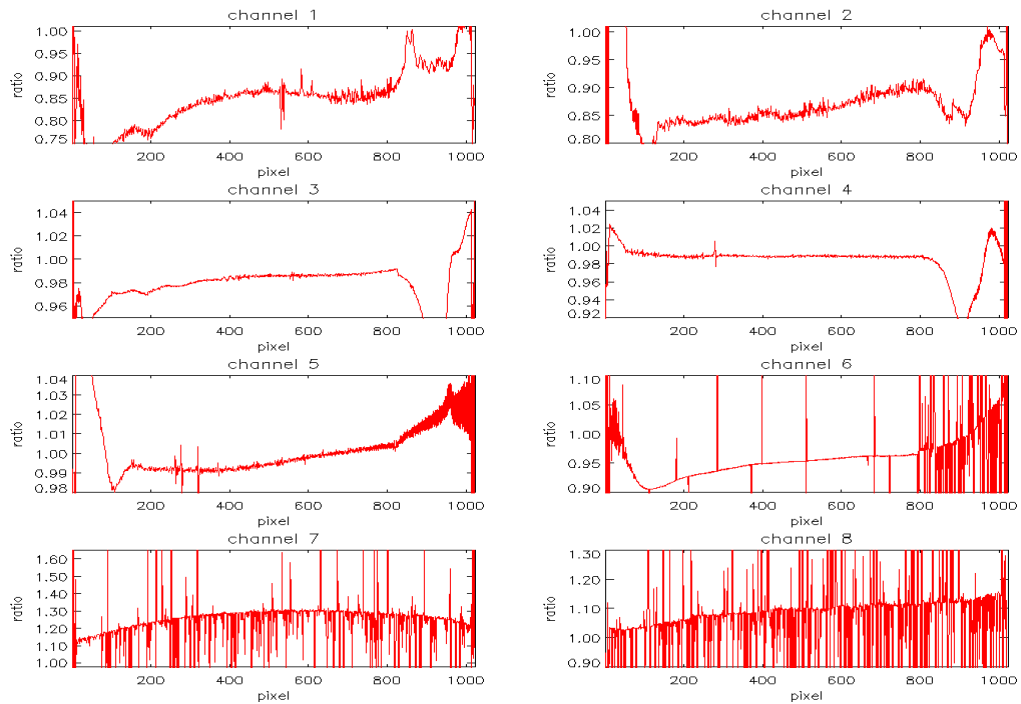


Fig. 5-6: SMR ratios per detector channel on Long Term Trend

smr ratio, D0 16/12/2008 divided by 16/12/2002

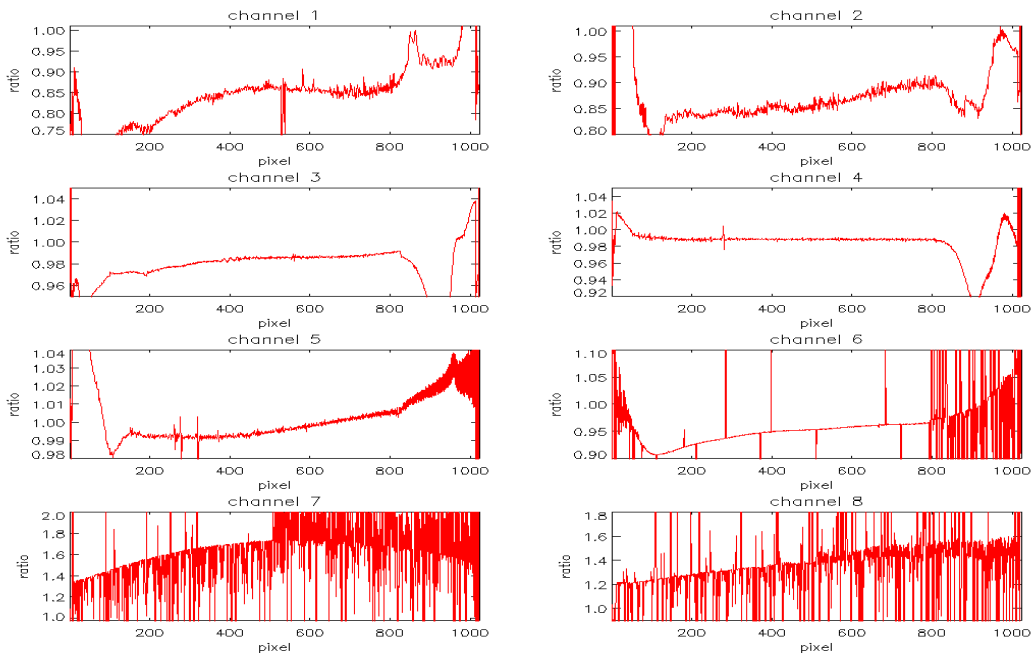


Fig. 5-7: SMR ratios per detector channel on Long Term Trend



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 44 of 64

5.2.1.2 LK1 analysis

5.2.1.2.1 Leakage Constant part

On an orbital basis a leakage current calibration is performed, if measurement data do not lie in the South Atlantic Anomaly region.

In Fig. 5-8 to Fig. 5-11 the leakage constant part FPN (fixed pattern noise) of the LK1 ADFs are analysed by determining the ratios of the FPN of each month with a time distance of one orbit, one day, one week, two weeks, three weeks and a month.

For channels 1-5 and the first part of channel 6, during up to three weeks nearly no changes can be noticed. Sudden jumps however between the different dark current ratios can be seen for channels 1, 2, 4 and 5 between 4 weeks. They are very small but above the noise level.

The IR channels show a lot of noise. Note that since the processor version IPF 6.02, the time dependent part of the leakage current is considered (see 5.2.3.2.2).



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 45 of 64

LK1 ADF analysis, ratios of fpn const November 2008

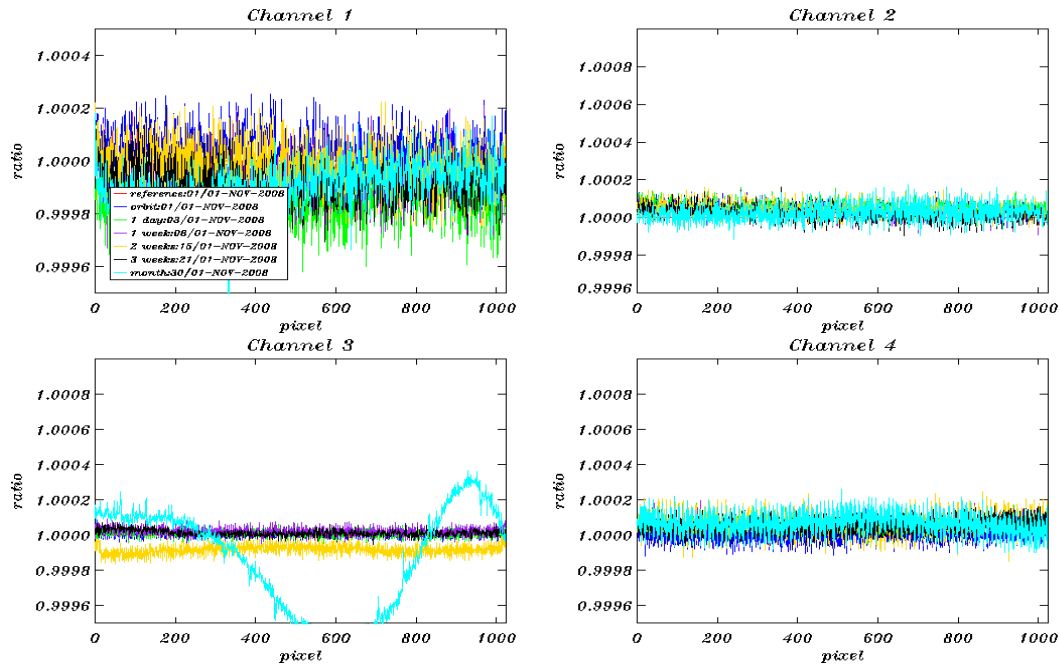


Fig. 5-8: dark current ratios (constant part) channel 1-4 during November 2008, Reference Spectrum used: Orbit 34887, 01-November-2008

LK1 ADF analysis, ratios of fpn const November 2008

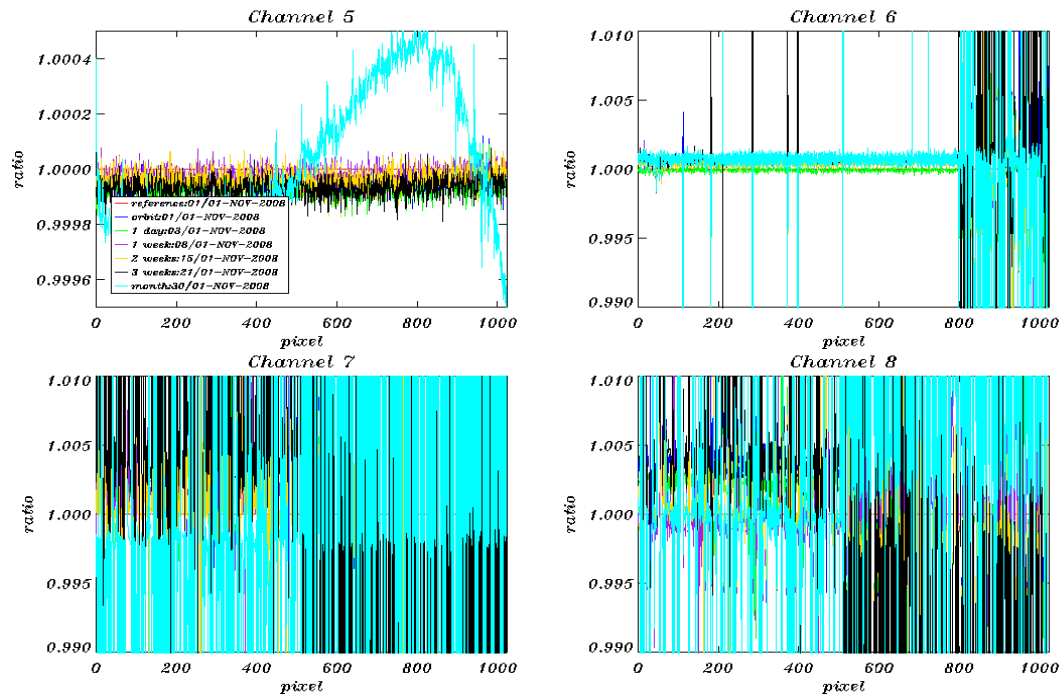


Fig. 5-9: dark current ratios (constant part) channel 5-8 during November 2008, Reference Spectrum used: Orbit 34887, 01-November-2008



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 46 of 64

LK1 ADF analysis, ratios of fpn const December 2008

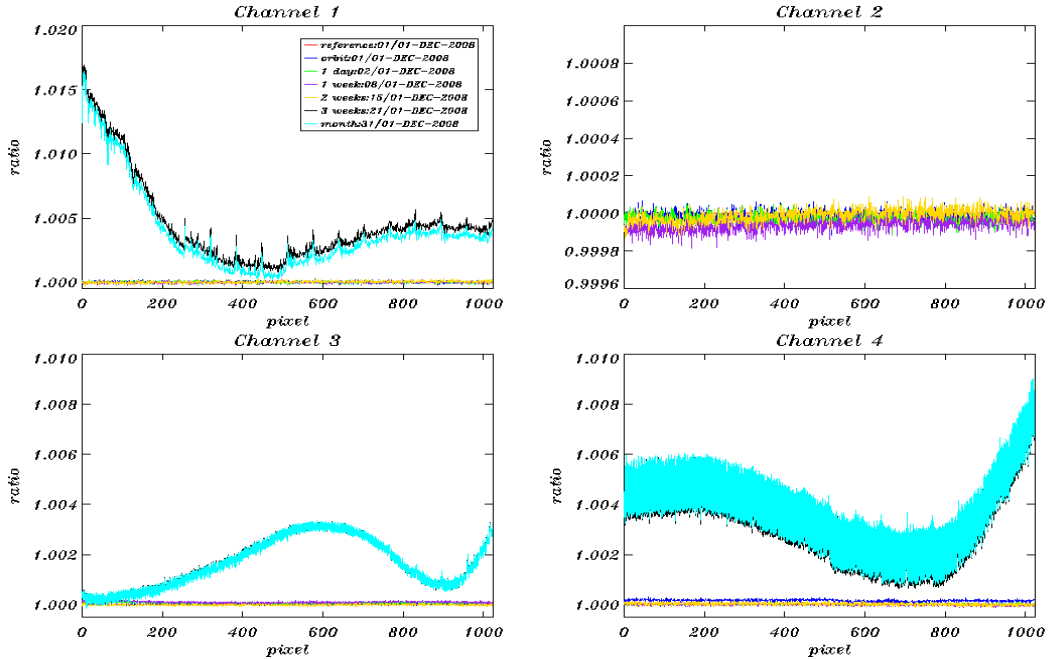


Fig. 5-10: dark current ratios (constant part) channel 1-4 during December 2008, Reference Spectrum used: Orbit 35316, 01-December 2008

LK1 ADF analysis, ratios of fpn const December 2008

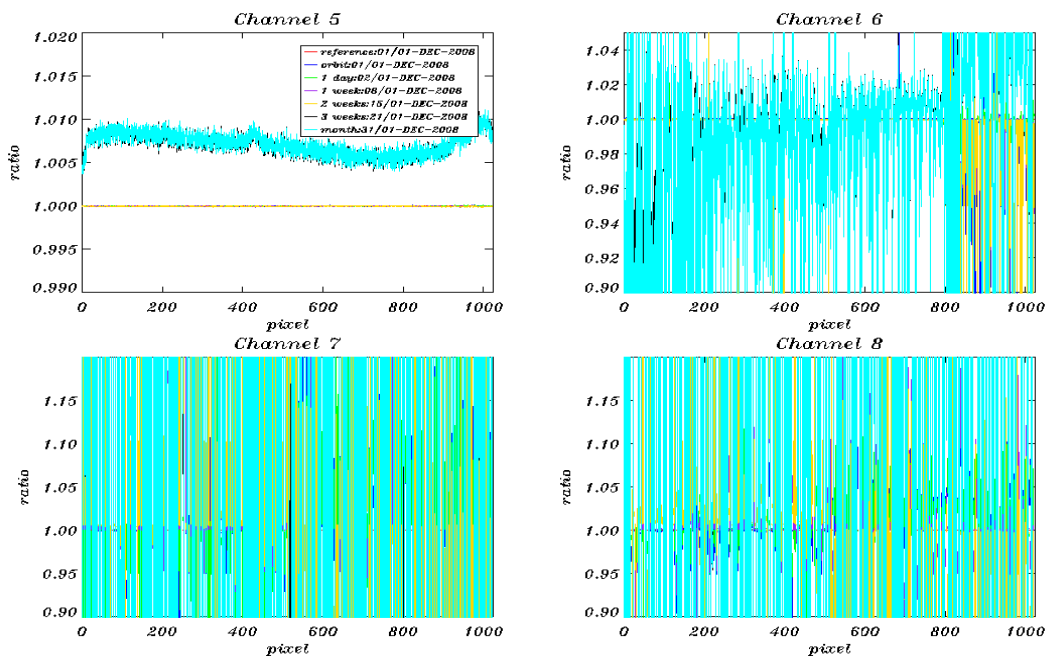


Fig. 5-11: dark current ratios (constant part) channel 5-8 during December 2008, Reference Spectrum used: Orbit 35316, 01-December-2008



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 47 of 64

5.2.1.2.2 Leakage Variable part

With IPF 6.03 the orbital dependency of channel 6 to 8 leakage current is considered. SCIAMACHY detector channels 6 – 8 have a time dependent leakage dark signal that consists of two components, the leakage current of the detector pixel and second a component due to thermal background that varies along the orbit. The implementation of the orbital variation of the leakage current is expected to improve retrieval especially in detector channel 8 for infrared products.

Figure 5-12 shows the evolution of the leakage variable part of the SCI_LK1_ADF during the time span 01 November 2008 to 31 December 2008. The leakage variation for a selected pixel (222) in channel 7 corresponding to orbit phase 5 is shown. Updates of the leakage variable are expected after the processing of the monthly calibration orbits, i.e. once per month. During this period Monthly Calibration sequences were scheduled for:

- 12/13 November 2008
- 11/12 December 2008

For both dates the change of the Leakage Variable value can be clearly seen, demonstrating that the calibration was performed successfully.

SCIAMACHY leakage variable analysis 01/11/2008 – 31/12/2008

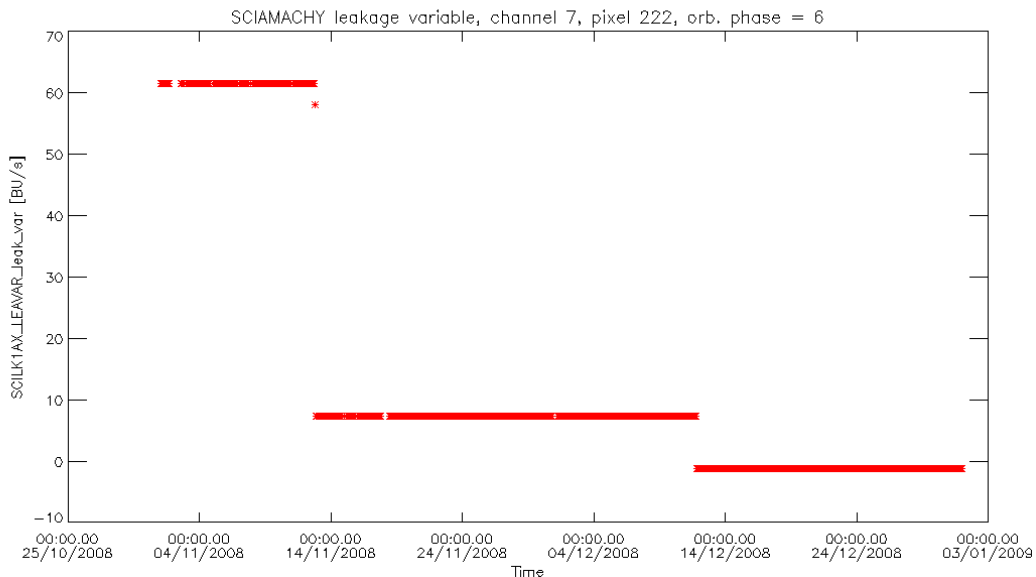


Figure 5-12: Leakage VARIABLE, SCI_LK1_AX, 01 November – 31 December 2008, channel 7, Orbit phase=6 pixel 222



esa



serco

SCIAMACHY Bi-MONTHLY R




issue 1 revision 0

page 48 of 64

5.3 Bad and Dead Pixel Mask

SRON performs routinely analysis on the SCIAMACHY Bad and Dead Pixel Mask. Within this analysis bad pixels of the detector arrays are identified by the SCIAMACHY Detector Monitoring Facility (SDMF) using 11 flagging criteria. These criteria are based on the dark signal model, transmission, gain and noise of a pixel. Bad pixel masks are calculated on an orbital basis and combined into a "smoothmask" that combines the masks of about 50 orbits. In Fig. 5.13 we show the number/fraction of pixels that is flagged as bad for channels 6, 6+, 7 and 8. Note that channel 6 consists of two parts employing different detector materials. Channel 6+ starts at pixel 794. The rate at which the number of pixels that is flagged is increasing is similar for the IR channels 6+, 7 and 8. The fraction of flagged pixels in channel 6 is much lower and almost constant over the mission, because of the different detector materials used in this part of the channel. The mask currently provided in the level 1b product must be regarded experimental. It uses a different algorithm and is not identical to the mask provided by SRON. It is planned to align the two masks in future processor versions.

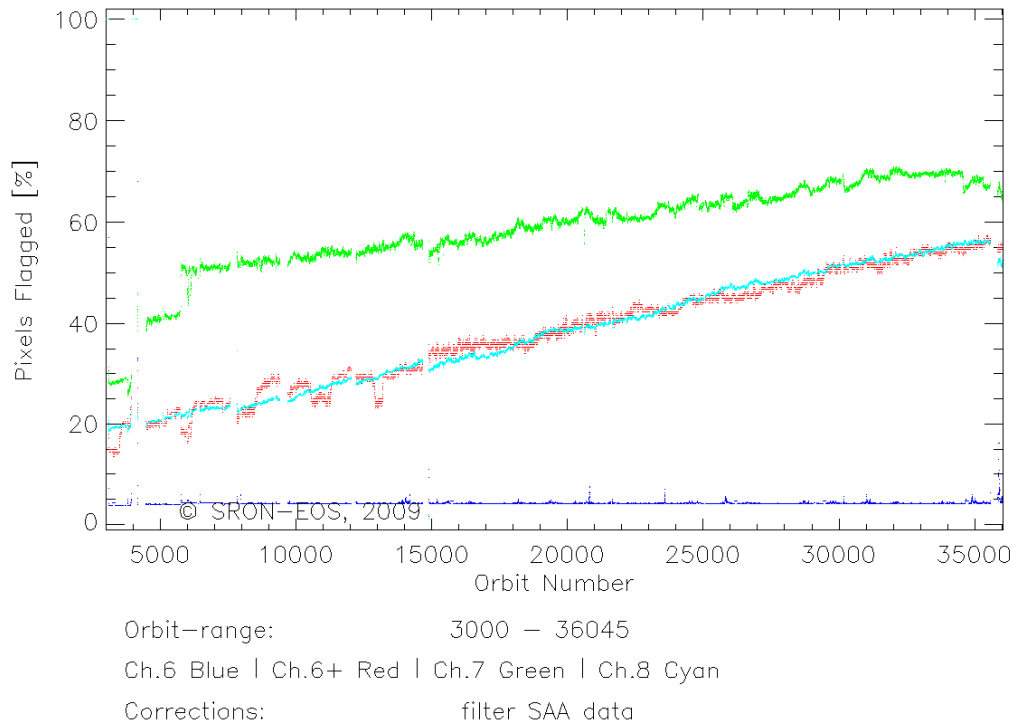

Generated on Thu Jul 22 10:57:03 2009 by SDMF channel evolution viewer

Figure 5-13: Number/Fraction of pixels that is flagged as bad by the SDMF smoothmask for channels 6 (blue), 6+ (red), 7 (green) and 8 (dark yellow). Orbits during SODAP or decontaminations have been removed.



esa



DLR



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 49 of 64

5.4 *Pointing Performance*

No upgrade with respect to the pointing performance during this reporting period. See BMR September-October 2007 for the last status.

5.5 *SciaL1c tool*

The SciaL1c tool is an application provided to the users of SCIAMACHY Level 1b products. This application allows selecting specific calibrations to apply to Level 1b data, which are in case of SCIAMACHY defined as not fully calibrated Level 0 channel information in combination with calculated calibration data. The generated Level 1c products are suitable for the user's particular applications.

The SciaL1C Calibration and Extraction Software was upgraded to be compatible with IPF 6.02 data. It is downward compatible, i.e. it can also be used with data from older IPF versions.

SciaL1c can be downloaded at:

<http://envisat.esa.int/scial1c>

LINUX, Sun Solaris, LINUX on DEC-Alpha and HP-UX on IA64 versions are available.

A new updated version 2.1 of the SciaL1c tool was provided to the users end of November 2008. New in this version is the possibility to apply m-factor calibration.



esa



DLR



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 50 of 64

6 LEVEL 2 NRT PRODUCT QUALITY MONITORING

6.1 *Processor Configuration*

6.1.1 *Version*

Since 08 May 2006 the near real time processing of SCIAMACHY level 2 data has been suspended, evolution is currently restricted to the level 2 Off-line processor (see chapter 7).

The last IPF version used was 5.04. The corresponding product specification is [2]. The disclaimer at

http://envisat.esa.int/dataproducts/availability/disclaimers/SCI_NL__2P_Disclaimers.pdf describes known artefacts.

An overview on the implementation dates of the IPF at the different PDS processing centres and the main modifications implemented can be found in previous BMR (June-May 2007).

6.1.2 *Auxiliary Data Files*

An overview of Auxiliary Files being used as input for SCI_NL__2P products can be found in BMR May-June 2007.



esa



DLR



ife

serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 51 of 64

7 LEVEL 2 OFF-LINE PRODUCT QUALITY MONITORING

7.1 Processor Configuration

7.1.1 Version

The Level 2 Off-line processing version is 3.01.

The product specification corresponding to the level 2 off-line processor 3.01 is Volume 15, issue 3/k [2] and can be found at

http://earth.esa.int/pub/ESA_DOC/ENVISAT/Vol15_Sciamachy_3k.pdf

The disclaimer at

http://envisat.esa.int/dataproducts/availability/disclaimers/SCI_OL_2P_Disclaimers.pdf

describes known artefacts.

SCI_OL__2P products contain geo-located vertical column amounts of O₃ and NO₂ Nadir measurements, as well as stratospheric Limb profiles of O₃ and NO₂. Additionally the fractional cloud coverage, the cloud-top height, and the cloud optical thickness are derived and provided as product to the user. The major upgrades are summarised in table 7.1.

Processor Version	Description	Proc Centre	Date	Start Orbit
3.01	<p>Main processor changes:</p> <ul style="list-style-type: none"> • Updated SACURA cloud algorithm • Offset applied in NO₂ slant column processing was removed • Number of retrieved profiles per state was set from one to four (4) • Cloud and Aerosol MDS are filled with the next valid value instead of being set to zero • Molecular Ring correction applied on NADIR O₃ slant column density <p>Non-compliance corrections:</p> <ul style="list-style-type: none"> • Inter change of Pressure and Temperature values in LIMB MDS • Erroneous Cloud and Aerosol Quality Flags • AAI erroneously set to zero in Cloud 	D-PAC	23-SEP-2007	29092



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 52 of 64

	<ul style="list-style-type: none"> and Aerosol MDS • Scaling of too large NO₂ error estimate 			
3.00	<ul style="list-style-type: none"> • Nadir UV/Visible algorithm for ozone and NO₂ is based on the GDP (GOME Data Processor) Version 4.0 • Nadir UV/Visible algorithm for cloud-top height and cloud optical thickness based on the SACURA algorithm • Limb UV/Visible products: Stratospheric Ozone and NO₂ profiles • Improved pointing performance through the use of the ENVISAT Restituted Attitude information in the consolidated Level 1b product 	D-PAC	03-MAY-2006	21824

Table 7-1: Level 2 off-line Processor Configuration

7.1.2 Anomalies

During this reporting period no anomalies in level 2 offline processing were identified.

7.1.3 Auxiliary Data Files

Input for level 2 Off-line processing is the so-called Initialization File. For processor version 3.01 a new Initialization file became active which is SCI_IN_AXNPDE20070629_092400_20070720_000000_20991231_235959 This ADF is usually changed only in case of a processor upgrade.



esa



DLR



ife

serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 53 of 64

7.2 *Monitoring results*

7.2.1 *Nadir: NO₂ consistency checking*

The world map plots of nadir NO₂ vertical column density (VCD) values averaged over one month are generated from the SCI_OL__2P nadir products. Fig 7.1 and 7.3 show the monthly world map plots for November and December 2008.

Figures 7.2 and 7.4 show the VCD errors for the monthly average plots. The errors are given in relative fraction. Generally the equator region has NO₂ values with higher errors.

High concentration of NO₂ is expected over industrial regions, as over North America, especially the East coast, over central Europe, China and South Africa, which is reflected in the world maps.

7.2.1.1 Nadir: VCD NO₂ map November 2008

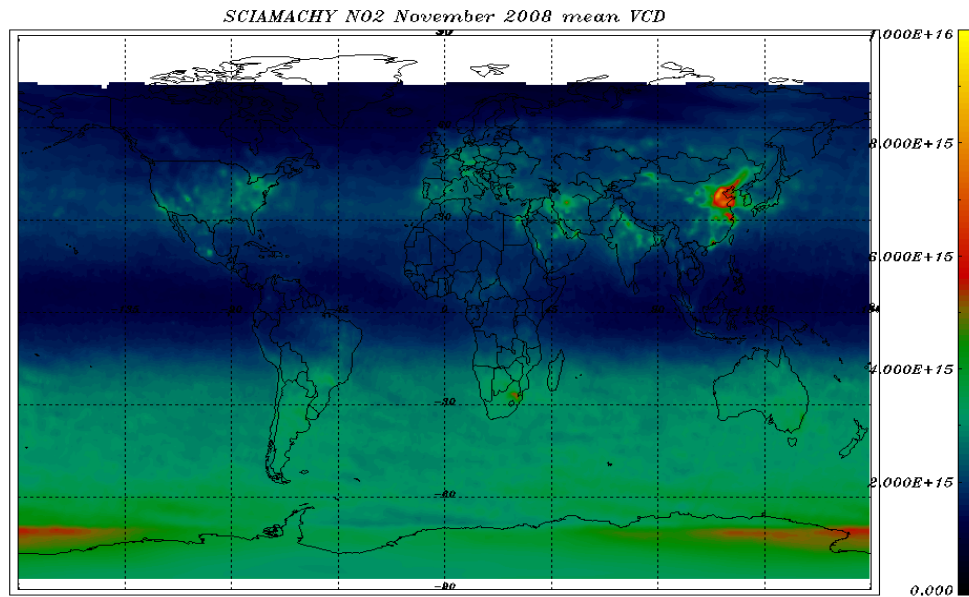


Figure 7-1: NO₂ VCD world map 01 - 30 November 2008 – monthly average

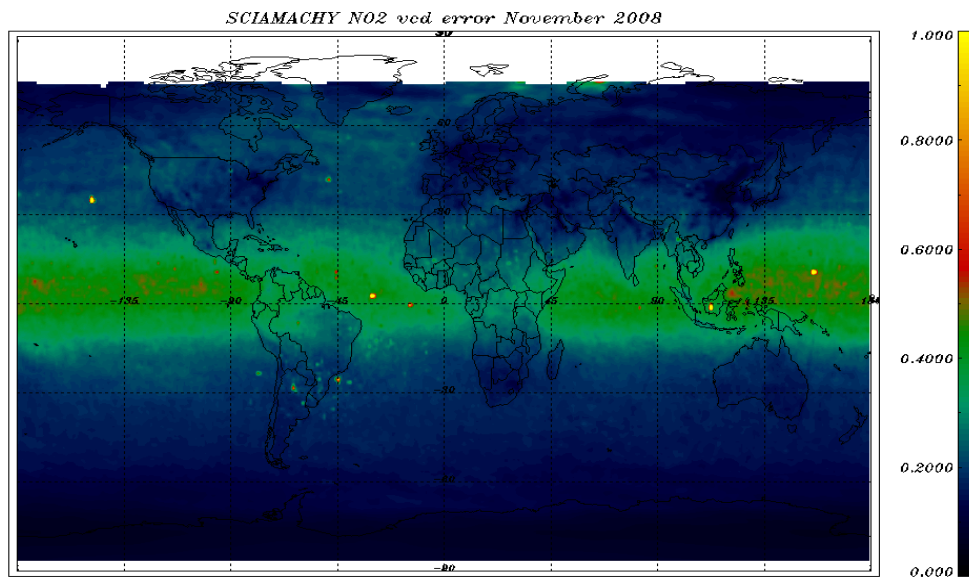


Figure 7-2: NO₂ VCD error 01-30 November 2008

7.2.1.2 Nadir: VCD NO₂ map December 2008

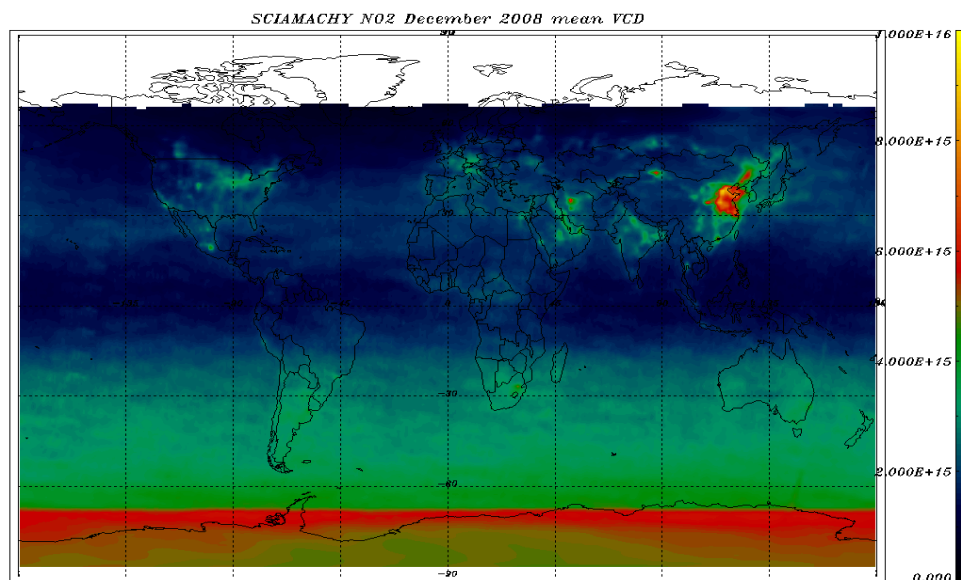


Figure 7-3: NO₂ VCD world map 01 – 31 December 2008 – monthly average

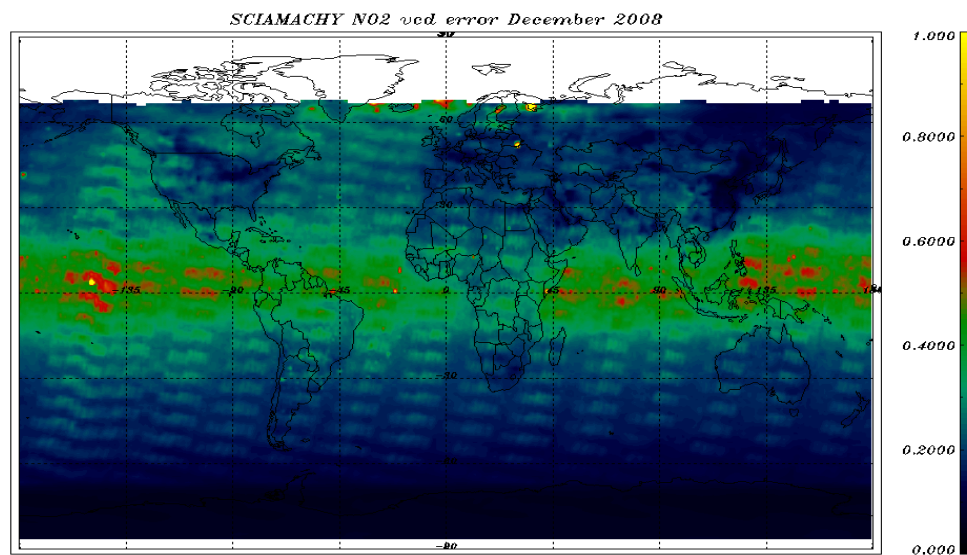


Figure 7-4: NO₂ VCD error 01 – 31 December 2008



esa



DLR



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 56 of 64

7.2.2 Nadir: O₃ consistency checking

Analogous to the NO₂ world maps, O₃ vertical column density (VCD) values averaged over one month are generated from the SCI_OL__2P nadir products and plotted on a world map. Fig 7.5 and 7.7 show the ozone distribution converted in Dobson units for November and December 2008. Corresponding to the seasonal evolution the Ozone Hole over the Antarctica is clearly visible during these two months.

The VCD errors as monthly average plots are shown in Figures 7.6 and 7.8. The errors are given in relative fraction. Systematically higher error values at the North Pole area are visible.

7.2.2.1 Nadir: VCD O₃ map November 2008

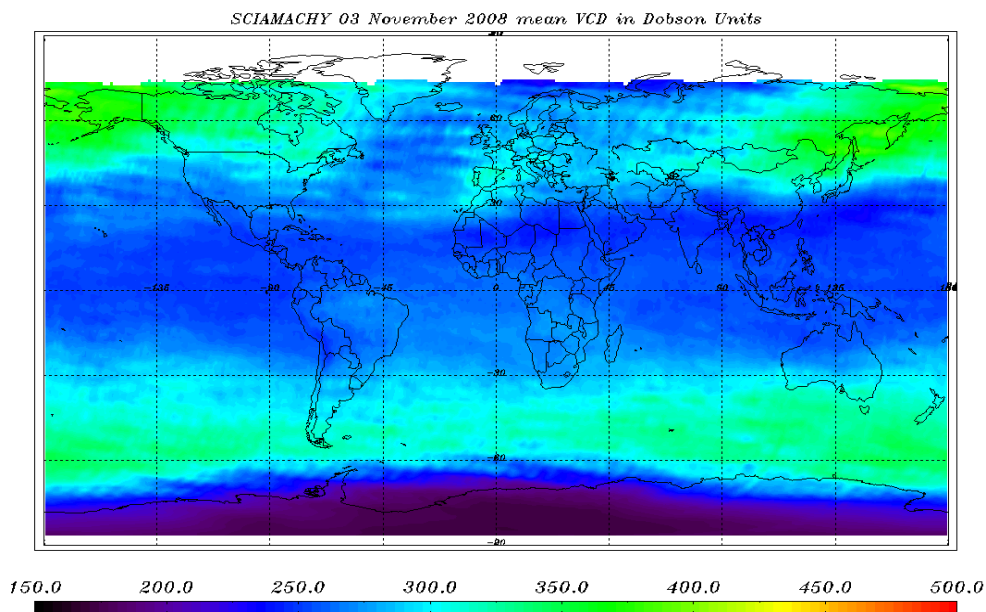


Figure 7-5: O₃ VCD world map 01-30 November 2008 – monthly average

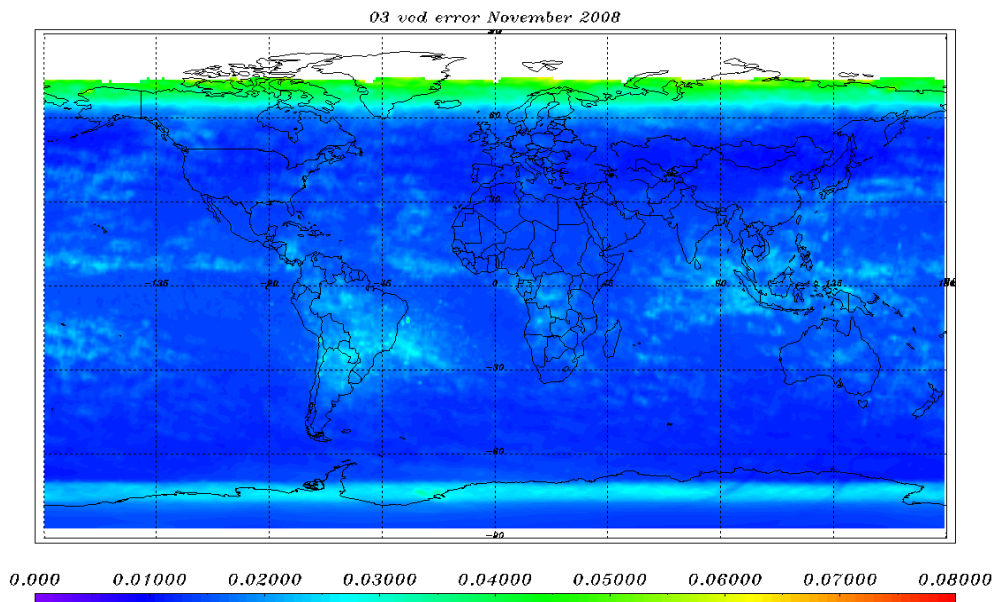


Figure 7-6: O₃ VCD error 01-30 November 2008

7.2.2.2 Nadir: VCD O₃ map December 2008

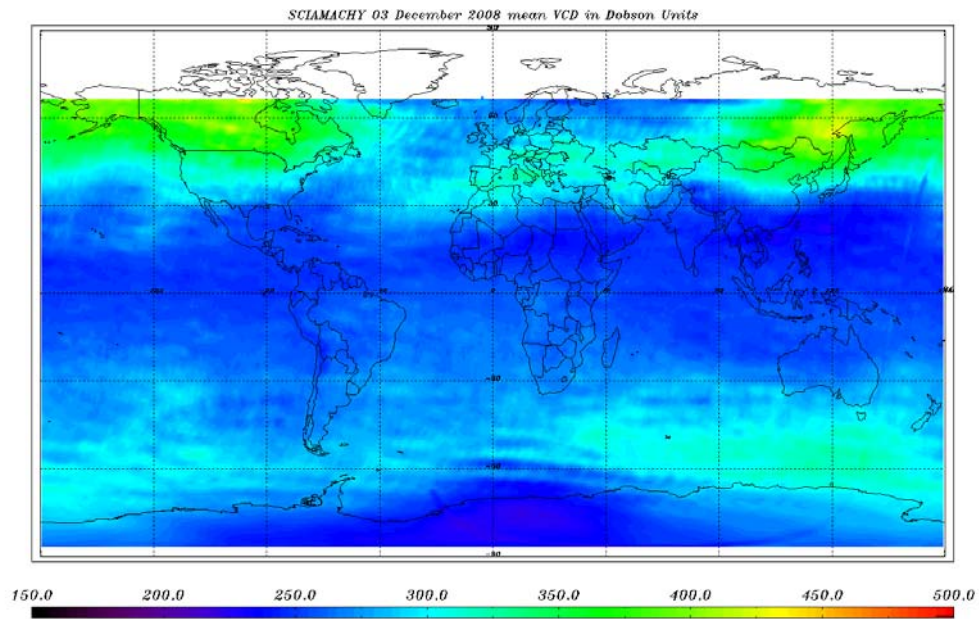


Figure 7-7: O₃ VCD world map 01 - 31 December 2008 – monthly average

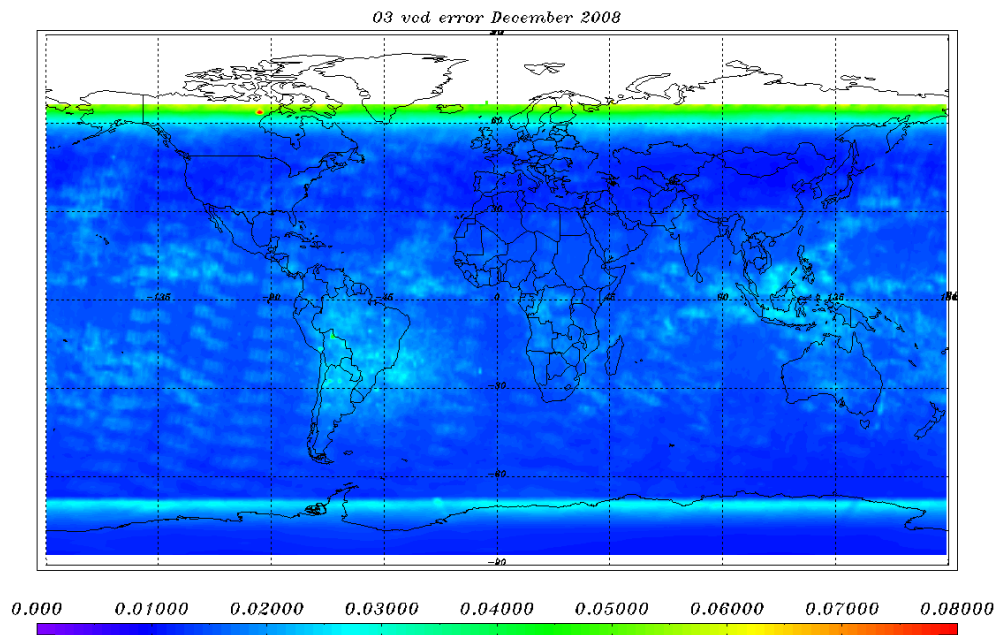


Figure 7-8: O₃ VCD error 01-31 December 2008



esa



DLR



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 59 of 64

7.2.3 *Limb: Ozone profile averages*

This paragraph reports on the quality check of SCIAMACHY limb profiles on a monthly basis, showing the results for Ozone limb profiles binned for two tangent height regions bins:

- 21.0 – 24.5 km (17th bin, bin index=16).
- 35.0 – 38.5 km (13th bin, bin index=12).

The data of the first half of each month (calendar days 1 - 15) and the second half (calendar days 16 - 31) are averaged for selected tangent heights into geolocation bins of 10 degrees longitude and 5 degrees latitude. The binning algorithm uses a single longitude and latitude value for the entire profile, being the value for the middle of the integration time as reported in the Geolocation Limb Dataset. The corresponding error is averaged as well.

The world maps of the averaged Ozone values show comparably low errors over the SAA region, which is not as expected. Investigation showed that the low SAA errors result from irregular conditions of the LIMB retrieval in that region. This issue will be included into the level 2 off-line disclaimer.

Figures 7.9 – 7.12 show the results for the months of November and December 2008 and for the two different tangent height regions.



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 60 of 64

7.2.3.1 Ozone limb profiles November 2008

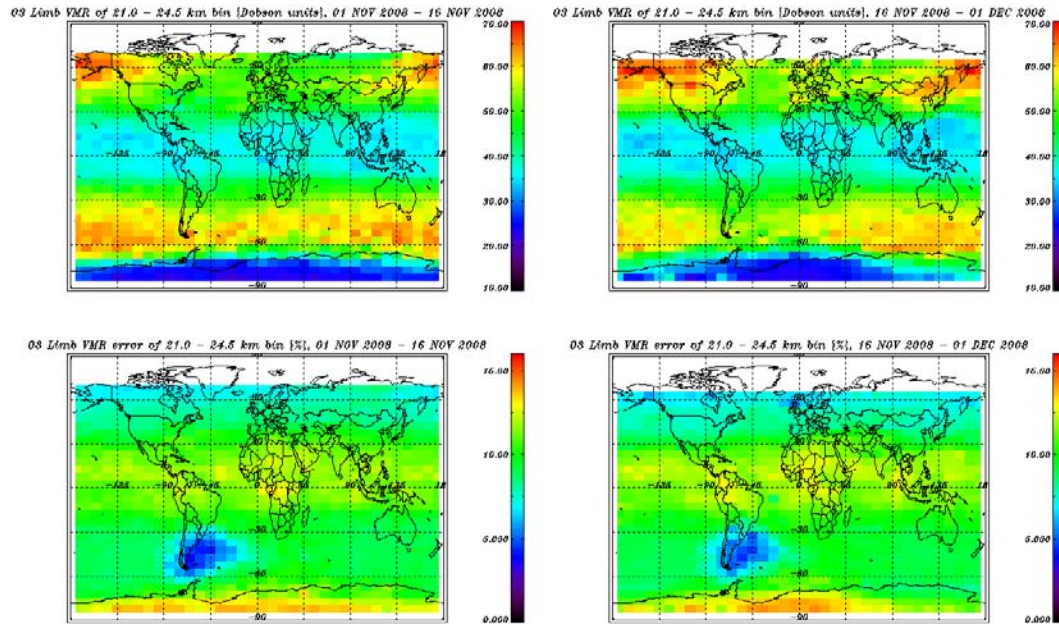


Figure 7-9 Limb Ozone profiles, binned over 21.0 - 24.5 km

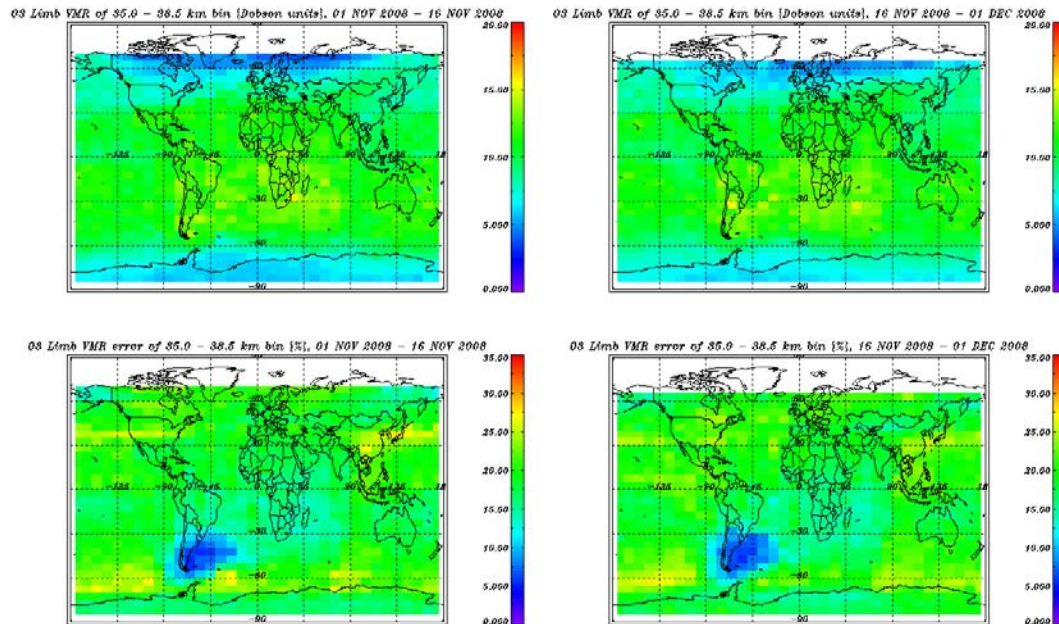


Figure 7-10 Limb Ozone profiles, binned over 35.0 - 38.5 km



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 61 of 64

7.2.3.2 Ozone limb profiles December 2008

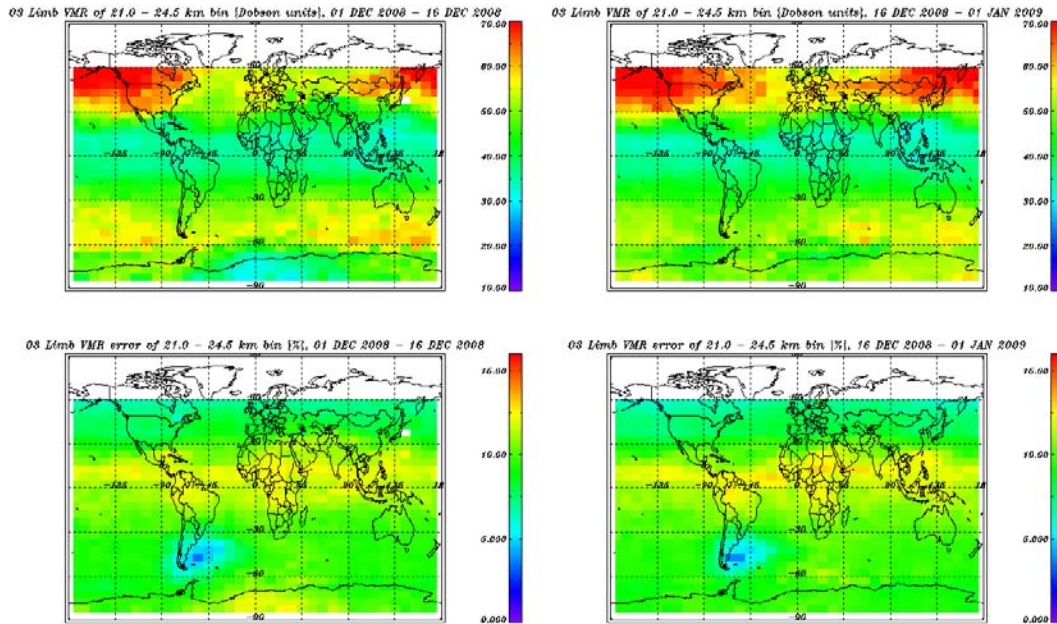


Figure 7-11: Limb Ozone profiles binned over 21.0 – 24.5 km

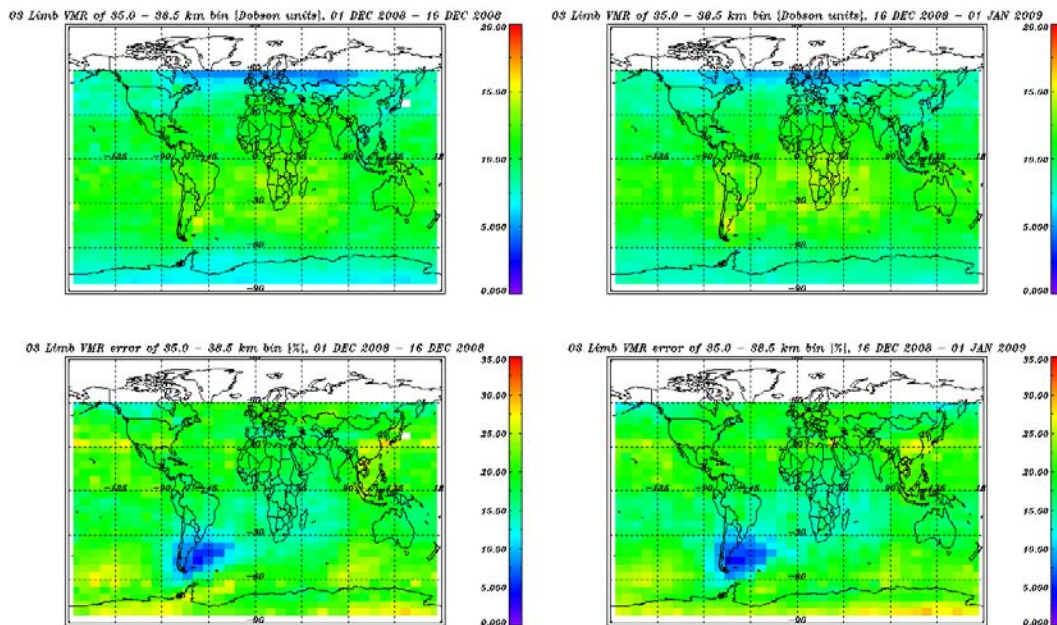


Figure 7-12: Limb Ozone profiles binned over 35.0 – 38.5 km



esa



DLR



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 62 of 64

7.2.4 Limb: NO_2 profile averages

Analogous as for the limb Ozone profiles monthly averages for NO_2 limb averages were generated. The tangent height region chosen is:

- 24.5 – 28.0 km (15th bin, bin index=14).

As for the ozone averages the data of the first half of each month (calendar days 1 - 15) and the second half (calendar days 16 - 31) are averaged for selected tangent heights into geolocation bins of 10 degrees longitude and 5 degrees latitude. The binning algorithm used is the same as the described in 7.2.3. The corresponding error is averaged as well. Figures 7.13 – 7.14 show the results for the months of November and December 2008.



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0

page 63 of 64

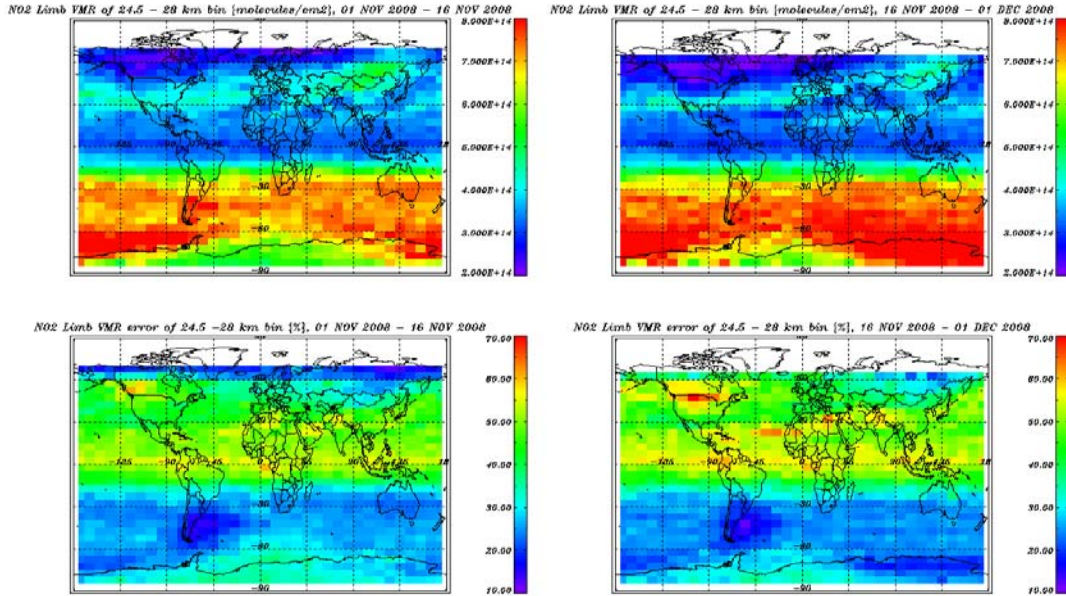


Figure 7-13 Limb NO₂ profiles binned over 24.5 - 28 km, November 2008

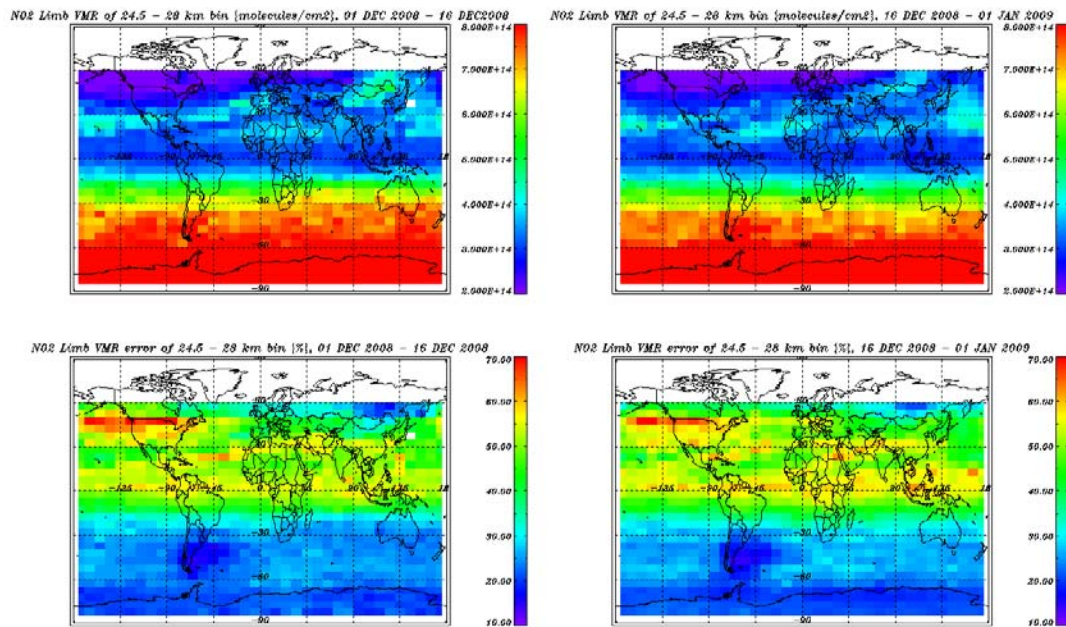


Figure 7-14 Limb NO₂ profiles binned over 24.5 - 28 km, December 2008



esa



serco

SCIAMACHY Bi-MONTHLY R



issue 1 revision 0-

page 64 of 64

8 VALIDATION ACTIVITIES AND RESULTS

Validation activities of products from re-processing, level 1 IPF 6.03 and level 2 off-line processor 3.01 have been performed.

The SCIAVALIG group has published the results of the Product Quality at

http://www.sciamachy.org/validation/documentation/technotes/SCIAVALIG/Summary_operational_product_quality_20080326.pdf