

---

/document title/ titre du document

# **SCIAMACHY BI-MONTHLY REPORT: MAY - JUNE 2009**

---

prepared by/ <i>préparé par</i>	Gabriele Brizzi
reference/ <i>référence</i>	ENVI-SPPA-EOPG-TN-09-0025
issue/ <i>édition</i>	1
revision/ <i>révision</i>	0
date of issue/ <i>date d'édition</i>	28 July 2009
status/ <i>état</i>	
Document type/ <i>type de document</i>	Technical Note
Distribution/ <i>distribution</i>	

## APPROVAL

<b>Title</b> <i>titre</i>	SCIAMACHY Bi-Monthly Report: May - June 2009	<b>issue</b> <i>issue</i> 1	<b>revision</b> <i>revision</i> 0
------------------------------	--	--------------------------------	--------------------------------------

<b>author</b> <i>auteur</i>	Gabriele Brizzi, IDEAS-SERCO, Angelika Dehn, IDEAS-SERCO, Manfred Gottwald, SOST-DLR, Stefan Noël, SOST-IFE, Richard von Hees, SRON	<b>date</b> <i>date</i>	28/07/2009
--------------------------------	---	----------------------------	------------

<b>approved by</b> <i>approuvé by</i>	T. Fehr ESA/ESRIN, D/EOP-GQ G. Lichtenberg, IDEAS-DLR	<b>date</b> <i>date</i>	28/07/2009
--	--	----------------------------	------------

## CHANGE LOG

<b>reason for change /raison du changement</b>	<b>issue/issue</b>	<b>revision/revision</b>	<b>date/date</b>

## CHANGE RECORD

Issue: 1 Revision: 0

<b>reason for change/raison du changement</b>	<b>page(s)/page(s)</b>	<b>paragraph(s)/paragraph(s)</b>

## **TABLE OF CONTENTS**

<b>1</b>	<b>INTRODUCTION.....</b>	<b>5</b>
1.1	Scope.....	5
1.2	References.....	5
1.3	Acronyms and Abbreviations.....	7
<b>2</b>	<b>SUMMARY .....</b>	<b>9</b>
<b>3</b>	<b>INSTRUMENT CONFIGURATION AND PERFORMANCE.....</b>	<b>10</b>
3.1	In-Flight Status and Performance .....	10
3.1.1	Planned Operations and Measurements (SOST-DLR) .....	10
3.1.2	Instrument Measurement Status (SOST-DLR) .....	11
3.1.3	Executed Operations and Measurements (SOST-DLR) .....	11
3.1.4	Performance Monitoring - System (SOST-DLR) .....	13
3.1.5	Performance Monitoring - Light Path (SOST-IFE) .....	20
3.1.5.1	Science Channel Averages.....	20
3.1.5.2	Spectral light path monitoring results .....	22
3.1.5.3	PMD monitoring results.....	27
<b>4</b>	<b>DATA AVAILABILITY STATISTICS .....</b>	<b>29</b>
4.1	Downlink/Acquisition Performance .....	29
4.2	Statistics on unconsolidated data .....	29
	(SCI_NL__0P, SCI_NL__1P) .....	29
4.3	Statistics on consolidated data .....	30
4.3.1	Anomalies on Level 0 consolidated data products.....	30
4.3.2	Availability of consolidated SCI_NL__1P products .....	31
4.4	Statistics on reprocessed data.....	32
4.4.1	Level 1b re-processing .....	32
4.4.2	Level 2 re-processing .....	32
<b>5</b>	<b>LEVEL 1 PRODUCT QUALITY MONITORING .....</b>	<b>33</b>
5.1	Processor Configuration.....	33
5.1.1	Version .....	33
5.1.2	Anomalies .....	34
5.2	Auxiliary Data Files .....	35
5.2.1	Auxiliary Data File quality analysis.....	36
5.2.1.1	SMR analysis .....	36
5.2.1.2	LK1 analysis .....	41
5.2.1.2.1	Leakage Constant part.....	41
5.2.1.2.2	Leakage Variable part .....	44

---

5.3	Bad and Dead Pixel Mask.....	45
5.4	Pointing Performance.....	46
5.5	SciaL1c tool .....	46
<b>6</b>	<b>LEVEL 2 NRT PRODUCT QUALITY MONITORING .....</b>	<b>47</b>
6.1	Processor Configuration.....	47
6.1.1	Version .....	47
6.1.2	Auxiliary Data Files .....	47
<b>7</b>	<b>LEVEL 2 OFF-LINE PRODUCT QUALITY MONITORING.....</b>	<b>48</b>
7.1	Processor Configuration.....	48
7.1.1	Version .....	48
7.1.2	Anomalies .....	49
7.1.3	Auxiliary Data Files .....	49
7.2	Monitoring results .....	50
7.2.1	Nadir: NO <sub>2</sub> consistency checking .....	50
7.2.1.1	Nadir: VCD NO <sub>2</sub> map May 2009.....	51
7.2.1.2	Nadir: VCD NO <sub>2</sub> map June 2009.....	52
7.2.2	Nadir: O <sub>3</sub> consistency checking .....	53
7.2.2.1	Nadir: VCD O <sub>3</sub> map May 2009.....	54
7.2.2.2	Nadir: VCD O <sub>3</sub> map June 2009.....	55
7.2.2.3	Limb: Ozone profile averages.....	56
7.2.2.4	Ozone limb profiles May 2009 .....	57
7.2.2.5	Ozone limb profiles June 2009 .....	58
7.2.3	Limb: NO <sub>2</sub> profile averages .....	59
<b>8</b>	<b>VALIDATION ACTIVITIES AND RESULTS.....</b>	<b>61</b>

# **SCIAMACHY BI-MONTHLY REPORT MAY - JUNE 2009**

## **1 INTRODUCTION**

The SCIAMACHY Bi-Monthly report documents the current status and recent changes to the SCIAMACHY instrument, its data processing chain, and its data products.

The Bi-Monthly Report (hereafter BMR) is composed of analysis results obtained by IDEAS, combined with inputs received from the different groups working on SCIAMACHY operation, calibration, product validation and data quality.

The first part of the report is dedicated to Instrument Configuration and Performance. It is composed of contributions from SOST-DLR, SOST-IFE and SRON.

The remainder of the report is dedicated to Level 1b and Level 2 performance assessment and is generated by ESA/ESRIN IDEAS with contributions from ESA/ESTEC PLSO and DLR-IMF.

The structure of the report will be in constant evolution through the ENVISAT mission, as experience with SCIAMACHY data and quality control grows.

### **1.1 Scope**

The main objective of the BMR is to give, on a regular basis, the status of SCIAMACHY instrument performance, data acquisition, results of anomaly investigations, calibration activities and validation campaigns. The BMR is composed of the following six sections:

- Summary;
- Instrument Configuration and Performance;
- Data Availability Statistics;
- Level 1 Product Quality Monitoring;
- Level 2 Product Quality Monitoring;
- Validation Activities and Results.

### **1.2 References**

- [1] 'Instrument Operation Manual', MA-SCIA-0000DO/01, Issue F R2, 16 Dec. 2004.
- [2] 'ENVISAT-1 Products Specifications Volume 15: SCIAMACHY Products Specifications', PO-RS-MDA-GS-2009, Issue 3, Rev: K, Gianni Sotis, 06 May 2006.
- [3] 'SCIAMACHY cL0 Statistics, PO-TN-DLR-SH-0012, Issue 1, Rev. 1 14 April 2005'.
- [4] SCIAMACHY cL0 Statistics 2003, PO-TN-DLR-SH-0013, Issue 1, Rev. 0 14 April 2005.

[5] 'SCIAMACHY Consolidated Level 0: Statistics for the Year 2005', PO-TN-DLR-SH-0014, Issue 1, Rev. 0 11 July 2006.

[6] 'Summary of the Atmospheric Chemistry Instrument Validation results as presented at the ACVE-3 Workshop', Paul Snoeij, Ankie Piters, Herbert Fischer, Yasjka Meijer, Jean-Christopher Lambert, Thorsten Fehr.

[7] 'SCIAMACHY Extra Misalignment Model', PO-TN-DLR-SH-0016 Issue 1, M. Gottwald, E. Krieg, DLR-IMF, C. von Savigny, S. Noël, K. Bramstedt IUP-IFE, 07 March 2007.

[8] 'Verification of the extra misalignment correction in the SCIAMACHY IPF 6.03 processor', TN-IUP/IFE-2007-cvs-02, C. von Savigny, A. Dehn, H. Bovensmann, J. Steinwagner IUP-IFE, 05 July 2007.

[9] 'SCIAMACHY SciCal Tool Change of Leakage ADF generation' ENV-TN-DLR-SCIA-0094, Issue 1.0, Bernd Aberle, Günter Lichtenberg, 08 November 2007.



esa



DLR



ife

serco

SCIAMACHY Bi-MONTH



page 7 of 61

### 1.3 Acronyms and Abbreviations

ADC	Analogue to Digital Converter
ADF	Auxiliary Data File
ANX	Ascending Node Crossing
AOCS	Attitude and Orbit Control System
APSM	Aperture Stop Mechanism
ASM	Azimuth Scan Mechanism
ATC	Active Thermal Control
BMR	Bi-Monthly Report
CA	Corrective Action
CCA	Communication Area
CTI	Configurable Transfer Item
DAC	Digital Analogue Converter
DLR-IMF	Deutsches Zentrum fuer Luft- und Raumfahrt
DPQC	Data Processing Quality Control
EOL	End of Life
ESM	Elevation Scan Mechanism
FAT	Factory Acceptance Test
FPN	Fixed Pattern Noise
HK	Housekeeping
HSM	High Speed Multiplexer
ICE	Instrument Control Electronics
ICU	Instrument Control Unit
IDEAS	Instrument Data quality Evaluation and Analysis Service
IECF	Instrument Engineering and Calibration Facilities
IOM	Instrument Operation Manual
LK1	Leakage Current Auxiliary File (SCI_LK1_AX)
LLI	Life Limited Item
LOS	Line of Sight
MCMD	Macro Command
MPH	Main Product Header
MPS	Mission Planning Schedule
MR	Monthly Report
NCWM	Nadir Calibration Window Mechanism
NDFM	Neutral Density Filter Mechanism
NIVR	Netherlands Agency for Aerospace Programmes
NNDEC	Non-nominal Decontamination
NRT	Near Real Time
OAR	Observation Anomaly Report
OBM	Optical Bench Module
OCR	Operations Change Request
OSDF	Orbit Sequence Definition File
OSV	Orbit State Vector
PCF	Product Control Facility



esa



DLR



ife

serco

SCIAMACHY Bi-MONTH



page 8 of 61

PDHS	Payload Data Handling Station (PDS)
PDHS-E	Payload Data Handling Station – ESRIN
PDHS-K	Payload Data Handling Station – Kiruna
PDS	Payload Data Segment
PE1	Pixel to Pixel/ Etalon Auxiliary File (SCI_PE1_AX)
PLSO	Payload Switch OFF
PMD	Polarization Measurement Device
QUADAS	Quality Analysis of Data from Atmospheric Sounders
QWG	Quality Working Group
SAA	South Atlantic Anomaly
SCIAMACHY	Scanning Imaging Absorption Spectrometer for Atmospheric Chartography
SCICAL	SCIAMACHY Calibration tool
SEU	Single Event Upset
SLS	Spectral Line Source
SM	Service Module
SMR	Sun Mean Reference
SOST	SCIAMACHY Operations Support Team
SP1	Spectral Calibration Auxiliary File (SCI_SP1_AX)
SU1	Sun Reference Auxiliary File (SCI_SU1_AX)
SZA	Sun Zenith Angle
TC	Thermal Control
TCFoV	Total Clear Field of View
TOA	Top of Atmosphere
TRUE	Tangent height Retrieval by UV-B Exploitation
VCD	Vertical Column Density
WLS	White Light Source
WUR	Wageningen University and Research
YSM	Yaw Steering Mode

## 2 SUMMARY

- During the reported period SCIAMACHY measurements were nominal with respect to planning, besides two unavailability period during following orbits:
  - 37959-3798 (03-05 June 2009)                    SCIAMACHY        PMT\_Tx  
buffer overflow
  - 38131-38153 (15-17 June 2009)                SCIAMACHY        PMT\_Tx  
buffer overflow
  - 38216-38230 (21-22 June 2009)                SCIAMACHY    SDPU    Tx  
Buffer Overflow
  
- Monthly Calibration was executed during Orbits:
  - 37584-37588 (08-May-2009)
  - 38014-38018 (07/08-Jun-2009)
  
- Occultation measurements with the moon rising on night side were executed during:
  - 37505-37575 (03-May-2009 until 08-May-2009)
  - 37935-37993 (02-Jun-2009 until 06-Jun-2009)
  
- OCR 37 was successfully implemented (slit width calibration to test Venus measurements) for a total of 5 orbits (38261-38266) on 25-Jun-2009 More details on this measurement activity can be found on the Space Daily web portal at [http://www.spacedaily.com/reports/Venus\\_Atmosphere\\_Observed\\_SCIAMACHY\\_On\\_Envisat\\_Looks\\_Elsewhere\\_999.html](http://www.spacedaily.com/reports/Venus_Atmosphere_Observed_SCIAMACHY_On_Envisat_Looks_Elsewhere_999.html).
  
- No TC adjustments was required
  
- Light Path monitoring:
  - Channels 1 & 2 degradation in the UV remains at about 1% per month.
  - Channel 3 small throughput loss (less than 0.5%).
  - Channels 4-7 remained stable.
  - Channel 8 throughput is decreased and lies now at ca. 68%.
  
- PMD monitoring:
  - Observed PMD throughput changes are (except for PMD 4 and 7) very similar to those of the science channels.



esa



serco

SCIAMACHY Bi-MONTH



### 3 INSTRUMENT CONFIGURATION AND PERFORMANCE

#### 3.1 In-Flight Status and Performance

Detailed operations, planning and instrument status information can be found on the website of the *SCIAMACHY Operations Support (SOST)* under <http://atmos.caf.dlr.de/projects/scops/>. These pages are maintained on a daily basis and show the history and actual progress of the SCIAMACHY mission.

##### 3.1.1 Planned Operations and Measurements (SOST-DLR)

The reporting period covers the orbits 37474 (ANX = 01-May-2009, 00:26:04.441) to 38346 (ANX = 30-Jun-2009, 22:28:13.783). Two OSDF specified the planning baseline.

Orbit		ANX		OSDF
Start	Stop	Start	Stop	
37474	37917	01-May-2009 00:26:04.441	31-May-2009 23:11:20.609	MFL_OSD_SHVSH_20090324_010101_00000000_35050001_20090501_002606_20090601_005154.N1
37918	38790	01-Jun-2009 00:51:56.537	31-Jul-2009 22:54:05.879	MFL_OSD_SHVSH_20090325_010101_00000000_35060001_20090601_005158_20090801_003440.N1

Table 3-1: SCIAMACHY OSDF planning files from May – June 2009.

Measurements were nominal, i.e. timelines executed limb/nadir sequences with wide swath settings on the dayside of the orbit. Each month they were interleaved with 2 blocks of 14-15 orbits each where the limb state was replaced by the *limb\_mesosphere\_thermosphere* state (see below). In-flight calibration and monitoring measurements occurred on daily, weekly and monthly timescales according to the mission scenarios. Regular monthly calibration was scheduled between orbits

- 37584-37588 (08-May-2009)
- 38014-38018 (07/08-Jun-2009)

The moon was in the limb TCFoV between orbits

- 37505-37621 (03-May-2009 until 11-May-2009)
- 37935-38041 (02-Jun-2009 until 09-Jun-2009)

Occultation measurements with the moon rising on the night side could be executed between orbits

- 37505-37575 (03-May-2009 until 08-May-2009)
- 37935-37993 (02-Jun-2009 until 06-Jun-2009)

Four blocks of *limb\_mesosphere\_thermosphere* measurements were scheduled.



esa



serco

SCIAMACHY Bi-MONTH



Orbit		UTC		Remark
Start	Stop	Start	Stop	
37490	37505	02-May-2009 03:15:39	03-May-2009 04:24:38	
37775	37790	22-May-2009 01:06:18	23-May-2009 02:15:17	MIPAS upper atmosphere mode
38042	38057	09-Jun-2009 16:46:11	10-Jun-2009 17:55:10	
38204	38219	21-Jun-2009 00:23:11	22-Jun-2009 01:32:10	MIPAS upper atmosphere mode

Table 3-2: Scheduled *limb\_mesosphere\_thermosphere* measurements in May – June 2009

One OCR was successfully implemented. This was

- OCR\_037 (*slit width calibration*): Between orbits 38261-38266 (25-Jun-2009) Venus was observed shortly after sunrise. This was the required measurement for the slit width calibration. Besides calibration data scientific information about the Venus atmosphere was acquired as well.

### 3.1.2 Instrument Measurement Status (SOST-DLR)

The final flight status for states and timelines remained unchanged.

### 3.1.3 Executed Operations and Measurements (SOST-DLR)

#### Measurements and instrument availability

The OSDF planning files have been scheduled as requested except for three periods:

- Orbit 37959-37980 (03-Jun-2009 to 05-Jun-2009): Transfer to STANDBY due to a *PMTC\_Tx buffer overflow* (likely SEU) followed by a *PMTC driver timeout* anomaly.
- Orbit 38131-38153 (15-Jun-2009 to 17-Jun-2009): Transfer to STANDBY due to a *PMTC\_Tx buffer overflow* (likely SEU) followed by a *PMTC driver timeout* anomaly.
- Orbit 38216-38230 (21/22-Jun-2009): Transfer to HTR/RF due to a *SDPU\_Tx buffer overflow* (likely SEU).



esa



serco

SCIAMACHY Bi-MONTH

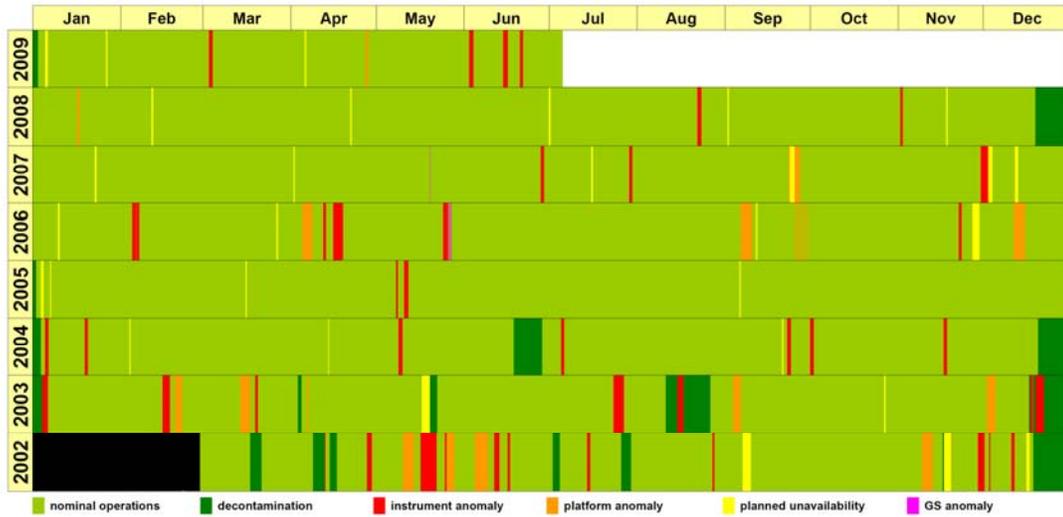


Fig. 3-1: Current instrument availability status including the reporting period

**Detector thermal adjustment (TC)**

No TC adjustment was required. The TC settings remained at

- DAC1 = 0.53 W
- DAC2 = 0.50 W
- DAC3 = 0.00 W

**APSM/NDFM health checks & PMD ADC cal**

In the reporting period 1 APSM/NDFM health check and 2 PMD ADC calibrations were executed. All showed nominal results.

APSM/NDFM			PMD ADC	
Orbit	ANX	Result	Orbit	ANX
n.a.	n.a.	n.a.	37864	28-May-2009 07:36:09
38336	30-Jun-2009 07:02:19	ok	38337	30-Jun-2009 08:38:49

Table 3-3: APSM/NDFM health check and PMD ADC calibration

**Anomalies**

Three major instrument (likely caused by a SEU) anomalies had occurred.

- Two transfers to STANDBY due to a *PMTC\_Tx buffer overflow* (likely SEU) followed by a *PMTC driver timeout* anomaly: Both double anomalies were similar to that experienced in March 2009. In total measurement data for orbits 37959-37980 (03-Jun-2009, 21:55:02 UTC to 05-Jun-2009, 09:50:55 UTC) and orbits

38131-38153 (15-Jun-2009, 22:20:42 UTC to 17-Jun-2009, 12:10:55 UTC) could not be generated as planned.

- Transfer to HTR/RF due to a *SDPU\_Tx buffer overflow* (likely SEU). In total measurement data for orbits 38216-38230 (21-Jun-2009, 21:51:06 UTC to 22-Jun-2009, 21:17:00 UTC) could not be generated as planned.

One short minor instrument anomaly was reported in orbit 37672 (14-May-2009, 21:39:05 UTC), caused by 1 sec detector module latch-up.

Orbit	Date	Entry - UTC	Level	Entry Type	ID Content/Transition	Mode	Remark
37672	14-MAY-2009	2009.134.21.39.05.646	Instrument	HK PARAMETER LIMIT EXCEEDING	1 (E000)	MEASUREMENT	DM latchup (1 sec OOL), possible SEU
37959	03-JUN-2009	2009.154.21.55.02.677	INSTRUMENT	AUTONOMOUS SWITCHING	ID454 / goto HEATER/REFUSE	HTR/REF	FMIC Tx Buffer Overflow
37959	03-JUN-2009	2009.154.21.55.02.946	INSTRUMENT	AUTONOMOUS SWITCHING	ID455 / goto STANDBY/REFUSE-I	STDBY/REF-I	FMIC Driver Timeout
37959	03-JUN-2009	2009.154.22.40.01.697	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	START TIMELINE	STDBY/REF-I	Complementary Failure
37959	03-JUN-2009	2009.154.22.40.01.704	INSTRUMENT	COMPLEMENTARY FAILURES	---	STDBY/REF-I	Complementary Failure
37959	03-JUN-2009	2009.154.22.40.01.709	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	START TIMELINE	STDBY/REF-I	Complementary Failure
In total 5 Complementary Failures until 2009.154.23.21.32.650							
37960	03-JUN-2009	2009.154.23.21.32.638	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	START TIMELINE	STDBY/REF-I	Complementary Failure
37960	03-JUN-2009	2009.154.23.21.32.646	INSTRUMENT	COMPLEMENTARY FAILURES	---	STDBY/REF-I	Complementary Failure
37960	03-JUN-2009	2009.154.23.21.32.650	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	START TIMELINE	STDBY/REF-I	Complementary Failure
38131	15-JUN-2009	2009.166.22.20.49.076	INSTRUMENT	AUTONOMOUS SWITCHING	ID454 / goto HEATER/REFUSE	HTR/REF	FMIC Tx Buffer Overflow
38131	15-JUN-2009	2009.166.22.20.49.342	INSTRUMENT	AUTONOMOUS SWITCHING	ID455 / goto STANDBY/REFUSE-I	STDBY/REF-I	FMIC Driver Timeout
38131	15-JUN-2009	2009.166.23.17.46.479	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	START TIMELINE	STDBY/REF-I	Complementary Failure
38131	15-JUN-2009	2009.166.23.17.46.479	INSTRUMENT	COMPLEMENTARY FAILURES	---	STDBY/REF-I	Complementary Failure
38131	15-JUN-2009	2009.166.23.18.32.628	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	START TIMELINE	STDBY/REF-I	Complementary Failure
In total 8 Complementary Failures until 2009.167.01.30.50.925							
38133	16-JUN-2009	2009.167.01.30.50.925	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	START TIMELINE	STDBY/REF-I	Complementary Failure
38133	16-JUN-2009	2009.167.01.30.50.937	INSTRUMENT	COMPLEMENTARY FAILURES	---	STDBY/REF-I	Complementary Failure
38133	16-JUN-2009	2009.167.01.30.50.941	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	START TIMELINE	STDBY/REF-I	Complementary Failure
38216	22-JUN-2009	2009.172.21.51.12.112	Instrument	AUTONOMOUS SWITCHING	ID 406 / goto HEATER/REFUSE	HTR/RF	SOPL Tx Buffer Overflow
38217	22-JUN-2009	2009.172.22.15.02.077	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	START TIMELINE	STDBY/REF-I	Complementary Failure
38217	22-JUN-2009	2009.172.22.15.02.085	INSTRUMENT	COMPLEMENTARY FAILURES	---	STDBY/REF-I	Complementary Failure
38217	22-JUN-2009	2009.172.22.15.02.089	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	START TIMELINE	STDBY/REF-I	Complementary Failure
38217	22-JUN-2009	2009.172.22.21.04.503	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	START TIMELINE	STDBY/REF-I	Complementary Failure
38217	22-JUN-2009	2009.172.22.21.04.510	INSTRUMENT	COMPLEMENTARY FAILURES	---	STDBY/REF-I	Complementary Failure
38217	22-JUN-2009	2009.172.22.21.04.514	INSTRUMENT	MACROCOMMAND EXECUTION ENTRY	START TIMELINE	STDBY/REF-I	Complementary Failure

Table 3-4: Instrument anomalies between May and June 2009

### 3.1.4 Performance Monitoring - System (SOST-DLR)

Detector and OBM temperatures are monitored according to the requirements of the IOM [1]. It requests to ensure that the average temperature per orbit remains within the specified limits.

#### Detector temperatures

For each detector the average temperatures per orbit are determined from HK telemetry parameters. Fig. 3-2 displays the temperatures of all 8 detectors. Colour coding is as on the operational monitoring website, i.e. data from orbits with HK telemetry coverage > 90% are shown in red, for < 90% in green. Minimum/maximum values per orbit are indicated as vertical bars. The temperature limits of each detector are shown as horizontal lines.

During the reporting period detectors 4 & 5 temperatures exceeded the upper limits. It was decided to tolerate elevated detector 5 temperatures up to about 0.5 K. This is the observed range until the seasonal maximum in early June. The three telemetry gaps are caused by the instrument anomalies described above.



esa



DLR



serco

SCIAMACHY Bi-MONTH



page 14 of 61

### *OBM temperatures*

The average OBM temperature per orbit is determined from specific HK telemetry parameters. In addition power readings for the ATC heaters are monitored. Temperatures and ATC heater powers are given in Fig. 3-3 and 3-4. Colour coding is as in Fig. 3-2.

OBM temperatures and ATC heater powers remained within limits. The two telemetry gaps are caused by the instrument anomalies (transfer to STANDBY) described above.

### *PMD ADC status*

The status of the PMD ADC is monitored according to the requirements of the IOM [1]. It requests to ensure that no glitches occur caused by an SEU.

No PMD ADC glitches have been detected.





esa





serco

SCIAMACHY BI-MONTH

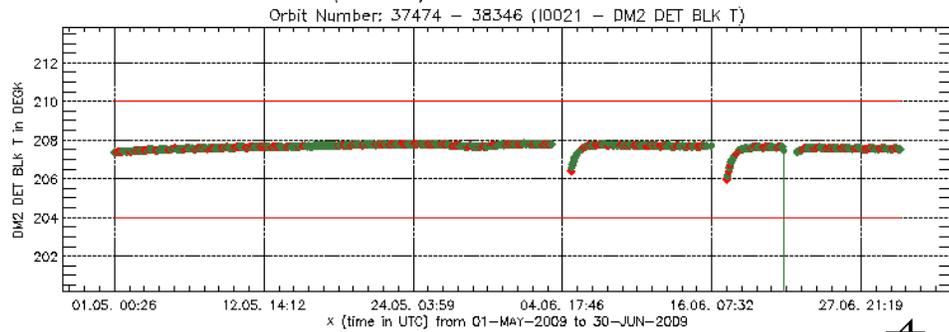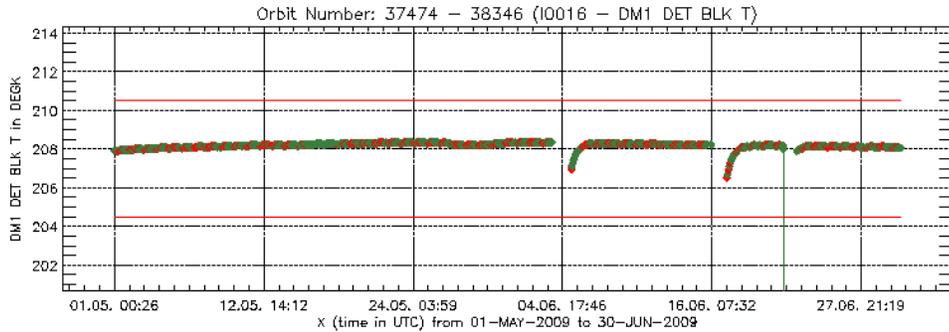

Filename: PIN\_401\_37474\_38346\_ Date : 13-07-2009 Page : 1

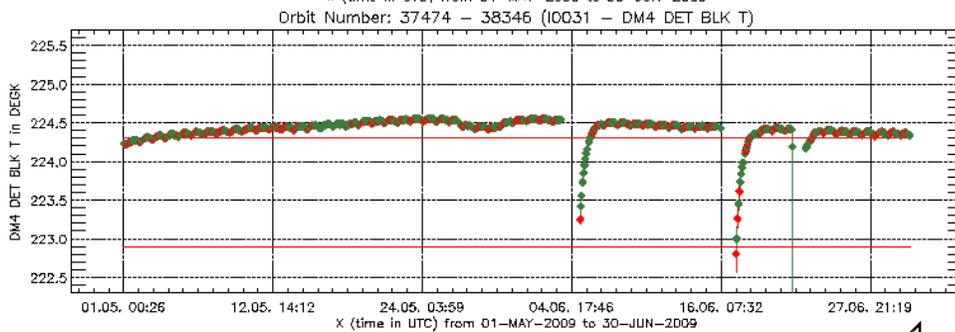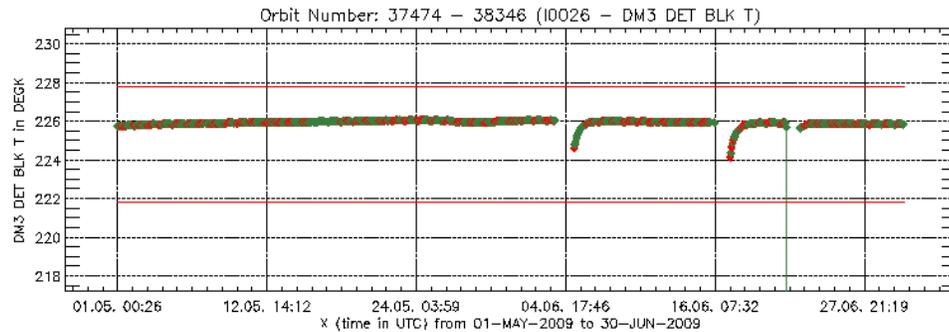

Filename: PIN\_401\_37474\_38346\_ Date : 13-07-2009 Page : 1



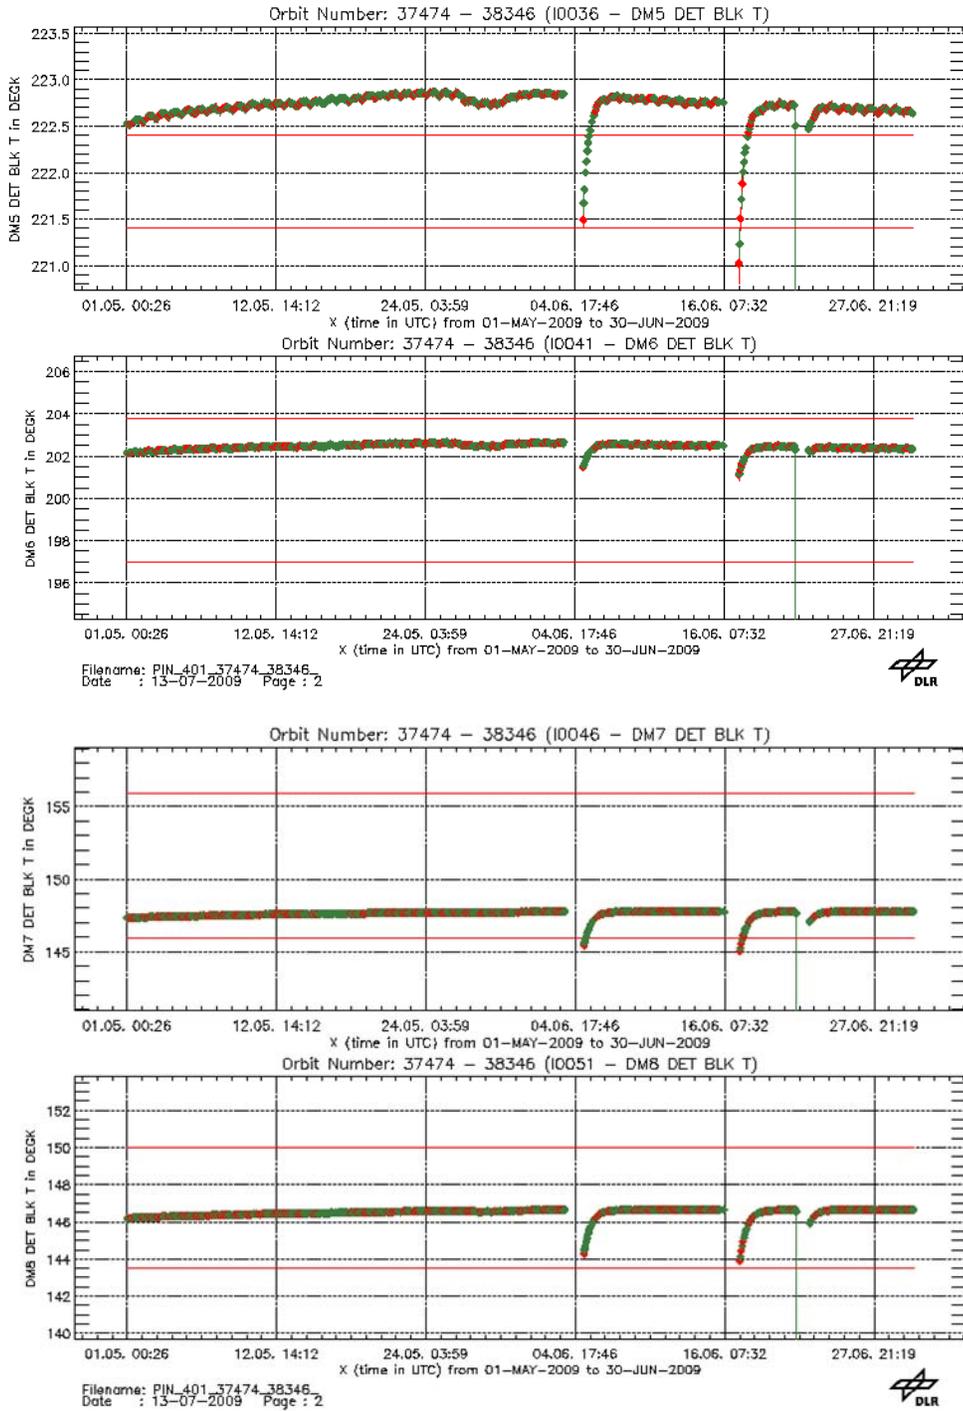


Fig. 3-2: Detector temperatures



esa



serco

SCIAMACHY Bi-MONTH

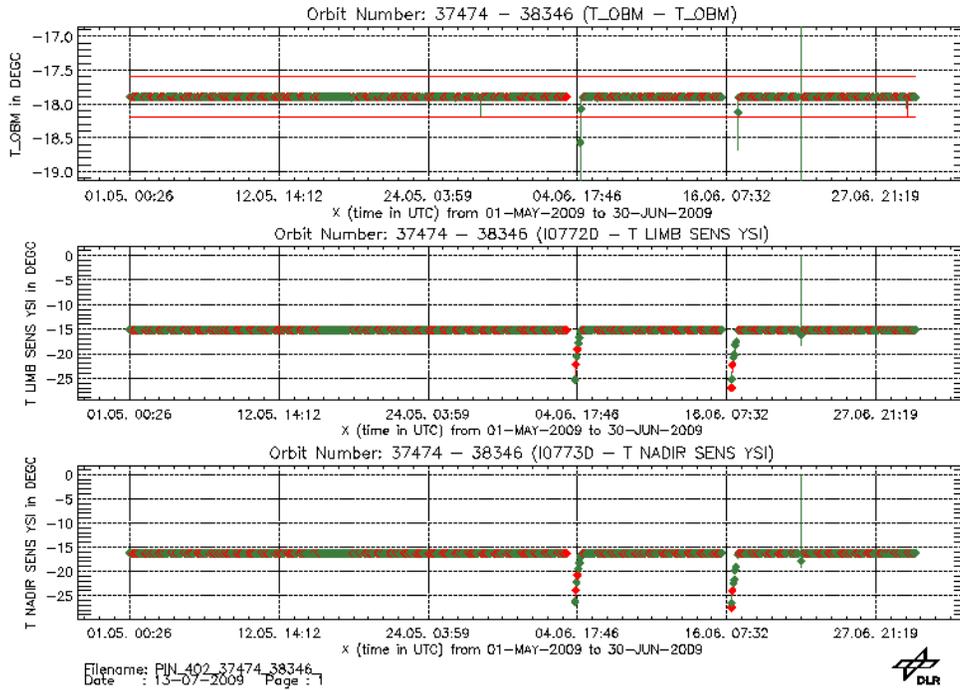


Fig. 3-3: OBM temperatures (top: derived OBM, middle: limb sensor, bottom: nadir sensor)

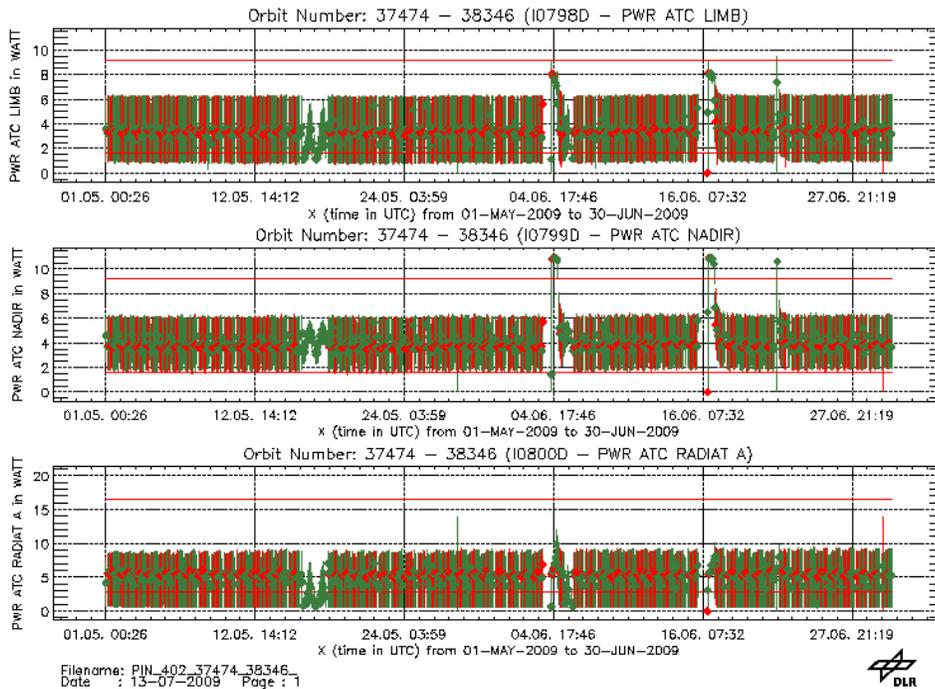


Fig. 3-4: ATC heater power (top: ATC limb, middle: ATC nadir, bottom: ATC Rad A)



esa



serco

SCIAMACHY Bi-MONTH



*LLI status*

Life Limited Items are monitored based on analysis of the

- OSDF: This yields a predicted LLI usage.
- Report format: This counts the actual LLI switches or used LLI cycles. No WLS/SLS burning times can be derived thereof.

In addition, the in-flight usage of the cryogenic heat pipe is recorded. This subsystem has a limited number of cycles. Each decontamination increases the accumulated number of cycles by 1.

At the end of the reporting period the fractional usage of the LLI relative to the allowed in-flight budget was (based on OSDF prediction)

- NDFM: 0.49
- APSM: 0.45
- NCWM (sub-solar port): 0.81
- WLS (switches): 0.16
- WLS (burning time): 0.29
- SLS (switches): 0.06
- SLS (burning time): 0.02

For the NDFM and APSM the safety margin factor of 2 was no longer applied in the calculation of the fractional usage since it was found acceptable to stay below the figures of the life-tests. How the relative LLI usage has accumulated since launch can be seen in fig. 3-5. 'EOL' assumes a total mission lifetime until end of 2013.

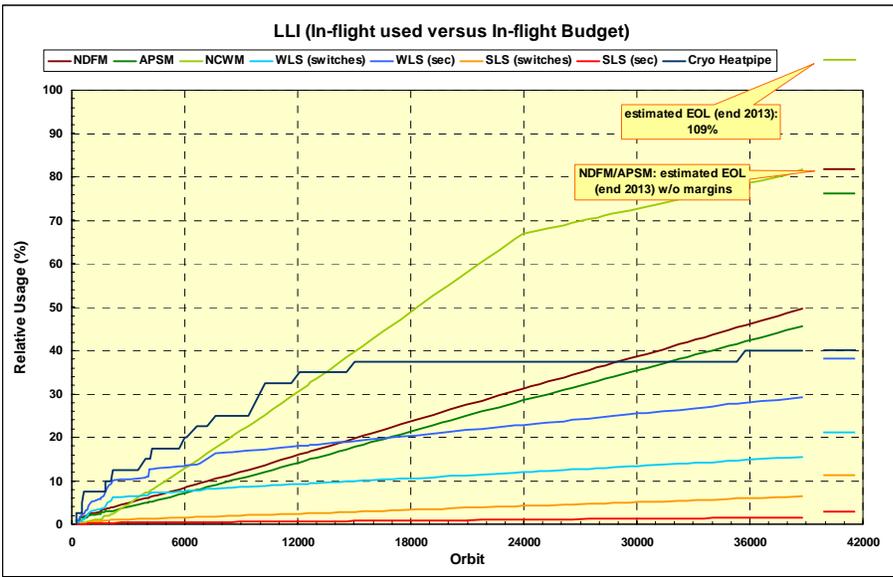


Fig. 3-5: Relative usage of LLIs. 'EOL' is derived for a mission lifetime until 2013. For the NDFM and APSM no margin factors have been applied to derive the EOL relative usage.



esa



serco

SCIAMACHY Bi-MONTH



Note that the NCWM usage exceeding 100% by the end of 2013 will be adjusted once the second phase of the mission extension has started in 2010.

The number of cryogenic heatpipe cycles did not increase (decontamination was already included in the November-December report). The budget used remained at 40% of the allowed in-flight budget.

*Time reference*

The times quoted in all planning files refer to the reference orbit. Since the actual orbit differs from the reference orbit (e.g. orbit drift), the times given w.r.t. the reference orbit also do not reflect exactly the actual absolute times of events along the orbit (e.g. ANX, sunrise, sub-solar, moonrise, eclipse). The requirements for orbit maintenance may result in time differences of usually  $< \pm 10$  sec. In some cases this value may even reach  $\pm 1$  min, however.

SOST monitors how the reference time deviates from the actual time. This is done by using the predicted time which comes very close to the actual = restituted time. If the predicted times are delayed w.r.t. the reference orbit, then the difference *predicted - reference time* is  $> 0$  sec; in the other case it is  $< 0$  sec.

Fig. 3-6 displays the time difference *predicted - reference*. Orbit manouevres cause distinct discontinuities.

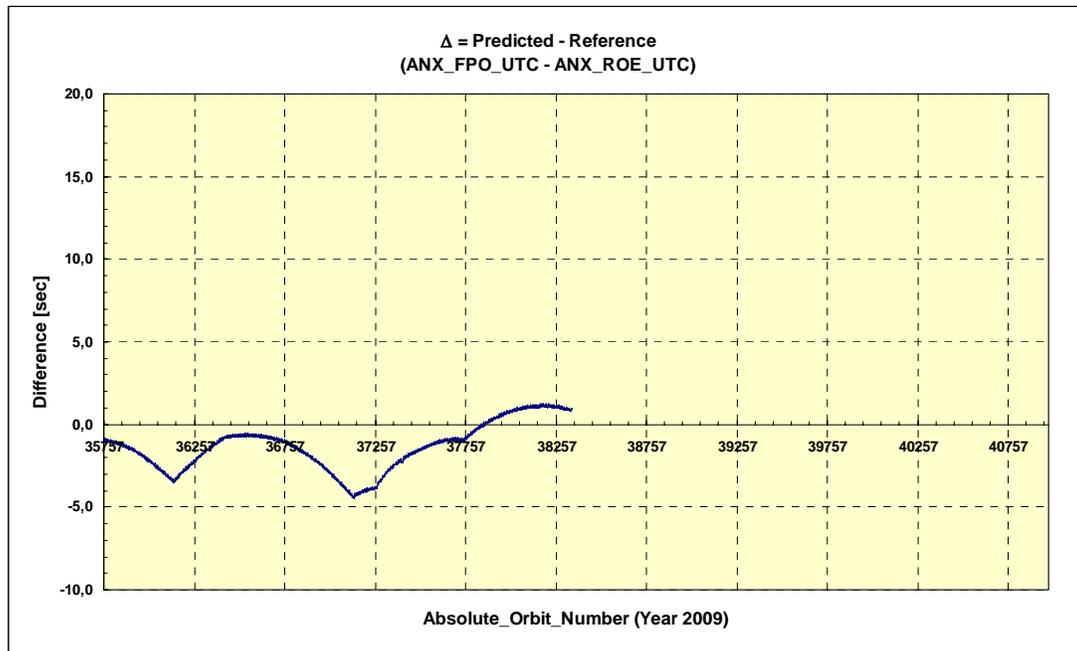


Fig. 3-6: Time difference between predicted and reference time.



esa



serco

SCIAMACHY Bi-MONTH



page 20 of 61

### 3.1.5 Performance Monitoring - Light Path (SOST-IFE)

This section summarises the performance monitoring results for the two months time interval covered by this report.

A more detailed description of the performance monitoring activities is given in the SCIAMACHY Bi-Monthly Report May-June 2008.

#### 3.1.5.1 Science Channel Averages

One part of the SOST long-term monitoring activities is the trend analysis of measurements with the internal White Light Source (WLS) and of observations of the unobscured Sun above the atmosphere. In order to monitor the different SCIAMACHY light paths solar measurements are taken in various viewing geometries: In limb/occultation geometry (via ASM and ESM mirrors), in nadir geometry (via the ESM mirror through the subsolar port), and via the so-called calibration light path involving the ASM mirror and the ESM diffuser. SCIAMACHY long-term monitoring comprises a regular analysis of these measurements. The plots displayed in Fig. 3.7 show results of these monitoring activities for the time interval May to June 2009.

Note that the reported channel averages are medians. The currently used scan angle correction is based on V6 radiometric key data.

The light path monitoring results presented in this section may be regarded as a first step towards spectrally resolved monitoring factors (m-factors) which will be produced based on fully calibrated data.

Daily updated light path monitoring results can be found on the SOST or IUP web site (<http://www.iup.uni-bremen.de/sciamachy/LTM/LTM.html>).

The following specific features can be identified from the light path monitoring results during the time interval of this report:

- Overall the instrument behaved as expected.
- Channel 2 shows some slight jumps in throughput in June (similar as observed in the last reporting period) which are still unexplained.
- The gaps on 5/6 and 17/18 June 2009 are due to instrument anomalies during that time.
- The degradation rate in the UV (channels 1 & 2) remains at about 1% per month.
- The minimum average throughput in channel 1 lies currently around 39% (for the limb light path). The throughput of the calibration light path is currently at about 80% in channel 1 and 83% in channel 2.
- The overall degradation of channel 3 is very small (2 – 7%, depending on light path) compared to channels 1 and 2. A small decrease in throughput of less than 0.5% is observed within the two months of this report.
- Channel 4 to 7 remained stable except from some remaining seasonal variations, especially visible in the calibration light path.
- The channel 8 throughput is still slightly decreasing (about 1% per month), but there is some first indication of a stabilisation. Currently, the throughput for all light paths lies at around 68%.

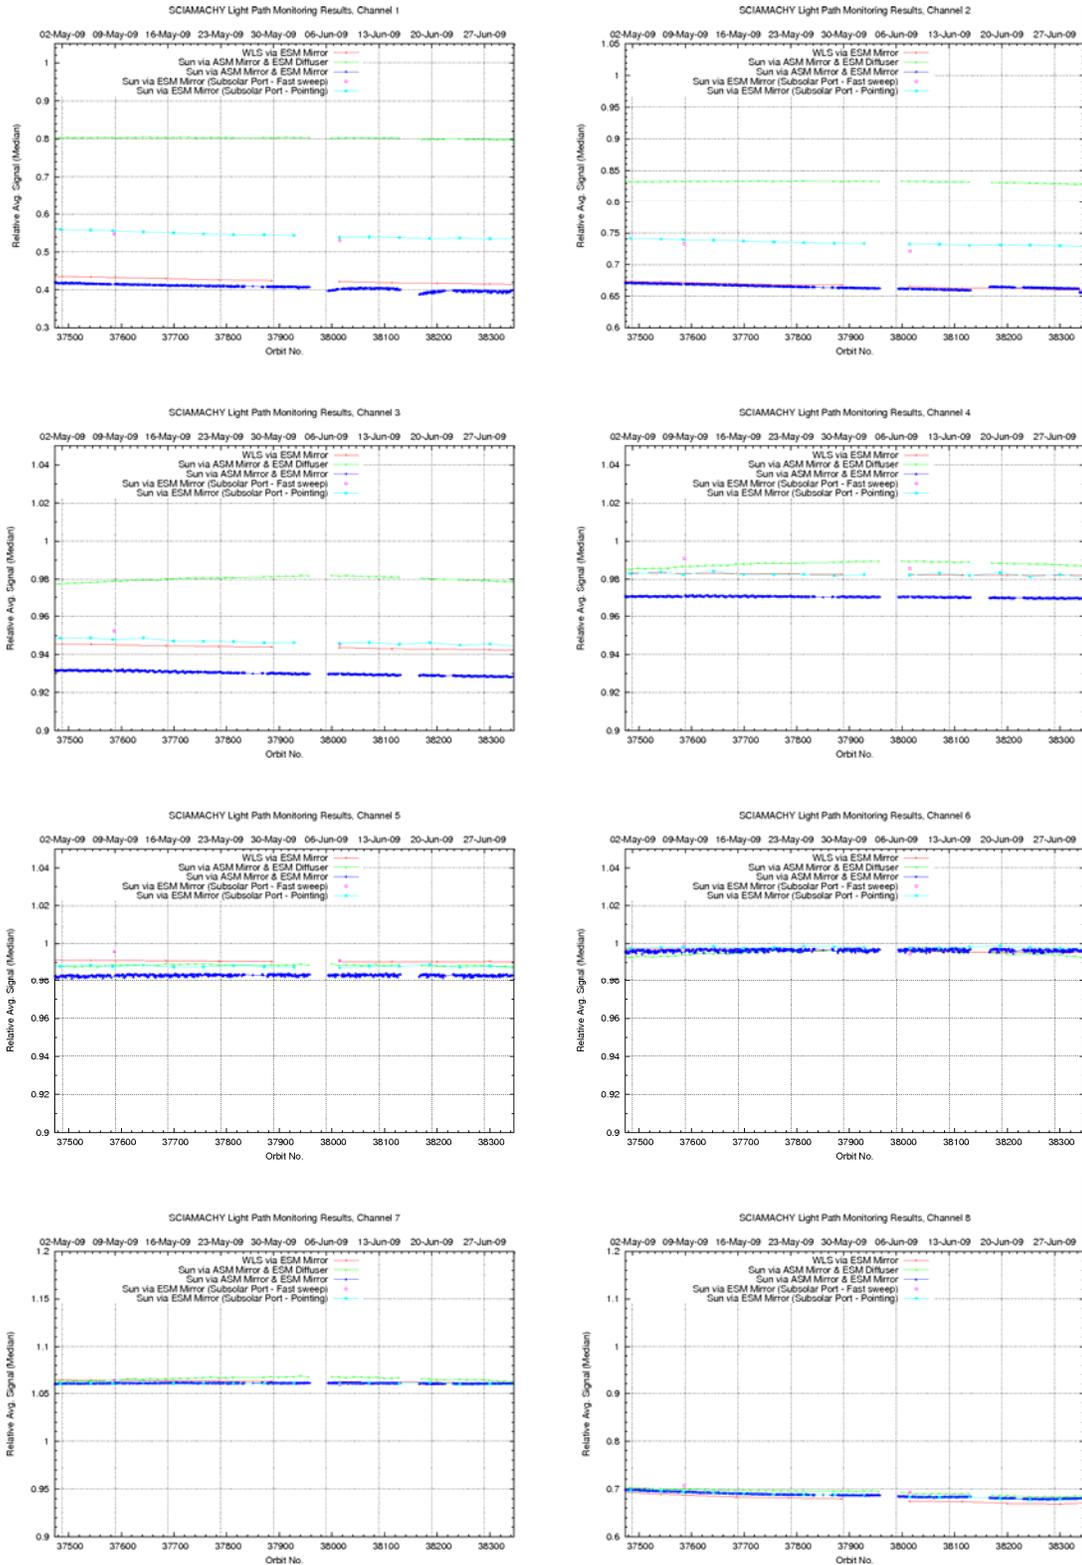


Fig. 3.7: Light path monitoring results May to June 2009 (medians).



esa



DLR



serco

SCIAMACHY Bi-MONTH



page 22 of 61

### 3.1.5.2 Spectral light path monitoring results

Fig. 3.8 – 3.11 show results of spectral throughput monitoring performed by SOST-IFE for the different light paths (nadir, limb, calibration, and WLS). These results have been derived from Level 0 data analysed in a similar way as for the channel averaged throughput data (but of course without spectral averaging). Because the variation in spectral direction is very small within two months, Fig. 3.8 – 3.11 show the complete time series from 2 August 2002 to the end of June 2009.

The underlying data for the spectral monitoring are available via the SOST-IFE web site (see [http://www.iup.uni-bremen.de/sciamachy/LTM/LTM\\_spectral/LTM\\_spectral.html](http://www.iup.uni-bremen.de/sciamachy/LTM/LTM_spectral/LTM_spectral.html)). As for the plotted results, these data are regularly updated (since January 2009 on a daily basis).

The current status of the degradation is as follows:

- The minimum throughput is below 40% for the limb and WLS (nadir) light paths at the short wavelength edge of channel 1 (i.e. below about 260 nm).
- The minimum throughput at the degradation peak around 350 nm in channel 2 is currently about 50%.
- The minimum throughput at the lower wavelength edge of channel 3 is currently about 80% (not considering the overlaps).
- Channels 4 to 7 are still stable over the whole spectral range (except for the overlaps).
- Channel 8 throughput still decreases.



esa



serco

SCIAMACHY BI-MONTH

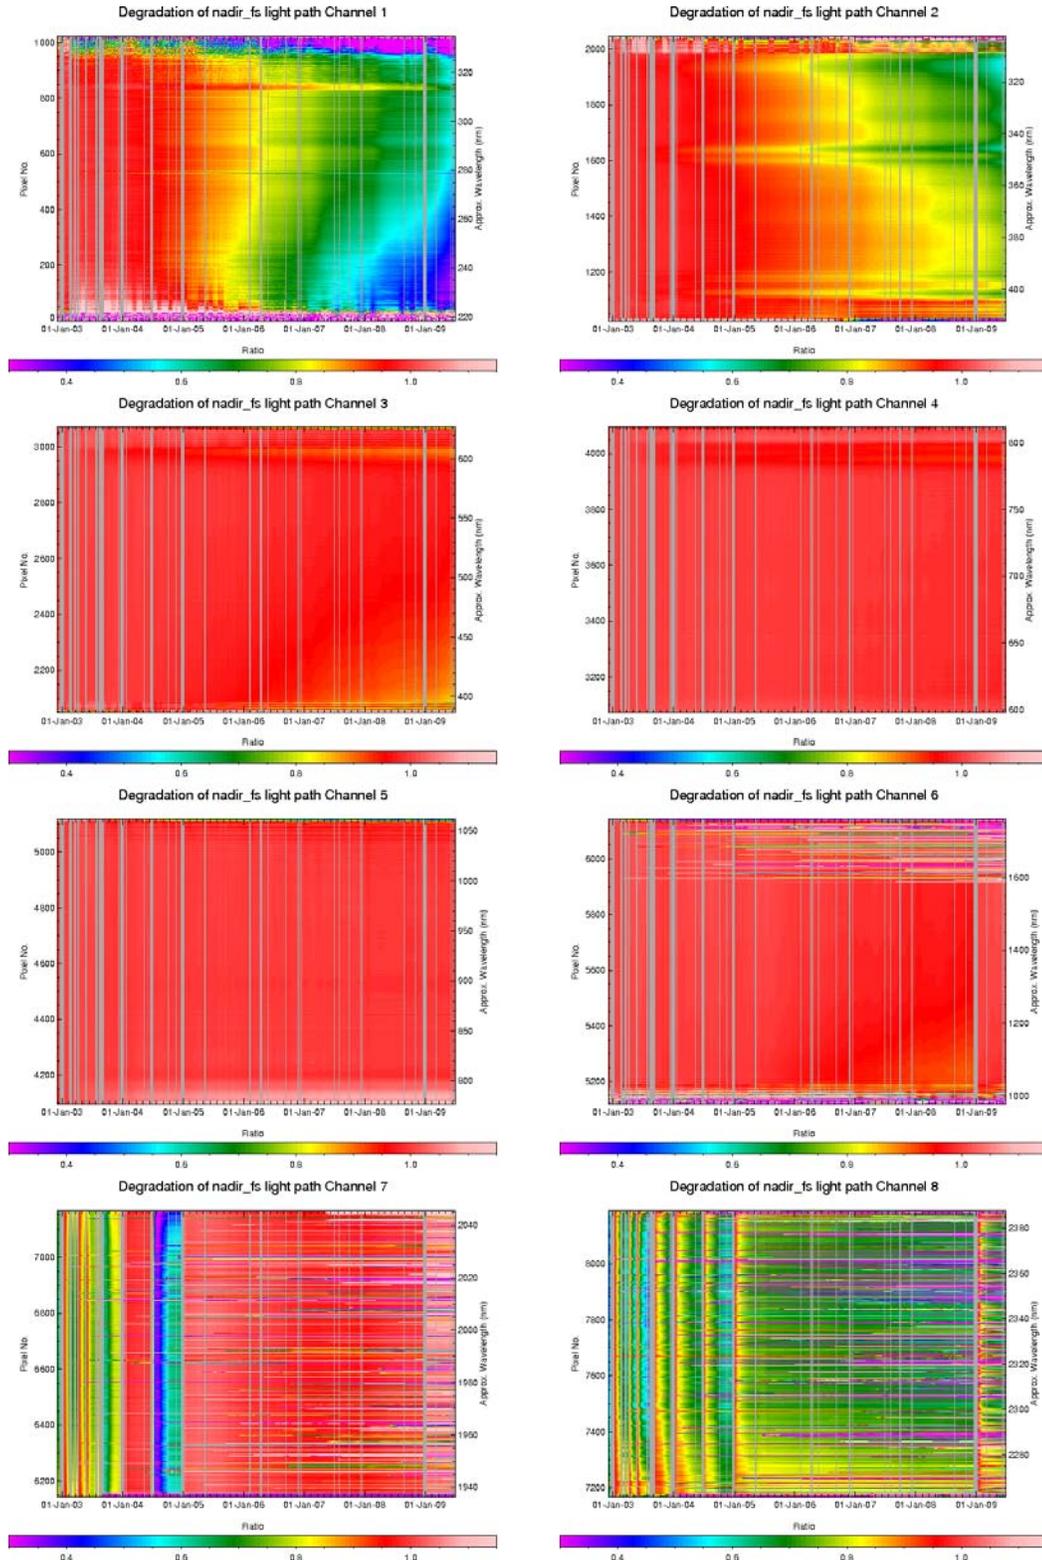


Fig. 3.8: Spectral light path monitoring results August 2002 to June 2009 (nadir light path).



esa



serco

SCIAMACHY BI-MONTH

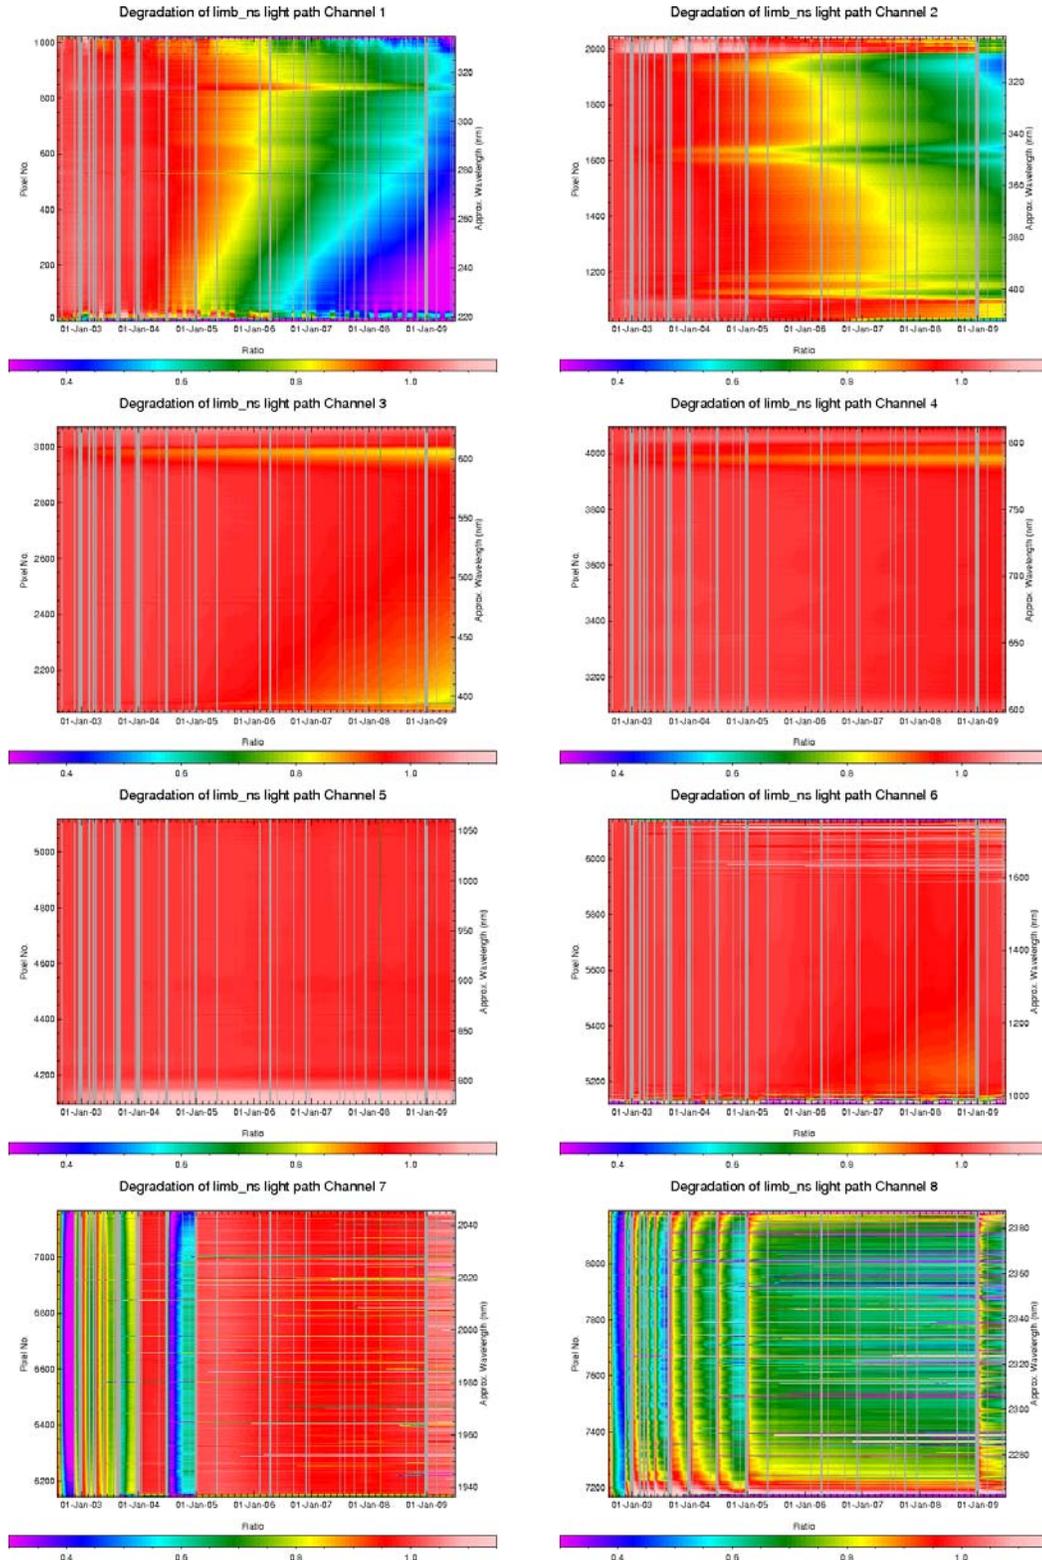


Fig. 3.9: Spectral light path monitoring results August 2002 to June 2009 (limb light path).



esa



serco

SCIAMACHY BI-MONTH

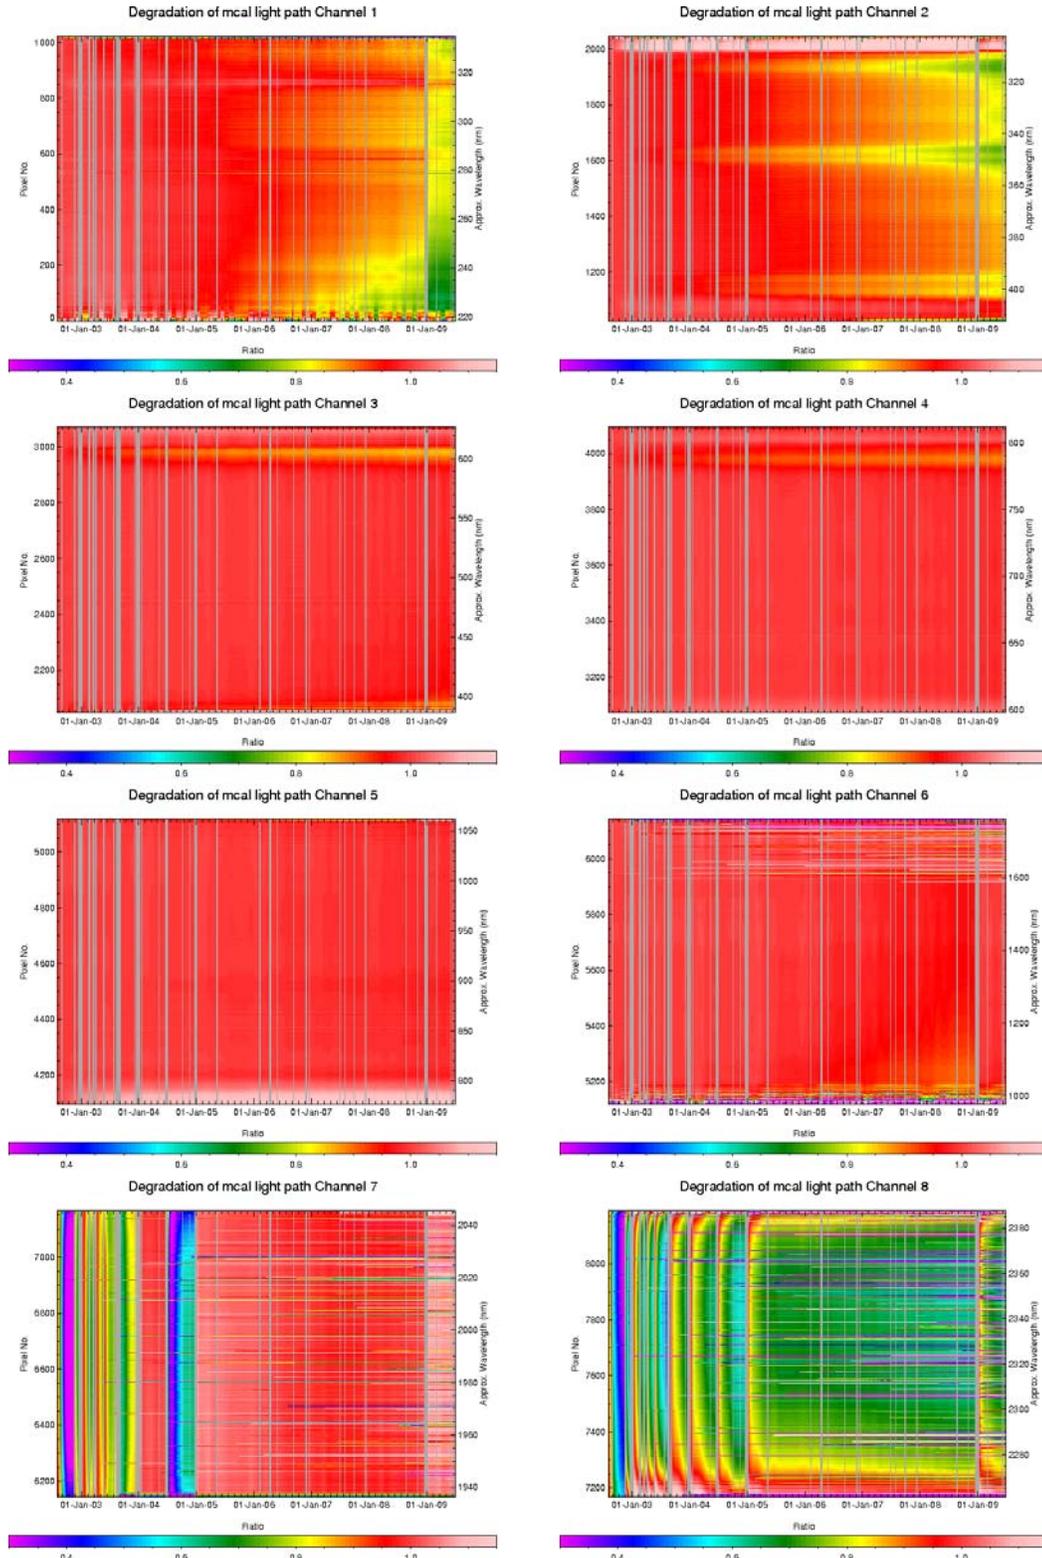


Fig. 3.10: Spectral light path monitoring results August 2002 to June 2009 (calibration light path).



esa



serco

SCIAMACHY BI-MONTH

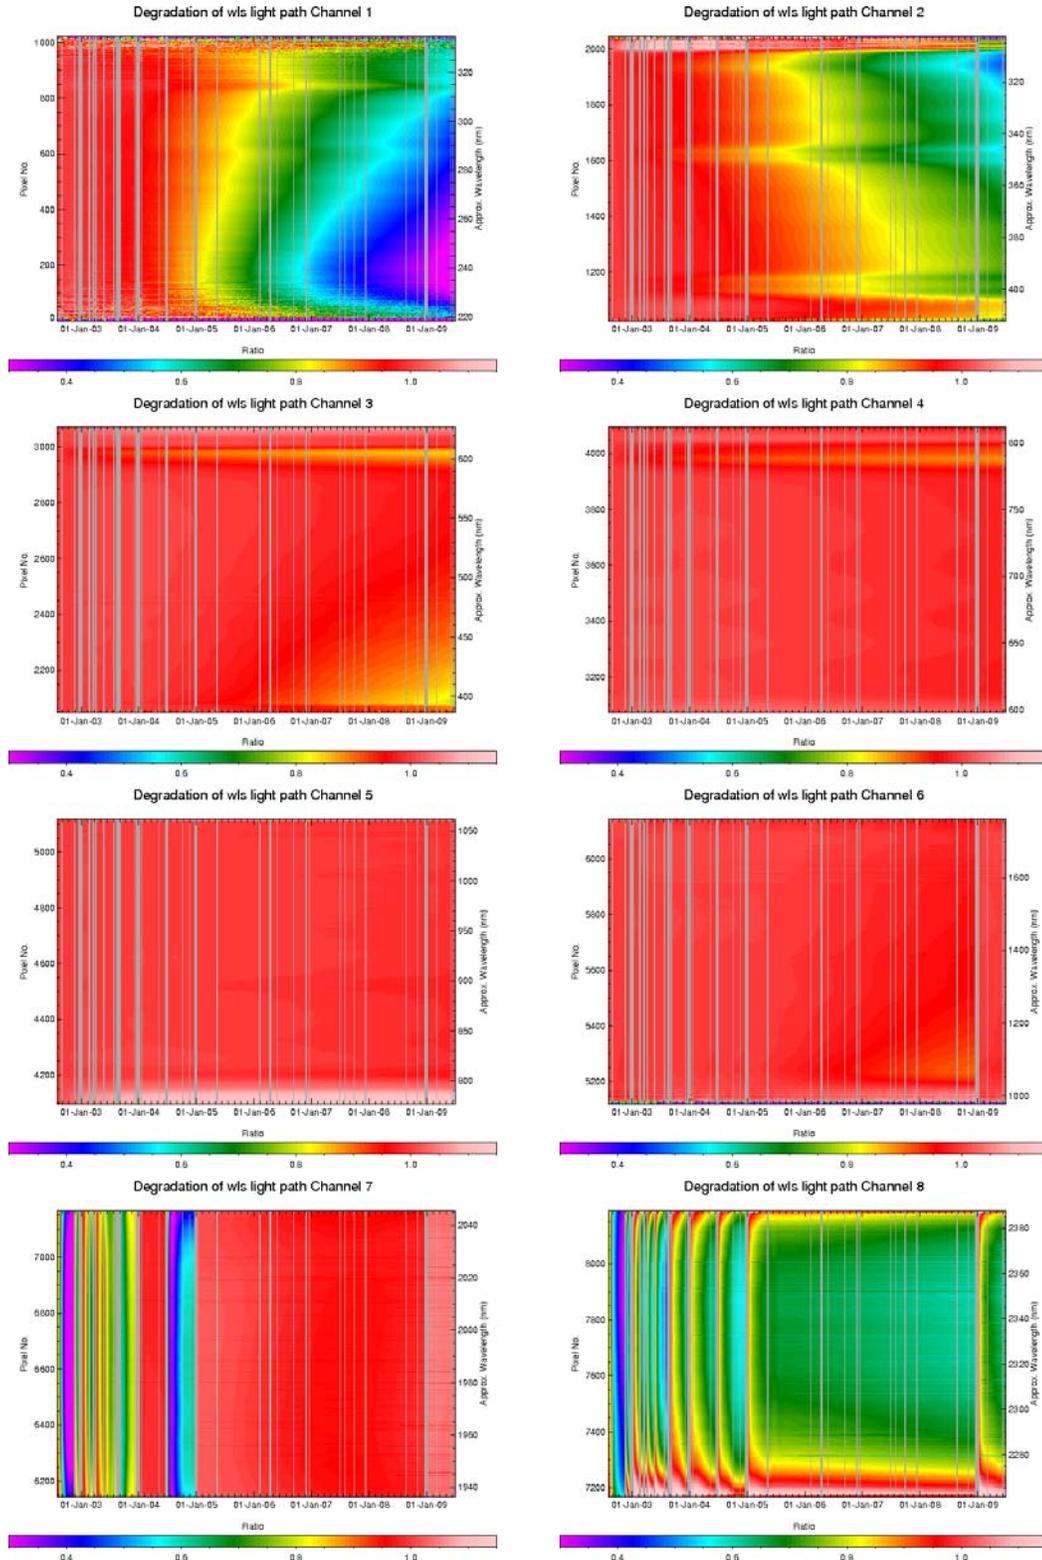


Fig. 3.11: Spectral light path monitoring results August 2002 to June 2009 (WLS light path).



esa



DLR



serco

SCIAMACHY Bi-MONTH



page 27 of 61

### 3.1.5.3 PMD monitoring results

The SCIAMACHY PMDs are monitored in a similar way as the science channels, but of course no channel averaging is performed. However, the results presented here are based on the same measurements as the science channel results (but using the PMD low gain signal), and they have been normalized to the same reference times as the spectral results. Fig. 3.12 shows the PMD throughput variation for the whole time period between 2 August 2002 and 30 June 2009. Note that a constant dark signal for each of the PMDs has been assumed. To verify this assumption, Fig. 3.12 also shows the variation of the PMD dark signal over time, which is usually quite low.

Considering the broadband character of the PMDs, the observed PMD throughput changes are (except for PMD 4 and 7) very similar to those of the science channels.

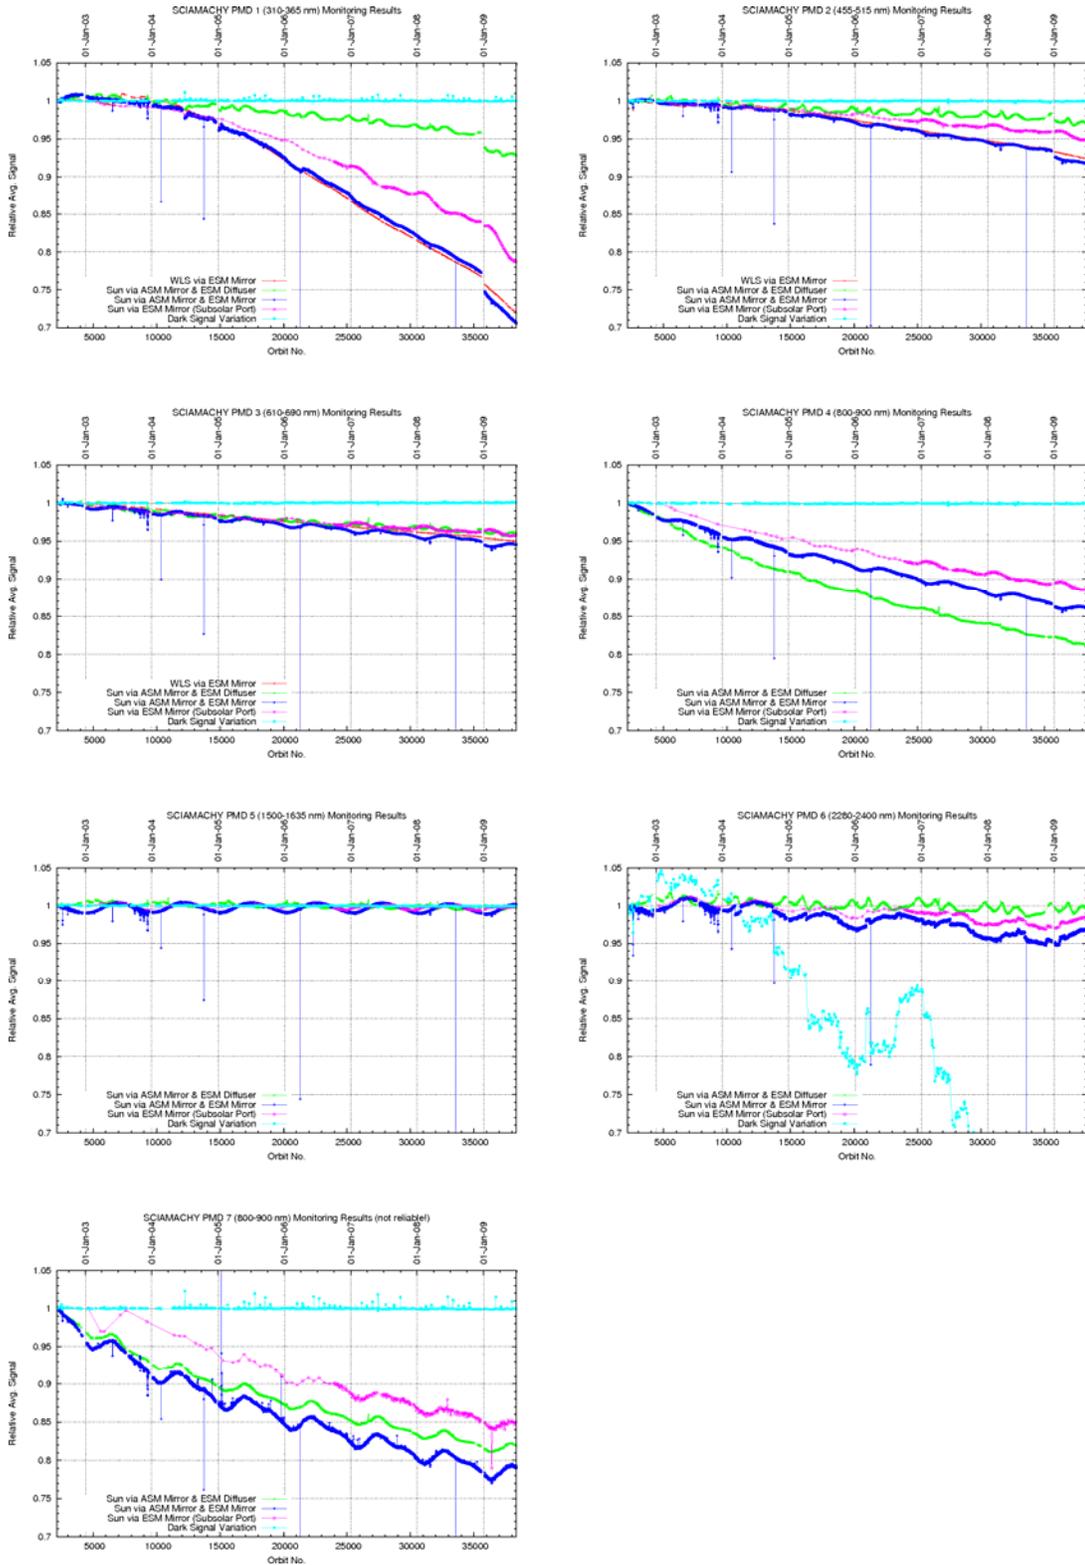


Fig. 3.12: PMD monitoring results August 2002 to June 2009.

## 4 DATA AVAILABILITY STATISTICS

### 4.1 Downlink/Acquisition Performance

Problems are known for the products listed in Tab. 4.1:

Product	Day	Filename	description
SCI_NL__0P	8-may-2009	SCI_NL__0PNPDK20090508_180220_000027602078_00456_37584_1482.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	12-may-2009	SCI_NL__0PNPDK20090512_115114_000059672079_00009_37638_1515.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	14-may-2009	SCI_NL__0PNPDK20090514_140659_000058432079_00039_37668_1535.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	20-may-2009	SCI_NL__0PNPDK20090520_063024_000041132079_00120_37749_1583.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	25-may-2009	SCI_NL__0PNPDK20090525_145854_000059672079_00197_37826_1634.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	26-may-2009	SCI_NL__0PNPDK20090526_111216_000059672079_00209_37838_1640.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	2-jun-2009	SCI_NL__0PNPDK20090602_105042_000061042079_00309_37938_1700.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	3- jun-2009	SCI_NL__0PNPDK20090603_083828_000061602079_00322_37951_1708.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	11- jun-2009	SCI_NL__0PNPDK20090611_142700_000058992079_00440_38069_1777.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	12- jun-2009	SCI_NL__0PNPDK20090612_180059_000028192079_00456_38085_1789.N1	sciamachy_source_packets ERROR: incorrect file size

Table 4-1 Products containing format errors.

### 4.2 Statistics on unconsolidated data (SCI\_NL\_\_0P, SCI\_NL\_\_1P)

This paragraph reports the availability of NRT data on a monthly basis. The statistics are based on Level 0 data and Level 1 data inventoried in the ground segment. Unavailability periods due to instrument anomalies or satellite switch-offs are excluded. The gaps considered are only interfile gaps. Statistics of Level 1 NRT data production are calculated with respect to Level 0 product availability.



esa



serco

SCIAMACHY Bi-MONTH

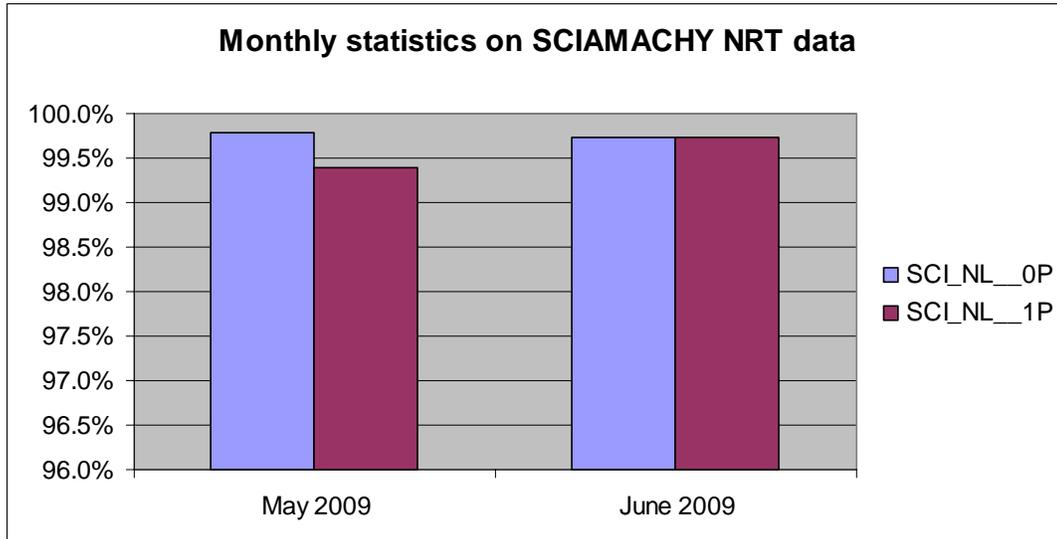


Fig. 4-1: Statistics on available unconsolidated Level 0 and Level 1b products.

### 4.3 Statistics on consolidated data

In this chapter an overview about operational off-line data (consolidated data) is provided.

#### 4.3.1 Anomalies on Level 0 consolidated data products

In the past it had been reported by SOST-DLR that the SCIAMACHY consolidated Level 0 data contain errors and are not complete. Following specific problems have been identified and are reported in detail in the technical notes [3], [4] for years 2003 and 2004 as well as for products of 2005 [5]:

- For one orbit there can be more than one consolidated Level 0 product. These products may be identical or different in content (disregarding the product type file counter).
- Some orbits are not covered by consolidated Level 0 products although SCIAMACHY was operational.
- Some orbits are covered by consolidated Level 0 products but the product duration does not comply with the actually planned and executed instrument operations in that particular orbit.
- Some consolidated Level 0 products exceed the Reed Solomon correction threshold and are flagged accordingly. The occurrence of Reed Solomon errors is non-uniform.
- Until late October / early November 2003 consolidated Level 0 data are hampered by an incorrect orbit number.



esa



DLR



ife

serco

SCIAMACHY Bi-MONTH



More details on consolidated Level 0 anomalies can be found on the SOST web page, which contains a catalogue of available Level 0 consolidated data and description of errors. [http://atmos.caf.dlr.de/projects/scops/data\\_availability/availability.html](http://atmos.caf.dlr.de/projects/scops/data_availability/availability.html)

A recovery plan was initiated in order to reprocess erroneous data 2002 - 2007. This activity has been completed. For the year 2008 the recovery is currently being performed.

The overall goal is to achieve a Level 0 consolidated data 'master set' that allows data reprocessing of improved data quality.

#### 4.3.2 Availability of consolidated SCI\_NL\_\_1P products

SCIAMACHY Level 1b consolidated data are generated at D-PAC using the consolidated Level 0 products as input for processing. The available Level 1b off-line products on the D-PAC ftp-server are checked for completeness and an overview for the months May - June 2009 is summarised here, considering flight segment and ground segment anomalies. Note that also interfile gaps are considered, but no data gaps inside the products.

The FTP address accessing the data server at D-PAC is ftp-ops-dp.eo.esa.int.

Month/Year	Planned orbit range	Number of orbits unavailable due to anomalies	Number of unique orbits available at D-PAC	Expected number of orbits (considering anomalies)	Availability in percentage during month
05/2009	37474 - 37917	0	443	444	97.81%
06/2009	37918 - 38346	54	369	375	93.85%

Table 4-2 Consolidated Level 1b statistics.

## 4.4 *Statistics on reprocessed data*

### 4.4.1 *Level 1b re-processing*

The next re-processing is planned to be started during 2009 with the new IPF 7.02 (LINUX processor).

IPF 7.02 will include the following changes compared to the operational IPF 6.03:

- Straylight Matrix in Channel 2
- Limb mesosphere/thermosphere measurement written to Limb MDS
- Correction of the Scanner encoding values

### 4.4.2 *Level 2 re-processing*

The quality of the data reprocessed with off-line processor version 3.01 has been checked and can be viewed via the daily Level 2 reports that are made available at [http://earth.esa.int/pcs/envisat/sciamachy/reports/daily/Level\\_2/](http://earth.esa.int/pcs/envisat/sciamachy/reports/daily/Level_2/)

The next re-processing cycle is planned to be started during 2009 with the new processor version 5.00 instead of version 4.00, as already significant progress on the new baseline has been made.

The new processor version introduces the following changes compared to the operational processor:

- M-Factors implemented in Level 1b-2 processing step
- Changes in the NO<sub>2</sub> retrieval settings
- New AAI algorithm
- Improvements in Limb retrieval
- Nadir SO<sub>2</sub> total columns
- Nadir BrO total columns
- Nadir H<sub>2</sub>O total columns
- Nadir xCO columns
- Nadir OCIO slant columns
- Limb BrO profile
- Limb Cloud product

## 5 LEVEL 1 PRODUCT QUALITY MONITORING

### 5.1 Processor Configuration

#### 5.1.1 Version

The operational IPF version used for processing of near real-time SCIAMACHY Level 1b data is 6.03 at Kiruna and ESRIN. The same IPF is used for Level 1b off-line processing at D-PAC for forward processing.

The corresponding product specification is Volume 15 issue 3/k [2]. It is available at [http://earth.esa.int/pub/ESA\\_DOC/ENVISAT/Vol15\\_Sciamachy\\_3k.pdf](http://earth.esa.int/pub/ESA_DOC/ENVISAT/Vol15_Sciamachy_3k.pdf)

The disclaimer at [http://envisat.esa.int/dataproducts/availability/disclaimers/SCI\\_NL\\_1P\\_Disclaimers.pdf](http://envisat.esa.int/dataproducts/availability/disclaimers/SCI_NL_1P_Disclaimers.pdf) describes known artefacts as well as major improvements with respect to the previous IPF version.

In the frame of the upgrade of the ENVISAT ground segment infrastructure, IPFs are being ported from AIX to LINUX. For SCIAMACHY the AIX version 6.03 has been ported to LINUX IPF 6.05. Note that currently the AIX 6.03 version is still operational. The LINUX IPF will be activated for a short period and the users will be informed in time on the switch.

The new baseline version 7 has been implemented by industry and was tested. The complete delivery is expected by end July 2009.

Table 5.1 gives a brief overview of changes implemented with processor versions IPF 6.03, 6.02, 6.01 and 5.04/5.01.

IPF Version	Description	Proc Centre	Date	Start Orbit
6.03	Following changes are implemented with IPF 6.03 <ul style="list-style-type: none"> <li>• New pointing correction (new SCI_LI1_AX)</li> <li>• Updated of the ESA CFI (5.6) software</li> <li>• Correction of a non compliancy report, impacting the Leakage GADS in the consolidated data processing chain (channels 6-8)</li> </ul>	D-PAC	04-JUL-2007	27937
		PDHS-E	19-JUL-2007	28153
		PDHS-K	19-JUL-2007	28145
6.02	No algorithm specification changes were implemented, but following non	D-PAC	05-MAY-2006	21843
		PDHS-E	07-JUN-2006	22327



esa



serco

SCIAMACHY Bi-MONTH



	compliances of version 6.01 have been corrected, to get <ul style="list-style-type: none"> <li>• Polarisation correction factors different from 0</li> <li>• Correct order of SMR spectra in Sun Reference ADS</li> <li>• Solar mean reference spectra in New Sun Reference Data set with positive sign (was negative in IPF 6.01)</li> </ul>	PDHS-K	07-JUN-2006	22318
6.01	<ul style="list-style-type: none"> <li>• Improved parameterization of the Memory effect for channels 1 to 5</li> <li>• New correction for the Non-Linearity effect in the infrared channels</li> <li>• Usage of improved key data for the radiometric calibration of all channels</li> <li>• Each solar spectrum is provided in a calibrated and un-calibrated manner for all channels</li> <li>• Orbital dependency of channel 6 to 8 leakage calculated; currently applied only to channel 8</li> <li>• Improvement of the pointing accuracy through the usage of the ENVISAT Restituted Attitude auxiliary files for the off-line processing</li> <li>• decontamination flag added to the SPH</li> </ul>	D-PAC	No operations activated	-
		PDHS-E	22-MAY-2006	22098
		PDHS-K	22-MAY-2006	22090
		PDHS-E PDHS-K LRAC	24-MAR-2004	

Tab. 5-1: Processor Version and main changes.

5.1.2 Anomalies

During analysis of the reprocessed Level 1b data set version IPF 6.03, it was found that for limited data sets

- January 2005, orbits 15154-15166
- December 2005, orbits 19752-19762
- January 2006, orbits 20224-20235, 20352-20363
- April 2006, orbits 21356-21512

the D1 solar reference spectra were not updated in the SCI\_SU1\_AX files and in the Level 1b products. Analysis of this problem could confirm that the spectra were measured. Please note, that for operational Level 1b – Level 2 off-line processing the D1 spectrum is not used.



esa



serco

SCIAMACHY Bi-MONTH



In the meantime it could be verified with the upcoming calibration tool SCICAL version 2.0 that the D1 spectra are correctly updated. With the new reprocessing cycle for IPF version 7, the level 1b products will contain the D1 spectra updated also in the above time periods.

## 5.2 Auxiliary Data Files

For operation of the SCIAMACHY Level 1 processor, a set of auxiliary files as input is required.

One subset of these auxiliary files usually changes only in correspondence with a new IPF version, namely the Initialisation file (SCI\_LI1\_AX), the Key Data File (SCI\_KD1\_AX).

In addition there is the m-factor file (SCI\_MF1\_AX), which shall describe the degradation of the instrument during its stay in orbit. Note that the m-factor file has not been changed so far.

Another subset of auxiliary files is the In-flight calibration data files, which are generated when calibration measurements are included in the set of Level 0 data to be processed.

Four types of In-flight calibration auxiliary files exist:

- Leakage Current Calibration (SCI\_LK1\_AX - updated on orbital basis)
- Solar Reference Spectrum (SCI\_SU1\_AX - updated on daily basis)
- Spectral Calibration Parameters (SCI\_SP1\_AX - updated on a weekly basis)
- Pixel-to-Pixel Gain and Etalon Parameters (SCI\_PE1\_AX - updated on a weekly basis)

Table 5-2 lists the actual Key Data File and Initialisation File used with IPF 6.02 and IPF 6.03. The SCI\_LI1\_AX was updated with IPF 6.03 in order to improve the instrument pointing correction.

**Table 5-2 Key data and Initialisation configuration**

SCI_LI1_AXVIEC20060523_182643_20020701_000000_20991231_235959 (until 18/07/2007)
SCI_LI1_AXVIEC20070628_134108_20020701_000000_20991231_235959 (from 18/07/2007)
SCI_KD1_AXVIEC20060523_182626_20020301_000000_20991231_235959

Fig. 5.1 shows statistics of the SU1 and LK1 ADFs generated operationally with SCICAL. It has to be noted that unavailability periods are excluded from statistics. Generation of SU1 ADFs for May and June was 100 %. The LK1 ADF statistic is calculated by dividing the number of all LK1 ADFs by number of all available (to SCICAL) Level 0 products. The statistics on available LK1 ADFs during May 2009 (75.2%) and June 2009 (91.7%) are on a nominal level.

The statistic does not exclude dark measurements that cannot be used for ADF generation due to SAA and orbit phase constraints leading to an over-estimation of missing files.



esa



serco

SCIAMACHY Bi-MONTH

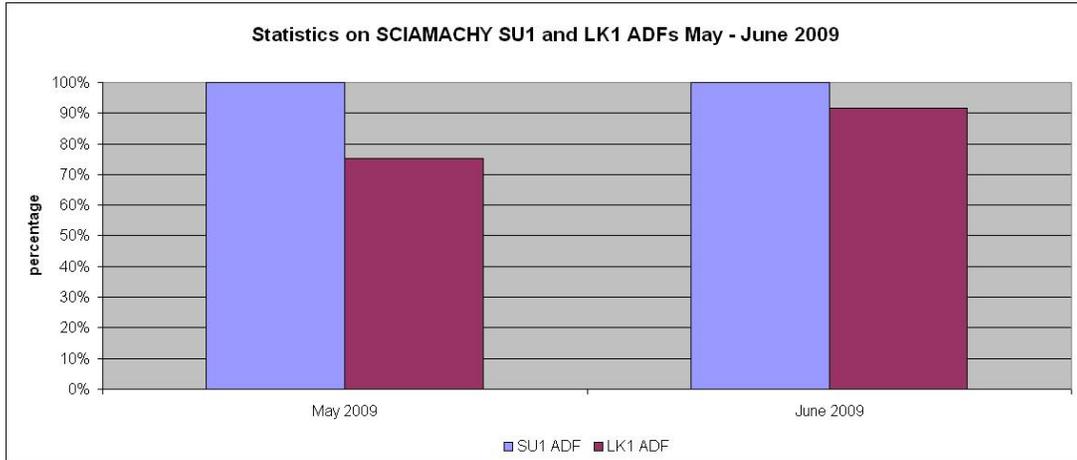


Fig. 5-1: Statistics on SU1 and LK1 processing.

## 5.2.1 Auxiliary Data File quality analysis

### 5.2.1.1 SMR analysis

SCICAL generates daily SU1 Auxiliary Files. Solar spectra obtained from ESM and ASM calibration measurements are provided in two ways:

- fully calibrated
- not radiometrically calibrated.

The different types of spectra can be recognized by the so called identifier in the solar reference global annotation data set record.

Note the following recommendation:

- Use a not radiometrically calibrated ASM diffuser spectrum (A0) for DOAS type applications.
- All retrieval methods requiring absolute calibrated radiance and irradiance are obliged to use the calibrated ESM diffuser spectrum (D0) (see also disclaimer).

Fig. 5-2 to Fig. 5-5 show the ratios of SMR spectra derived from calibrated SMR/ESM (D0) during the months May - June 2009. The ratios were determined by dividing the spectra of the beginning of each month to a set of days during each month. Ratios are not corrected for variation of distance Earth/Sun.

In detail the spectra used for the ratios of each month are the following:

- **May 2009**  
Reference SMR - 01 May 2009  
SMR used for ratios: 02, 03, 04, 05, 06, 07, 08, 09, 10, 15, 22, 31 May 2009
- **June 2009**  
Reference SMR - 01 June 2009  
SMR used for ratios: 02, 03, 04, 05, 06, 07, 08, 09, 10, 15, 22, 30 June 2009



esa



DLR



ife

serco

SCIAMACHY Bi-MONTH



page 37 of 61

The overall changes lie usually at about 1-2 % during one month for all channels, which is at least partially caused by the decreasing distance between Sun and Earth.

In channel 1 around pixel 550 (at 282 nm) some strong features can be noticed, as well as in channel 2 near pixel 840 (near 393 nm). These strong features coincide with the Mg II and Ca Fraunhofer lines respectively. These lines are partially formed in the solar chromosphere and are known to change with solar variability.

The weaker spectral features in channel 2 (e.g. near pixels 550, 650,750), on the other hand, correlate with strong Fraunhofer lines, which are not chromospheric. These features probably arise from small wavelength shifts (order of 1/100 of a pixel).

Generally a spectral feature could have significant impact on the product quality, especially when the affected spectral parts are used for DOAS retrieval.

The large features in the end of channel 6 (channel 6+) and channels 7 and 8 are due to bad pixels.

Note that the bad pixel mask used is still from the on-ground calibration.

A regular update of the bad pixel mask is implemented starting with IPF 6.02. However a bad pixel correction will not be applied to the SMR spectra, but only to PMD out-of-band factors, in order to enable the user to apply a different mask from the one provided by the ADF.

Fig. 5-6 and Fig. 5-7 show SMR ratios on a long term trend dividing the ESM spectra from days 31 May 2003 and 31 May 2009, respectively 30 June 2003 and 30 June 2009.

The first spectrum available exists for 18-Jul-2002. However to consider sun/earth distance, the ratio was performed with spectra from same calendar days. All SCI\_SU1\_AX files used were generated with SCICAL.

What can be concluded is that for channels 1-2 an average degradation in 6 years of about 10-15% is observed, channels 3 degrades by about 2% and channels 4-5 degrade by less than 1%, channel 6 by about 4-5%. The signal in channel 7 has increased with respect to the SMR of year 2003. This is due to the impact of the icing of the IR detectors.

This is consistent with the Light Path monitoring at SOST-IFE.



esa



serco

SCIAMACHY BI-MONTH



Ratio of SMRs as a function of pixel, May 2009

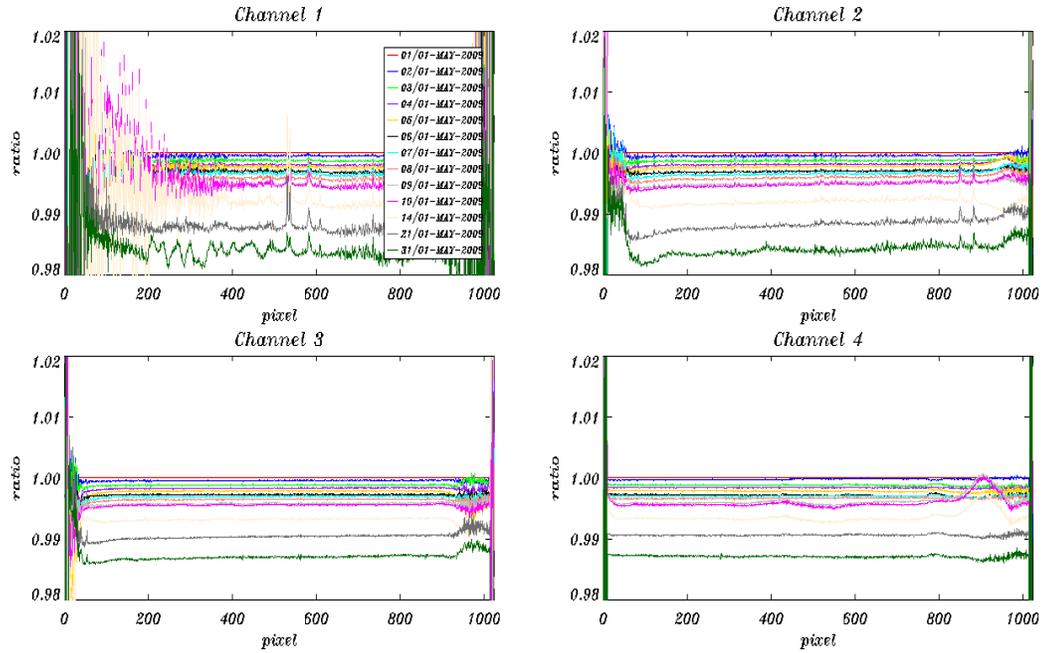


Fig. 5-2: SMR ratios per detector channel 1-4 (changes during May 2009).

Ratio of SMRs as a function of pixel, May 2009

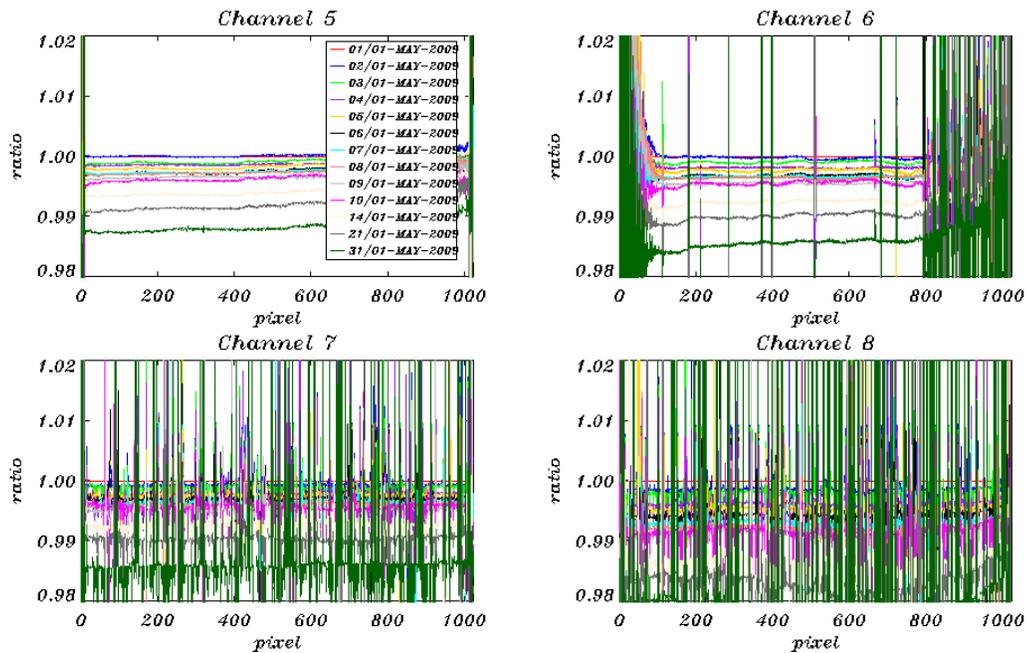


Fig. 5-3: SMR ratios per detector channel 5-8 (changes during May 2009).



esa



serco

SCIAMACHY Bi-MONTH



Ratio of SMRs as a function of pixel, June 2009

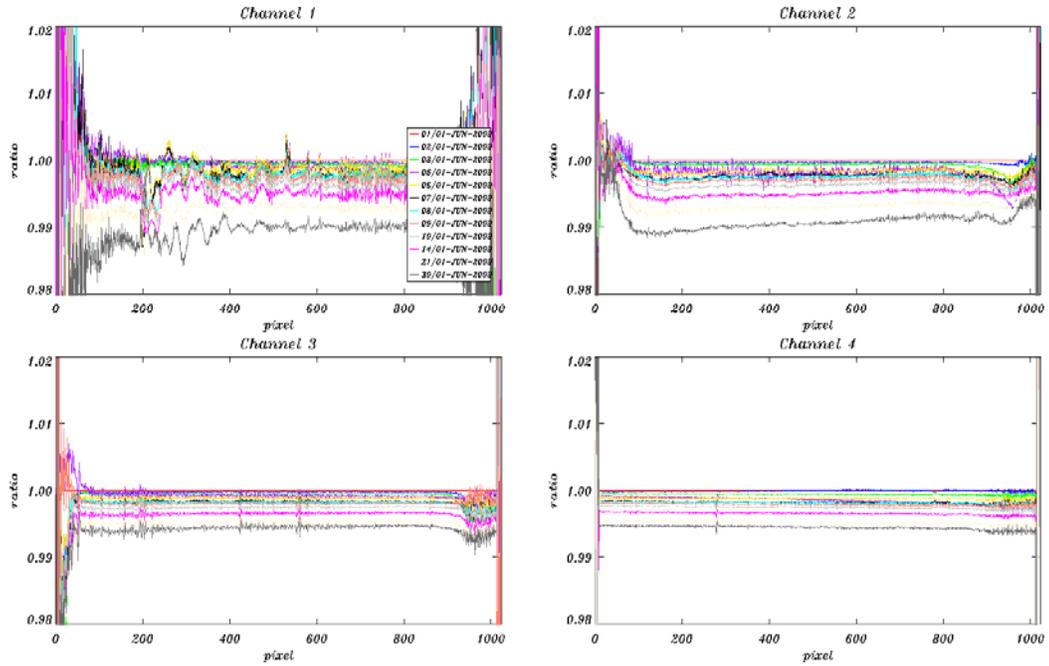


Fig. 5-4: SMR ratios per detector channel 1-4 (changes during June 2009).

Ratio of SMRs as a function of pixel, June 2009

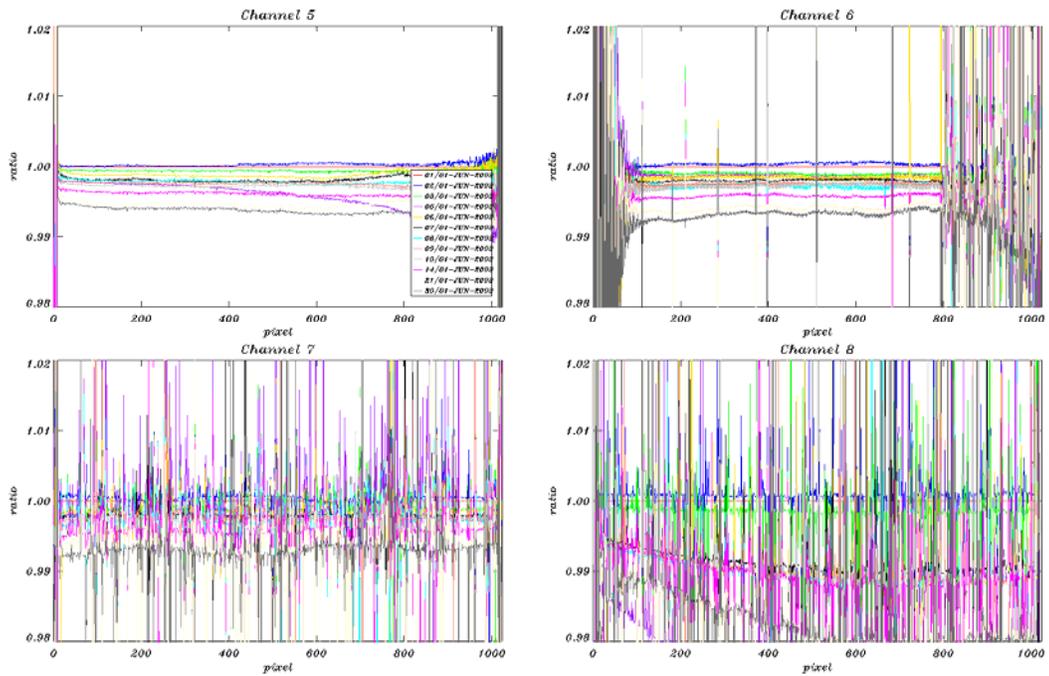


Fig. 5-5: SMR ratios per detector channel 5-8 (changes during June 2009).



smr ratio, DO 31/05/2009 divided by 31/05/2003

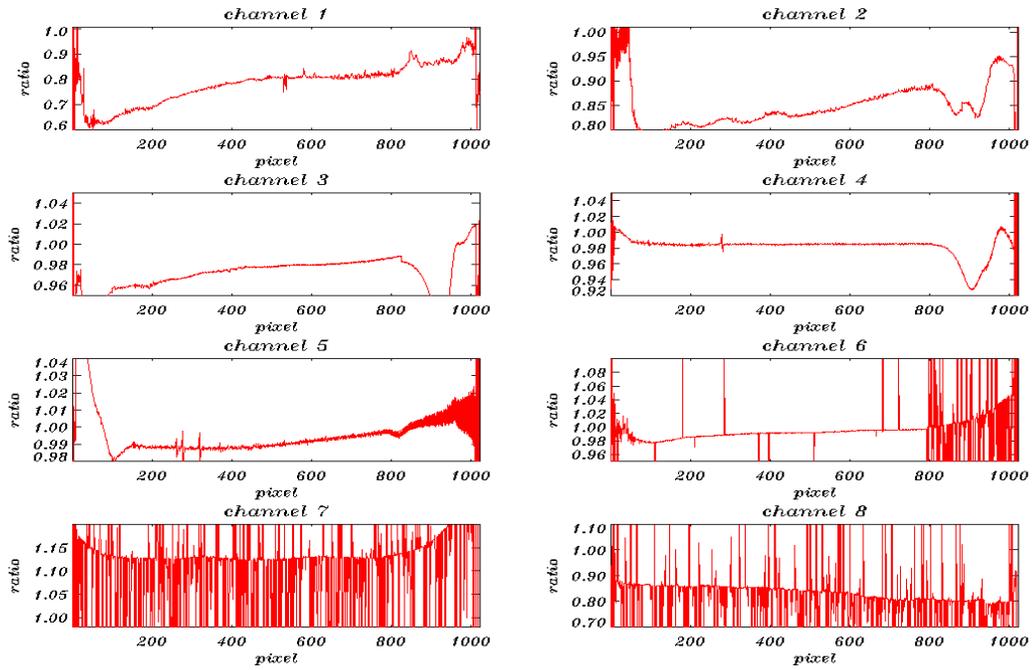


Fig. 5-6: SMR ratios per detector channel on Long Term Trend 31/05/2003 divided by 31/05/2009.

SMR ratio, DO 30/06/2009 divided by 30/06/2003

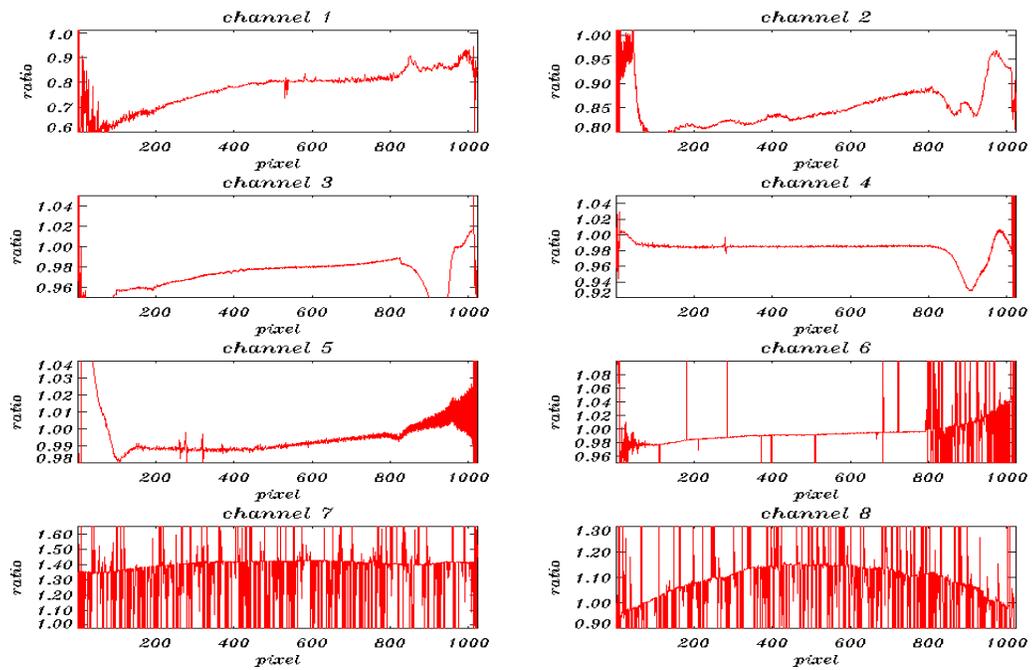


Fig. 5-7: SMR ratios per detector channel on Long Term Trend 30/06/2003 divided by 30/06/2009.



esa



DLR



serco

SCIAMACHY Bi-MONTH



page 41 of 61

## 5.2.1.2 LK1 analysis

### 5.2.1.2.1 Leakage Constant part

On an orbital basis a leakage current calibration is performed, if measurement data do not lie in the South Atlantic Anomaly region.

In Fig. 5-8 to Fig. 5-11 the leakage constant part FPN (fixed pattern noise) of the LK1 ADFs are analysed by determining the ratios of the FPN of each month with a time distance of one orbit, one day, one week, two weeks, three weeks and a month.

For channels 1-5 and the first part of channel 6, during up to three weeks nearly no changes can be noticed. Sudden jumps however between the different dark current ratios can be seen for channels 1, 2, 4 and 5 between 4 weeks. They are very small but above the noise level.

The IR channels show a lot of noise. Note that since the processor version IPF 6.02, the time dependent part of the leakage current is considered (see 5.2.1.2.2).



esa



serco

SCIAMACHY Bi-MONTH



LK1 ADF analysis, ratios of fpn const May 2009

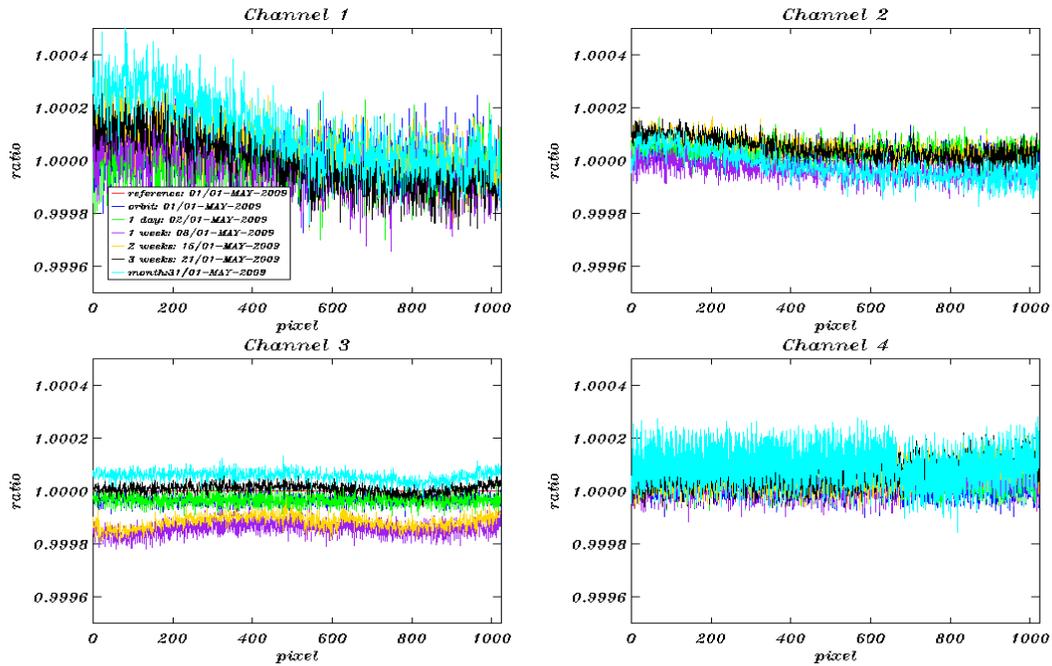


Fig. 5-8: Dark current ratios (constant part) channel 1-4 during May 2009. Reference Spectrum used: Orbit 37478, 01-May-2009.

LK1 ADF analysis, ratios of fpn const May 2009

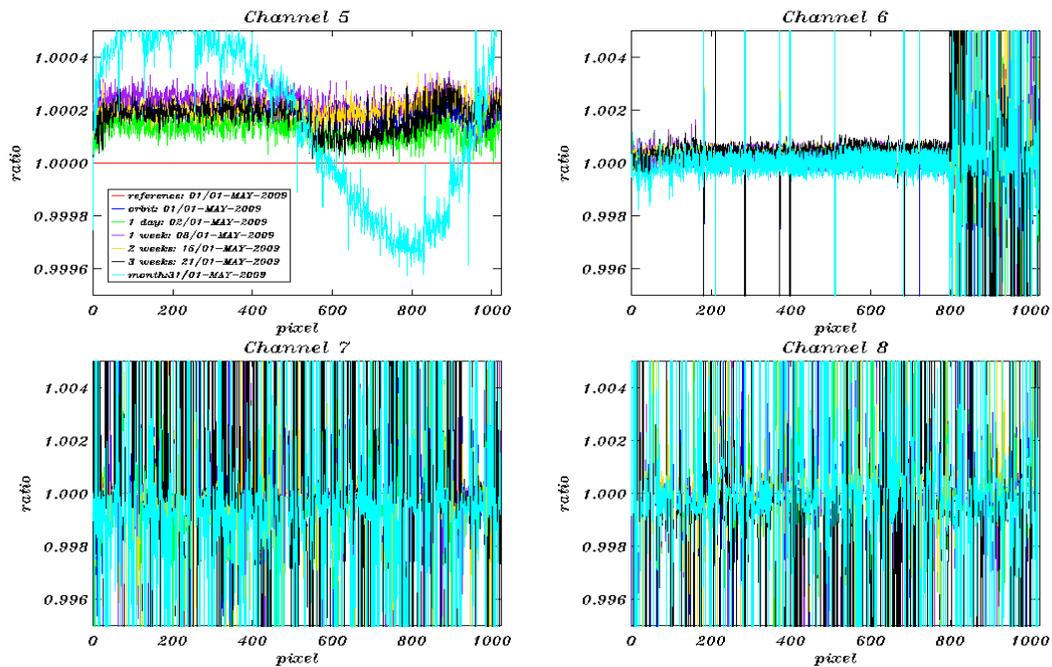


Fig. 5-9: Dark current ratios (constant part) channel 5-8 during May 2009. Reference Spectrum used: Orbit 37478, 01-May-2009.



esa



serco

SCIAMACHY Bi-MONTH



LK1 ADF analysis, ratios of fpn const June 2009

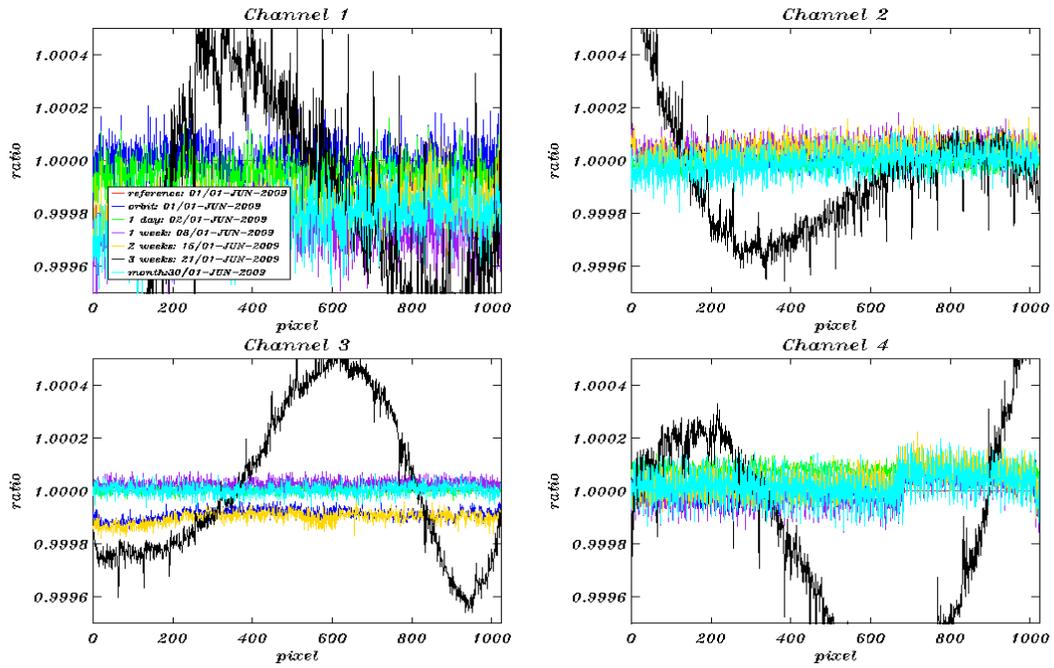


Fig. 5-10: Dark current ratios (constant part) channel 1-4 during June 2009. Reference Spectrum used: Orbit 37921, 01-June-2009

LK1 ADF analysis, ratios of fpn const June 2009

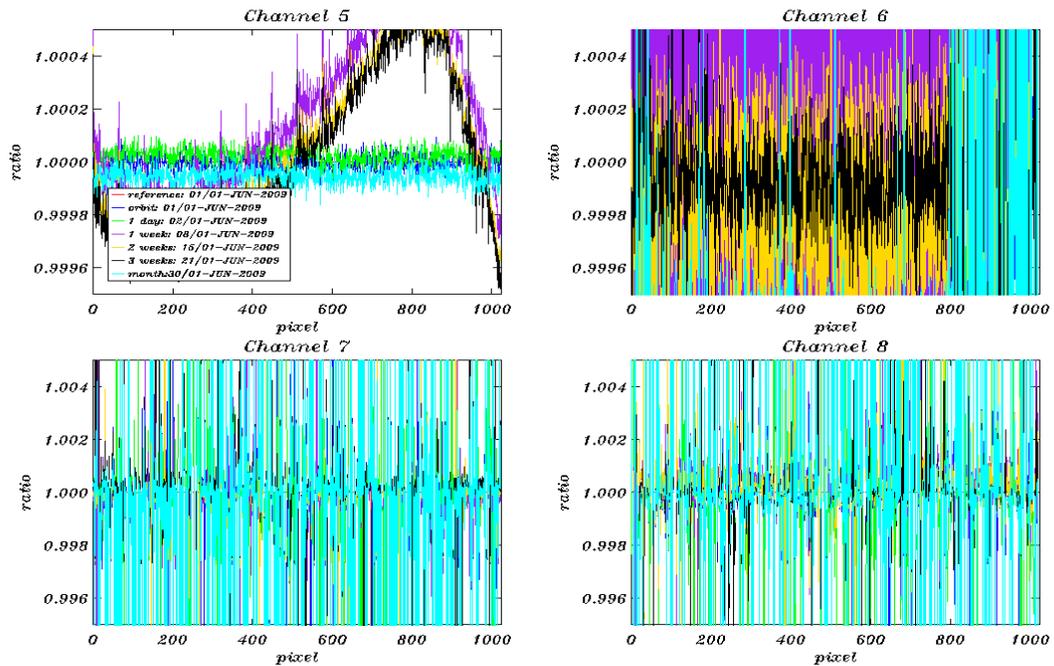


Fig. 5-11: Dark current ratios (constant part) channel 5-8 during June 2009. Reference Spectrum used: Orbit 37921, 01-June-2009.



esa



serco

SCIAMACHY Bi-MONTH



### 5.2.1.2.2 Leakage Variable part

With IPF 6.03 the orbital dependency of channel 6 to 8 leakage current is considered. SCIAMACHY detector channels 6 – 8 have a time dependent leakage dark signal that consists of two components, the leakage current of the detector pixel and second a component due to thermal background that varies along the orbit. The implementation of the orbital variation of the leakage current is expected to improve retrieval especially in detector channel 8 for infrared products.

Figure 5-12 shows the evolution of the leakage variable part of the SCI\_LK1\_ADF during the time span 01 May 2009 to 30 June 2009. The leakage variation for a selected pixel (222) in channel 7 corresponding to orbit phase 6 is shown. Updates of the leakage variable are expected after the processing of the monthly calibration orbits, i.e. once per month. During this period Monthly Calibration sequences were scheduled for:

- 37584-37588 (08-May-2009)
- 38014-38018 (07/08-Jun-2009)

For both dates the change of the Leakage Variable value can be clearly seen, demonstrating that the calibration was performed successfully.

SCIAMACHY leakage variable analysis 01/05/2009 – 30/06/2009

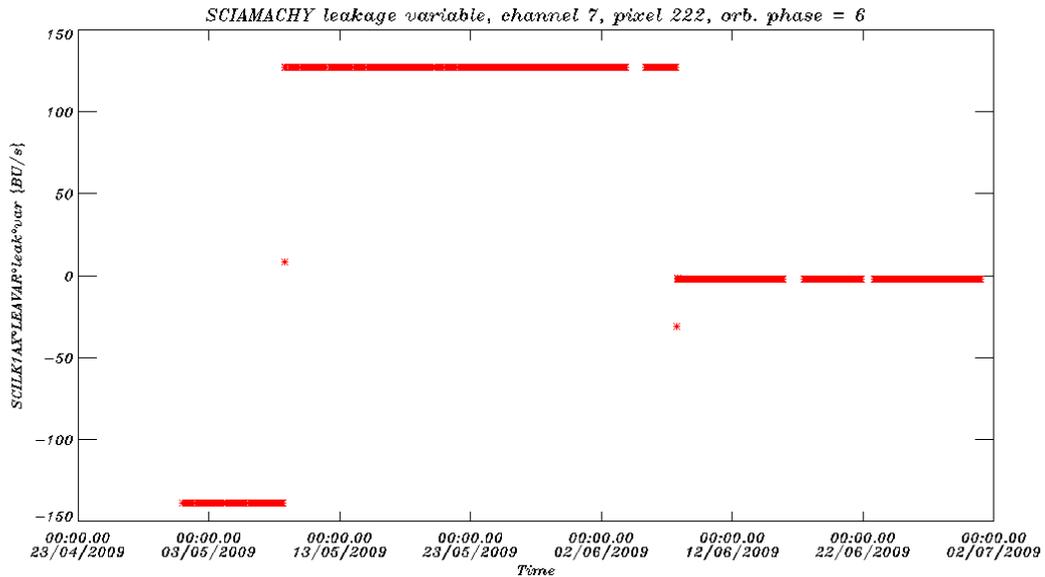


Figure 5-12: Leakage VARIABLE, SCI\_LK1\_AX, 01 May – 30 June 2009, channel 7, orbit phase 6, pixel 222.



esa



serco

SCIAMACHY Bi-MONTH



### 5.3 Bad and Dead Pixel Mask

SRON performs routinely analysis on the SCIAMACHY Bad and Dead Pixel Mask. Within this analysis bad pixels of the detector arrays are identified by the SCIAMACHY Detector Monitoring Facility (SDMF) using 11 flagging criteria. These criteria are based on the dark signal model, transmission, gain and noise of a pixel. Bad pixel masks are calculated on an orbital basis and combined into a "smoothmask" that combines the masks of about 50 orbits. In Fig. 5.13 we show the number/fraction of pixels that is flagged as bad for channels 6, 6+, 7 and 8. Note that channel 6 consists of two parts employing different detector materials. Channel 6+ starts at pixel 794. The rate at which the number of pixels that is flagged is increasing is similar for the IR channels 6+, 7 and 8. The fraction of flagged pixels in channel 6 is much lower and almost constant over the mission, because of the different detector materials used in this part of the channel. The mask currently provided in the Level 1b product must be regarded experimental. It uses a different algorithm and is not identical to the mask provided by SRON. It is planned to align the two masks in future processor versions.

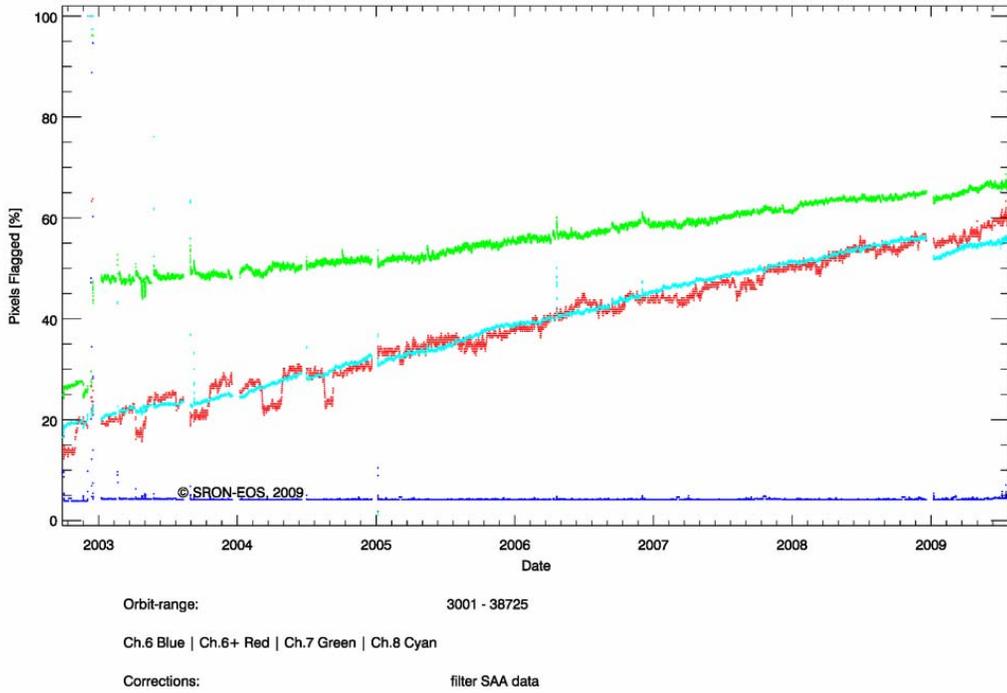


Figure 5-13: Number/Fraction of pixels that is flagged as bad by the SDMF smoothmask for channels 6 (blue), 6+ (red), 7 (green) and 8 (cyan). Orbits during SODAP or decontaminations have been removed. Note the temporary decrease in the number of bad pixels after the last decontamination, for channel 8 about 6%, a few percent more than after the previous decontaminations.



esa



DLR



serco

SCIAMACHY Bi-MONTH



page 46 of 61

## 5.4 *Pointing Performance*

Investigations by the SCIAMACHY teams are indicating a trend as well as a seasonal dependence in the pointing of the instrument. Results based on calibration measurements as well as on science products indicate a negative trend. The values derived by exploiting the sun occultations result in of -15 m/year in northern mid-latitudes, while the analysis of Ozone and BrO indicate a value of -60 m/yr. In a dedicated meeting at the end of June, this was also compared to GOMOS and MIPAS results. For GOMOS (“Most Illuminated Pixel”) and MIPAS a similar trend as derived from the SCIAMACHY science data was found. The value for the MIPAS LOS is significantly lower (~20 m/yr) and subjected to strong noise for 2008/09 data. While the analysis needs further refinement and confirmation, all atmospheric sensors indicate a residue not taken into account by the ENVISAT onboard orbit model or the restituted attitude file. In addition, the noise of the data sets possibly masks a distinctive jump in the attitude behaviour. Investigations point to a potential discrepancy in the date model applied by the flight dynamics team for the star tracker and the orbit model. It needs to be noticed that the differences under investigations are very small and can be caused by a single small, or a combination of small, effects. Nevertheless, the SCIAMACHY limb data is impacted by this issue, e.g., indicating a trend in stratospheric BrO and Ozone. The other limb measuring instruments, GOMOS and MIPAS, are less affected due to their observation principles. Further investigations are still on-going.

## 5.5 *SciaL1c tool*

The SciaL1c tool is an application provided to the users of SCIAMACHY Level 1b products. This application allows selecting specific calibrations to apply to Level 1b data, which are in case of SCIAMACHY defined as not fully calibrated Level 0 channel information in combination with calculated calibration data. The generated Level 1c products are suitable for the user's particular applications.

The SciaL1C Calibration and Extraction Software was upgraded to be compatible with IPF 6.03 data. It is downward compatible, i.e. it can also be used with data from older IPF versions.

SciaL1c can be downloaded at: <http://envisat.esa.int/scial1c/>

LINUX, Sun Solaris, LINUX on DEC-Alpha and HP-UX on IA64 versions are available.

The latest updated version 2.1 of the SciaL1c tool was provided to the users end of November 2008. New in this version is the possibility to apply m-factor calibration.



esa



serco

SCIAMACHY Bi-MONTH



page 47 of 61

## 6 LEVEL 2 NRT PRODUCT QUALITY MONITORING

### 6.1 Processor Configuration

#### 6.1.1 Version

Since 08 May 2006 the near real time processing of SCIAMACHY Level 2 data has been suspended, evolution is restricted to the Level 2 off-line processor (see chapter 7).

The last IPF version used was 5.04. The corresponding product specification is [2]. The disclaimer at

[http://envisat.esa.int/dataproducts/availability/disclaimers/SCI\\_NL\\_2P\\_Disclaimers.pdf](http://envisat.esa.int/dataproducts/availability/disclaimers/SCI_NL_2P_Disclaimers.pdf) describes known artefacts.

An overview on the implementation dates of the IPF at the different PDS processing centres and the main modifications implemented can be found in previous BMR (June-May 2007).

The Fast Delivery processing of Level 2 off-line products has started running pre-operationally. Level 1b near real time products are used as input for the Level 2 off-line processor. Data products monitoring is routinely performed and the corresponding Daily Reports are published on ESA's PCS web-pages within 24 hours from data acquisition. Daily reports for SCIAMACHY Level 2 Fast Delivery off-line products can be found at the link: [http://earth.esa.int/pcs/envisat/sciamachy/reports/daily/Level\\_2/](http://earth.esa.int/pcs/envisat/sciamachy/reports/daily/Level_2/)

The main difference between off-line and Fast Delivery files is that the Restituted Attitude file cannot be used for processing. Level 2 products generated from the Fast-Delivery processing chain will be made available to the SCIAMACHY end-users community with the release of the next Level 2 off-line processor version 5, foreseen currently by early September 2009.

#### 6.1.2 Auxiliary Data Files

An overview of Auxiliary Files being used as input for SCI\_NL\_\_2P products can be found in BMR May-June 2007.

## 7 LEVEL 2 OFF-LINE PRODUCT QUALITY MONITORING

### 7.1 Processor Configuration

#### 7.1.1 Version

The Level 2 off-line processing version is 3.01.

The product specification corresponding to the Level 2 off-line processor 3.01 is Volume 15, issue 3/k [2] and can be found at

[http://earth.esa.int/pub/ESA\\_DOC/ENVISAT/Vol15\\_Sciamachy\\_3k.pdf](http://earth.esa.int/pub/ESA_DOC/ENVISAT/Vol15_Sciamachy_3k.pdf)

The disclaimer at

[http://envisat.esa.int/dataproducts/availability/disclaimers/SCI\\_OL\\_2P\\_Disclaimers.pdf](http://envisat.esa.int/dataproducts/availability/disclaimers/SCI_OL_2P_Disclaimers.pdf) describes known artefacts.

The level 2 offline processor version 5 has undergone a successful FAT on 18 June 2009.

SCI\_OL\_2P products contain geo-located vertical column amounts of O<sub>3</sub> and NO<sub>2</sub> Nadir measurements, as well as stratospheric Limb profiles of O<sub>3</sub> and NO<sub>2</sub>. Additionally the fractional cloud coverage, the cloud-top height, and the cloud optical thickness are derived and provided as product to the user. The major upgrades are summarised in table 7.1.

Processor Version	Description	Proc Centre	Date	Start Orbit
3.01	<p>Main processor changes:</p> <ul style="list-style-type: none"> <li>• Updated SACURA cloud algorithm</li> <li>• Offset applied in NO<sub>2</sub> slant column processing was removed</li> <li>• Number of retrieved profiles per state was set from one to four (4)</li> <li>• Cloud and Aerosol MDS are filled with the next valid value instead of being set to zero</li> <li>• Molecular Ring correction applied on NADIR O<sub>3</sub> slant column density</li> </ul> <p>Non-compliance corrections:</p> <ul style="list-style-type: none"> <li>• Inter change of Pressure and Temperature values in LIMB MDS</li> <li>• Erroneous Cloud and Aerosol</li> </ul>	D-PAC	23-SEP-2007	29092



esa



serco

SCIAMACHY Bi-MONTH



	<p>Quality Flags</p> <ul style="list-style-type: none"> <li>• AAI erroneously set to zero in Cloud and Aerosol MDS</li> <li>• Scaling of too large NO<sub>2</sub> error estimate</li> </ul>			
3.00	<ul style="list-style-type: none"> <li>• Nadir UV/Visible algorithm for ozone and NO<sub>2</sub> is based on the GDP (GOME Data Processor) Version 4.0</li> <li>• Nadir UV/Visible algorithm for cloud-top height and cloud optical thickness based on the SACURA algorithm</li> <li>• Limb UV/Visible products: Stratospheric Ozone and NO<sub>2</sub> profiles</li> <li>• Improved pointing performance through the use of the ENVISAT Restituted Attitude information in the consolidated Level 1b product</li> </ul>	D-PAC	03-MAY-2006	21824

Table 7-1: Level 2 off-line Processor Configuration

### 7.1.2 Anomalies

During this reporting period no anomalies in Level 2 off-line processing were identified.

### 7.1.3 Auxiliary Data Files

Input for Level 2 off-line processing is the so-called Initialization File. For processor version 3.01 a new Initialization file became active which is SCI\_IN\_\_AXNPDE20070629\_092400\_20070720\_000000\_20991231\_235959 This ADF is usually changed only in case of a processor upgrade.



esa



DLR



serco

SCIAMACHY Bi-MONTH



page 50 of 61

## 7.2 *Monitoring results*

### 7.2.1 *Nadir: NO<sub>2</sub> consistency checking*

The world map plots of Nadir NO<sub>2</sub> vertical column density (VCD) values averaged over one month are generated from the SCI\_OL\_\_2P Nadir products. Fig 7.1 and 7.3 show the monthly world map plots for May and June 2009.

Figures 7.2 and 7.4 show the VCD errors for the monthly average plots. The errors are given in relative fraction. Generally the equator region has NO<sub>2</sub> values with higher errors.

High concentration of NO<sub>2</sub> is expected over industrial regions, as over North America, especially the East coast, over central Europe, China and South Africa, which is reflected in the world maps.



esa



serco

SCIAMACHY Bi-MONTH



7.2.1.1 Nadir: VCD NO<sub>2</sub> map May 2009

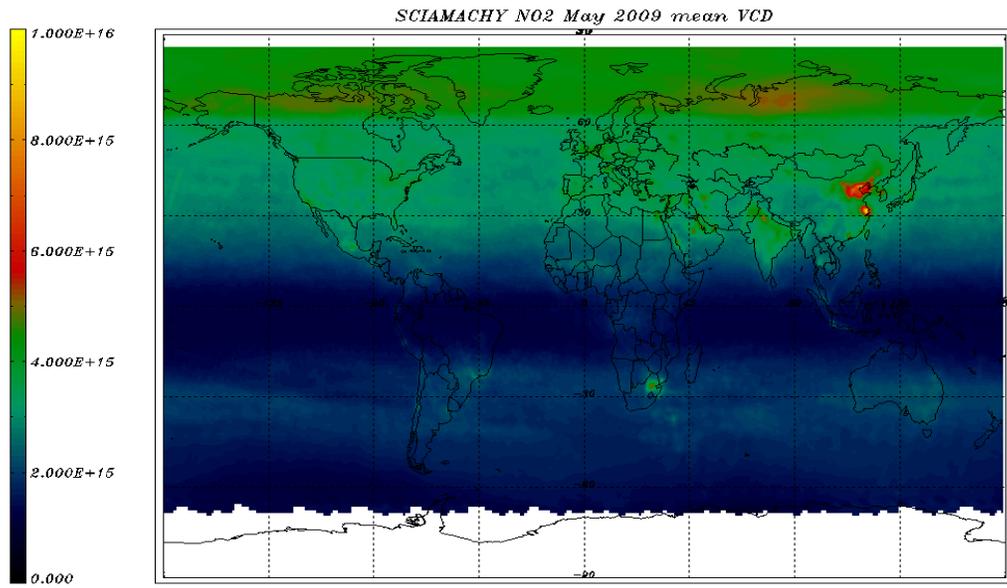


Figure 7-1: NO<sub>2</sub> VCD world map 01 - 31 May 2009 – monthly average.

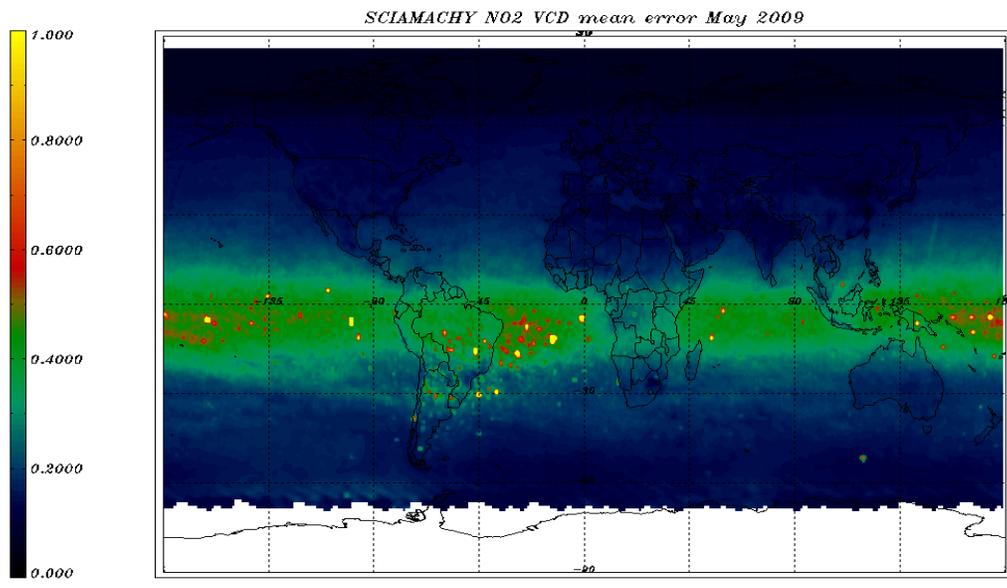


Figure 7-2: NO<sub>2</sub> VCD error 01 - 31 May 2009 - monthly average.



esa



serco

SCIAMACHY Bi-MONTH



7.2.1.2 Nadir: VCD NO<sub>2</sub> map June 2009

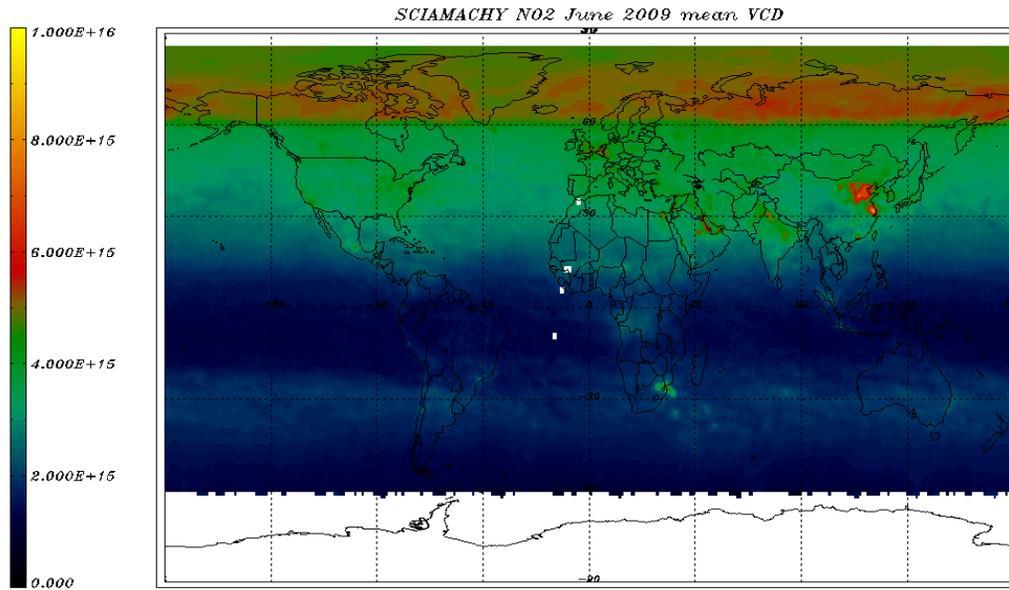


Figure 7-3: NO<sub>2</sub> VCD world map 01 – 30 June 2009 – monthly average.

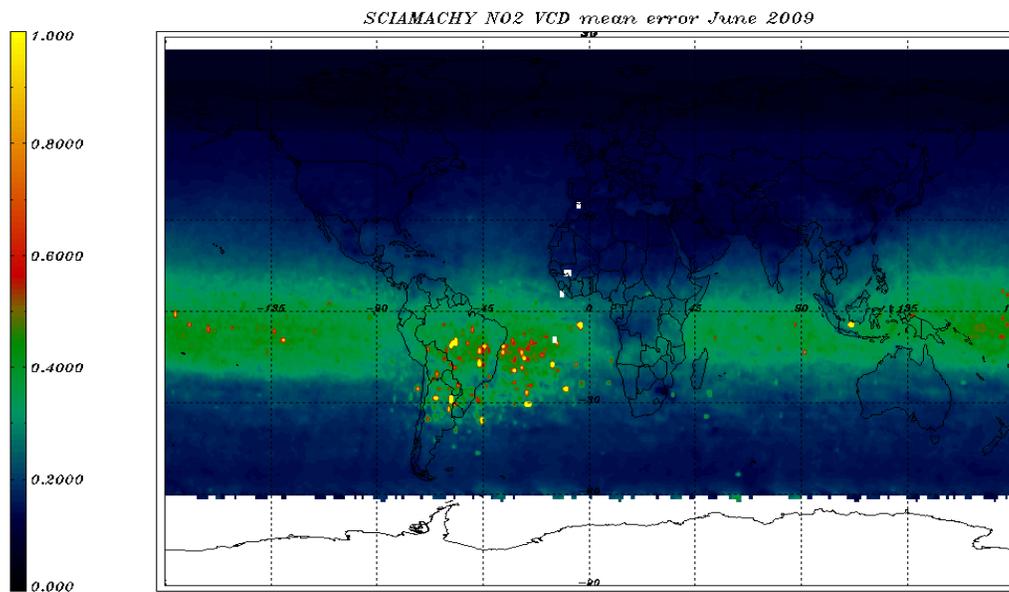


Figure 7-4: NO<sub>2</sub> VCD error 01 – 30 June 2009- monthly average.



esa



DLR



serco

SCIAMACHY Bi-MONTH



page 53 of 61

### 7.2.2 Nadir: $O_3$ consistency checking

Analogous to the  $NO_2$  world maps,  $O_3$  vertical column density (VCD) values averaged over one month are generated from the SCI\_OL\_\_2P Nadir products and plotted on a world map. Fig 7.5 and 7.7 show the ozone distribution converted in Dobson units for May and June 2009.

The VCD errors as monthly average plots are shown in Figures 7.6 and 7.8. The errors are given in relative fraction. Systematically higher error values at the North Pole area are visible.

7.2.2.1 Nadir: VCD O<sub>3</sub> map May 2009

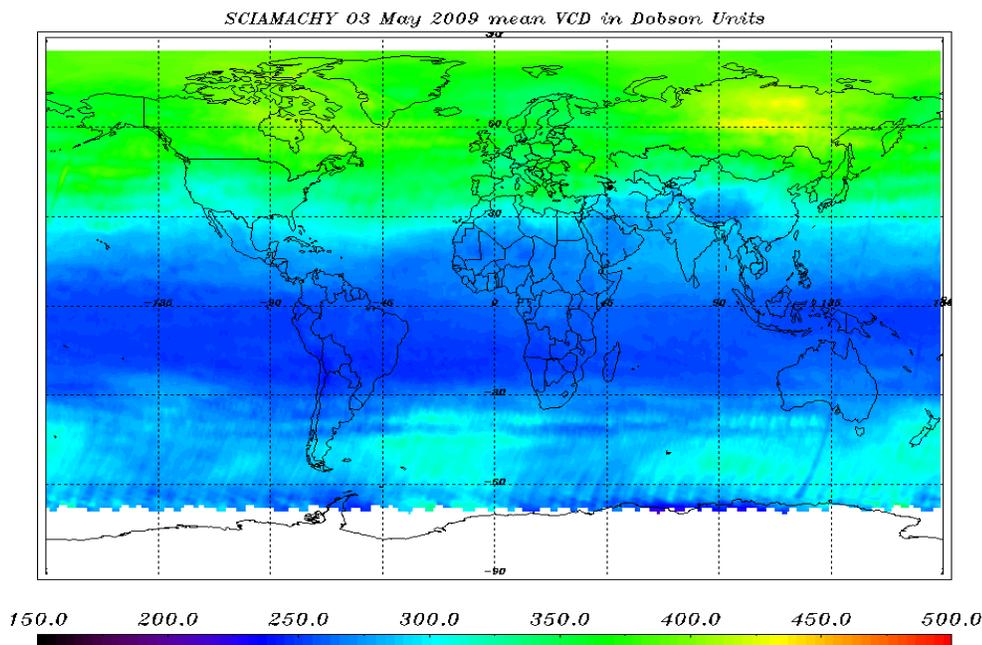


Figure 7-5: O<sub>3</sub> VCD world map 01 - 31 May 2009 – monthly average.

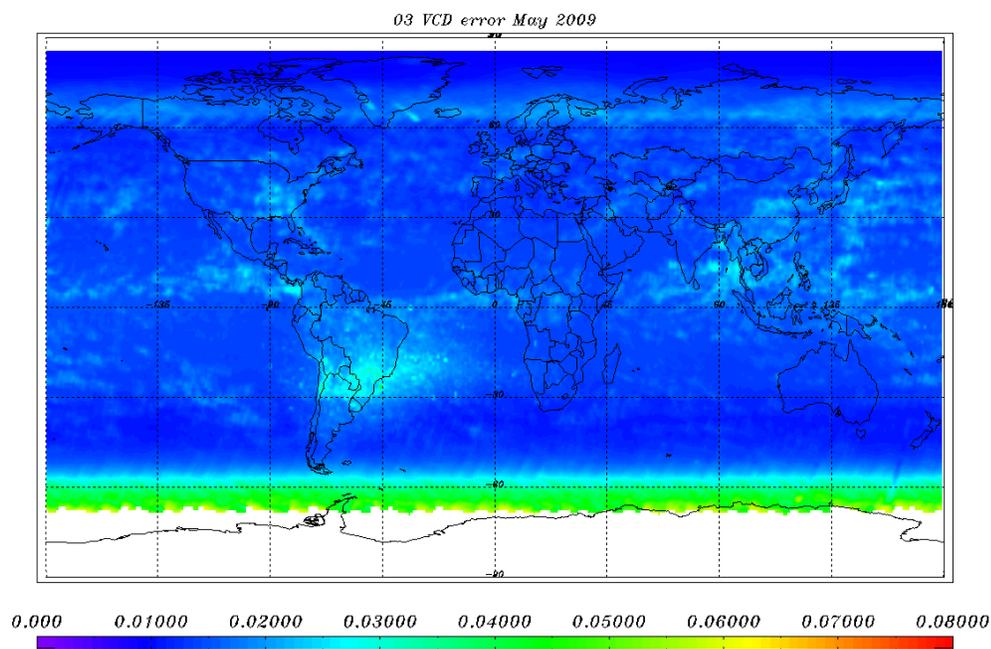


Figure 7-6: O<sub>3</sub> VCD error 01 - 31 May 2009 - monthly average.



esa



serco

SCIAMACHY Bi-MONTH



7.2.2.2 Nadir: VCD O<sub>3</sub> map June 2009

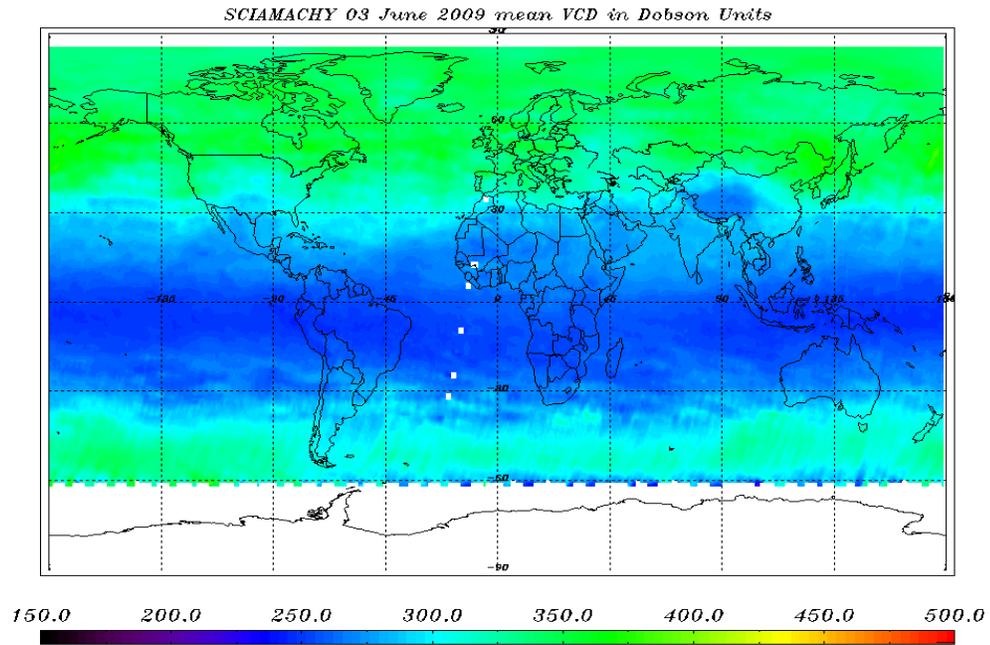


Figure 7-7: O<sub>3</sub> VCD world map 01 - 30 June 2009 – monthly average.

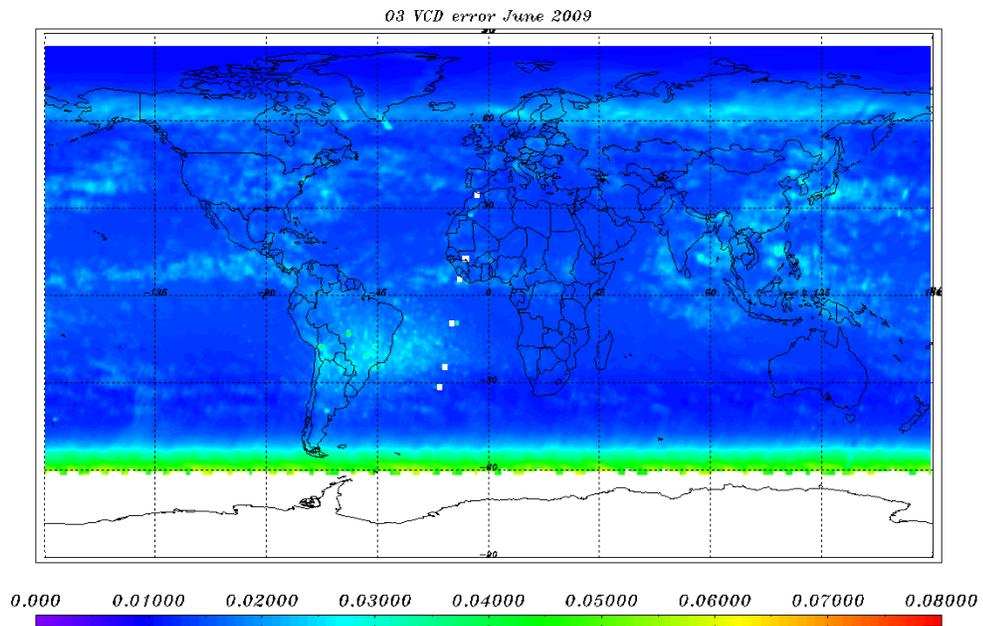


Figure 7-8: O<sub>3</sub> VCD error 01- 30 June 2009 - monthly average.



esa



DLR



serco

SCIAMACHY Bi-MONTH



page 56 of 61

### 7.2.2.3 Limb: Ozone profile averages

This paragraph reports on the quality check of SCIAMACHY limb profiles on a monthly basis, showing the results for Ozone limb profiles binned for two tangent height regions bins:

- 21.0 – 24.5 km (17th bin, bin index=16).
- 35.0 – 38.5 km (13th bin, bin index=12).

The data of the first half of each month (calendar days 1 - 15) and the second half (calendar days 16 - 31) are averaged for selected tangent heights into geo-location bins of 10 degrees longitude and 5 degrees latitude. The binning algorithm uses a single longitude and latitude value for the entire profile, being the value for the middle of the integration time as reported in the Geo-location Limb Dataset. The corresponding error is averaged as well.

The world maps of the averaged Ozone values show comparably low errors over the SAA region, which is not as expected. Investigation showed that the low SAA errors result from irregular conditions of the LIMB retrieval in that region. This issue will be included into the Level 2 off-line disclaimer.

Figures 7.9 – 7.12 show the results for the months of May and June 2009 and for the two different tangent height regions.



esa



serco

SCIAMACHY Bi-MONTH



7.2.2.4 Ozone limb profiles May 2009

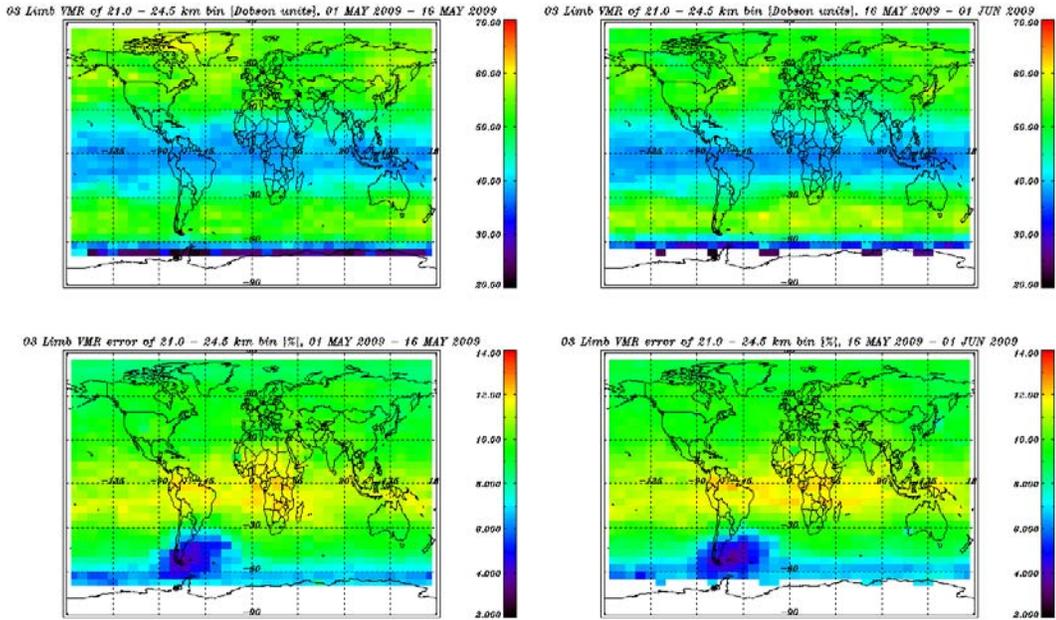


Figure 7-9 Limb Ozone profiles, binned over 21.0 – 24.5 km, May 2009.

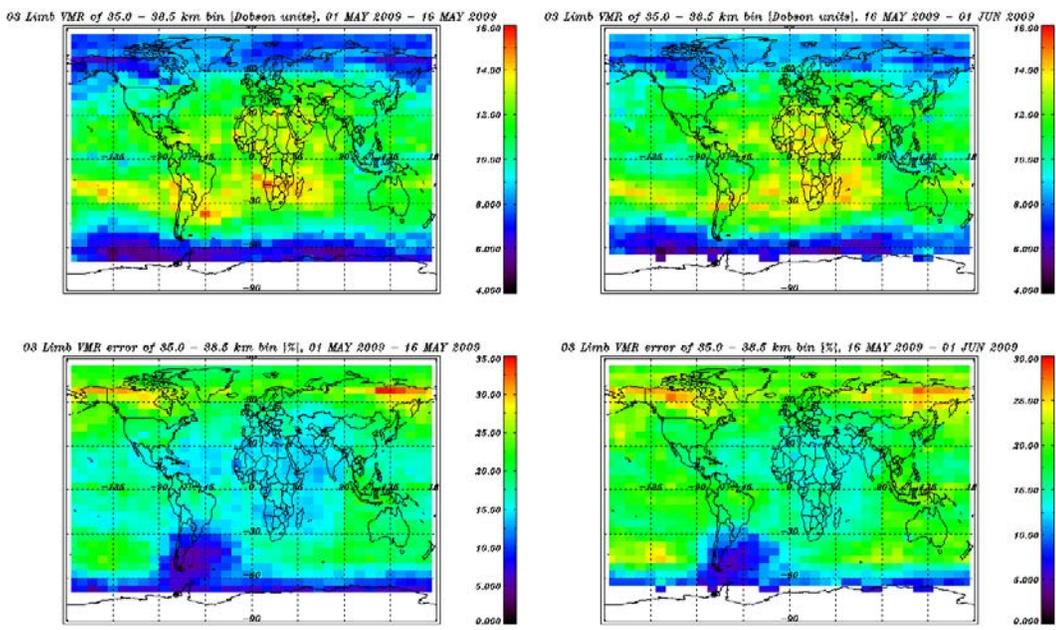


Figure 7-10 Limb Ozone profiles, binned over 35.0 – 38.5 km, May 2009.



esa



serco

SCIAMACHY Bi-MONTH



7.2.2.5 Ozone limb profiles June 2009

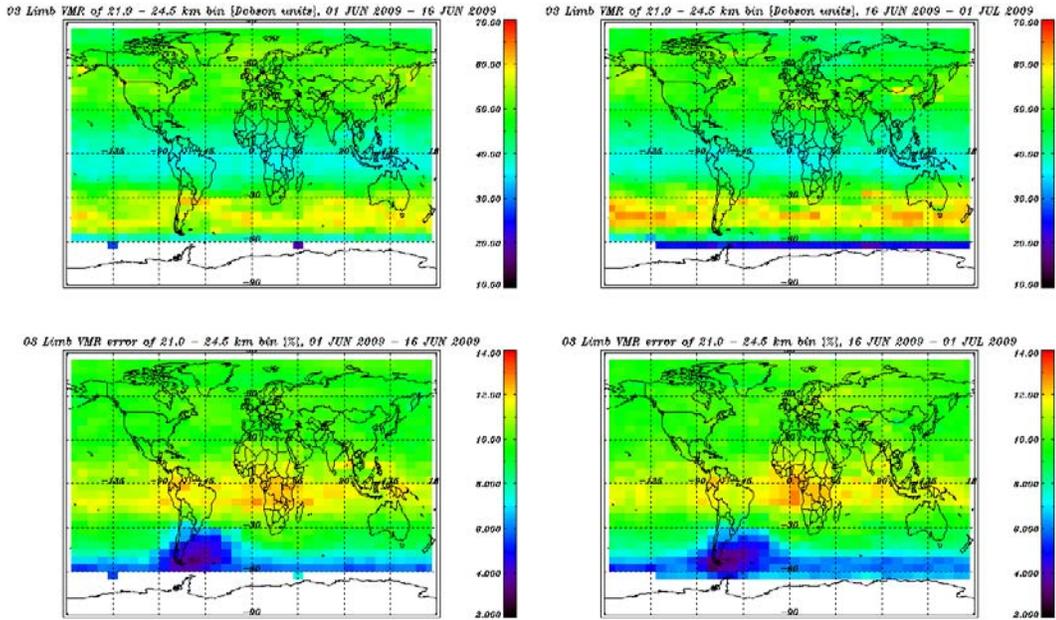


Figure 7-11: Limb Ozone profiles binned over 21.0 – 24.5 km, June 2009.

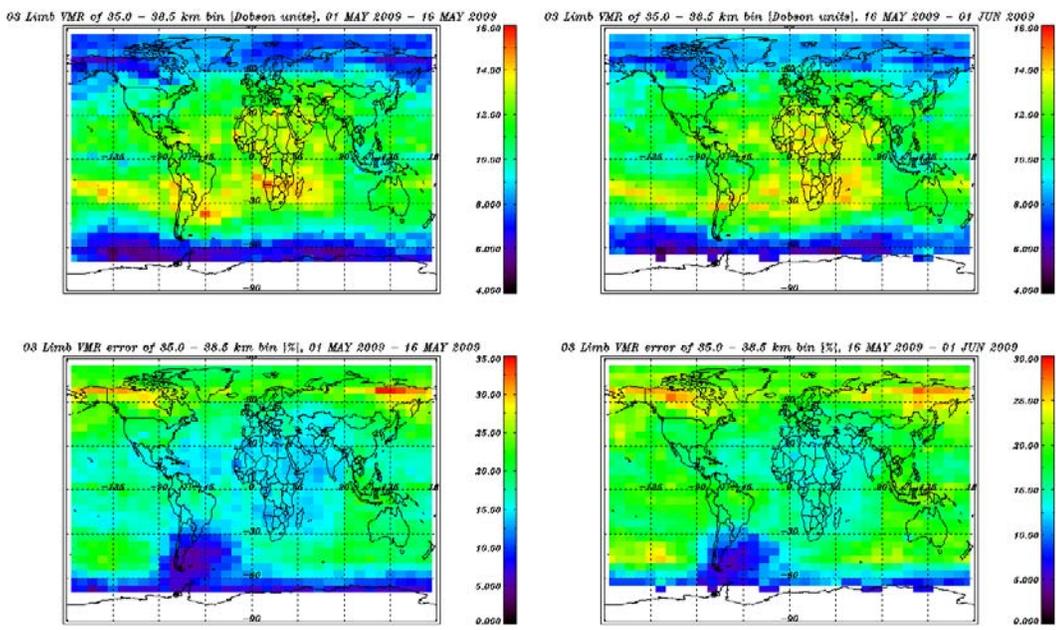


Figure 7-12: Limb Ozone profiles binned over 35.0 – 38.5 km, June 2009.

### 7.2.3 *Limb: NO<sub>2</sub> profile averages*

Analogous as for the limb Ozone profiles monthly averages for NO<sub>2</sub> limb averages were generated. The tangent height region chosen is:

- 24.5 – 28.0 km (15th bin, bin index=14).

As for the ozone averages the data of the first half of each month (calendar days 1 - 15) and the second half (calendar days 16 - 31) are averaged for selected tangent heights into geo-location bins of 10 degrees longitude and 5 degrees latitude. The binning algorithm used is the same as the described in 7.2.3. The corresponding error is averaged as well. Figures 7.13 – 7.14 show the results for the months of May and June 2009.



esa



serco

SCIAMACHY BI-MONTH

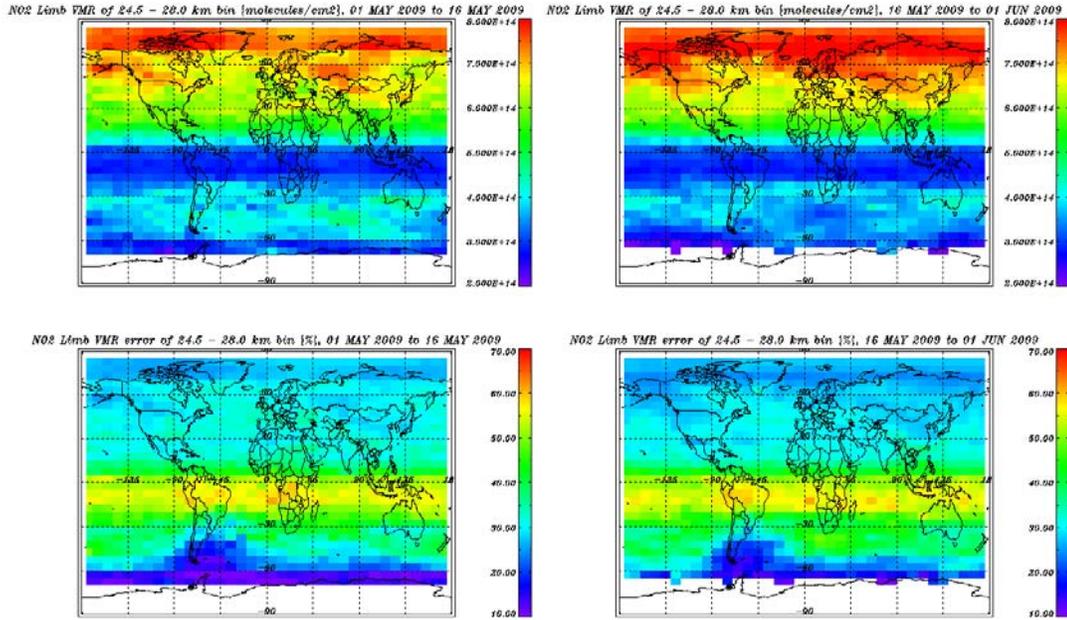


Figure 7-13 Limb NO<sub>2</sub> profiles binned over 24.5 - 28 km, May 2009.

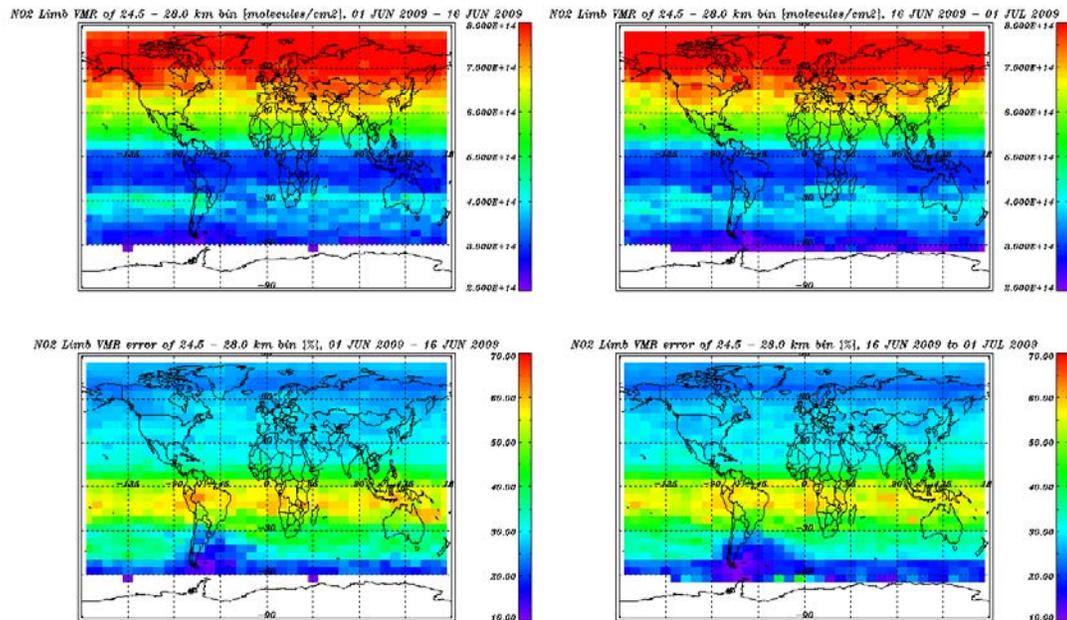


Figure 7-14 Limb NO<sub>2</sub> profiles binned over 24.5 - 28 km, June 2009.

## 8 VALIDATION ACTIVITIES AND RESULTS

Validation activities of products from re-processing, Level 1 IPF 6.03 and Level 2 off-line processor 3.01 have been performed.

The SCIAVALIG group has published the results of the Product Quality at

[http://www.sciamachy.org/validation/documentation/technotes/SCIAVALIG/Summary\\_operational\\_product\\_quality\\_20080326.pdf](http://www.sciamachy.org/validation/documentation/technotes/SCIAVALIG/Summary_operational_product_quality_20080326.pdf)