
/document title/ titre du document

SCIAMACHY BI-MONTHLY REPORT: SEPTEMBER - OCTOBER 2009

prepared by/ <i>préparé par</i>	Gabriele Brizzi
reference/ <i>référence</i>	ENVI-SPPA-EOPG-TN-09-0037
issue/ <i>édition</i>	1.1
revision/ <i>révision</i>	0
date of issue/ <i>date d'édition</i>	10 March 2010
status/ <i>état</i>	
Document type/ <i>type de document</i>	Technical Note
Distribution/ <i>distribution</i>	

APPROVAL

Title <i>titre</i>	SCIAMACHY Bi-Monthly Report: September - October 2009	issue <i>issue</i> 1.1	revision <i>revision</i> 0
------------------------------	-------------------------------------------------------	----------------------------------	--------------------------------------

author <i>auteur</i>	Gabriele Brizzi, IDEAS-SERCO, Angelika Dehn, IDEAS-SERCO, Manfred Gottwald, SOST-DLR, Stefan Noël, SOST-IFE, Richard von Hees, SRON	date <i>date</i>	10/12/2009
--------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------	----------------------------	------------

approved by <i>approuvé by</i>	T. Fehr ESA/ESRIN, D/EOP-GQ G. Lichtenberg, IDEAS-DLR	date <i>date</i>	
------------------------------------------	----------------------------------------------------------	----------------------------	--

CHANGE LOG

reason for change /raison du changement	issue/issue	revision/revision	date/date

CHANGE RECORD

Issue: 1 Revision: 0

reason for change/raison du changement	page(s)/page(s)	paragraph(s)/paragraph(s)

TABLE OF CONTENTS

1	INTRODUCTION	5
1.1	Scope	5
1.2	References	6
1.3	Acronyms and Abbreviations.....	7
2	SUMMARY	9
3	INSTRUMENT CONFIGURATION AND PERFORMANCE	11
3.1	In-Flight Status and Performance	11
3.1.1	Planned Operations and Measurements (SOST-DLR)	11
3.1.2	Instrument Measurement Status (SOST-DLR)	12
3.1.3	Executed Operations and Measurements (SOST-DLR)	12
3.1.4	Performance Monitoring - System (SOST-DLR)	14
3.1.5	Performance Monitoring - Light Path (SOST-IFE)	20
3.1.5.1	Science Channel Averages	20
3.1.5.2	Spectral light path monitoring results	22
3.1.5.3	PMD monitoring results.....	27
4	DATA AVAILABILITY STATISTICS	29
4.1	Downlink/Acquisition Performance	29
4.2	Statistics on unconsolidated data	29
	(SCI_NL__0P, SCI_NL__1P)	29
4.3	Statistics on consolidated data	30
4.3.1	Anomalies on Level 0 consolidated data products.....	30
4.3.2	Availability of consolidated SCI_NL__1P products	31
4.4	Statistics on reprocessed data.....	32
4.4.1	Level 1b re-processing	32
4.4.2	Level 2 re-processing	32
5	LEVEL 1 PRODUCT QUALITY MONITORING	33
5.1	Processor Configuration.....	33
5.1.1	Version	33
5.1.2	Anomalies	34
5.1.2.1	Wrong Orbit number assignment.....	34
5.1.2.2	Wrong processor version	35
5.1.2.3	SCI_SU1_AX without update of D1 spectra	35
5.2	Auxiliary Data Files	35
5.2.1	Auxiliary Data File quality analysis.....	37
5.2.1.1	SMR analysis	37

5.2.1.2	LK1 analysis	42
5.2.1.2.1	Leakage Constant part.....	42
5.2.1.2.2	Leakage Variable part	45
5.3	Bad and Dead Pixel Mask.....	46
5.4	Pointing Performance.....	47
5.5	SciaL1c tool	47
6	LEVEL 2 NRT PRODUCT QUALITY MONITORING	48
6.1	Processor Configuration.....	48
6.1.1	Version	48
6.1.2	Auxiliary Data Files	48
7	LEVEL 2 OFF-LINE PRODUCT QUALITY MONITORING.....	49
7.1	Processor Configuration.....	49
7.1.1	Version	49
7.1.2	Anomalies	50
7.1.3	Auxiliary Data Files	50
7.2	Monitoring results	51
7.2.1	Nadir: NO ₂ consistency checking	51
7.2.1.1	Nadir: VCD NO ₂ map September 2009.....	52
7.2.1.2	Nadir: VCD NO ₂ map October 2009	53
7.2.2	Nadir: O ₃ consistency checking	54
7.2.2.1	Nadir: VCD O ₃ map September 2009.....	55
7.2.2.2	Nadir: VCD O ₃ map October 2009	56
7.2.2.3	Limb: Ozone profile averages.....	57
7.2.2.4	Ozone limb profiles September 2009.....	58
7.2.2.5	Ozone limb profiles October 2009.....	59
7.2.3	Limb: NO ₂ profile averages	60
8	VALIDATION ACTIVITIES AND RESULTS.....	62

SCIAMACHY BI-MONTHLY REPORT SEPTEMBER - OCTOBER 2009

1 INTRODUCTION

The SCIAMACHY Bi-Monthly report documents the current status and recent changes to the SCIAMACHY instrument, its data processing chain, and its data products.

The Bi-Monthly Report (hereafter BMR) is composed of analysis results obtained by IDEAS, combined with inputs received from the different groups working on SCIAMACHY operation, calibration, product validation and data quality.

The first part of the report is dedicated to Instrument Configuration and Performance. It is composed of contributions from SOST-DLR, SOST-IFE and SRON.

The remainder of the report is dedicated to Level 1b and Level 2 performance assessment and is generated by ESA/ESRIN IDEAS with contributions from ESA/ESTEC PLSO and DLR-IMF.

The structure of the report will be in constant evolution through the ENVISAT mission, as experience with SCIAMACHY data and quality control grows.

1.1 Scope

The main objective of the BMR is to give, on a regular basis, the status of SCIAMACHY instrument performance, data acquisition, results of anomaly investigations, calibration activities and validation campaigns. The BMR is composed of the following six sections:

- Summary;
- Instrument Configuration and Performance;
- Data Availability Statistics;
- Level 1 Product Quality Monitoring;
- Level 2 Product Quality Monitoring;
- Validation Activities and Results.

1.2 References

- [1] ‘Instrument Operation Manual’, MA-SCIA-0000DO/01, Issue F R2, 16 Dec. 2004.
- [2] ‘ENVISAT-1 Products Specifications Volume 15: SCIAMACHY Products Specifications’, PO-RS-MDA-GS-2009, Issue 3, Rev: K, Gianni Sotis, 06 May 2006.
- [3] ‘SCIAMACHY cL0 Statistics’, PO-TN-DLR-SH-0012, Issue 1, Rev. 1 14 April 2005.
- [4] SCIAMACHY cL0 Statistics 2003, PO-TN-DLR-SH-0013, Issue 1, Rev. 0, 14 April 2005.
- [5] ‘SCIAMACHY Consolidated Level 0: Statistics for the Year 2005’, PO-TN-DLR-SH-0014, Issue 1, Rev. 0, 11 July 2006.
- [6] ‘Summary of the Atmospheric Chemistry Instrument Validation results as presented at the ACVE-3 Workshop’, Paul Snoeij, Ankie Pijters, Herbert Fischer, Yasjka Meijer, Jean-Christopher Lambert, Thorsten Fehr.
- [7] ‘SCIAMACHY Extra Misalignment Model’, PO-TN-DLR-SH-0016 Issue 1, M. Gottwald, E. Krieg, DLR-IMF, C. von Savigny, S. Noël, K. Bramstedt IUP-IFE, 07 March 2007.
- [8] ‘Verification of the extra misalignment correction in the SCIAMACHY IPF 6.03 processor’, TN-IUP/IFE-2007-cvs-02, C. von Savigny, A. Dehn, H. Bovensmann, J. Steinwagner IUP-IFE, 05 July 2007.
- [9] ‘SCIAMACHY SciCal Tool Change of Leakage ADF generation’ ENV-TN-DLR-SCIA-0094, Issue 1.0, Bernd Aberle, Günter Lichtenberg, 08 November 2007.

1.3 *Acronyms and Abbreviations*

ADC	Analogue to Digital Converter
ADF	Auxiliary Data File
ANX	Ascending Node Crossing
AOCS	Attitude and Orbit Control System
APSM	Aperture Stop Mechanism
ASM	Azimuth Scan Mechanism
ATC	Active Thermal Control
BMR	Bi-Monthly Report
CA	Corrective Action
CCA	Communication Area
CTI	Configurable Transfer Item
DAC	Digital Analogue Converter
DLR-IMF	Deutsches Zentrum fuer Luft- und Raumfahrt
EOL	End of Life
ESM	Elevation Scan Mechanism
FAT	Factory Acceptance Test
FPN	Fixed Pattern Noise
HK	Housekeeping
HSM	High Speed Multiplexer
ICE	Instrument Control Electronics
ICU	Instrument Control Unit
IDEAS	Instrument Data quality Evaluation and Analysis Service
IECF	Instrument Engineering and Calibration Facilities
IOM	Instrument Operation Manual
LK1	Leakage Current Auxiliary File (SCI_LK1_AX)
LLI	Life Limited Item
LOS	Line of Sight
MCMD	Macro Command
MPH	Main Product Header
MPS	Mission Planning Schedule
MR	Monthly Report
NCWM	Nadir Calibration Window Mechanism
NDFM	Neutral Density Filter Mechanism
NIVR	Netherlands Agency for Aerospace Programmes
NNDEC	Non-nominal Decontamination
NRT	Near Real Time
OAR	Observation Anomaly Report
OBM	Optical Bench Module
OCM	Orbit Control manoeuvre
OCR	Operations Change Request
OSDF	Orbit Sequence Definition File
OSV	Orbit State Vector
PCF	Product Control Facility



esa



DLR



ife

serco



SCI/

issue 1.1 revision 0-

page 8 of 62

PDHS	Payload Data Handling Station (PDS)
PDHS-E	Payload Data Handling Station – ESRIN
PDHS-K	Payload Data Handling Station – Kiruna
PDS	Payload Data Segment
PE1	Pixel to Pixel/ Etalon Auxiliary File (SCI_PE1_AX)
PLSO	Payload Switch OFF
PMD	Polarization Measurement Device
QUADAS	Quality Analysis of Data from Atmospheric Sounders
QWG	Quality Working Group
SAA	South Atlantic Anomaly
SCIAMACHY	Scanning Imaging Absorption Spectrometer for Atmospheric Chartography
SCICAL	SCIAMACHY Calibration tool
SEU	Single Event Upset
SLS	Spectral Line Source
SM	Service Module
SMR	Sun Mean Reference
SOST	SCIAMACHY Operations Support Team
SP1	Spectral Calibration Auxiliary File (SCI_SP1_AX)
SU1	Sun Reference Auxiliary File (SCI_SU1_AX)
SZA	Sun Zenith Angle
TC	Thermal Control
TCFoV	Total Clear Field of View
TOA	Top of Atmosphere
TRUE	Tangent height Retrieval by UV-B Exploitation
VCD	Vertical Column Density
WLS	White Light Source
WUR	Wageningen University and Research
YSM	Yaw Steering Mode

2 SUMMARY

- The SCIAMACHY near real-time Level 1b processor has been switched to a LINUX operating system in the ESA Ground Segment on 29 September 2009, start orbit 39639. This change did not include any evolution in the algorithm, but corresponds to a porting of the existing processor from AIX to LINUX. No changes in the science data are therefore expected. The new processor version indicated in the Level 1b product MPH is 06.05L01. The corresponding switch of the Level 1b off-line processor at D-PAC was carried out on 05 October 2009, start orbit 39634.
- During the reported period SCIAMACHY measurements were nominal with respect to planning, besides two unavailability periods during following orbits:
 - 39634 – 39639 (28-29 Sep. 2009) ENVISAT planned OCM manoeuvre. This manoeuvre has implemented a new approach permitting a faster return to operation.
 - 40048- 40053 (27-Oct -2009 20:17 UTC to 28-Oct-2009 07:11 UTC) ARTEMIS unavailability
- Monthly Calibration was performed during orbits:
 - 39274-39278 (03/04-Sep-2009)
 - 39703-39707 (03/04-Oct-2009)
- Occultation measurements with the moon rising on night side were executed between orbits:
 - 39702-39726 (03-05 Oct-2009)
- OCR_041 (*Cluster 16 and 18 short integration times*) was successfully implemented between orbits:
 - 39664 – 40107 (01 – 31 Oct. 2009)
- No TC adjustments were required.
- Light Path monitoring:
 - Channels 1 & 2 degradation in the UV remains at about 1% per month.
 - Channel 3 observed a small throughput loss (less than 0.5%) within the two months of this report.

- Channel 4 to 7 remained quite stable, although there is also a small (less than 1%) decrease in throughput visible between September and October 2009, largest in channels 6 and 7.
 - Channel 8 throughput for all light paths remains almost stable at around 71%.
- PMD monitoring:
 - The observed PMD throughput changes are (except for PMD 4 and 7) very similar to those of the science channels.



esa



DLR



ife

serco

SCI



issue 1.1 revision 0

page 11 of 62

3 INSTRUMENT CONFIGURATION AND PERFORMANCE

3.1 In-Flight Status and Performance

Detailed operations, planning and instrument status information can be found on the website of the *SCIAMACHY Operations Support (SOST)* under <http://atmos.caf.dlr.de/projects/scops/>. These pages are maintained on a daily basis and show the history and actual progress of the SCIAMACHY mission.

3.1.1 Planned Operations and Measurements (SOST-DLR)

The reporting period covers the orbits 39235 (ANX = 01-Sep-2009, 01:00:33.903) to 40107 (ANX = 31-Oct-2009, 23:02:43.244). One OSDF specified the planning baseline.

Orbit		ANX		OSDF
Start	Stop	Start	Stop	
39235	40107	01-Sep-2009 01:00:33.903	31-Oct-2009 23:02:43.244	IMPL_OSD_SHVSH_20090714_010101_00000000_35090001_20090901_010036_20091101_004317.N1

Table 3-1: SCIAMACHY OSDF planning files from September – October 2009.

Measurements were nominal, i.e. timelines executed limb/nadir sequences with wide swath settings on the dayside of the orbit. Each month they were interleaved with 2 blocks of 14-15 orbits each where the limb state was replaced by the *limb_mesosphere_thermosphere* state (see below). In-flight calibration and monitoring measurements occurred on daily, weekly and monthly timescales according to the mission scenarios. Regular monthly calibration was scheduled between orbits

- 39274-39278 (03/04-Sep-2009)
- 39703-39707 (03/04-Oct-2009)

The moon was in the limb TCFoV between orbits

- 39203-39302 (29-Aug-2009 until 05-Sep-2009)
- 39628-39726 (28-Sep-2009 until 05-Oct-2009)
- 40055-40147 (28-Oct-2009 until 03-Nov-2009)

Occultation measurements with the moon rising on the night side could be executed between orbits

- 39702-39726 (03-Oct-2009 until 05-Oct-2009)

Four blocks of *limb_mesosphere_thermosphere* measurements were scheduled.

Orbit		UTC		Remark
Start	Stop	Start	Stop	
39306	39321	06-Sep-2009 00:03:04	07-Sep-2009 01:12:03	
39521	39536	21-Sep-2009 00:31:49	22-Sep-2009 01:40:48	MIPAS upper atmosphere mode
39736	39751	06-Oct-2009 01:00:33	07-Oct-2009 02:09:32	
39951	39966	21-Oct-2009 01:29:18	22-Oct-2009 02:38:17	MIPAS upper atmosphere mode

Table 3-2: Scheduled *limb_mesosphere_thermosphere* measurements in September – October 2009

One OCR was successfully implemented. This was

- OCR_041 (*Cluster 16 and 18 short integration times*): Execution started in orbit 39664 (01-Oct-2009) and ended in orbit 40107 (31-Oct-2009). Co-adding factors in channel 3 were modified as required. Some channel 6 and 7 co-adding factors needed modifications to compensate for the increased data rate.

3.1.2 Instrument Measurement Status (SOST-DLR)

The final flight status for states and timelines remained unchanged.

3.1.3 Executed Operations and Measurements (SOST-DLR)

Measurements and instrument availability

The OSDF planning file has been scheduled as requested except for one period:

- Orbit 39634-39639 (28/29-Sep-2009): A planned orbit control manoeuvre (OCM) required a transfer to MEASUREMENT IDLE. SCIAMACHY measurements started after the OCM with the platform being in *yaw steering mode* only for a few orbits. This is the new approach which gains several 100 minutes of additional measurements data (with slightly reduced pointing performance).



esa



serco



SCI/

issue 1.1 revision 0-

page 13 of 62



Fig. 3-1: Current instrument availability status including the reporting period

Detector thermal adjustment (TC)

No TC adjustment was required. The TC settings remained at

- DAC1 = 0.53 W
- DAC2 = 0.50 W
- DAC3 = 0.00 W

APSM/NDFM health checks & PMD ADC cal

In the reporting period 1 APSM/NDFM health check and 2 PMD ADC calibrations were executed. All showed nominal results.

APSM/NDFM			PMD ADC	
Orbit	ANX	Result	Orbit	ANX
n.a.	n.a.	n.a.	39653	30-Sep-2009 07:50:11
40069	27-Oct-2009 08:51:45	ok	40070	27-Oct-2009 10:28:15

Table 3-3: APSM/NDFM health check and PMD ADC calibration


Anomalies

Only two minor instrument anomalies had occurred.

- In orbits 39380 and 39456 a detector module latchup occurred causing a parameter out-of-limit for 1 sec. In both cases the onboard anomaly counter was incremented but measurements continued.



esa



serco

SCI



issue 1.1 revision 0

page 14 of 62

Orbit	Date	Entry - UTC	Level	Entry Type	ID Content/Transition	Mode	Remark
39380	11-SEP-2009	2009.254.05.20.48.087	Instrument	HK PARAMETER LIMIT EXCEEDING	1 (E000)	MEASUREMENT	DM latchup (1 sec OOL), possible SEU
39456	16-SEP-2009	2009.259.12.05.34.588	Instrument	HK PARAMETER LIMIT EXCEEDING	1 (E000)	MEASUREMENT	DM latchup (1 sec OOL), possible SEU

Table 3-4: Instrument anomalies between September and October 2009

3.1.4 Performance Monitoring - System (SOST-DLR)

Detector and OBM temperatures are monitored according to the requirements of the IOM [1]. It requests to ensure that the average temperature per orbit remains within the specified limits.

Detector temperatures

For each detector the average temperatures per orbit are determined from HK telemetry parameters. Fig. 3-2 displays the temperatures of all 8 detectors. Colour coding is as on the operational monitoring website, i.e. data from orbits with HK telemetry coverage > 90% are shown in red, for < 90% in green. Minimum/maximum values per orbit are indicated as vertical bars. The temperature limits of each detector are shown as horizontal lines.

During part of the reporting period detectors 4 & 5 temperatures exceeded the upper limits. It was decided to tolerate elevated detector 5 temperatures up to about 0.5 K. This was the observed range at the seasonal maximum in November/December.

OBM temperatures

The average OBM temperature per orbit is determined from specific HK telemetry parameters. In addition power readings for the ATC heaters are monitored. Temperatures and ATC heater powers are given in Fig. 3-3 and 3-4. Colour coding is as in Fig. 3-2.

OBM temperatures and ATC heater powers remained within limits.

PMD ADC status

The status of the PMD ADC is monitored according to the requirements of the IOM [1]. It requests to ensure that no glitches occur caused by an SEU.

No PMD ADC glitches have been detected.



esa





serco

SCI





issue 1.1 revision 0

page 15 of 62

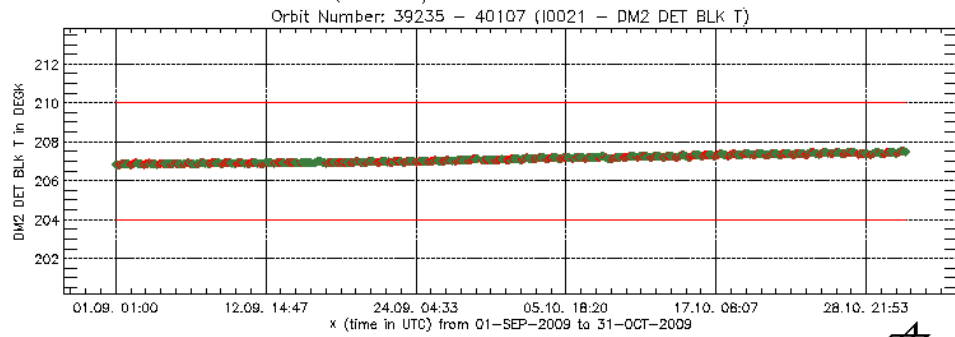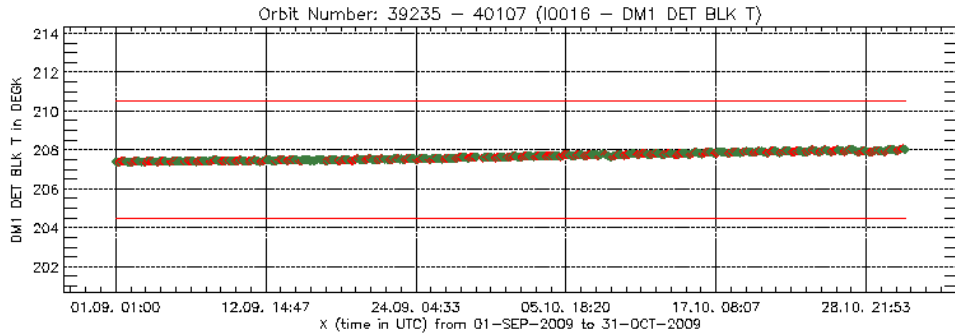

Filename: PIN_401_39235_40107
Date : 11-11-2009 Page : 7

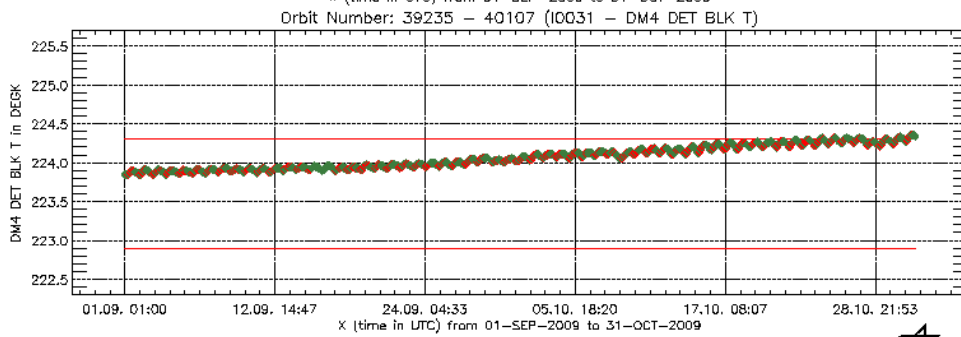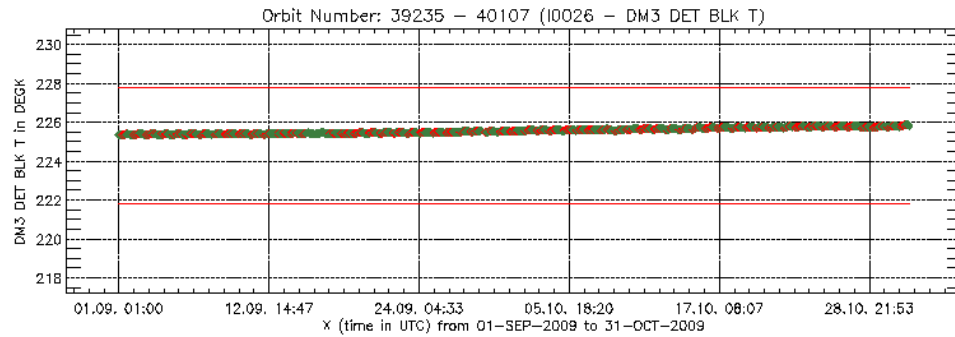

Filename: PIN_401_39235_40107
Date : 11-11-2009 Page : 7





esa



serco

SCI/



issue 1.1 revision 0-

page 16 of 62

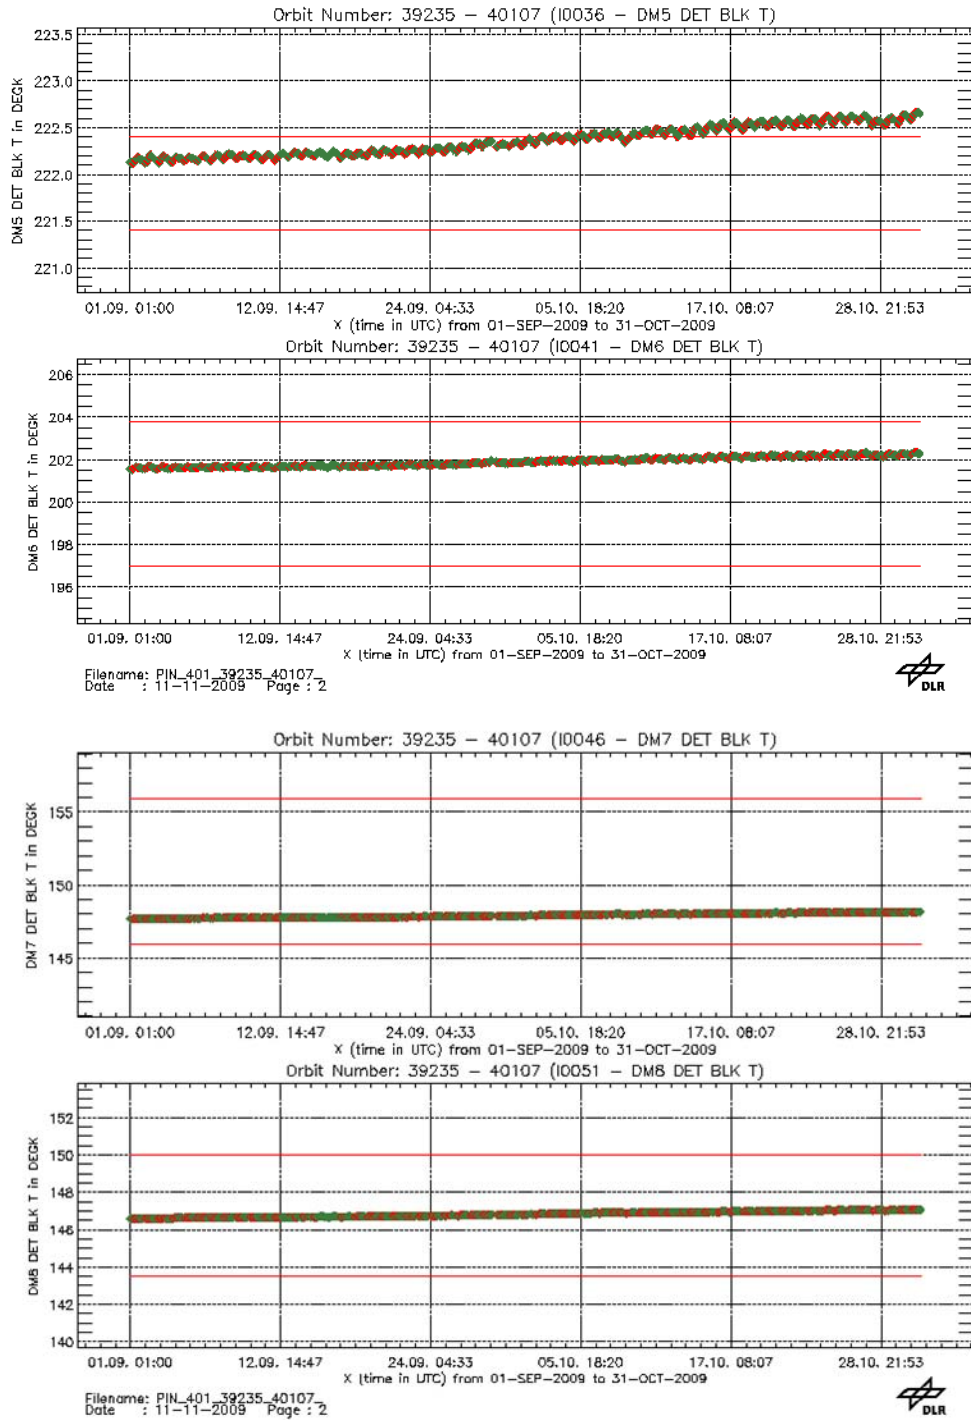


Fig. 3-2: Detector temperatures



esa



serco



SCI/

issue 1.1 revision 0-

page 17 of 62

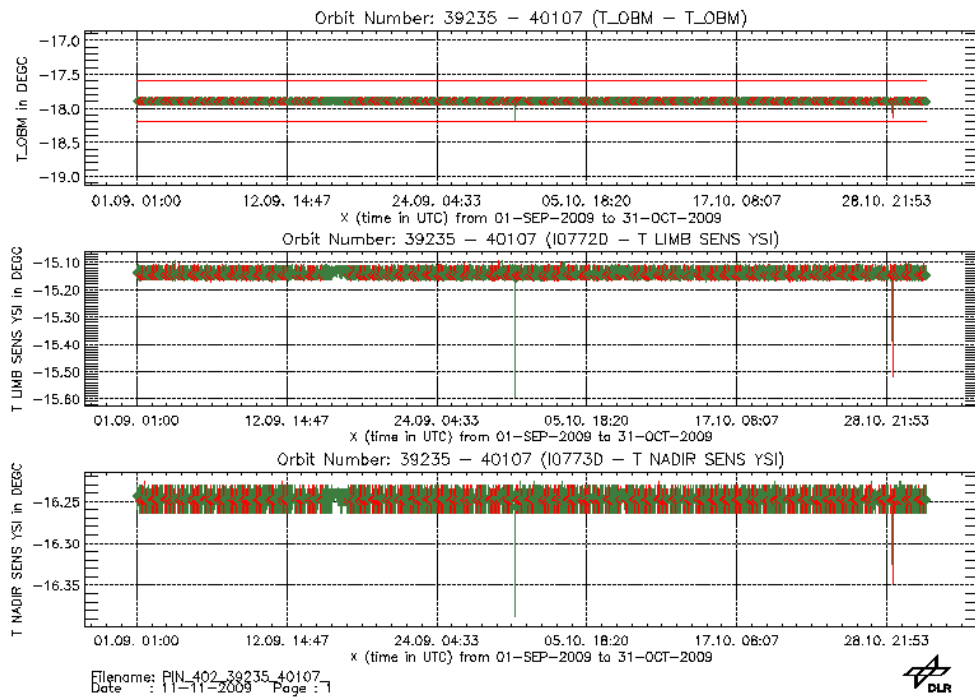


Fig. 3-3: OBM temperatures (top: derived OBM, middle: limb sensor, bottom: nadir sensor)


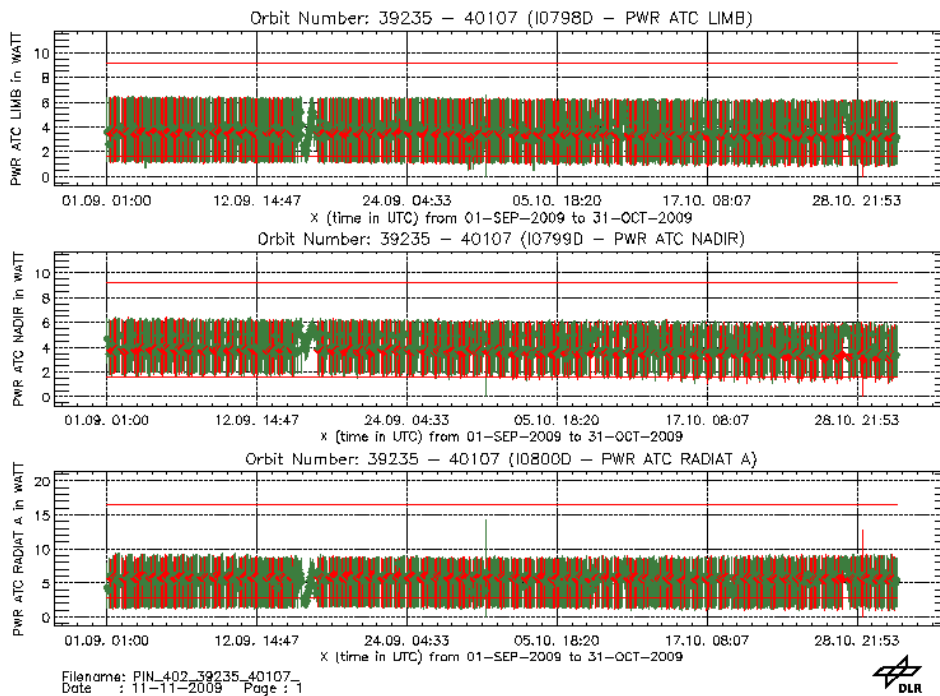


Fig. 3-4: ATC heater power (top: ATC limb, middle: ATC nadir, bottom: ATC Rad A)



esa



serco

SCI



issue 1.1 revision 0

page 18 of 62

LLI status

Life Limited Items are monitored based on analysis of the

- OSDF: This yields a predicted LLI usage.
- Report format: This counts the actual LLI switches or used LLI cycles. No WLS/SLS burning times can be derived thereof.

In addition, the in-flight usage of the cryogenic heat pipe is recorded. This subsystem has a limited number of cycles. Each decontamination increases the accumulated number of cycles by 1.

At the end of the reporting period the fractional usage of the LLI relative to the allowed in-flight budget was (based on OSDF prediction)

- NDFM: 0.51
- APSM: 0.47
- NCWM (sub-solar port): 0.83
- WLS (switches): 0.16
- WLS (burning time): 0.30
- SLS (switches): 0.07
- SLS (burning time): 0.02

For the NDFM and APSM the safety margin factor of 2 was no longer applied in the calculation of the fractional usage since it was found acceptable to stay below the figures of the life-tests. How the relative LLI usage has accumulated since launch can be seen in fig. 3-5. 'EOL' assumes a total mission lifetime until end of 2013.

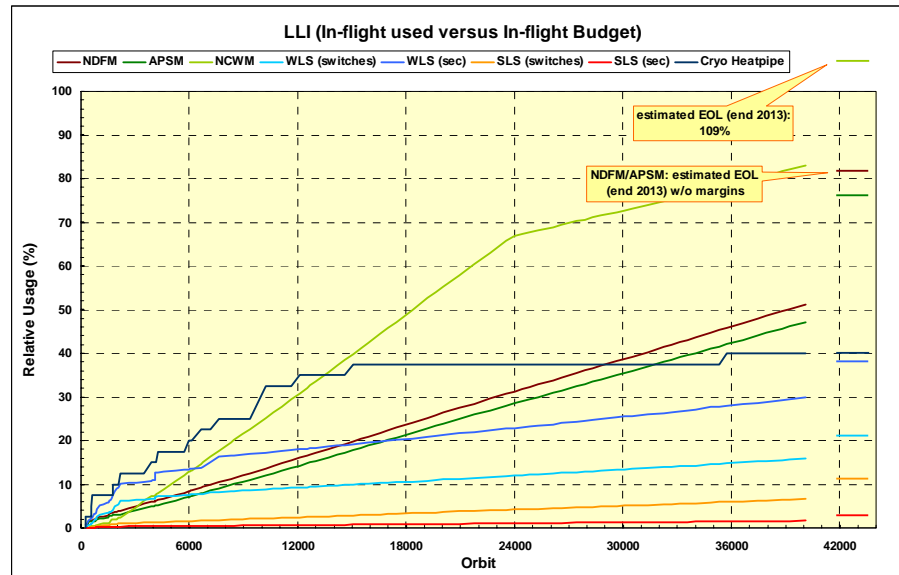


Fig. 3-5: Relative usage of LLI. 'EOL' is derived for a mission lifetime until 2013. For the NDFM and APSM no margin factors have been applied to derive the EOL relative usage.



esa



serco



SCI/

issue 1.1 revision 0-

page 19 of 62

Note that the NCWM usage exceeding 100% by the end of 2013 will be adjusted once the second phase of the mission extension has started in 2010.

The number of cryogenic heatpipe cycles did not increase (decontamination was already included in the November-December report). The budget used remained at 40% of the allowed in-flight budget.

Time reference

The times quoted in all planning files refer to the reference orbit. Since the actual orbit differs from the reference orbit (e.g. orbit drift), the times given w.r.t. the reference orbit also do not reflect exactly the actual absolute times of events along the orbit (e.g. ANX, sunrise, sub-solar, moonrise, eclipse). The requirements for orbit maintenance may result in time differences of usually ± 10 sec. In some cases this value may even reach $\pm 1</math> min, however.$

SOST monitors how the reference time deviates from the actual time. This is done by using the predicted time which comes very close to the actual = restituted time. If the predicted times are delayed w.r.t. the reference orbit, then the difference *predicted – reference time* is > 0 sec; in the other case it is < 0 sec.

Fig. 3-6 displays the time difference *predicted – reference*. Orbit manouevres cause distinct discontinuities.

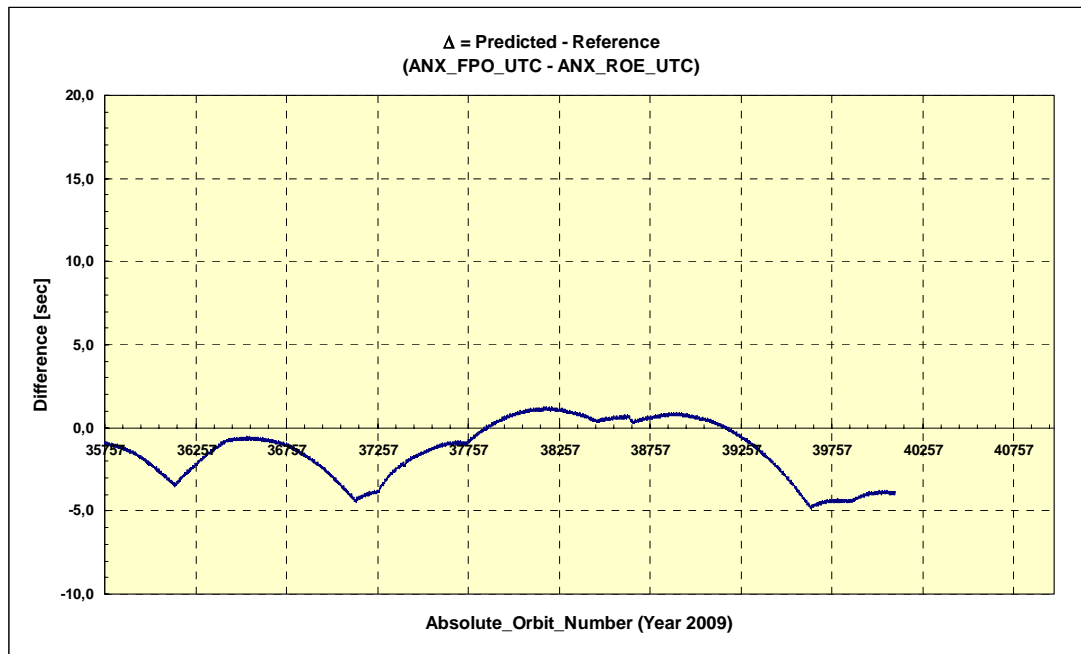


Fig. 3-6: Time difference between predicted and reference time.



esa



serco



SCI

issue 1.1 revision 0

page 20 of 62

3.1.5 Performance Monitoring - Light Path (SOST-IFE)

This section summarises the performance monitoring results for the two months time interval covered by this report.

A more detailed description of the performance monitoring activities is given in the SCIAMACHY Bi-Monthly Report May-June 2008.

3.1.5.1 Science Channel Averages

One part of the SOST long-term monitoring activities is the trend analysis of measurements with the internal White Light Source (WLS) and of observations of the unobscured Sun above the atmosphere. In order to monitor the different SCIAMACHY light paths, solar measurements are taken in various viewing geometries: In limb/occultation geometry (via ASM and ESM mirrors), in nadir geometry (via the ESM mirror through the subsolar port), and via the so-called calibration light path involving the ASM mirror and the ESM diffuser. SCIAMACHY long-term monitoring comprises a regular analysis of these measurements. The plots displayed in Fig. 3.7 show results of these monitoring activities for the time interval September to October 2009.

Note that the reported channel averages are medians. The currently used scan angle correction is based on V6 radiometric key data.

The light path monitoring results presented in this section may be regarded as a first step towards spectrally resolved monitoring factors (m-factors) which will be produced based on fully calibrated data.

Daily updated light path monitoring results can be found on the SOST or IUP web site (<http://www.iup.uni-bremen.de/sciamachy/LTM/LTM.html>).

The following specific features can be identified from the light path monitoring results during the time interval of this report:

- Overall the instrument behaved as expected.
- Small fluctuations end of September are related to an Orbit Control Manoeuvre performed at that time. This has been observed before.
- The degradation rate in the UV (channels 1 & 2) remains at about 1% per month.
- The minimum average throughput in channel 1 lies currently around 36% (for the limb light path). The throughput of the calibration light path is currently at about 78% in channel 1 and 81.5% in channel 2.
- The overall degradation of channel 3 is very small (2 – 8%, depending on light path) compared to channels 1 and 2. A small decrease in throughput of less than 0.5% is observed within the two months of this report.
- Channel 4 to 7 remained quite stable, although there is also a small (less than 1%) decrease in throughput visible between September and October 2009, largest in channels 6 and 7.
- The channel 8 throughput for all light paths remains almost stable at around 71%.



esa



serco

SCI/



issue 1.1 revision 0

page 21 of 62

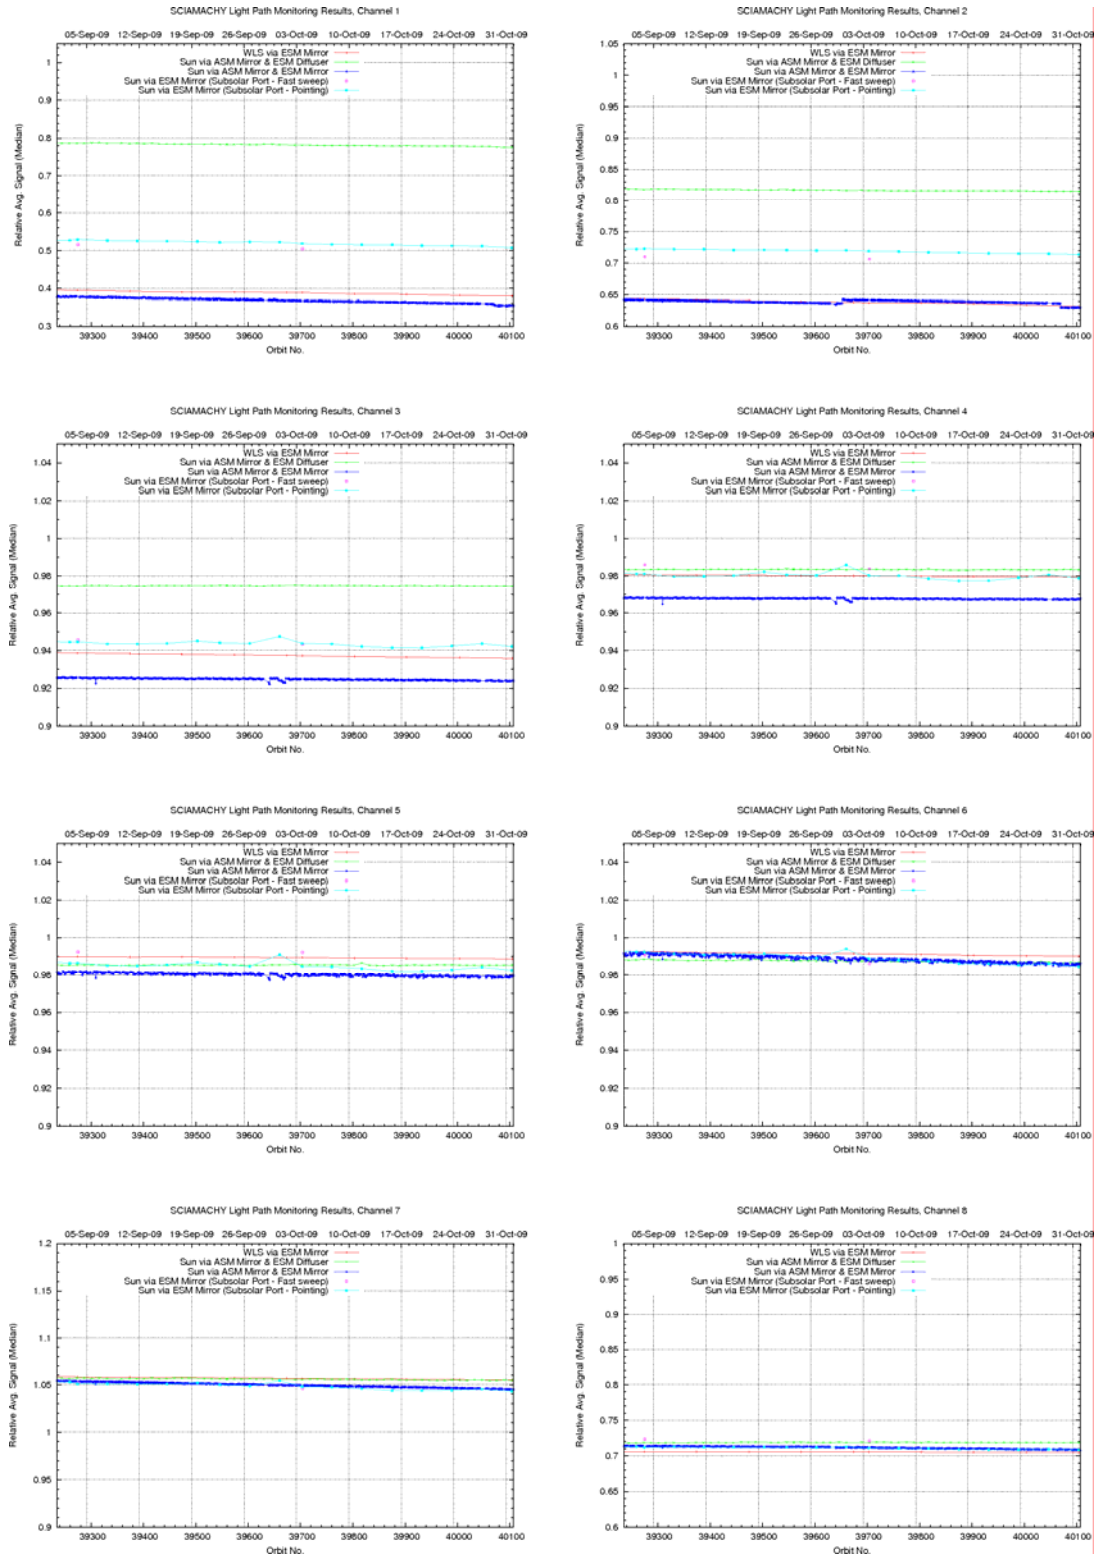


Fig. 3.7: Light path monitoring results September to October 2009 (medians).

3.1.5.2 Spectral light path monitoring results

Fig. 3.8 – 3.11 show results of spectral throughput monitoring performed by SOST-IFE for the different light paths (nadir, limb, calibration, and WLS). These results have been derived from Level 0 data analysed in a similar way as for the channel averaged throughput data (but of course without spectral averaging). Because the variation in spectral direction is very small within two months, Fig. 3.8 – 3.11 show the complete time series from 2 August 2002 to the end of October 2009.

The underlying data for the spectral monitoring are available via the SOST-IFE web site (see http://www.iup.uni-bremen.de/sciamachy/LTM/LTM_spectral/LTM_spectral.html). As for the plotted results, these data are regularly updated (since January 2009 on a daily basis).

The current status of the degradation is as follows:

- The minimum throughput is below 40% for the limb and WLS (nadir) light paths at the short wavelength edge of channel 1 (i.e. below about 280 nm).
- The minimum throughput at the degradation peak around 350 nm in channel 2 is currently about 45%.
- The minimum throughput at the lower wavelength edge of channel 3 is currently about 80% (not considering the overlaps).
- The throughput of channels 4 to 8 is stable over the whole spectral range (except for the overlaps).



SCI/



issue 1.1 revision 0

page 23 of 62

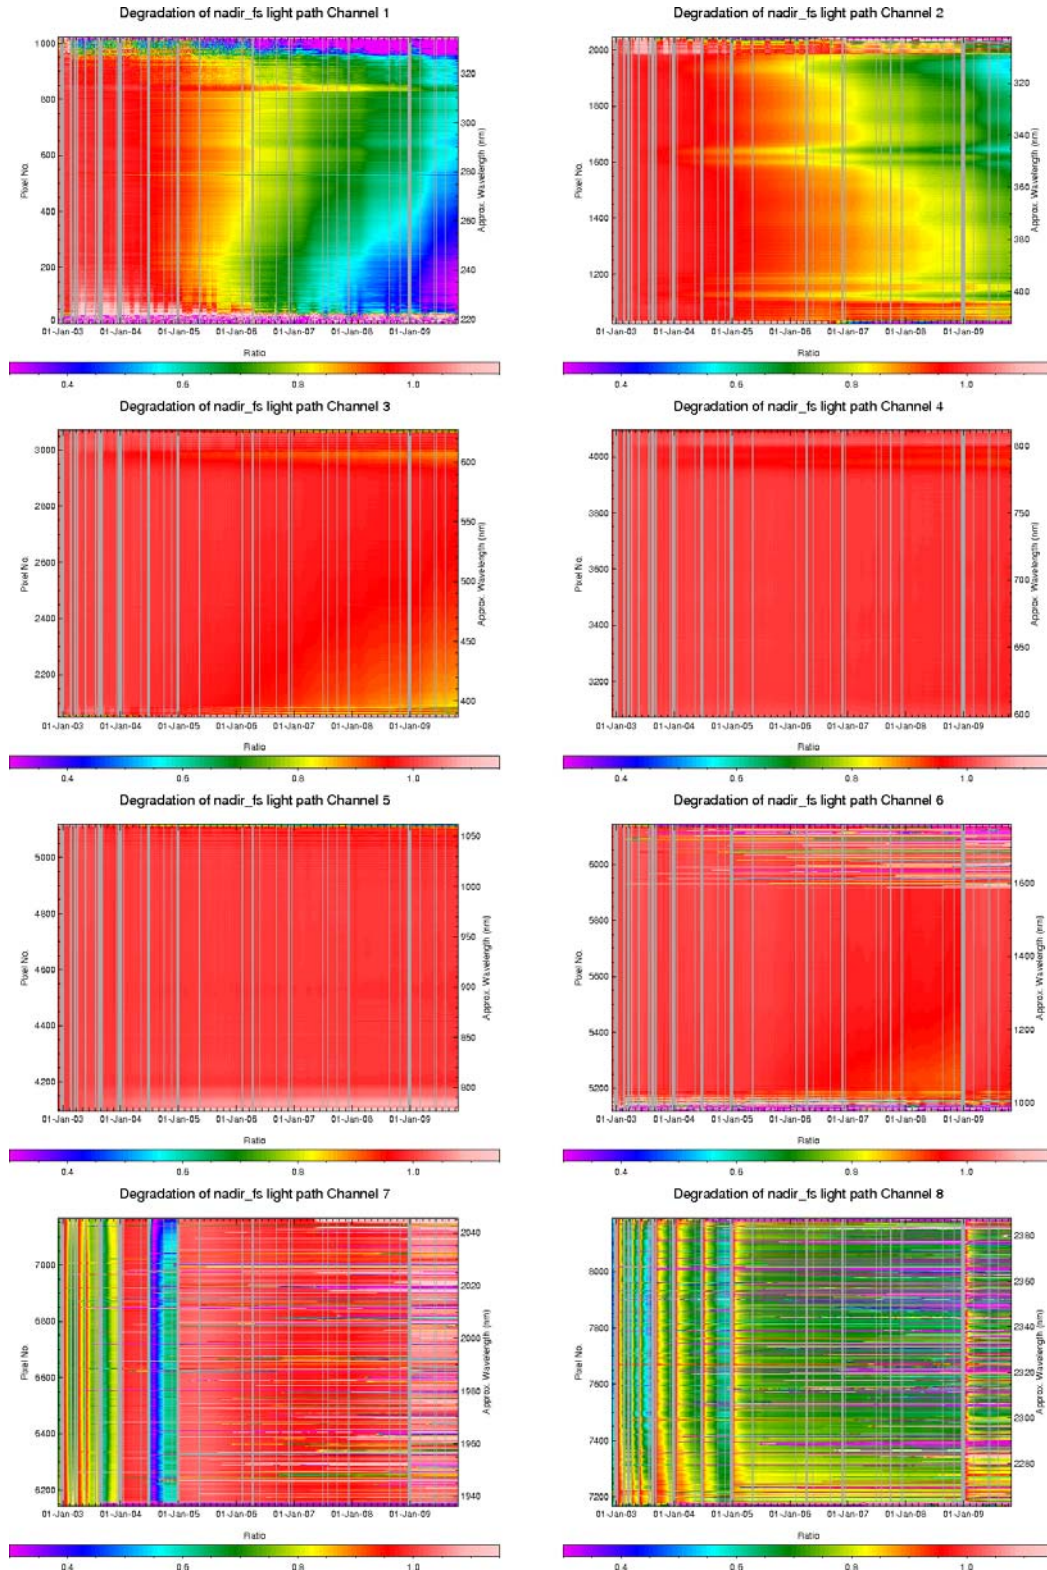


Fig. 3.8: Spectral light path monitoring results August 2002 to October 2009 (nadir light path).



esa



serco

SCI/



issue 1.1 revision 0

page 24 of 62

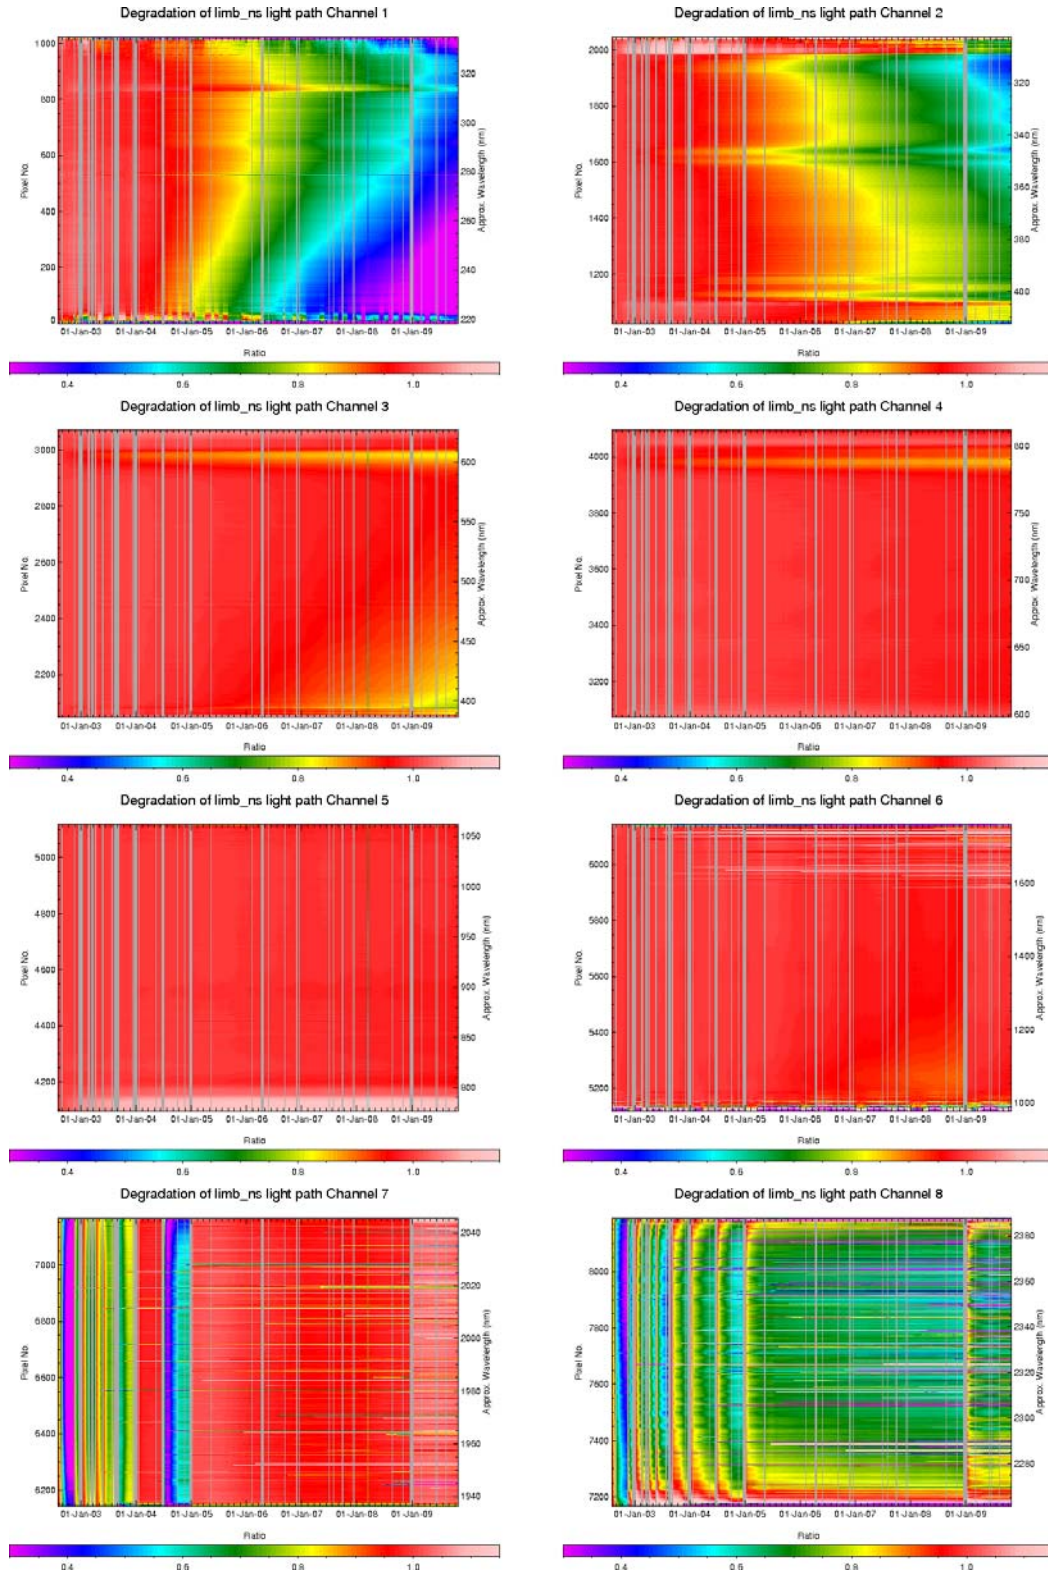


Fig. 3.9: Spectral light path monitoring results August 2002 to October 2009 (limb light path).



SCI/



issue 1.1 revision 0

page 25 of 62

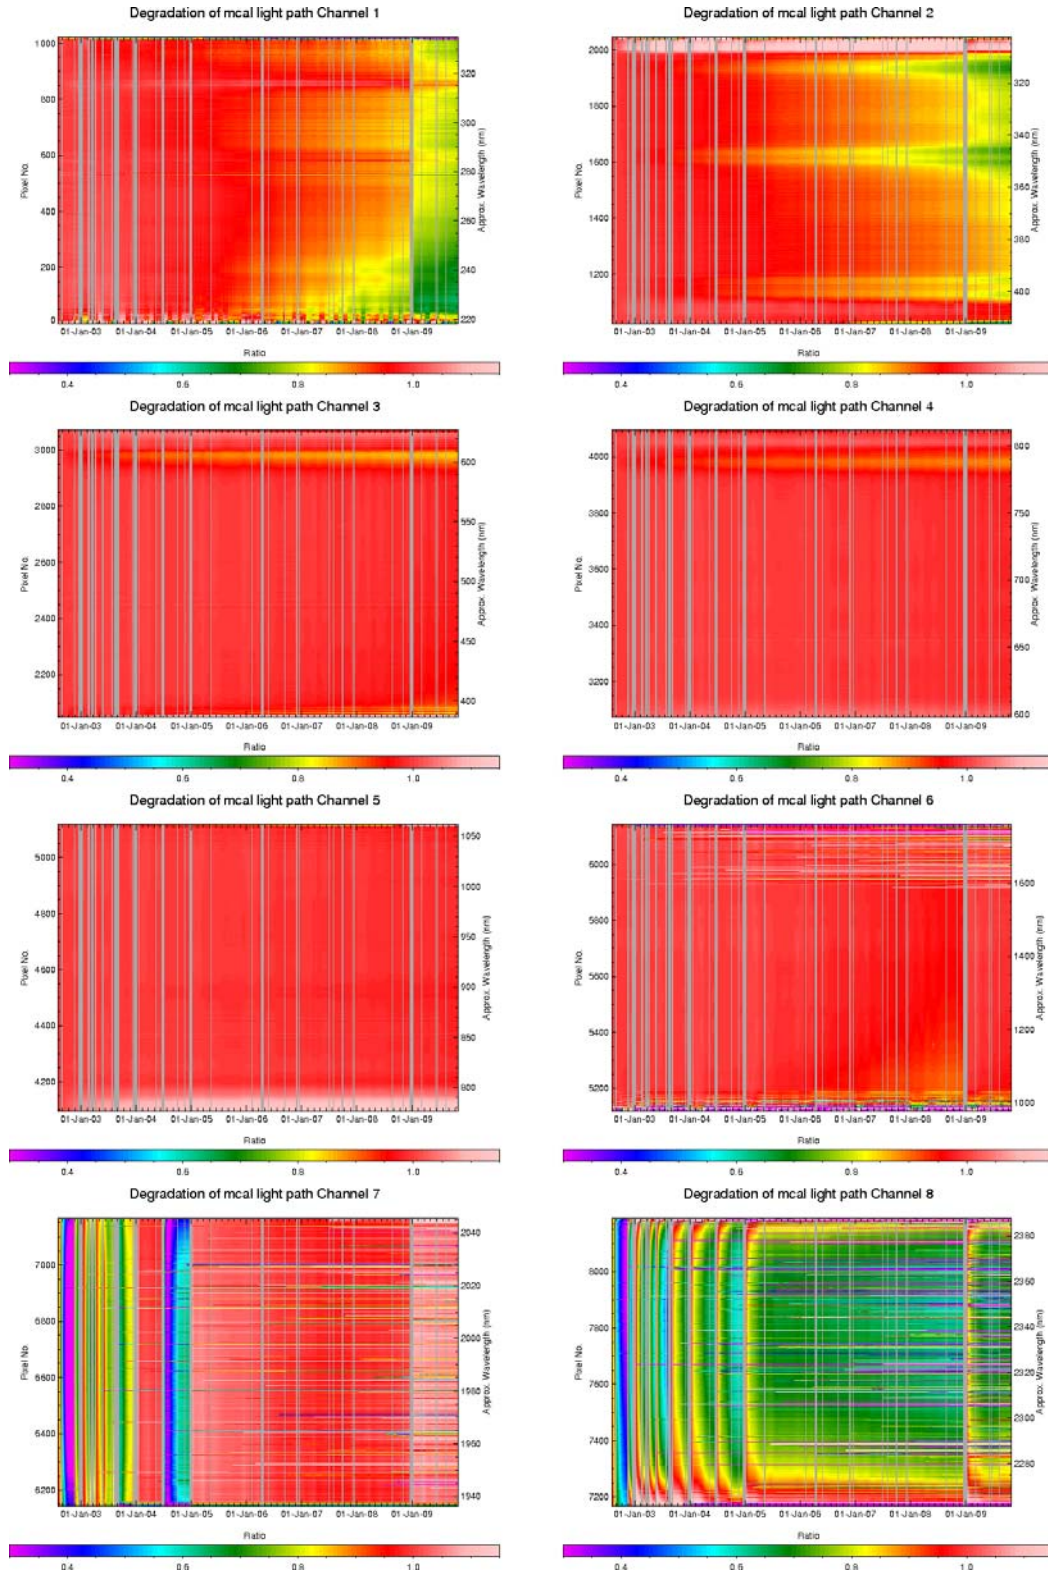


Fig. 3.10: Spectral light path monitoring results August 2002 to October 2009 (calibration light path).



SCI/



issue 1.1 revision 0

page 26 of 62

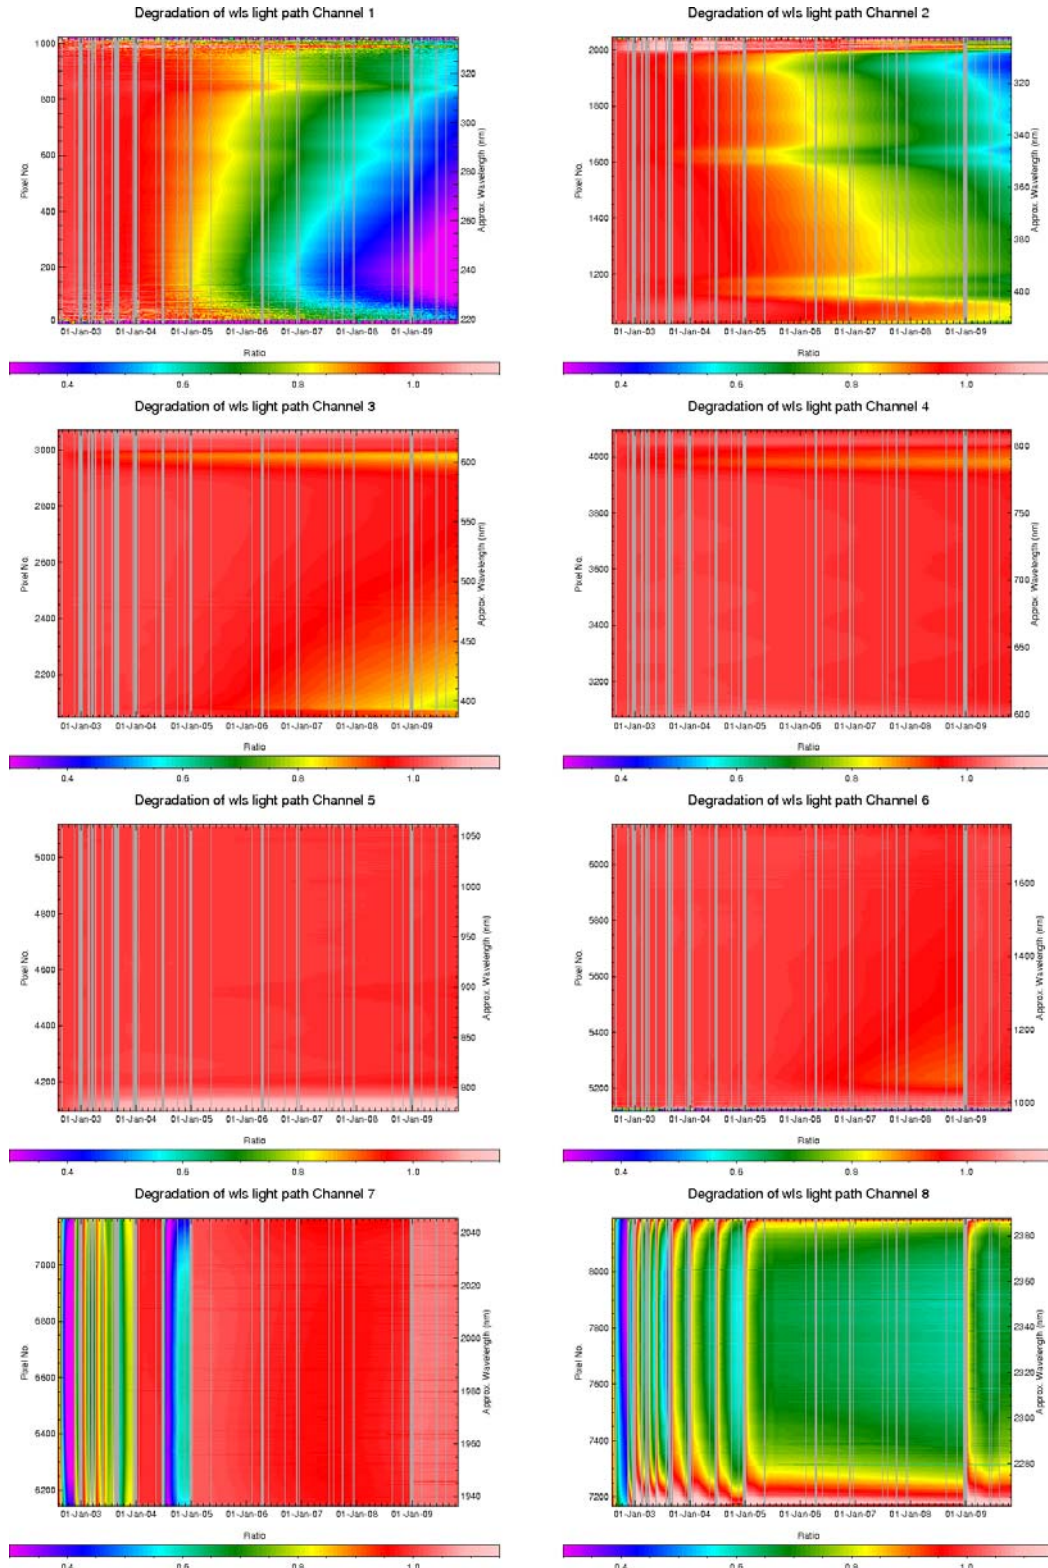


Fig. 3.11: Spectral light path monitoring results August 2002 to October 2009 (WLS light path).

3.1.5.3 PMD monitoring results

The SCIAMACHY PMDs are monitored in a similar way as the science channels, but of course no channel averaging is performed. However, the results presented here are based on the same measurements as the science channel results (but using the PMD low gain signal), and they have been normalized to the same reference times as the spectral results. Fig. 3.12 shows the PMD throughput variation for the whole time period between 2 August 2002 and 31 October 2009. Note that a constant dark signal for each of the PMDs has been assumed. To verify this assumption, Fig. 3.12 also shows the variation of the PMD dark signal over time, which is usually quite low.

Considering the broadband character of the PMDs, the observed PMD throughput changes are (except for PMD 4 and 7) very similar to those of the science channels.

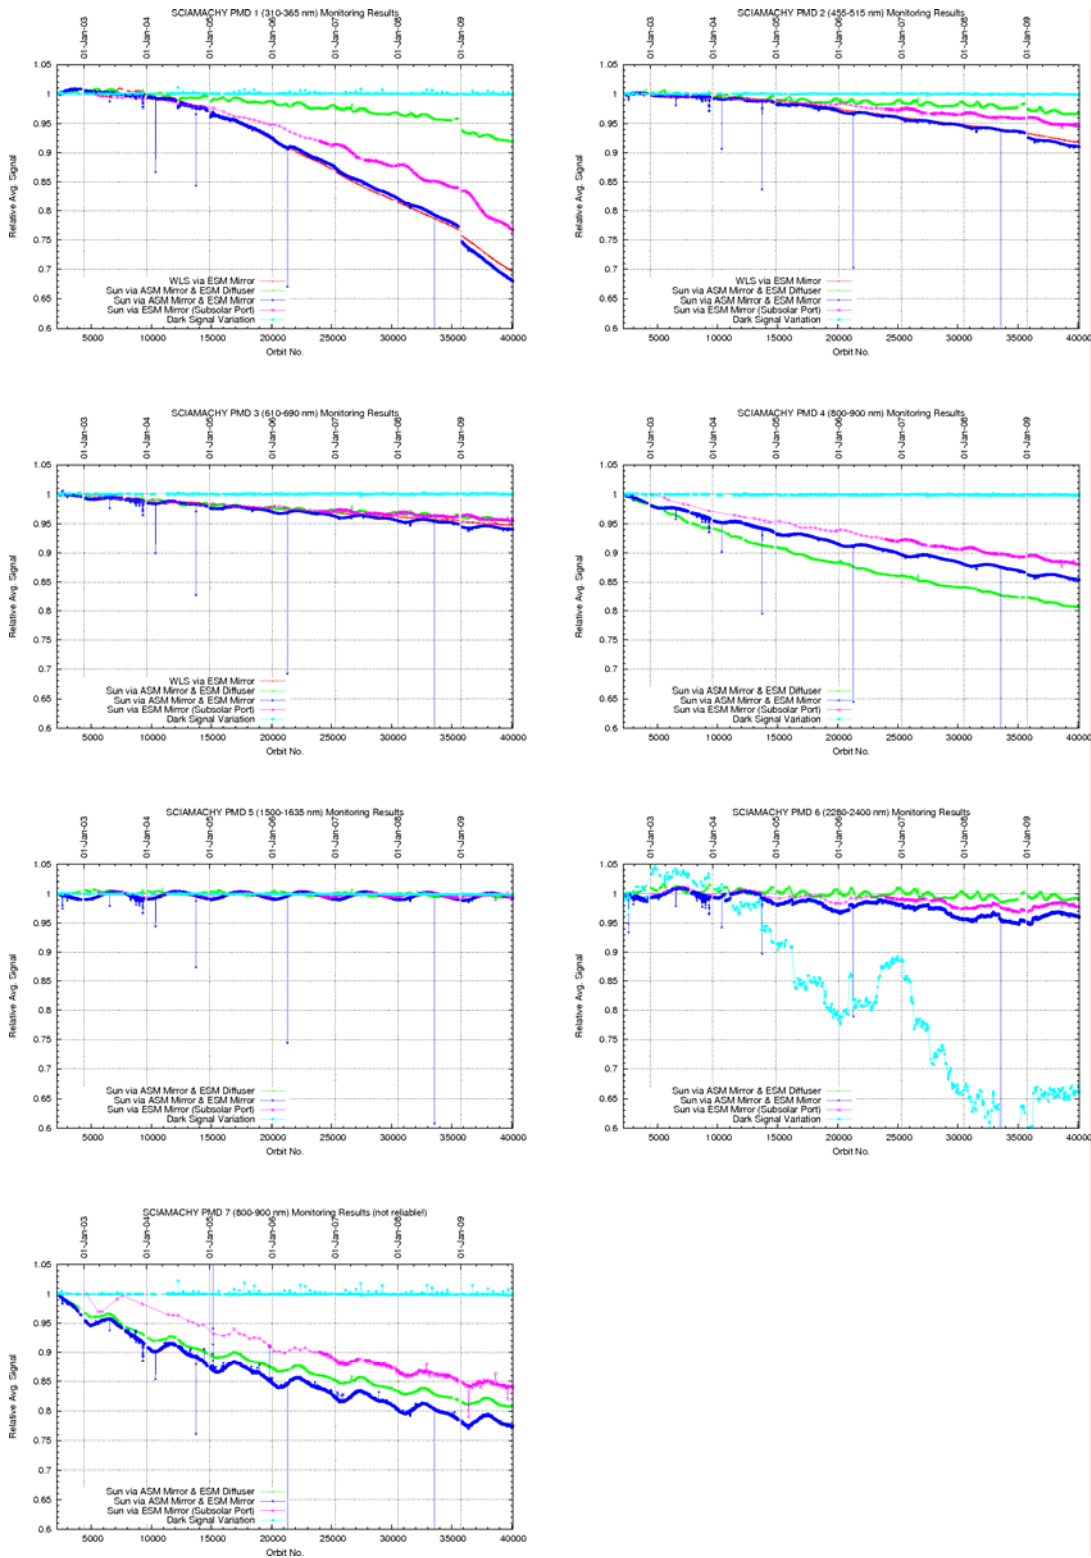


Fig. 3.12: PMD monitoring results August 2002 to October 2009.

4 DATA AVAILABILITY STATISTICS

4.1 Downlink/Acquisition Performance

Problems are known for the products listed in Tab. 4.1:

Product	Day	Filename	Description
SCI_NL__0P	2-Sep-09	SCI_NL__0PNPDK20090902_110009_000060362082_00123_39255_2611.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	2-Sep-09	SCI_NL__0PNPDK20090902_142013_000000002082_00125_39257_2615.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	2-Sep-09	SCI_NL__0PNPDK20090902_141809_000057322082_00125_39257_2621.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	8-Sep-09	SCI_NL__0PNPDK20090908_160444_000058892082_00212_39344_2687.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	8-Sep-09	SCI_NL__0PNPDK20090908_142925_000057882082_00211_39343_2690.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	15-Sep-09	SCI_NL__0PNPDE20090915_211523_000002492082_00315_39447_9923.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	15-Sep-09	SCI_NL__0PNPDE20090915_224634_000030902082_00316_39448_0034.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	1-Oct-09	SCI_NL__0PNPDK20091001_154339_000059452083_00040_39673_2891.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	24-Oct-09	SCI_NL__0PNPDK20091024_084713_000059122083_00365_39998_3096.N1	sciamachy_source_packets ERROR: incorrect file size
SCI_NL__0P	24-Oct-09	SCI_NL__0PNPDK20091024_090252_000000002083_00365_39998_3090.N1	sciamachy_source_packets ERROR: incorrect file size

Table 4-1 Products containing format errors.

In the previous report it was reported that during August 2009 an increased occurrence of product errors in SCIAMACHY Level 0 and Level 1 NRT data products generated at Kiruna station was observed. The anomaly was triggered by a high number of missing ISPs (CRC errors) leading to product fragmentation for some orbits in particular between 25 - 27 August. This problem is currently being investigated. The situation is back to nominal since begin of September.

4.2 Statistics on unconsolidated data (SCI_NL__0P, SCI_NL__1P)

This paragraph reports the availability of NRT data on a monthly basis. The statistics are based on Level 0 data and Level 1 data inventoried in the ground segment. Unavailability periods due to instrument anomalies or satellite switch-offs are excluded. The gaps considered are only interfile gaps. Statistics of Level 1 NRT data production are calculated with respect to Level 0 product availability.



esa



DLR



ife

serco



SCI

issue 1.1 revision 0-

page 30 of 62

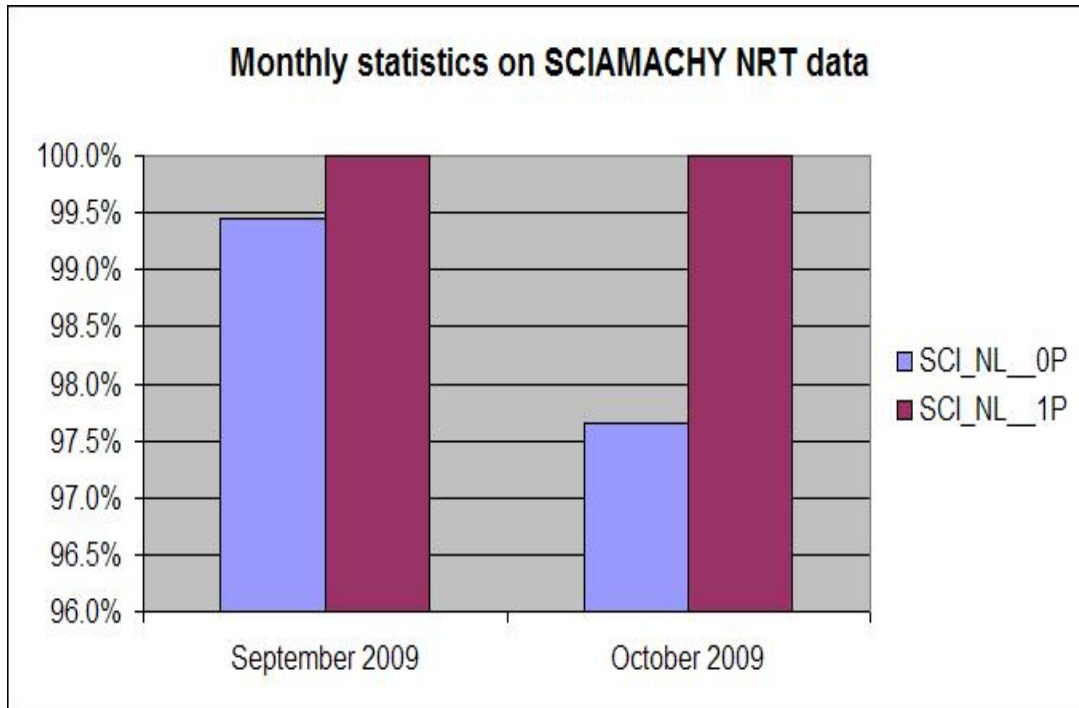


Fig. 4-1: Statistics on available unconsolidated Level 0 and Level 1b products.

4.3 Statistics on consolidated data

In this chapter an overview about operational off-line data (consolidated data) is provided.

4.3.1 Anomalies on Level 0 consolidated data products

In the past it had been reported by SOST-DLR that the SCIAMACHY consolidated Level 0 data contain errors and are not complete. Following specific problems have been identified and are reported in detail in the technical notes [3], [4] for years 2003 and 2004 as well as for products of 2005 [5]:

- For one orbit there can be more than one consolidated Level 0 product. These products may be identical or different in content (disregarding the product type file counter).
- Some orbits are not covered by consolidated Level 0 products although SCIAMACHY was operational.

- Some orbits are covered by consolidated Level 0 products but the product duration does not comply with the actually planned and executed instrument operations in that particular orbit.
- Some consolidated Level 0 products exceed the Reed Solomon correction threshold and are flagged accordingly. The occurrence of Reed Solomon errors is non-uniform.
- Until late October / early November 2003 consolidated Level 0 data are hampered by an incorrect orbit number.

More details on consolidated Level 0 anomalies can be found on the SOST web page, which contains a catalogue of available Level 0 consolidated data and description of errors. http://atmos.caf.dlr.de/projects/scops/data_availability/availability.html

A recovery plan was initiated in order to reprocess erroneous data 2002 - 2007. This activity has been completed. For the year 2008 the recovery is currently being performed.

The overall goal is to achieve a Level 0 consolidated data ‘master set’ that allows data reprocessing of improved data quality.

4.3.2 Availability of consolidated SCI_NL__1P products

SCIAMACHY Level 1b consolidated data are generated at D-PAC using the consolidated Level 0 products as input for processing. The available Level 1b off-line products on the D-PAC ftp-server are checked for completeness and an overview for the months September - October 2009 is summarised here, considering flight segment and ground segment anomalies. Note that also interfile gaps are considered, but no data gaps inside the products.

The FTP address accessing the data server at D-PAC is ftp-ops-dp.eo.esa.int.

Month/Year	Planned orbit range	Number of orbits unavailable due to anomalies	Number of unique orbits available at D-PAC	Expected number of orbits (considering anomalies)	Availability in percentage during month
09/2009	39235- 39663	4	424	425	99.25%
10/2009	39664 - 40107	5	439	432	98.32%

Table 4-2 Consolidated Level 1b statistics.

4.4 *Statistics on reprocessed data*

4.4.1 *Level 1b re-processing*

The next re-processing is planned to be started during 2010 with the new IPF 7.03 (LINUX processor).

IPF 7.03 will include the following changes compared to the operational IPF 6.05:

- Stray light Matrix in Channel 2
- Limb mesosphere/thermosphere measurement written to Limb MDS
- Correction of the Scanner encoding values

4.4.2 *Level 2 re-processing*

The quality of the data re-processed with off-line processor version 3.01 has been checked and can be viewed via the daily Level 2 reports that are made available at http://earth.esa.int/pes/envisat/sciamachy/reports/daily/Level_2/

The next re-processing cycle is planned to be started during 2010 with the new processor version 5.01 instead of version 4.00, as already significant progress on the new baseline has been made.

The new processor version introduces the following changes compared to the operational processor:

- M-Factors implemented in Level 1b-2 processing step
- Changes in the NO₂ retrieval settings
- New AAI algorithm
- Improvements in Limb retrieval
- Nadir SO₂ total columns
- Nadir BrO total columns
- Nadir H₂O total columns
- Nadir CO columns
- Nadir OCIO slant columns
- Limb BrO profile
- Limb Cloud product

5 LEVEL 1 PRODUCT QUALITY MONITORING

5.1 Processor Configuration

5.1.1 Version

The operational IPF version used for processing of near real-time SCIAMACHY Level 1b data is 6.05 at Kiruna and ESRIN. The same IPF is used for Level 1b off-line processing at D-PAC for forward processing.

The corresponding product specification is Volume 15 issue 3/k [2]. It is available at http://earth.esa.int/pub/ESA_DOC/ENVISAT/Vol15_Sciamachy_3k.pdf

The disclaimer at http://envisat.esa.int/dataproducts/availability/disclaimers/SCI_NL_1P_Disclaimers.pdf describes known artefacts as well as major improvements with respect to the previous IPF version.

In the frame of the upgrade of the ENVISAT ground segment infrastructure, IPFs were ported from AIX to LINUX. For SCIAMACHY the AIX version 6.03 was ported to LINUX IPF 6.05. The next upgrade of the SCIAMACHY Level 0 to Level 1b processing baseline is represented by IPF 7.03. This processor will be activated beginning 2010; the users will be informed on further details with a dedicated EOHelp message beforehand.

Table 5.1 gives a brief overview of changes implemented with processor versions IPF 6.05, 6.03, 6.02, 6.01 and 5.04/5.01.

IPF Version	Description	Proc Centre	Date	Start Orbit
6.05	No evolution in the algorithm has been introduced with IPF 6.05 but the processor was ported from AIX to LINUX.	D-PAC	05-OCT-2009	39634
		PDHS-E	29-SEP-2009	39639
		PDHS-K	29-SEP-2009	39639
6.03	Following changes are implemented with IPF 6.03 <ul style="list-style-type: none"> • New pointing correction (new SCI_LI1_AX) • Updated of the ESA CFI (5.6) software • Correction of a non compliancy report, impacting the Leakage 	D-PAC	04-JUL-2007	27937
		PDHS-E	19-JUL-2007	28153
		PDHS-K	19-JUL-2007	28145

	GADS in the consolidated data processing chain (channels 6-8)			
6.02	<p>No algorithm specification changes were implemented, but following non compliances of version 6.01 have been corrected, to get</p> <ul style="list-style-type: none"> • Polarisation correction factors different from 0 • Correct order of SMR spectra in Sun Reference ADS • Solar mean reference spectra in New Sun Reference Data set with positive sign (was negative in IPF 6.01) 	D-PAC	05-MAY-2006	21843
		PDHS-E	07-JUN-2006	22327
		PDHS-K	07-JUN-2006	22318
6.01	<ul style="list-style-type: none"> • Improved parameterization of the Memory effect for channels 1 to 5 • New correction for the Non-Linearity effect in the infrared channels • Usage of improved key data for the radiometric calibration of all channels • Each solar spectrum is provided in a calibrated and un-calibrated manner for all channels • Orbital dependency of channel 6 to 8 leakage calculated; currently applied only to channel 8 • Improvement of the pointing accuracy through the usage of the ENVISAT Restituted Attitude auxiliary files for the off-line processing • decontamination flag added to the SPH 	D-PAC	No operations activated	-
		PDHS-E	22-MAY-2006	22098
		PDHS-K	22-MAY-2006	22090
		PDHS-E PDHS-K LRAC	24-MAR-2004	

Tab. 5-1: Processor Version and main changes.

5.1.2 Anomalies

5.1.2.1 Wrong Orbit number assignment

An anomaly leading to the wrong assignment of the orbit number in the product's filename and MPH for consolidated data products was observed. The science content of the products remains correct but the anomaly forced two subsequent Level 0 products



esa



DLR



ife

serco



SCI

issue 1.1 revision 0

page 35 of 62

being assigned with the same orbit number. This anomaly has consequently occurred in the higher level products as well. In total 96 Level 1 SCIAMACHY products for the period September 2008 - April 2009 are affected. The problem was solved for the operational off-line processing queue in April 2009. The same anomaly reappeared in correspondence to the switch to the Linux hardware at D-PAC in October 2009, but only occurring in Level 1 and Level 2 data sets. A work-around solution was implemented during 21 October 2009 removing this anomalous behaviour. All the affected products (16) were re-processed.

5.1.2.2 *Wrong processor version*

In the SCIAMACHY off-line Level 1 data production for September 2009, five SCI_NL__1P products were incorrectly generated with an obsolete processor (IPF 6.02). An investigation to identify the reason of this issue is on-going. The wrong products were removed and reprocessed at D-PAC with the correct IPF.

Lists of SCIAMACHY Level 1b products affected by anomalies can be found at <http://earth.esa.int/pcs/envisat/sciamachy/reports/anomalies/>.

5.1.2.3 *SCI_SU1_AX without update of D1 spectra*

During analysis of the reprocessed Level 1b data set version IPF 6.03, it was found that for limited data sets

January 2005,	orbits 15154-15166
December 2005,	orbits 19752-19762
January 2006,	orbits 20224-20235, 20352-20363
April 2006,	orbits 21356-21512

the D1 solar reference spectra were not updated in the SCI_SU1_AX files and in the Level 1b products. Analysis of this problem could confirm that the spectra were measured. Please note, that for operational Level 1b – Level 2 off-line processing the D1 spectrum is not used.

In the meantime it could be verified with the upcoming calibration tool SciCal version 2.1 that the D1 spectra are correctly updated. With the new reprocessing cycle for IPF version 7, the Level 1b products will contain the D1 spectra updated also in the above time periods.

5.2 *Auxiliary Data Files*

For operation of the SCIAMACHY Level 1 processor, a set of auxiliary files as input is required.

One subset of these auxiliary files usually changes only in correspondence with a new IPF version, namely the Initialisation file (SCI_LI1_AX) and the Key Data file (SCI_KD1_AX).



esa



serco



SCI/

issue 1.1 revision 0-

page 36 of 62

In addition there is the m-factor file (SCI_MF1_AX), which shall describe the degradation of the instrument during its stay in orbit. Note that the m-factor file has not been changed so far.

Another subset of auxiliary files is the In-flight calibration data files, which are generated when calibration measurements are included in the set of Level 0 data to be processed. Four types of In-flight calibration auxiliary files exist:

- Leakage Current Calibration (SCI_LK1_AX - updated on orbital basis)
- Solar Reference Spectrum (SCI_SU1_AX - updated on daily basis)
- Spectral Calibration Parameters (SCI_SP1_AX - updated on a weekly basis)
- Pixel-to-Pixel Gain and Etalon Parameters (SCI_PE1_AX - updated on a weekly basis)

Table 5-2 lists the actual Key Data File and Initialisation File used with IPF 6.02, IPF 6.03 and IPF 6.05. The SCI_LI1_AX was updated with IPF 6.03 in order to improve the instrument pointing correction.

Table 5-2 Key data and Initialisation configuration

SCI_LI1_AXVIEC20060523_182643_20020701_000000_20991231_235959 (until 18/07/2007)
SCI_LI1_AXVIEC20070628_134108_20020701_000000_20991231_235959 (from 18/07/2007)
SCI_KD1_AXVIEC20060523_182626_20020301_000000_20991231_235959

Fig. 5.1 shows statistics of the SU1 and LK1 ADFs generated operationally with SciCal. It has to be noted that unavailability periods are excluded from statistics. Generation of SU1 ADFs for September and October 2009 was 100 %. The LK1 ADF statistic is calculated by dividing the number of all LK1 ADFs by number of all available (to SciCal) Level 0 products. The statistics on available LK1 ADFs during September 2009 (52.0%) and October 2009 (73.0%) are on a nominal level considering seasonal variations.

The statistic does not exclude dark measurements that cannot be used for ADF generation due to SAA and orbit phase constraints leading to an over-estimation of missing files.



esa



DLR



ife

serco



SCI

issue 1.1 revision 0

page 37 of 62

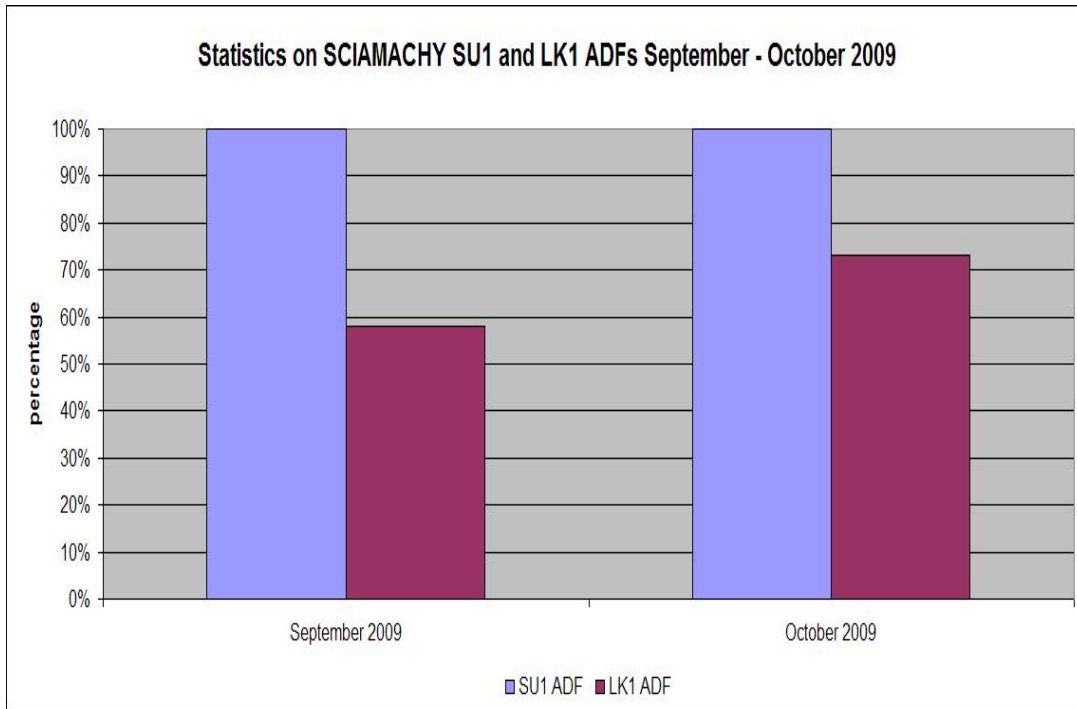


Fig. 5-1: Statistics on SU1 and LK1 processing.

5.2.1 Auxiliary Data File quality analysis

5.2.1.1 SMR analysis

SciCal generates daily SU1 Auxiliary Files. Solar spectra obtained from ESM and ASM calibration measurements are provided in two ways:

- fully calibrated
- not radiometrically calibrated.

The different types of spectra can be recognized by the so called identifier in the solar reference global annotation data set record.

Note the following recommendation:

- Use a not radiometrically calibrated ASM diffuser spectrum (A0) for DOAS type applications.
- All retrieval methods requiring absolute calibrated radiance and irradiance are obliged to use the calibrated ESM diffuser spectrum (D0) (see also disclaimer).

Fig. 5-2 to Fig. 5-5 show the ratios of SMR spectra derived from calibrated SMR/ESM (D0) during the months September - October 2009. The ratios were determined by dividing the spectra of the beginning of each month to a set of days during each month. Ratios are not corrected for variation of distance Earth/Sun.

In detail the spectra used for the ratios of each month are the following:



esa



serco



SCI

issue 1.1 revision 0

page 38 of 62

- **September 2009**
Reference SMR - 01 September 2009
SMR used for ratios: 02, 03, 04, 05, 06, 07, 08, 09, 10, 14, 21, 30 September 2009
- **October 2009**
Reference SMR - 01 October 2009
SMR used for ratios: 02, 03, 04, 05, 06, 07, 08, 09, 10, 14, 21, 31 October 2009

The overall changes lie usually at about 1-2 % during one month for all channels, which is at least partially caused by the decreasing distance between Sun and Earth.

In channel 1 around pixel 550 (at 282 nm) some strong features can be noticed, as well as in channel 2 near pixel 840 (near 393 nm). These strong features coincide with the Mg II and Ca Fraunhofer lines respectively. These lines are partially formed in the solar chromosphere and are known to change with solar variability.

The weaker spectral features in channel 2 (e.g. near pixels 550, 650,750), on the other hand, correlate with strong Fraunhofer lines, which are not chromospheric. These features probably arise from small wavelength shifts (order of 1/100 of a pixel).

Generally a spectral feature could have significant impact on the product quality, especially when the affected spectral parts are used for DOAS retrieval.

The large features in the end of channel 6 (channel 6+) and channels 7 and 8 are due to bad pixels.

Note that the bad pixel mask used is still from the on-ground calibration.

A regular update of the bad pixel mask is implemented starting with IPF 6.02. However a bad pixel correction will not be applied to the SMR spectra, but only to PMD out-of-band factors, in order to enable the user to apply a different mask from the one provided by the ADF.

Fig. 5-6 and Fig. 5-7 show SMR ratios on a long term trend dividing the ESM spectra from days 30 September 2003 and 30 September 2009, respectively 31 October 2003 and 31 October 2009.

The first spectrum available exists for 18-Jul-2002. However to consider Sun/Earth distance, the ratio was performed with spectra from same calendar days. All SCI_SU1_AX files used were generated with SciCal.

What can be concluded is that for channels 1-2 an average degradation in 6 years of about 10-15% is observed, channels 3 degrades by about 2% and channels 4-5 degrade by less than 1%, channel 6 by about 4-5%. The signal in channel 7 has increased with respect to the SMR of year 2003. This is due to the icing of the IR detectors. This is consistent with the Light Path monitoring at SOST-IFE.



esa



serco



SCI

issue 1.1 revision 0

page 39 of 62

Ratio of SMRs as a function of pixel, September 2009

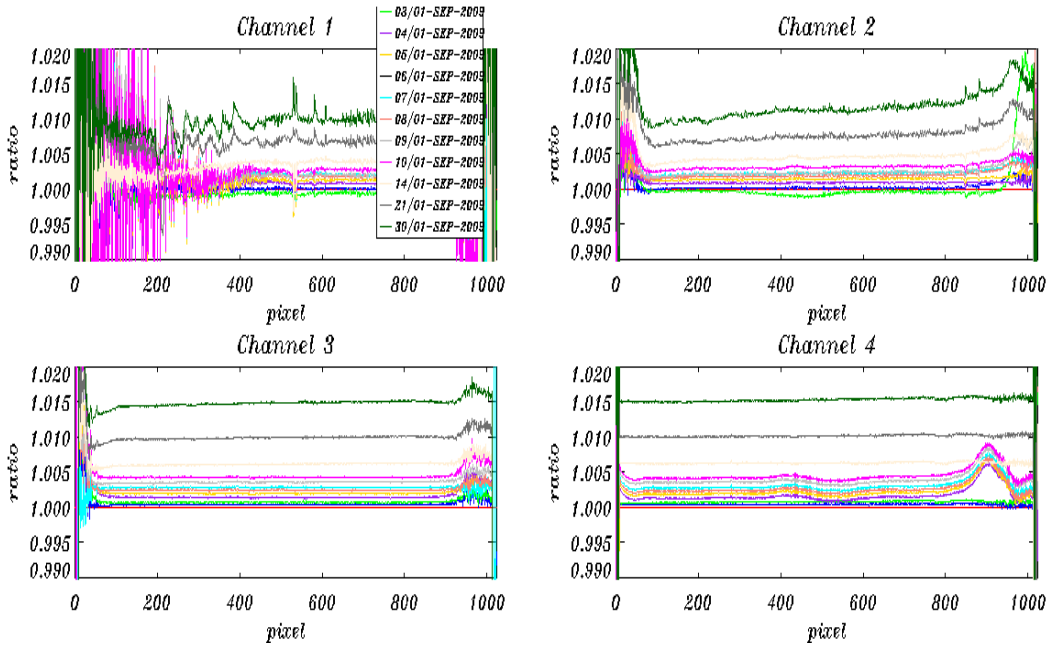


Fig. 5-2: SMR ratios per detector channel 1-4 (changes during September 2009).

Ratio of SMRs as a function of pixel, September 2009

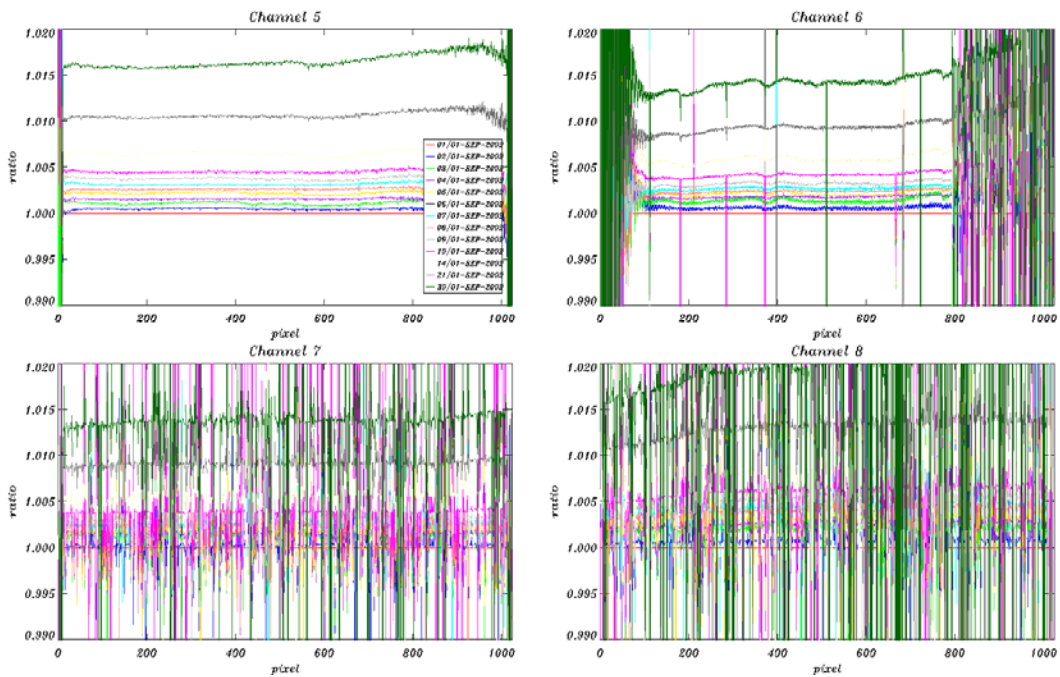


Fig. 5-3: SMR ratios per detector channel 5-8 (changes during September 2009).



esa



serco

SCI



issue 1.1 revision 0

page 40 of 62

Ratio of SMRs as a function of pixel, October 2009

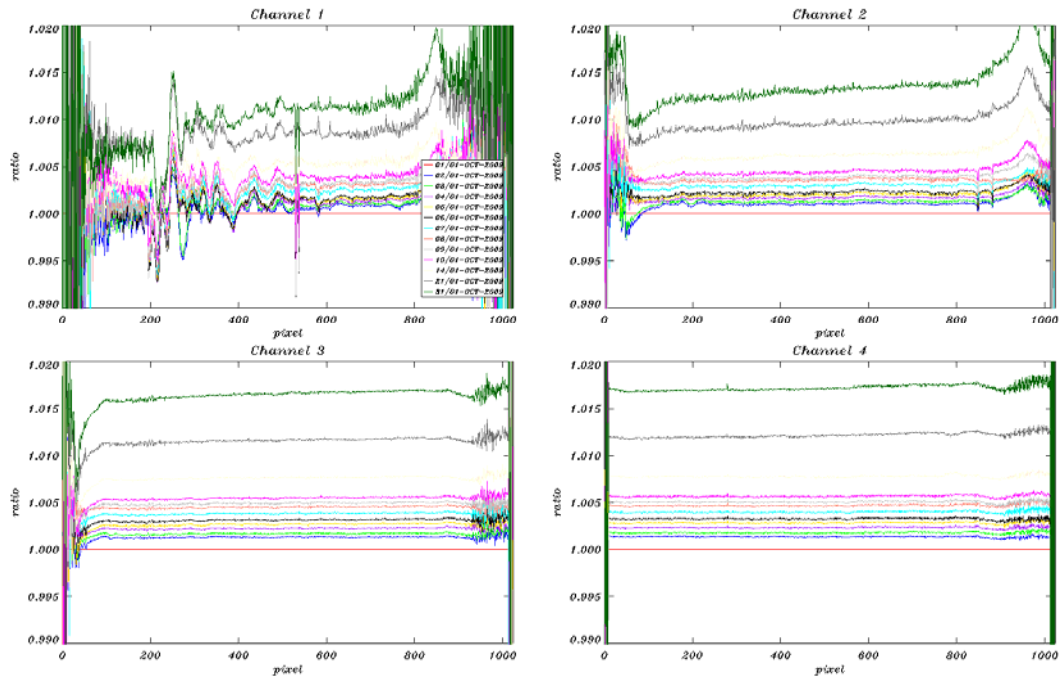


Fig. 5-4: SMR ratios per detector channel 1-4 (changes during October 2009).

Ratio of SMRs as a function of pixel, October 2009

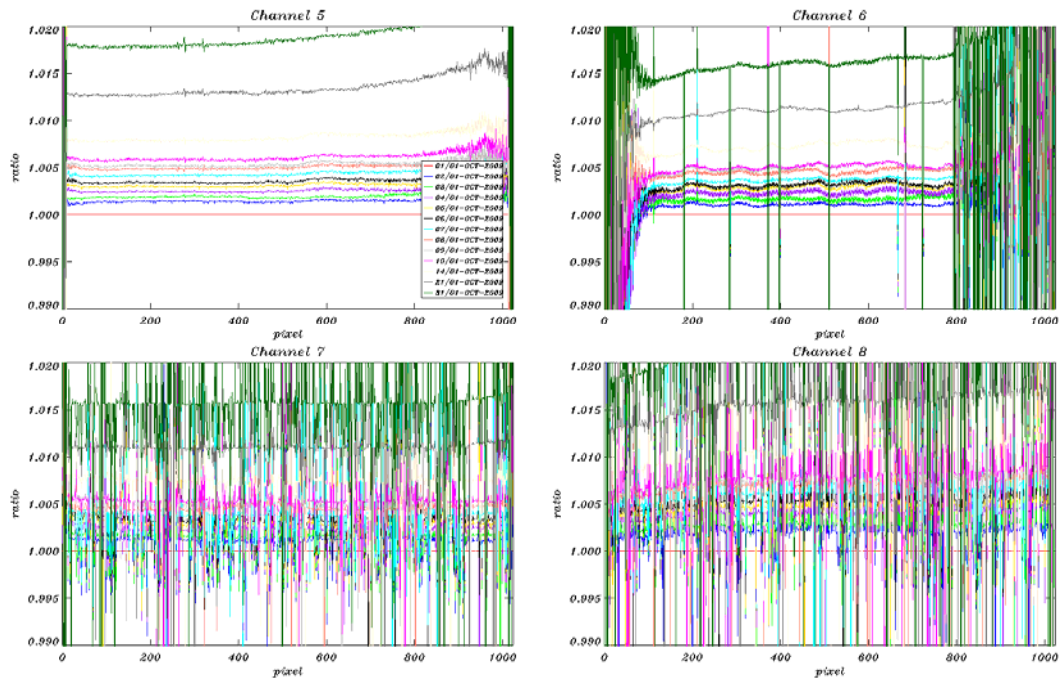


Fig. 5-5: SMR ratios per detector channel 5-8 (changes during October 2009).



SCI



issue 1.1 revision 0

page 41 of 62

SMR ratio, DO 30/09/2009 divided by 30/09/2003

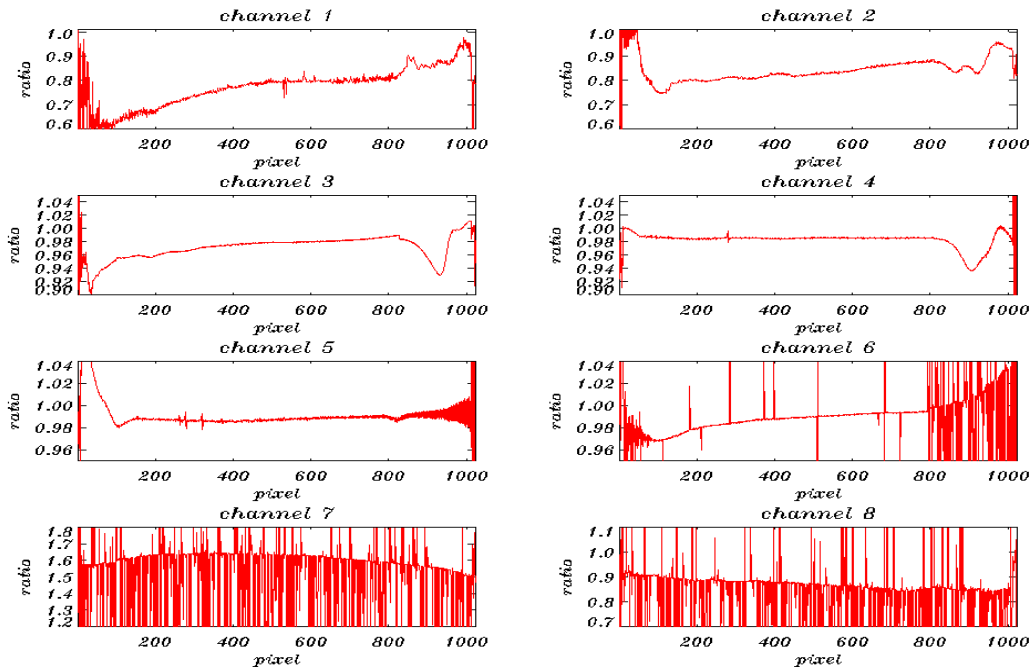


Fig. 5-6: SMR ratios per detector channel on Long Term Trend 30/09/2009 divided by 30/09/2003.

SMR ratio, DO 31/10/2009 divided by 31/10/2003

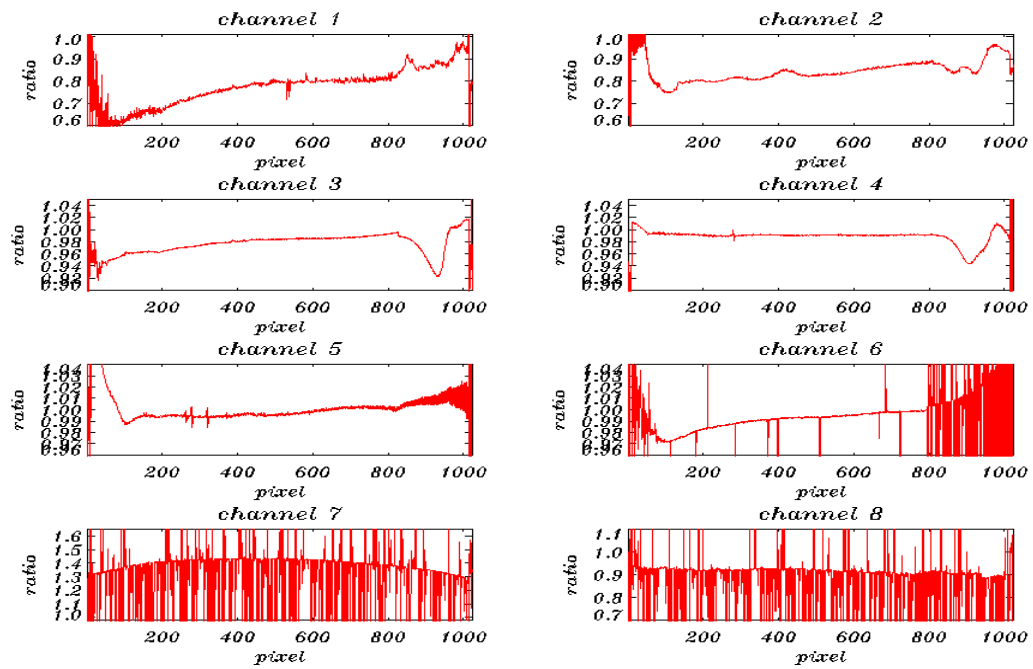


Fig. 5-7: SMR ratios per detector channel on Long Term Trend 31/10/2009 divided by 31/10/2003.

5.2.1.2 LK1 analysis

5.2.1.2.1 Leakage Constant part

On an orbital basis a leakage current calibration is performed, if measurement data do not lie in the South Atlantic Anomaly region.

In Fig. 5-8 to Fig. 5-11 the leakage constant part FPN (fixed pattern noise) of the LK1 ADFs are analysed by determining the ratios of the FPN of each month with a time distance of one orbit, one day, one week, two weeks, three weeks and a month.

For channels 1-5 and the first part of channel 6, during up to three weeks nearly no changes can be noticed. Sudden jumps however between the different dark current ratios can be seen for channels 1, 2, 4 and 5 between 4 weeks. They are very small but above the noise level.

The IR channels show a lot of noise. Note that since the processor version IPF 6.02, the time dependent part of the leakage current is considered (see 5.2.1.2.2).



esa



serco



SCI

issue 1.1 revision 0

page 43 of 62

LK1 ADF analysis, ratios of fpn const September 2009

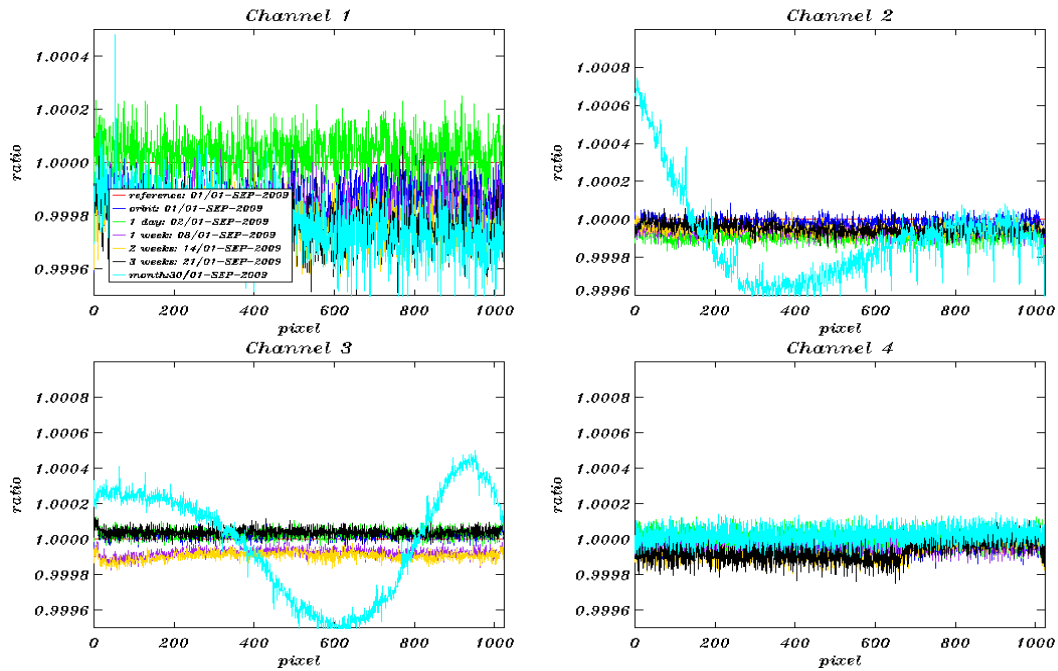


Fig. 5-8: Dark current ratios (constant part) channel 1-4 during September 2009. Reference Spectrum used: Orbit 39239, 01-September-2009.

LK1 ADF analysis, ratios of fpn const September 2009

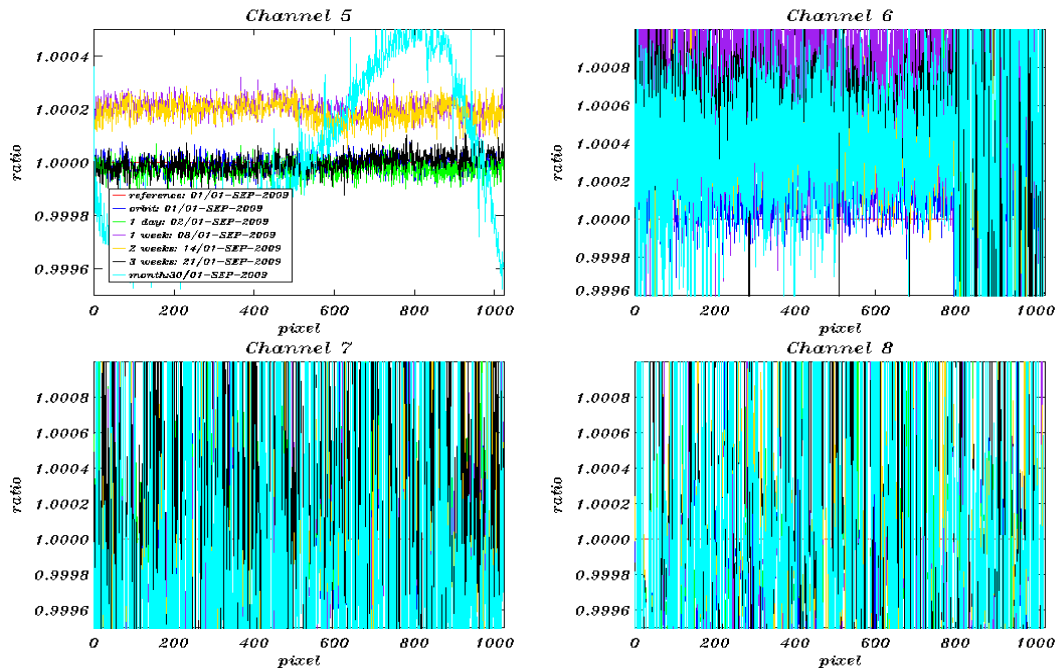


Fig. 5-9: Dark current ratios (constant part) channel 5-8 during September 2009. Reference Spectrum used: Orbit 39239, 01-September-2009.

LK1 ADF analysis, ratios of fpn const October 2009

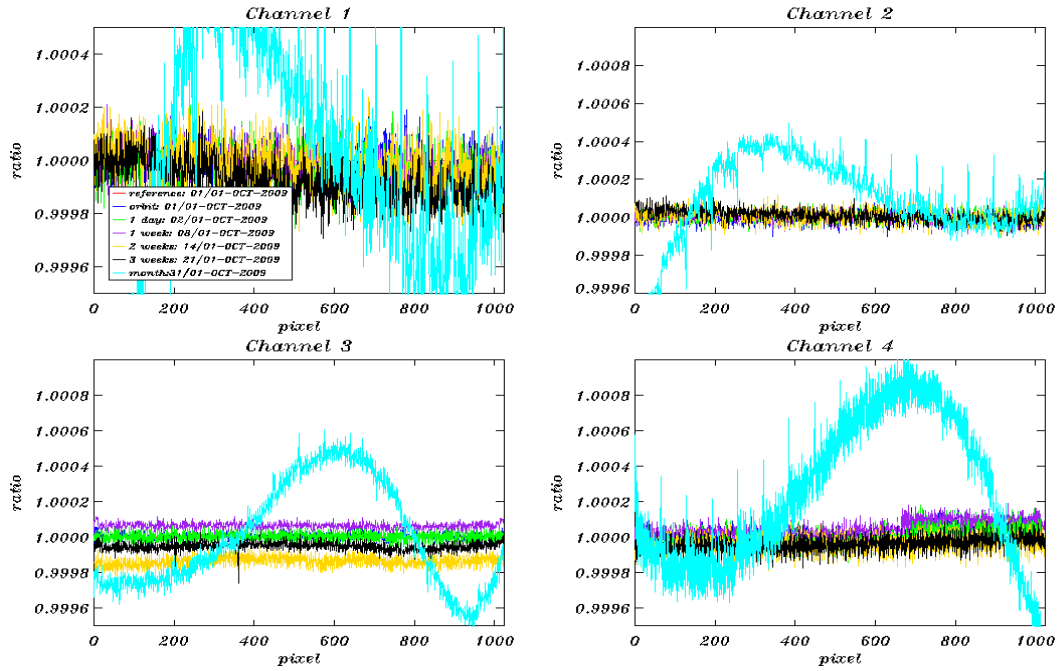


Fig. 5-10: Dark current ratios (constant part) channel 1-4 during October 2009. Reference Spectrum used: Orbit 39669, 01-October-2009

LK1 ADF analysis, ratios of fpn const October 2009

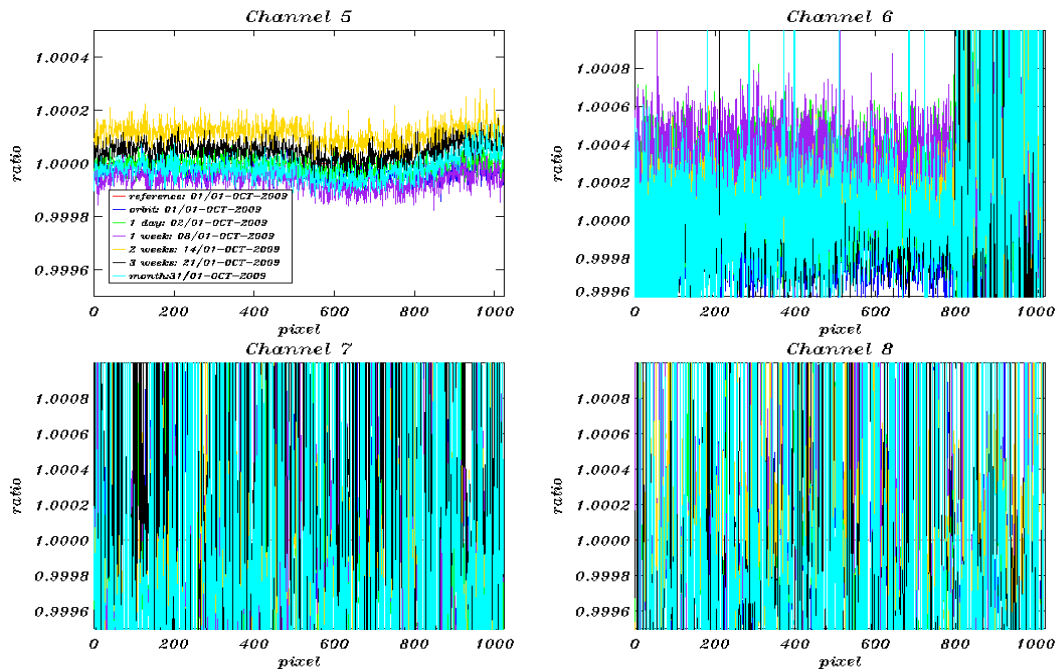


Fig. 5-11: Dark current ratios (constant part) channel 5-8 during October 2009. Reference Spectrum used: Orbit 39669, 01-October-2009.



esa



serco



SCI

issue 1.1 revision 0

page 45 of 62

5.2.1.2.2 Leakage Variable part

With IPF 6.03 the orbital dependency of channel 6 to 8 leakage current is considered. SCIAMACHY detector channels 6 – 8 have a time dependent leakage dark signal that consists of two components, the leakage current of the detector pixel and second a component due to thermal background that varies along the orbit. The implementation of the orbital variation of the leakage current is expected to improve retrieval especially in detector channel 8 for infrared products.

Figure 5-12 shows the evolution of the leakage variable part of the SCI_LK1_ADF during the time span 01 September 2009 to 31 October 2009. The leakage variation for a selected pixel (222) in channel 7 corresponding to orbit phase 6 is shown.

Updates of the leakage variable are expected after the processing of the monthly calibration orbits, i.e. once per month. During this period Monthly Calibration sequences were scheduled for:

- 39274-39278 (03/04-Sep-2009)
- 39703-39707 (03/04-Oct-2009).

For both dates the change of the Leakage Variable value can be clearly seen, demonstrating that the calibration was performed successfully.

SCIAMACHY leakage variable analysis 01/09/2009 – 31/10/2009

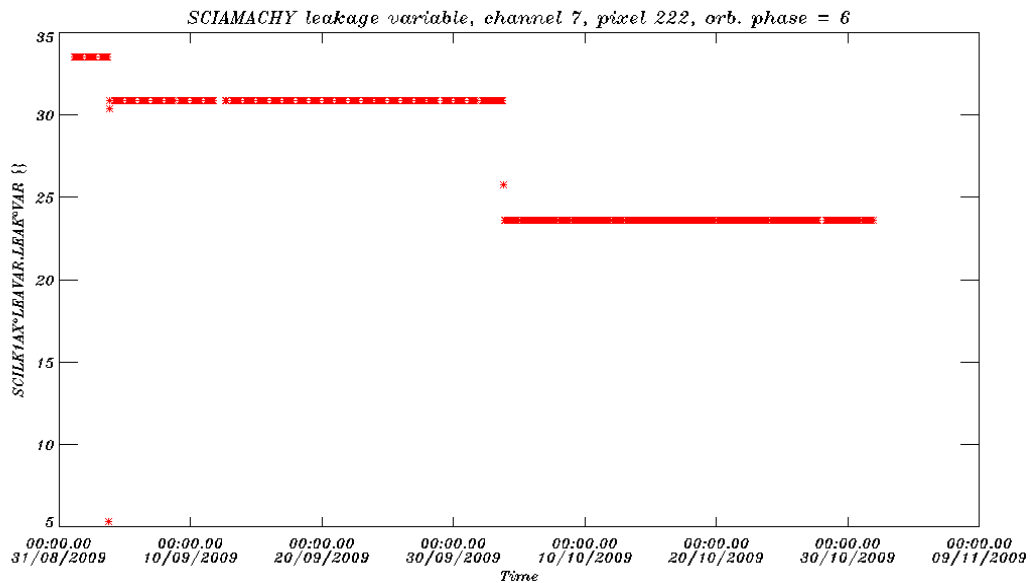


Figure 5-12: Leakage VARIABLE, SCI_LK1_AX, 01 September – 31 October 2009, channel 7, orbit phase 6, pixel 222.



esa



serco

SCI




issue 1.1 revision 0

page 46 of 62

5.3 Bad and Dead Pixel Mask

SRON performs routinely analysis on the SCIAMACHY Bad and Dead Pixel Mask. Within this analysis bad pixels of the detector arrays are identified by the SCIAMACHY Detector Monitoring Facility (SDMF) using 11 flagging criteria. These criteria are based on the dark signal model, transmission, gain and noise of a pixel. Bad pixel masks are calculated on an orbital basis and combined into a "smoothmask" that combines the masks of about 50 orbits. In Fig. 5-13 we show the number/fraction of pixels that is flagged as bad for channels 6, 6+, 7 and 8. Note that channel 6 consists of two parts employing different detector materials. Channel 6+ starts at pixel 794. The rate at which the number of pixels that is flagged is increasing is similar for the IR channels 6+, 7 and 8. The fraction of flagged pixels in channel 6 is much lower and almost constant over the mission, because of the different detector materials used in this part of the channel. The mask currently provided in the Level 1b product must be regarded experimental. It uses a different algorithm and is not identical to the mask provided by SRON. It is planned to align the two masks in future processor versions.

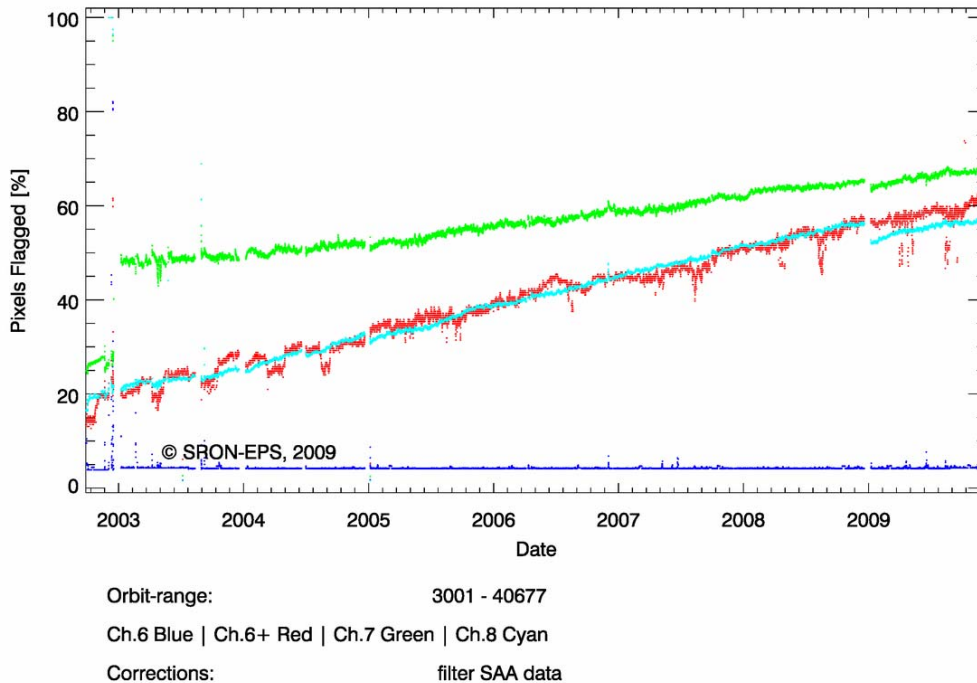


Generated on Fri Dec 11 12:15:03 2009 by SDMF channel evolution viewer (UTC) by SRON (SDMF-channel-evolution 3.0)

Figure 5-13: Number/Fraction of pixels that is flagged as bad by the SDMF smoothmask for channels 6 (blue), 6+ (red), 7 (green) and 8 (cyan). Orbits during SODAP or decontaminations have been removed. Note the temporary decrease in the number of bad pixels after the last decontamination, for channel 8 about 6%, a few percent more than after the previous decontaminations.



esa



serco



SCI

issue 1.1 revision 0

page 47 of 62

5.4 *Pointing Performance*

Investigations by the SCIAMACHY teams are indicating a trend as well as a seasonal dependence in the pointing of the instrument. Results based on calibration measurements as well as on science products indicate a negative trend. The values derived by exploiting the sun occultations result in of -15 m/year in northern mid-latitudes, while the analysis of Ozone and BrO indicate a value of -60 m/yr. In a dedicated meeting at the end of June, this was also compared to GOMOS and MIPAS results. For GOMOS (“Most Illuminated Pixel”) and MIPAS a similar trend as derived from the SCIAMACHY science data was found. The value for the MIPAS LOS is significantly lower (~20 m/yr) and subjected to strong noise for 2008/09 data. While the analysis needs further refinement and confirmation, all atmospheric sensors indicate a residue not taken into account by the ENVISAT onboard orbit model or the restituted attitude file. In addition, the noise of the data sets possibly masks a distinctive jump in the attitude behaviour. Investigations point to a potential discrepancy in the date model applied by the flight dynamics team for the star tracker and the orbit model. It needs to be noticed that the differences under investigations are very small and can be caused by a single small, or a combination of small, effects. Nevertheless, the SCIAMACHY limb data is impacted by this issue, e.g., indicating a trend in stratospheric BrO and Ozone. The other limb measuring instruments, GOMOS and MIPAS, are less affected due to their observation principles. Further investigations are still on-going.

5.5 *SciaL1c tool*

The SciaL1c tool is an application provided to the users of SCIAMACHY Level 1b products. This application allows selecting specific calibrations to apply to Level 1b data, which are in case of SCIAMACHY defined as not fully calibrated Level 0 channel information in combination with calculated calibration data. The generated Level 1c products are suitable for the user's particular applications.

The SciaL1C Calibration and Extraction Software was upgraded to be compatible with IPF 6.03 data. It is downward compatible, i.e. it can also be used with data from older IPF versions.

SciaL1c can be downloaded at: <http://envisat.esa.int/scial1c/>

LINUX, Sun Solaris, LINUX on DEC-Alpha and HP-UX on IA64 versions are available.

The latest updated version 2.1 of the SciaL1c tool was provided to the users end of November 2008. New in this version is the possibility to apply m-factor calibration.

An anomaly in the handling of the m-factor file during the calibration of SCIAMACHY Level 1b data was observed. The m-factor file (SCI_MF1_AX) is not correctly reported into the child product restituted from the SciaL1c processing. In particular, the MF1 ADF filename does not fully appear in the DSD descriptor. The quality of the product is not impacted; the anomaly will be fixed in the next delivery of SciaL1c.

6 LEVEL 2 NRT PRODUCT QUALITY MONITORING

6.1 *Processor Configuration*

6.1.1 *Version*

Since 08 May 2006 the near real time processing of SCIAMACHY Level 2 data has been suspended, evolution is restricted to the Level 2 off-line processor (see chapter 7).

The last IPF version used was 5.04. The corresponding product specification is [2].

The disclaimer at

http://envisat.esa.int/dataproducts/availability/disclaimers/SCI_NL_2P_Disclaimers.pdf describes known artefacts.

An overview on the implementation dates of the IPF at the different PDS processing centres and the main modifications implemented can be found in previous BMR (June-May 2007).

The Fast Delivery processing of Level 2 off-line products has started running pre-operationally. Level 1b near real time products are used as input for the Level 2 off-line processor. Data products monitoring is routinely performed and the corresponding Daily Reports are published on ESA's PCS web-pages within 24 hours from data acquisition. Daily reports for SCIAMACHY Level 2 Fast Delivery off-line products can be found at the link: http://earth.esa.int/pcs/envisat/sciamachy/reports/daily/Level_2/

The main difference between off-line and Fast Delivery files is that the Restituted Attitude file cannot be used for processing. Level 2 products generated from the Fast-Delivery processing chain will be made available to the SCIAMACHY end-users community with the release of the next Level 2 off-line processor version 5.01, foreseen currently beginning 2010.

6.1.2 *Auxiliary Data Files*

An overview of Auxiliary Files being used as input for SCI_NL__2P products can be found in BMR May-June 2007.

7 LEVEL 2 OFF-LINE PRODUCT QUALITY MONITORING

7.1 Processor Configuration

7.1.1 Version

The current Level 2 off-line processing version is 3.01.

The product specification corresponding to the Level 2 off-line processor 3.01 is Volume 15, issue 3/k [2] and can be found at

http://earth.esa.int/pub/ESA_DOC/ENVISAT/Vol15_Sciamachy_3k.pdf

The disclaimer at

http://envisat.esa.int/dataproducts/availability/disclaimers/SCI_OL_2P_Disclaimers.pdf describes known artefacts.

The Level 2 off-line processor version 5 has undergone a successful FAT on 18 June 2009. The switch for processor version 5.01 is foreseen to occur beginning 2010 in alignment with the activation of the Level 1b IPF 7.02.

SCI_OL__2P products contain geo-located vertical column amounts of O₃ and NO₂ Nadir measurements, as well as stratospheric Limb profiles of O₃ and NO₂. Additionally the fractional cloud coverage, the cloud-top height, and the cloud optical thickness are derived and provided as product to the user. The major upgrades are summarised in table 7.1.

Processor Version	Description	Proc Centre	Date	Start Orbit
3.01	<p>Main processor changes:</p> <ul style="list-style-type: none"> • Updated SACURA cloud algorithm • Offset applied in NO₂ slant column processing was removed • Number of retrieved profiles per state was set from one to four (4) • Cloud and Aerosol MDS are filled with the next valid value instead of being set to zero • Molecular Ring correction applied on NADIR O₃ slant column density <p>Non-compliance corrections:</p> <ul style="list-style-type: none"> • Inter change of Pressure and 	D-PAC	23-SEP-2007	29092



esa



DLR



ife

serco



SCI

issue 1.1 revision 0

page 50 of 62

	<ul style="list-style-type: none"> Temperature values in LIMB MDS Erroneous Cloud and Aerosol Quality Flags AAI erroneously set to zero in Cloud and Aerosol MDS Scaling of too large NO₂ error estimate 			
3.00	<ul style="list-style-type: none"> Nadir UV/Visible algorithm for ozone and NO₂ is based on the GDP (GOME Data Processor) Version 4.0 Nadir UV/Visible algorithm for cloud-top height and cloud optical thickness based on the SACURA algorithm Limb UV/Visible products: Stratospheric Ozone and NO₂ profiles Improved pointing performance through the use of the ENVISAT Restituted Attitude information in the consolidated Level 1b product 	D-PAC	03-MAY-2006	21824

Table 7-1: Level 2 off-line Processor Configuration.

7.1.2 Anomalies

An anomaly leading to the wrong assignment of the orbit number in the product's filename and MPH for consolidated data products was observed. The science content of the products remains correct but the anomaly forced two subsequent Level 0 products being assigned with the same orbit number. This anomaly has consequently occurred in the higher level products as well. In total 42 Level 2 SCIAMACHY products for the period September 2008 - April 2009 are affected. The problem was solved for the operational off-line processing queue in April 2009. The same anomaly reappeared in correspondence to the switch to the Linux IPF at D-PAC in October 2009. A work-around solution was implemented during 21 October 2009 removing this anomalous behaviour. All the affected products (16) were re-processed.

Lists of SCIAMACHY Level 2 products affected by anomalies can be found at <http://earth.esa.int/pcs/envisat/sciamachy/reports/anomalies/>.

7.1.3 Auxiliary Data Files

Input for Level 2 off-line processing is the so-called Initialization File. For processor version 3.01 a new Initialization file became active which is SCI_IN__AXNPDE20070629_092400_20070720_000000_20991231_235959 This ADF is usually changed only in case of a processor upgrade.

7.2 *Monitoring results*

7.2.1 *Nadir: NO₂ consistency checking*

The world map plots of Nadir NO₂ vertical column density (VCD) values averaged over one month are generated from the SCI_OL__2P Nadir products. Fig 7-1 and 7-3 show the monthly world map plots for September and October 2009.

Figures 7-2 and 7-4 show the VCD errors for the monthly average plots. The errors are given in relative fraction. Generally the equator region has NO₂ values with higher errors.

High concentration of NO₂ is expected over industrial regions, as over North America, especially the East coast, over central Europe, China and South Africa, which is reflected in the world maps.



esa



serco

SCI



issue 1.1 revision 0

page 52 of 62

7.2.1.1 Nadir: VCD NO₂ map September 2009

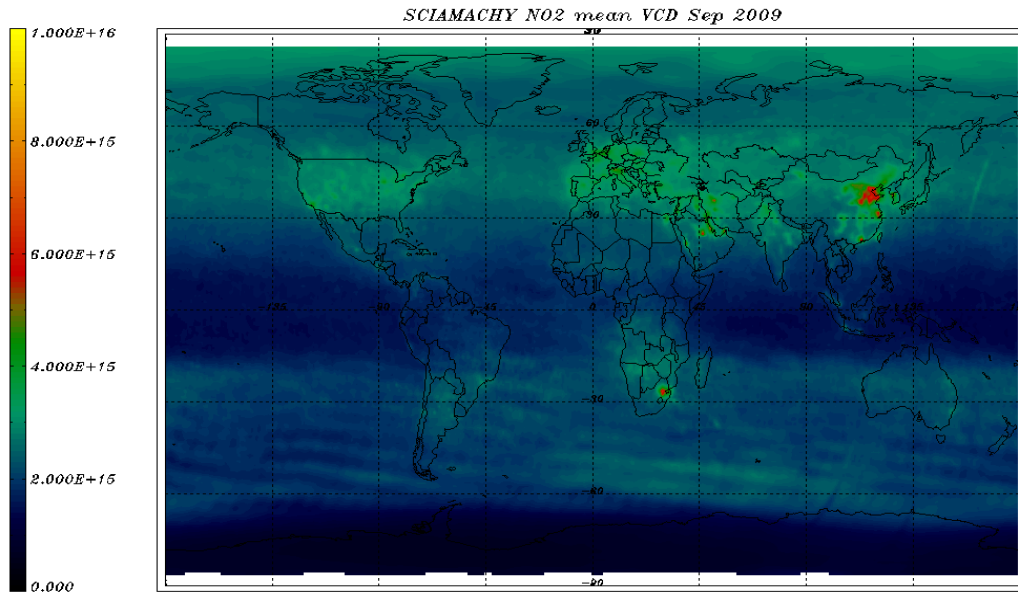


Figure 7-1: NO₂ VCD world map for 01 - 30 September 2009 – monthly average.

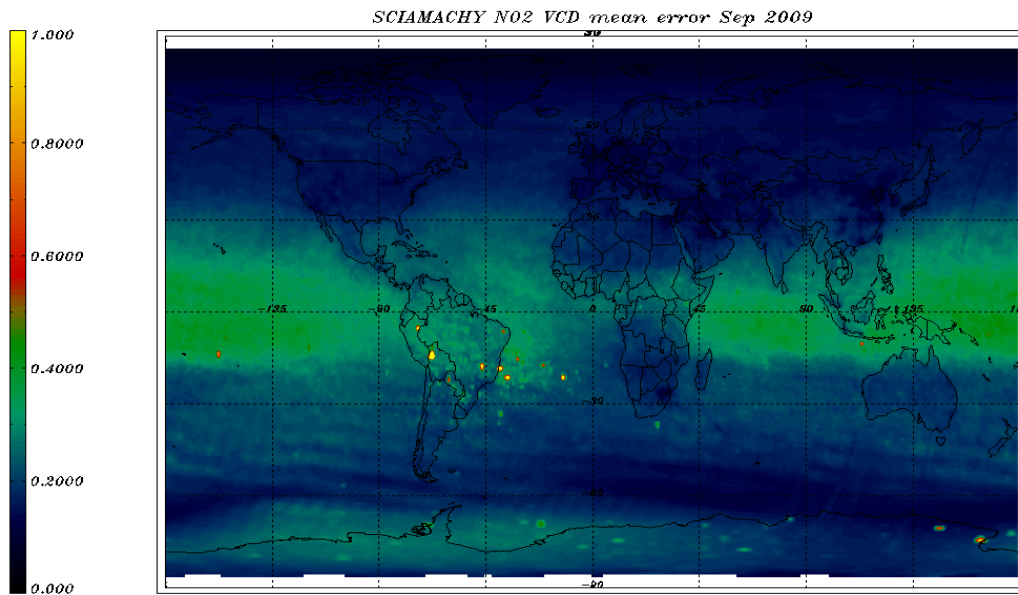


Figure 7-2: NO₂ VCD error for 01 - 30 September 2009 - monthly average.



esa



DLR



serco



SCI/



issue 1.1 revision 0-

page 54 of 62

7.2.2 Nadir: O_3 consistency checking

Analogous to the NO_2 world maps, O_3 vertical column density (VCD) values averaged over one month are generated from the SCI_OL__2P Nadir products and plotted on a world map. Figures 7-5 and 7-7 show the ozone distribution converted in Dobson units for September and October 2009.

The VCD errors as monthly average plots are shown in Figures 7-6 and 7-8. The errors are given in relative fraction. Systematically higher error values at the North Pole area are visible.



esa



serco



SCI

issue 1.1 revision 0

page 55 of 62

7.2.2.1 Nadir: VCD O₃ map September 2009

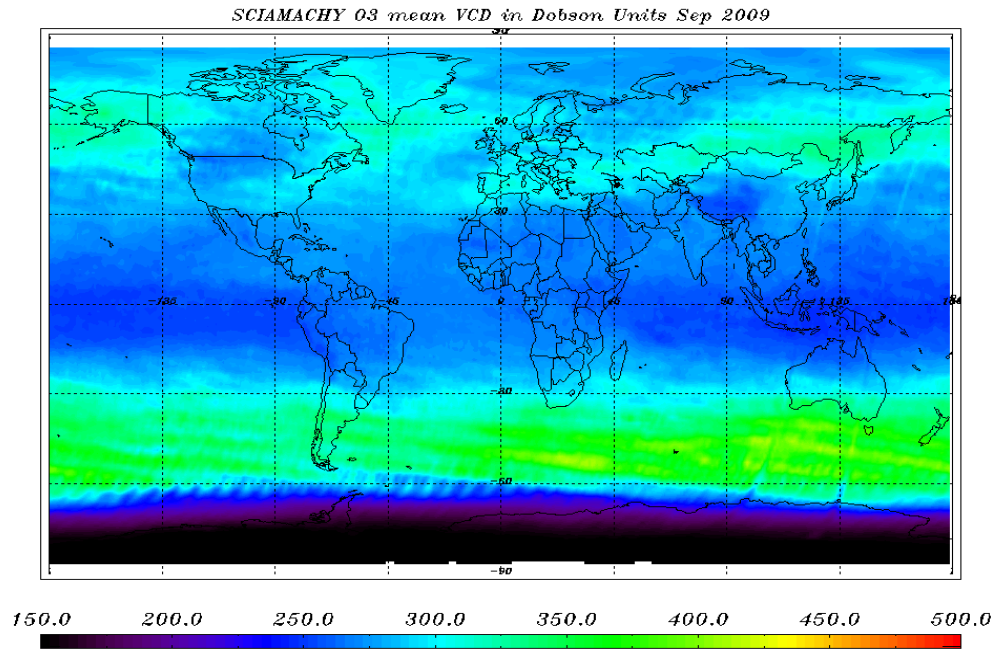


Figure 7-5: O₃ VCD world map for 01 - 30 September 2009 – monthly average.

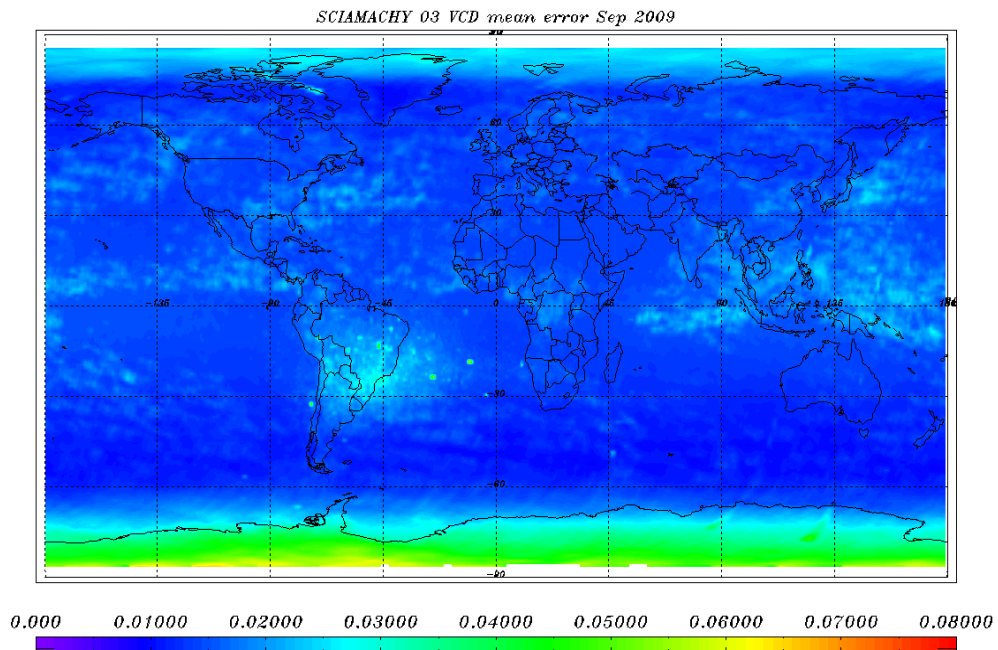


Figure 7-6: O₃ VCD error for 01 - 30 September 2009 - monthly average.

7.2.2.2 Nadir: VCD O₃ map October 2009

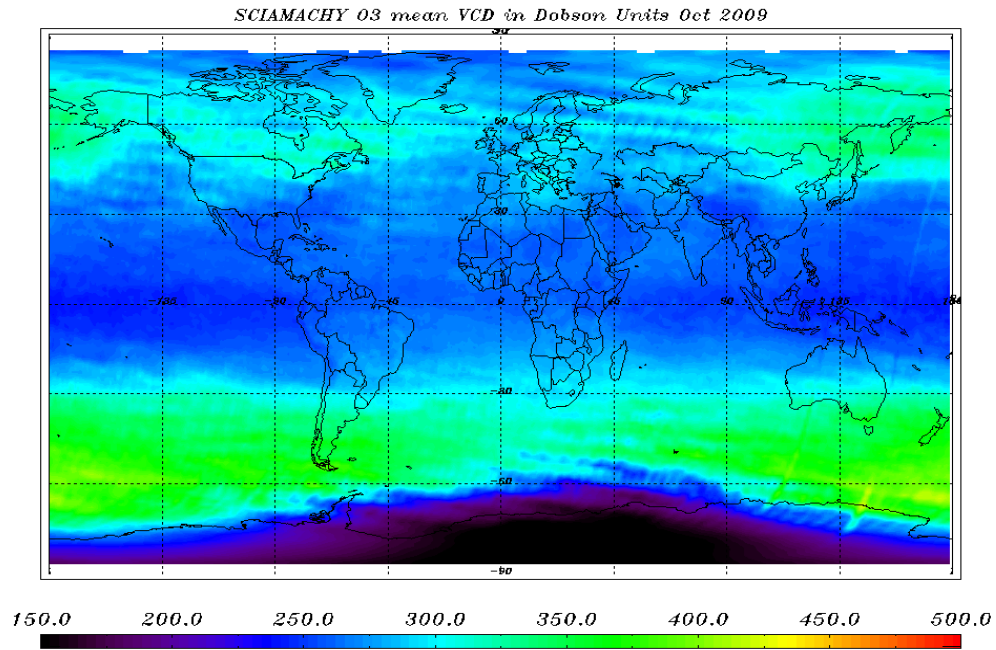


Figure 7-7: O₃ VCD world map for 01 - 31 October 2009 – monthly average.

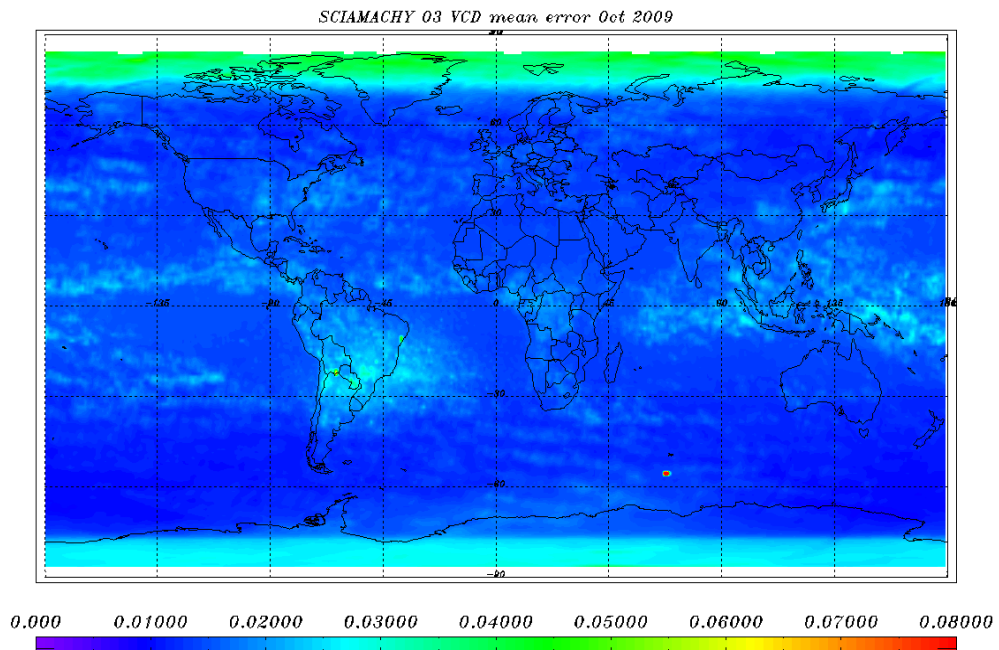


Figure 7-8: O₃ VCD error for 01- 31 October 2009 - monthly average.

7.2.2.3 Limb: Ozone profile averages

This paragraph reports on the quality check of SCIAMACHY limb profiles on a monthly basis, showing the results for Ozone limb profiles binned for two tangent height regions bins:

- 21.0 – 24.5 km (17th bin, bin index=16).
- 35.0 – 38.5 km (13th bin, bin index=12).

The data of the first half of each month (calendar days 1 - 15) and the second half (calendar days 16 - 31) are averaged for selected tangent heights into geo-location bins of 10 degrees longitude and 5 degrees latitude. The binning algorithm uses a single longitude and latitude value for the entire profile, being the value for the middle of the integration time as reported in the Geo-location Limb Dataset. The corresponding error is averaged as well.

The world maps of the averaged Ozone values show comparably low errors over the SAA region, which is not as expected. Investigation showed that the low SAA errors result from irregular conditions of the LIMB retrieval in that region. This issue will be included into the Level 2 off-line disclaimer.

Figures from 7-9 to 7-12 show the results for the months of September and October 2009 and for the two different tangent height regions.



esa



serco

SCI



issue 1.1 revision 0

page 58 of 62

7.2.2.4 Ozone limb profiles September 2009

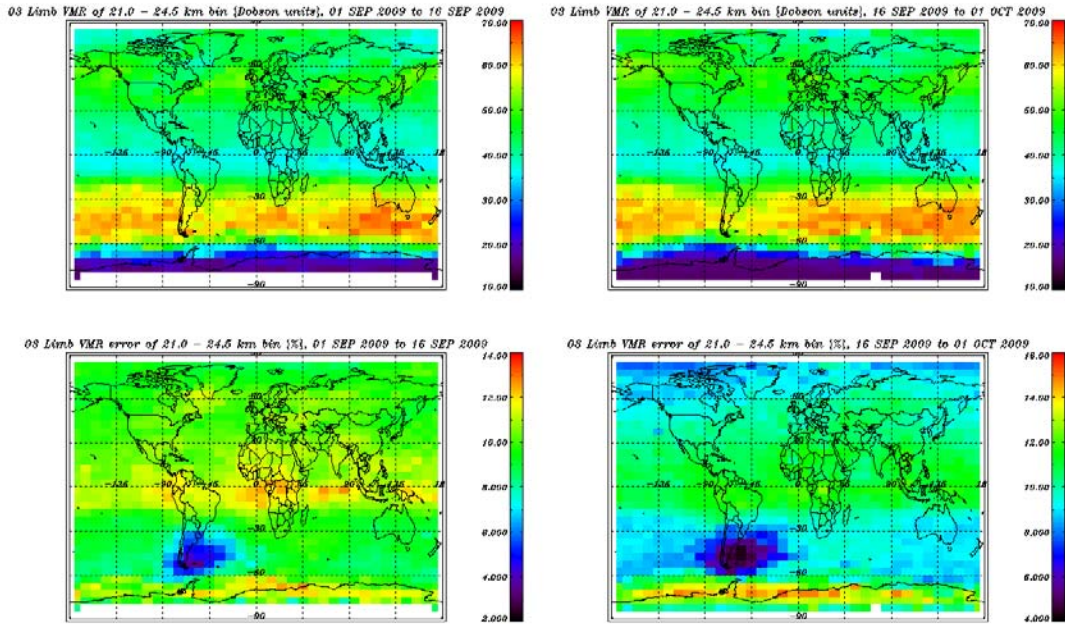


Figure 7-9 Limb Ozone profiles, binned over 21.0 – 24.5 km, September 2009.

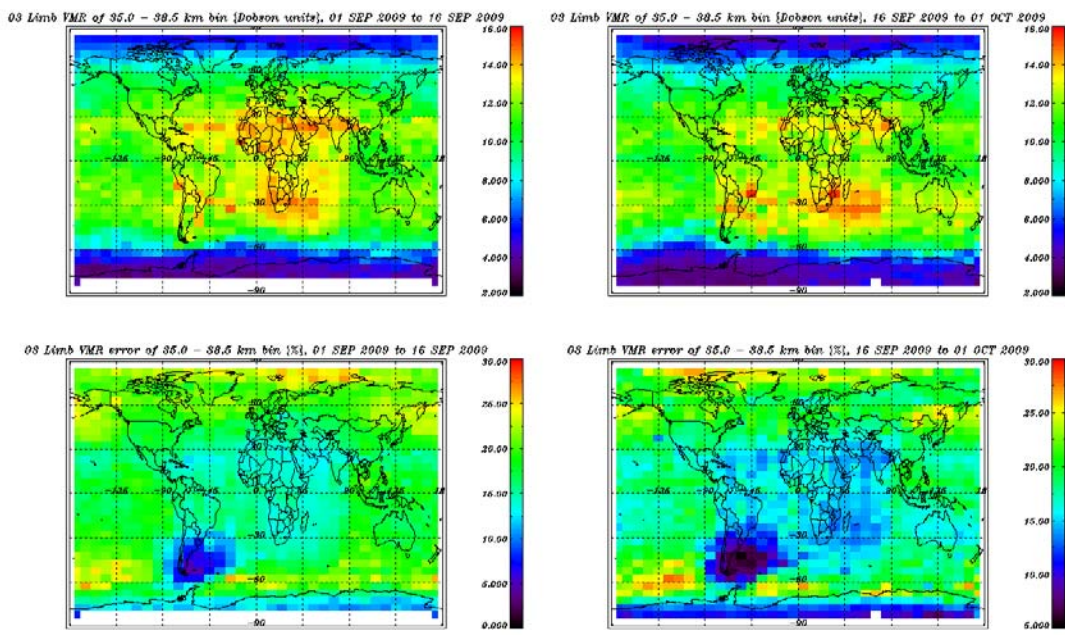


Figure 7-10 Limb Ozone profiles, binned over 35.0 – 38.5 km, September 2009.



esa



serco

SCI



issue 1.1 revision 0

page 59 of 62

7.2.2.5 Ozone limb profiles October 2009

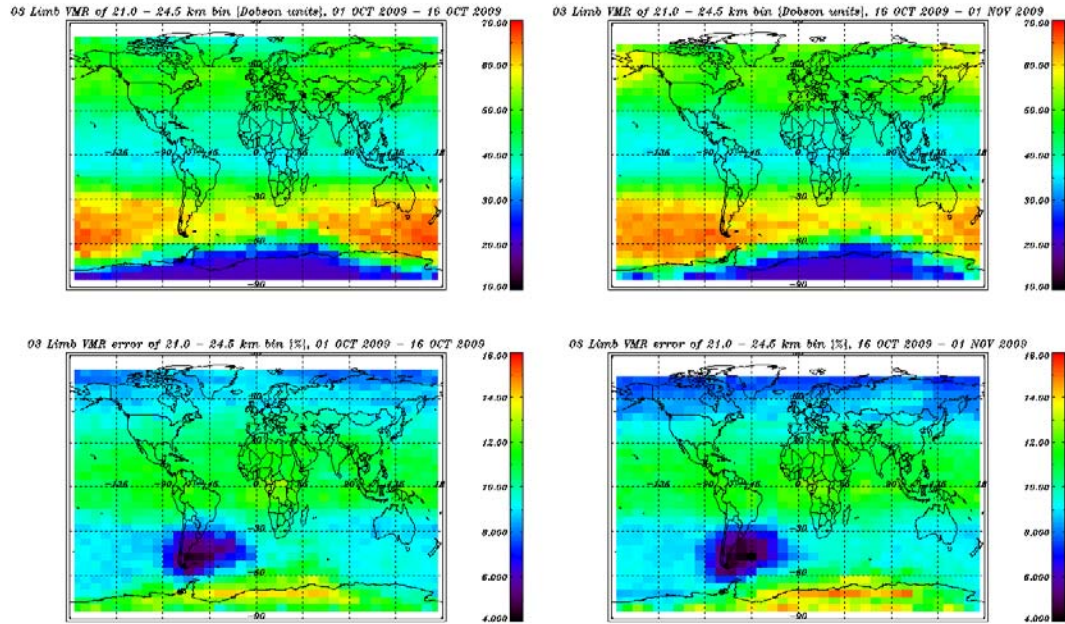


Figure 7-11: Limb Ozone profiles binned over 21.0 – 24.5 km, October 2009.

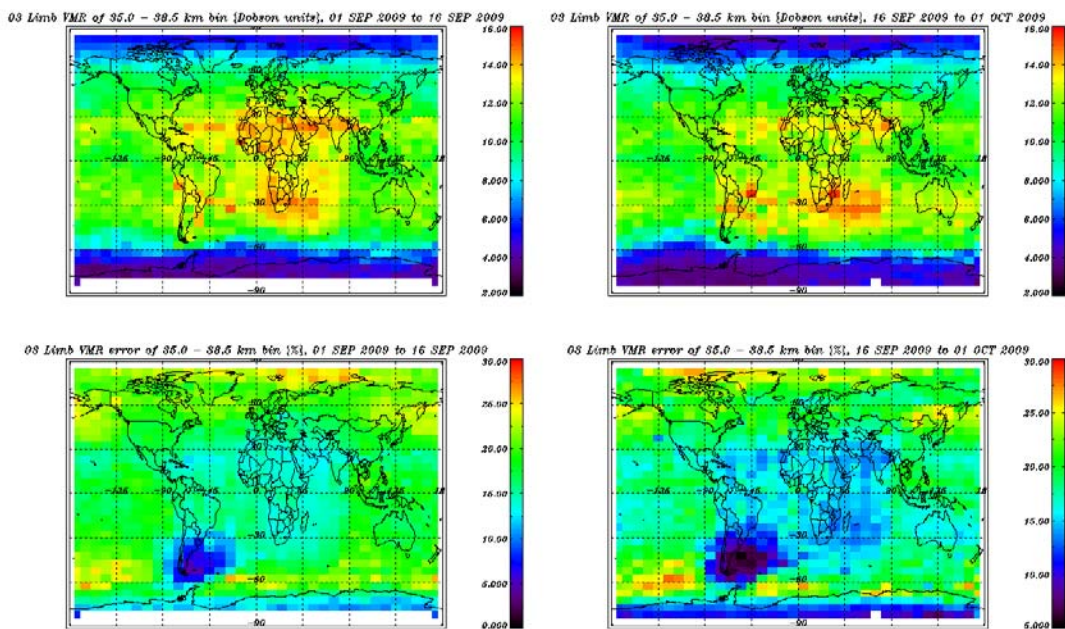


Figure 7-12: Limb Ozone profiles binned over 35.0 – 38.5 km, October 2009.

7.2.3 *Limb: NO₂ profile averages*

Analogous as for the limb Ozone profiles monthly averages for NO₂ limb averages were generated. The tangent height region chosen is:

- 24.5 – 28.0 km (15th bin, bin index=14).

As for the ozone averages the data of the first half of each month (calendar days 1 - 15) and the second half (calendar days 16 - 31) are averaged for selected tangent heights into geo-location bins of 10 degrees longitude and 5 degrees latitude. The binning algorithm used is the same as the described in 7.2.3. The corresponding error is averaged as well. Figures 7-13 and 7-14 show the results for the months of September and October 2009.



esa



serco

SCI



issue 1.1 revision 0

page 61 of 62

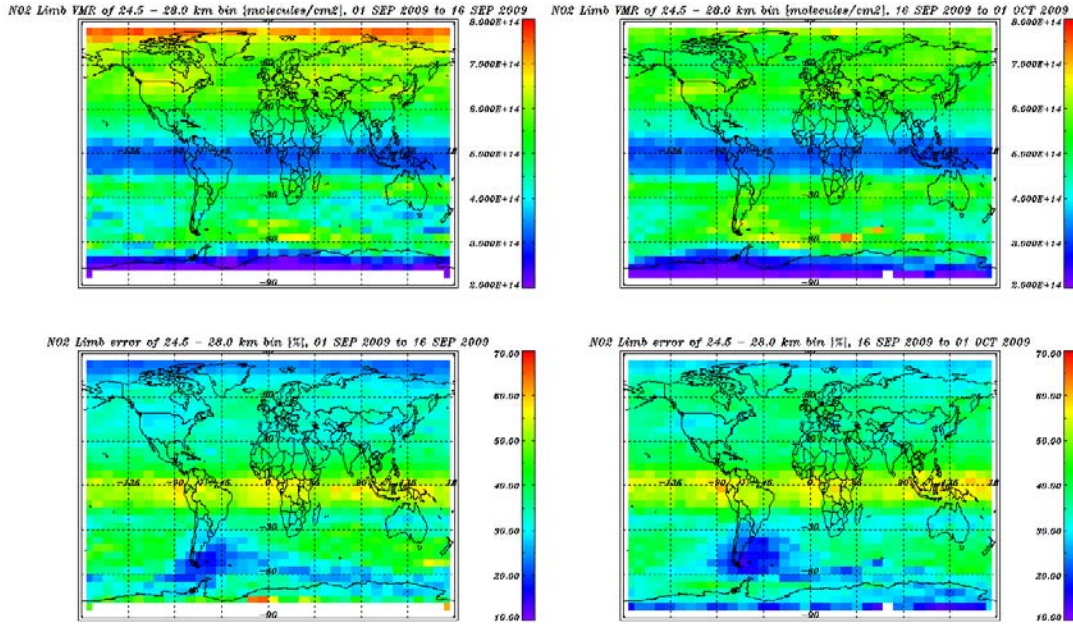


Figure 7-13 Limb NO₂ profiles binned over 24.5 – 28 km, September 2009.

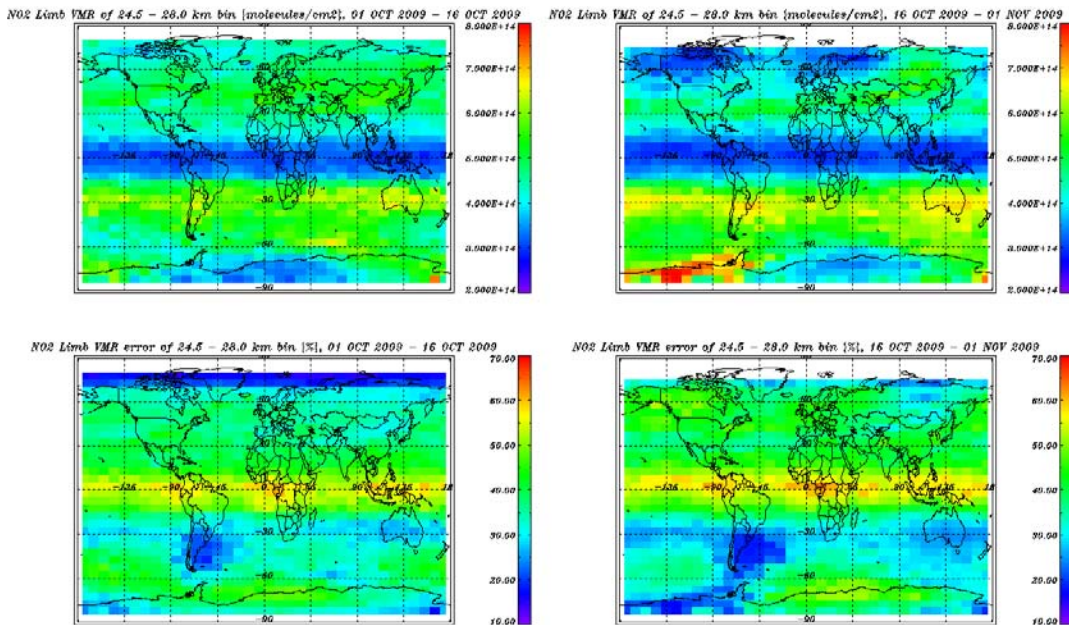


Figure 7-14 Limb NO₂ profiles binned over 24.5 – 28 km, October 2009.

8 VALIDATION ACTIVITIES AND RESULTS

Validation activities of products from re-processing, Level 1 IPF 6.03 and Level 2 off-line processor 3.01 have been performed.

The SCIAVALIG group has published the results of the Product Quality at

http://www.sciamachy.org/validation/documentation/technotes/SCIAVALIG/Summary_operational_product_quality_20080326.pdf