GOME Daily Report

INDEX

1 - General Info

1.1 - Report Summary

Item	Value
Report Version	GOMEver3_3
Report of Day	13-JUL-2010
Start Time of First Product	12-07-2010 23:50:54
Stop Time of Last Product	23:43:19
Number of EGOI Products analysed	33
Number of corrupted products	--
Anomalies and/or Special Operations	Nominal Data

1.2 - List of received products

Name	Date	Time

[BACK TO MENU]

1.3 - List of data gaps

Station	Orbit	Date	Start Time	Stop Time	Duration (s)

[BACK TO MENU]

1.4 - List of missing products

Station	Orbit	Date	Start Time	Stop Time	Duration (s)

[BACK TO MENU]

1.5 - List of corrupted products

Station	Orbit	Time

---

2 - Instrument Indicators and Daily Plots

2.1 - Instrument Indicators Status

Indicator	Value
MPH Product Confidence	OK
SPH Product Confidence	OK
Command Word Echo Summary	OK
Instrument Status 1A	OK
Instrument Status 1B	OK
Instrument Status 2	OK
Integration Times Channel 1	OK
Co-Adding and Cluster Mode Flags	OK
Integration Times Band 2A	OK
Integration Times Band 2B	OK
Integration Times Band 3	OK
Integration Times Band 4	OK
Scan Mirror position	OK
Polarization Detectors	OK
FPA Temperatures A	OK
FPA Temperaturas B	OK
Charge Amp Temperatures	OK
Other Temperatures A	OK
DDHU Temperatures	OK
Optical Bench Temperatures	OK
Other Temperatures B	OK
Calibration Lamp and Instr. Status 3	OK
Scan Mirror and Motor Current	OK
Selected Temperature A	OK
Selected Temperature B	OK
Selected Temperature C	OK
Channel 1 Summation	OK
Channel 2 Summation	OK
Channel 4 Summation	OK
Log Pages	OK
331/338 nm Uncal. Line Ratio	OK
Uncal. PMDs as RGB signal	OK
780 nm Uncal. Intensity	OK

2.2 - Daily Plots

The images linked below provide a quick check on the data coverage and instrument performance. All data are UNCALIBRATED. For the explaination see the GOME Performance Legend

NEAR IR Intensity

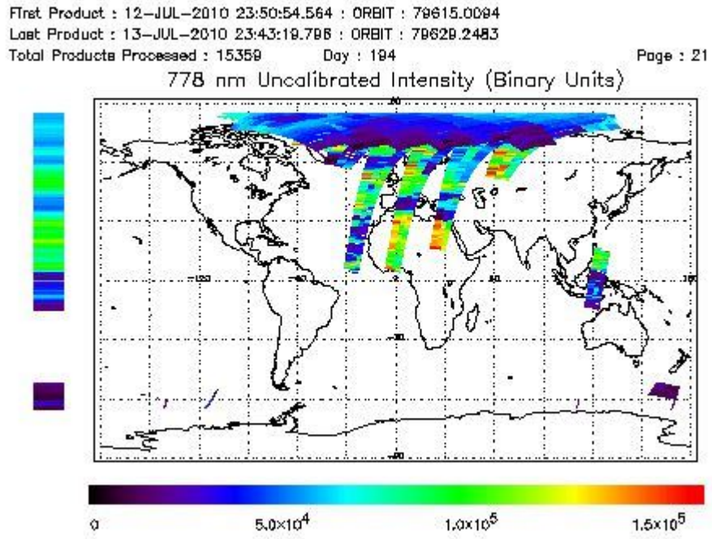

Ozone Line Ratio

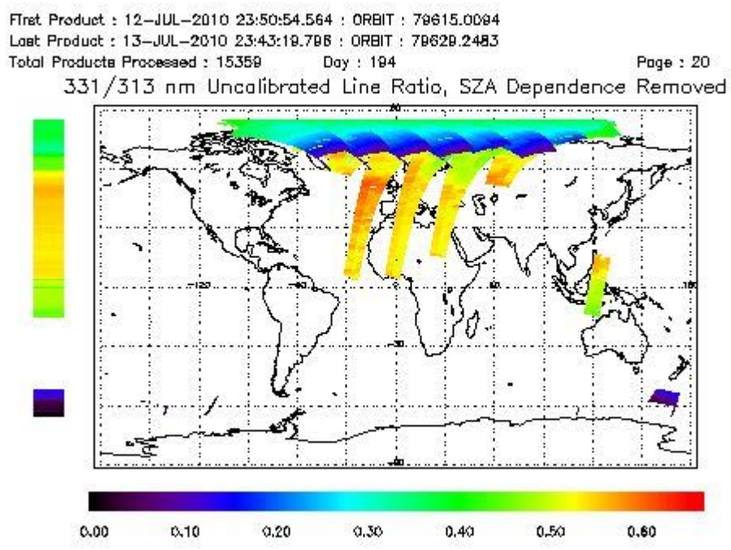

PMD Image (Earthshine Radiance)

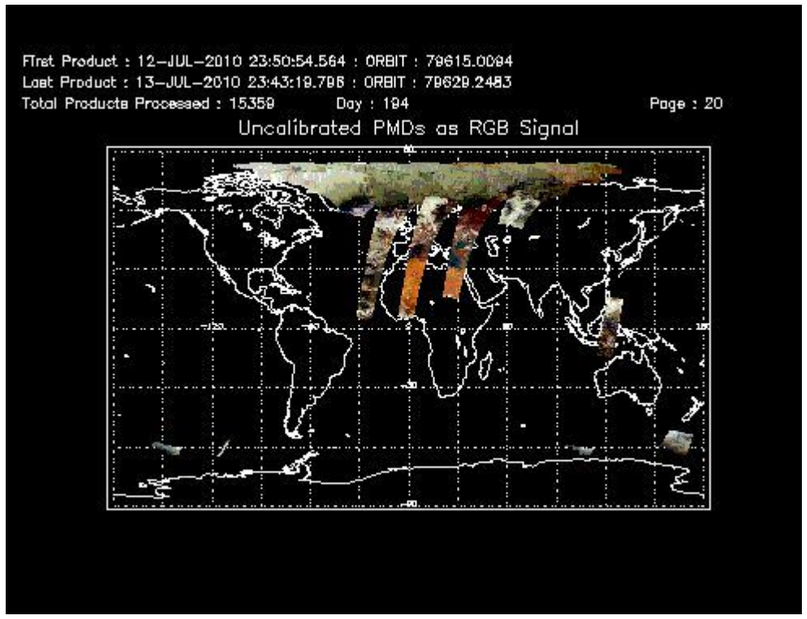

3 - Instrument Calibration

3.1 - Solar Calibration (Daily/TST44)

Daily(D)/TST44(T)	Start Time	End Time (T)	Orbit	Ground Station Visibility	Warm Detector Temperature (TST/44)	Max PMD Readout during solar calibration (BU set 2/12)
D	16:52:29.292	--	79625	Yes	--	14710

3.2 - Lamp Calibration (Quarterly/TST44)

Quarterly(Q)/TST44(T)	Start Time	End Time	Orbit	Ground Station Visibility	Warm Detector Temperature (TST/44)	Lamp Instability Voltage (if any)(V)	Lamp Failure N. (if any)
--	--	--	--	--	--	--	--

(1)

[BACK TO MENU]

4 - Instrument Anomalies

4.1 - Single Event Upset (SEU)

Start Time	End Time	Start Orbit	End Orbit	Ground Station Visibility
--	--	--	--	--

4.2 - Instrument Off

Start Time	End Time	Start Orbit	End Orbit	MPS Resumption	Ground Station Visibility
--	--	--	--	--	--

4.3 - Cooler Switchings

Start Time	End Time	Start Orbit	End Orbit	Ground Station Visibility	Max Temp. Ch 1	Max Temp. Ch 2	Max Temp. Ch 3	Max Temp. Ch 4
--	--	--	--	--	--	--	--	--

5 - Instrument Operations

Additional Info

5.1 - Timeline Interruptions

Start Time	End Time	Start Orbit	End Orbit	Ground Station Visibility
--	--	--	--	--

5.2 - TST44

Start Time	Start Orbit	Ground Station Visibility
--	--	--

5.3 - Power Cycle

Start Time	End Time	Start Orbit	End Orbit	Ground Station Visibility
--	--	--	--	--

5.4 - Wrong Command Execution

Start Time	End Time	Start Orbit	End Orbit	Ground Station Visibility
--	--	--	--	--

5.5 - Narrow Swath Timeline

Start Time	End Time	Start Orbit	End Orbit
--	--	--	--

5.6 - Seasonal Operations

Start Time	End Time	Start Orbit	End Orbit
--	--	--	--

(1) The Solar/lamp calibration is carried out routinely or after an instrument switch-off or a power cycle (performed to reset the instrument when abnormal values are observed); in the latter cases the coolers are off and the temperature refers to the warm detectors