



<b>Customer</b>	: ESRIN	<b>Document Ref</b>	: IDEAS+-VEG-OQC-REP-2889
<b>Contract No</b>	: 21525/08/I-OL	<b>Issue Date</b>	: 24 January 2018
<b>WP No</b>	: 14500	<b>Issue</b>	: 1.0

**Title** : IDEAS+ – SMOS Public Monthly Report - December 2017

**Abstract** : This document provides a summary of the status and performance of SMOS over the course of the reporting month.

**Author** : \_\_\_\_\_ **Accepted** : \_\_\_\_\_  
IDEAS SMOS QC Team R. Crapolicchio on behalf of  
ESA EOP-GMQ

**Distribution** :  
**Hard Copy File:**  
**Filename:** IDEAS+-VEG-OQC-REP-2898\_v1.0.doc

**Copyright © 2017 Telespazio Vega UK Ltd.**

*All rights reserved.*

*No part of this work may be disclosed to any third party translated reproduced copied or disseminated in any form or by any means except as defined in the contract or with the written permission of Telespazio Vega UK Ltd..*

**Telespazio Vega UK Ltd.**  
**350 Capability Green, Luton, Bedfordshire, LU1 3LU, United Kingdom**  
**Tel: +44 (0)1582 399 000 Fax: +44 (0)1582 728 686**  
**www.vegaspaces.com**



## TABLE OF CONTENTS

<b>1. EXECUTIVE SUMMARY .....</b>	<b>5</b>
<b>2. INTRODUCTION.....</b>	<b>6</b>
2.1 Structure of the Document .....	6
2.2 Definitions of Terms .....	6
<b>3. INSTRUMENT STATUS .....</b>	<b>9</b>
3.1 Instrument health .....	9
3.2 Instrument unavailabilities and anomalies .....	9
<b>4. DATA SUMMARY.....</b>	<b>11</b>
4.1 Reprocessing activities .....	11
4.2 Processing changes.....	13
4.2.1 Processor updates.....	13
4.2.2 Processor Status .....	13
4.2.3 Schema updates.....	14
4.2.4 Schema status .....	14
4.2.5 Aux file updates .....	15
4.3 Calibration Events Summary.....	15
4.4 Data Coverage Summary.....	16
4.5 Summary of degraded data.....	17
4.6 Product Quality Disclaimers .....	17
<b>5. LONG-TERM ANALYSIS .....</b>	<b>19</b>
5.1 Calibration Analysis.....	19
5.2 Brightness Temperatures Trends over Dome-C Point (Antarctic) .....	32
5.3 L2OS Ocean Target Transformation (OTT) Orchestration Analysis.....	34
5.4 L2OS Retrievals assessment.....	36
5.5 L2SM Retrievals assessment.....	39
<b>6. PRODUCT QUALITY ANALYSIS .....</b>	<b>44</b>
<b>7. ADF CONFIGURATION AT THE END OF THE REPORTING PERIOD.....</b>	<b>45</b>
<b>APPENDIX A. CONFIGURATION DOCUMENT LIST .....</b>	<b>47</b>



## AMENDMENT POLICY

This document shall be amended by releasing a new edition of the document in its entirety. The Amendment Record Sheet below records the history and issue status of this document.

### AMENDMENT RECORD SHEET

ISSUE	DATE	DCI No	REASON
1	24 <sup>nd</sup> January 2018	N/A	First release



***This Page is Intentionally Blank***



## **1. EXECUTIVE SUMMARY**

This is the routine Soil Moisture and Ocean Salinity (**SMOS**) Monthly Public Report containing a summary of the instrument health, product quality status and updates to SMOS processing and auxiliary files during December 2017.

The instrument health during December 2017 was found to be nominal. There were seven un-availabilities reported during the reporting period that translate into time intervals with data loss or degraded data. The list of unavailabilities is included in the section 3.2.

The data quality during December 2017 was found to be nominal, with the exceptions listed in section 4.5. These degraded periods have been induced either by instrument anomalies or unavailability of dynamic auxiliary files.



## 2. INTRODUCTION

### 2.1 Structure of the Document

After this introduction, the document is divided into a number of major sections that are briefly described below:

1 Executive summary

The executive summary covers the main findings from the report.

2 Introduction

A list of referenced documents and definitions of terms are available.

3 Instrument status

This section covers the instrument health and unavailabilities from this reporting period.

4 Data Summary

This section covers reprocessing, updates to processors and aux files as well as a data coverage summary.

5 Long Term Analysis

Long-term analysis of the instrument calibration and data quality are provided in this section.

### 2.2 Definitions of Terms

The following terms have been used in this report with the meanings shown.

<b>Term</b>	<b>Definition</b>
CMN	Control and Monitoring Node, responsible for commanding the receivers, reading their physical temperatures and telemetry and the generation of the synchronization signal (local oscillator tone) among receivers.
CCU	Correlator and Control unit, instrument computer on-board
DPGS	Data Processing Ground Segment
ESL	Expert Science Laboratory
IC4EC	Internal Calibration for External calibration. Calibration sequences for the instrument monitoring and calibration of science data acquired in external target pointing.
IDEAS+	Instrument Data quality Evaluation and Analysis Service, reporting to the ESA Data Quality and Algorithms



Management Office (EOP-GQ), responsible for quality of data provided to users including the data calibration and validation, the data processing algorithms, and the routine instrument and processing chain performances.

IPF	Instrument Processor Facility
L2SM	Level 2 Soil Moisture
MM	Mass Memory
OCM	Orbit Correction Manoeuvre
PMS	Power Measurement System
RFI	Radio Frequency Interference
SPQC	Systematic Product Quality Control facility
N/A	Not applicable



***This Page is Intentionally Blank***





### 3. INSTRUMENT STATUS

#### 3.1 Instrument health

The current instrument status is that all the **instrument** subsystems are working correctly. The current configuration of the instrument is that the arm A and the arm B are working in nominal side and arm C is in the redundant side.

**Table 3-1 History of instrument problems and mode changes**

Start	Stop	Description
11 January 2010 12:07z Orbit 1013	N/A	Arm A changes from redundant to nominal side. That operation is to avoid the malfunction of one of the redundant CMNs of the arm.
12 January 2011 09:15z Orbit 6278	N/A	Arm B changes from redundant to nominal side. That operation is to avoid the malfunction of one of the redundant CMNs of the arm.

#### 3.2 Instrument unavailabilities and anomalies

The unavailabilities and anomalies listed in Table 3-2 occurred during the reporting period. A full list of unavailabilities can be found in the Mission Status section on the SMOS Earthnet website accessible [here](#)

During these unavailabilities and anomalies the instrument may have either not collected data or may have collected corrupt data which may not have been processed to higher levels. Table 4-5, Table 4-6 and Table 4-7 provide details of the data which has been affected by gaps and quality degradation respectively.

**Table 3-2 SMOS unavailability list**

Start Time (UTC)	Stop Time (UTC)	Unavailability Report Reference	Planned	Description
11/12/2017 22:41z	11/12/2017 23:01z	FOS-3032	Yes	Orbit Correction Manoeuvre



16/12/2017 21:32z	16/12/2017 21:32z	FOS-3046	No	MM Latch-Up on P4
18/12/2017 08:01z	18/12/2017 09:45z	FOS-3047	No	CCU Reset
25/12/2017 11:20z	29/11/2017 11:20z	FOS-3051	No	MM Latch-Up on P1
23/12/2017 07:39z	23/12/2017 07:49z	FOS-3050	No	CMN Unlock on H1
26/12/2017 21:43z	26/12/2017 21:53z	FOS-3052	No	CMN Unlock on H3
29/12/2017 19:48z	29/12/2017 19:58z	FOS-3055	No	CMN Unlock on B3



## 4. DATA SUMMARY

### 4.1 Reprocessing activities

The information regarding to data reprocessing activities (REPR data type) during the reporting period are:

- 1) None

The information regarding to the data regeneration activities (OPER data type) during the reporting period are:

- 1) None

The information regarding to past version data reprocessing activities (REPR data type) are:

- 1) Level 2 soil moisture reprocessing for product baseline v650, finished the 9th of September 2017, catch-up reprocessing finished the 15th of November 2017. The reprocessed dataset has been delivered to the user on the 20<sup>th</sup> November 2017. Sensing time of the reprocessed data goes from 1st June 2010 to 14<sup>th</sup> November 2017. For more details see the SMOS news [here](#). The SMOS users are strongly encouraged to consult the level 2 read-me-first notes before using the SMOS data. The level 2 read-me-first note for soil moisture product is available [here](#).
- 2) Level 2 sea surface salinity reprocessing for products baseline v662, finished in April 2017, catch-up reprocessing finished in July 2017. The reprocessed dataset has been delivered to the user on 15 May 2017 and a gap filling reprocessed dataset has been delivered on 20 July 2017. Sensing time of the reprocessed data goes from 1<sup>st</sup> June 2010 to 9<sup>th</sup> May 2017. For more details see the SMOS news [here](#). The SMOS users are strongly encouraged to consult the level 2 sea surface salinity v662 read-me-first notes before using the SMOS data. The level 2 read-me-first note for sea surface salinity product is available [here](#).
- 3) The second SMOS mission reprocessing for L1 v62x finished the 25<sup>th</sup> June 2015. Sensing time of the reprocessed data goes from 12<sup>th</sup> January 2010 to 05<sup>th</sup> May 2015. Data set is available for the SMOS user community since 25<sup>th</sup> June 2015 (see the SMOS news [here](#)). The SMOS data users are strongly encouraged to consult the level 1 read-me-first note before using the SMOS data. The level 1 read-me-first note is available [here](#).

The information regarding to the past version V62x data regeneration activities (OPER data type) are:

- 1) On the 9<sup>th</sup> of October 2017, an anomaly in SPQC report distribution introduced processing timeouts for some products. In order to regenerate a properly consolidated calibration dataset, the following files were invalidated and regenerated: All affected telemetry (TLM) files were regenerated. Calibration CSTD1A data files were invalidated and regenerated: from validity times: 20171008T134744\_20171009T082745 to 20171009T053745\_20171010T001746. Science data files were regenerated: from validity times 20171009T064720\_20171009T074122 to 20171009T082725\_20171009T092125.
- 2) On the 4<sup>th</sup> of October 2017, a misconfiguration in a recently-installed processing node (PFW) introduced several TLM processing failures leading to data gaps in all subsequent levels (between 1312z-1416z, 1542z-1646z and 2132z-2236z, for the



- 4<sup>th</sup>, and 0002z-0106z and 0052z-0156z for the 5<sup>th</sup>). All TLM, Calibration (including CSTD1A) and Science (up to L2) affected was regenerated successfully.
- 3) Period from 20170804T011718 to 20170804T053039 has been regenerated from level L1C to level2 due to late arrival of ionosphere information (VTEC\_P auxiliary file).
  - 4) On the 22nd of July 2017, 3 Svalbard passes were received late at ESAC and L0 production was affected. L0 data affected by this anomaly were invalidated and re-generated. The next files and periods were reprocessed: **a)** TLM\_MIRA0 files were reprocessed from 20170722T084240 up to 20170722T112655; **b)** MIR\_CORD0 files were reprocessed from 20170722T090455 up to 20170722T221455; **c)** MIR\_SC\_F0 files were reprocessed up to L2 from 20170722T085250 up to 20170722T121657.
  - 5) The 7<sup>th</sup> of January 2017 Flat Target Transformation correction (FTTF) was produced and incorrectly used for level 1 data processing. Level 1A data from 20170110T104625 up to 20170112T025130 was regenerated up to level 2 with the correct FTTF (i.e. initial one from 2010).
  - 6) Leap second ingestion on the 31<sup>th</sup> of December 2016 lead to some issues when processing the SMOS data along the 1st of January 2017: one gap appeared and some calibration files were degraded due to some duplicated L0 packets stored inside the L0 database, since they were processed with different ORBPRES files. The next activities were carried on in order to have a proper and consolidated dataset: **a)** Reprocessing of L0 telemetry and science from 20170101T081550 to 20170101T095954; **b)** Invalidation of duplicated MIR\_CORD0 and MIR\_CSTD1A files; **c)** Regeneration of CSTD1A files from 20161231T154620 to 20170102T041620; **d)** Regeneration of science data and up to level 2 from 20170101T072633 to 20170102T104955
  - 7) A hardware anomaly in DPGS systems introduced a large delay in the production on 05<sup>th</sup> May 2016. As a consequence, some calibration CSTD1A files were incorrectly consolidated when the production was recovered. This introduced some LO gaps, which impacted the quality of the data severely (no local oscillator calibration) from 20160505T170715z until 20160506T113201z. All the affected data were successfully regenerated from L0 up to L2.
  - 8) Dataset sensed from 20160414T172533 to 20160419T100347 was degraded due to the usage of an out of date calibration. Period has been regenerated with the proper calibration up to level 2.
  - 9) The data gap from 20160314T095107 to 20160316T211747 originated by the Proteus platform on-board software upgrade operations has been recovered, level 1 and level 2 science data are now available.
  - 10) On December 2015, the next periods were regenerated from level 1C to level2 due to late arrival of ionosphere information (VTEC\_P auxiliary file): the period from 20151206T005504 to 20151206T041830 and the period from 20150719T005448 to 20150720T024908.
  - 11) CCU reset on the 25th of November 2015 caused a delay in the data production. As consequence, the calibration CSTD1A files were not processed in the correct order from 20151125T033228 to 20151127T082215. All these affected CSTD1A files have been regenerated and used to regenerate level 1 and level 2 science dataset.
  - 12) On 15<sup>th</sup> of August 2015 a hardware anomaly caused a TLM\_MIRA1A order to fail due to timeout. Therefore, a gap in science and in calibration (CSTD1A) was introduced. The next data types and periods has been regenerated: TLM\_MIRA1A at



20150815T031323, CSTD1A files with times between 20150815T003625 and 20150815T214626, affected science level 1 and level 2 between 20150815T023400 and 20150815T050753.

- 13) A hardware anomaly in DPGS systems introduced a large delay in the data production. As a consequence some CSTD1A orders were dropped due time-out. This introduced bad-consolidated calibration information in the system, with some Local Oscillator (LO) calibration gaps, which has impacted the quality of the data severely. Data from 20150713T194909 until 20150714T032238 was affected. All data were regenerated successfully from level 0 up to level 1; level 2 data was reprocessed and is available as REPR data type.
- 14) Due to an anomaly in the NIR calibration on the 3<sup>rd</sup> of June 2015, the next data types has been regenerated from 2015-06-03 06:43z to 2015-06-12 08:14z: MIR\_SC\_F1A, MIR\_SC\_F1B, MIR\_SCLF1C, MIR\_SCSF1C, MIR\_BWLF1C and MIR\_BWSF1C. Level 2 data was reprocessed and is available as REPR data type.
- 15) Period from 29 May 2015 to 31 May 2015 have been regenerated since one of the DPGS processing nodes (PWF-5) induced several science and calibration gaps for the reported period. Level 2 data was reprocessed and is available as REPR data type

The information regarding the past version V5xx data regeneration and reprocessing activities (OPER and REPR data type) are available in the monthly report of April 2015.

## 4.2 Processing changes

### 4.2.1 Processor updates

During the reporting period no updates were implemented for data processors

### 4.2.2 Processor Status

At the end of the reporting period, the Processing Facility is using the following processors:

**Table 4-1 Instrument Processors status**

Processor	Version	Deployment date
L1OP	620 (L1a/L1c/NIRCAL) 621 (L1b/CAL_1A)	05/05/2015
L2OS	662	10/05/2017
L2SM	650	16/11/2017

**Table 4-2 Pre- and Post-processors status**

Processor	Version	Deployment date
ECMWFP	318	07/11/2013



VTECGN	320	18/05/2016
LAI pre-processor (currently not used)	307	18/02/2010
OSCOTT	625	10/05/2017
L2 Post-processors	510	05/05/2015
SNOWP	102	28/10/2016

### 4.2.3 Schema updates

No updates for product schema in the reporting period.

### 4.2.4 Schema status

At the end of the reporting period, the schema version of the datablock of the products generated and distributed through SMOS dissemination service is:

**Table 4-3 Schema version status**

Product type	Version
MIR_SC_F1B	400
MIR_SCSF1C	400
MIR_SCLF1C	400
MIR_BWSF1C	400
MIR_BWLF1C	400
MIR_SMUDP2	400
MIR_OSUDP2	401
AUX_ECMWF_	300

The schema package v07.02.01 is available from the SMOS Global Mapping Tool (GMT) webpage:

[https://earth.esa.int/web/guest/software-tools/-/asset\\_publisher/P2xs/content/gmt-smos-global-mapping-tool](https://earth.esa.int/web/guest/software-tools/-/asset_publisher/P2xs/content/gmt-smos-global-mapping-tool)

Further information about the product format is available in the level 1 and level 2 Product specification documents available [here](#)



### 4.2.5 Aux file updates

The following quasi-static AUX files were disseminated to the processing stations this reporting period. The status of the quasi-static AUX files at the end of the reporting period is in the section 7.

#### **SM\_OPER\_AUX\_BULL\_B\_20171002T000000\_20171101T235959\_120\_001\_3**

Start sensing time at L1 processor: N/A

Justification: Bulletin Update including values from October 2017 and the prediction for November 2017. Its usage is intended for reprocessing.

#### **SM\_OPER\_AUX\_BULL\_B\_20171002T000000\_20500101T000000\_120\_001\_3**

Start sensing time at L1 processor: 2017-12-04 04:37:26z

Justification: Bulletin Update including values from October 2017 and the prediction for November 2017. Its usage is intended for the nominal production.

### 4.3 Calibration Events Summary

The following table summarizes the major calibration activities conducted during the reporting period. The Local Oscillator calibration is not included in the table since occurs periodically every 10 minutes. The short calibrations are acquired weekly since 2011-03-24 and they are currently used in the nominal processing chain.

**Table 4-4 Calibration summary**

Date	Start Time	Stop Time	Calibration	Comments
06/12/2017	02:24:13z	03:46:26z	NIR-Warm	Nominal  Warning on SPQC checks due to T_Noise_Cal_V and T_Phys_Tp7 slightly higher than 413K and 286K, respectively.  Brightness temperature: 3.8279 K RMS: 0.1045 K Moon Elevation: -43.3615 Sun Elevation: 10.01 Right Ascension: 341.33 Declination: -23.97
07/12/2017	07:45:00z	07:46:45z	Short	Nominal
14/12/2017	14:37:00z	17:12:19z	Long	Nominal
20/12/2017	03:18:19z	04:40:32z	NIR-Warm	Nominal  Warning on SPQC: T_Noise_Cal_H is lower



				than 419K. Brightness temperature: 3.6966 K RMS: 0.0659 K Moon Elevation: 27.7018 Sun Elevation: 9.982489 Right Ascension: 355.79 Declination: -20.48
21/12/2017	08:38:00z	08:39:44z	Short	Nominal
29/12/2017	16:27:24z	17:49:37z	NIR-Warm	Nominal Brightness temperature: 3.9938 K RMS: 0.3706 K Moon Elevation: -53.7422 Sun Elevation: 9.966425 Right Ascension: 191.32 Declination: -19.09
30/12/2017	14:14:30z	16:50:19z	Long	Nominal
31/12/2017	17:00:42z	18:26:21z	FTR	Nominal – no disseminated Brightness temperature: 3.5103 K RMS: 0.1353 K Moon Elevation: -6.4688 Sun Elevation: -13.917646 Right Ascension: 186.12 Declination: 26.58

#### 4.4 Data Coverage Summary

Where instrument unavailabilities or anomalies have occurred during this reporting period, gaps in data coverage may have occurred. A list of the gaps due to a permanent data loss is given in Table 4-5 by product level. On the other hand, a list of gaps due to operational problems is given in Table 4-6. The latter gaps may be recovered when the problem is fixed.

The science data gaps due to the execution of calibration activities are not listed in this section.

**Table 4-5 Data loss summary**

Start	Finish	Data Level	Comments
11/12/2017 22:41z	11/12/2017 23:01z	All Products	Orbit Correction Manoeuvre <sup>1</sup> (FOS-3032)
18/12/2017 08:01z	18/12/2017 09:45z	All Products	CCU Reset (FOS-3047)

<sup>1</sup>: Data acquired during the manoeuvre is flagged as external pointing and not available as nominal data.



**Table 4-6 Operational gaps summary**

Start	Finish	Data Level	Comments
N/A	N/A	N/A	N/A

#### 4.5 Summary of degraded data

In December 2017, SMOS data was affected by the following instrument and processing anomalies which have had a detrimental effect on the data quality.

**Table 4-7 Summary of degraded data**

Start	Finish	Affected products	Problem Description
23/12/2017 07:39z	23/12/2017 07:49z	L1a and above products	CMN Unlock on H1 (FOS-3050)
26/12/2017 21:43z	26/12/2017 21:53z	L1a and above products	CMN Unlock on H3 (FOS-3052)
29/12/2017 19:48z	29/12/2017 19:58z	L1a and above products	CMN Unlock on B3 (FOS-3055)

#### 4.6 Product Quality Disclaimers

The following product disclaimers affects the data generated in the reporting period:

**Table 4-8 Summary of product quality disclaimers**

Date	Product level	
From: beginning of the mission To: 1 <sup>st</sup> September 2016	L1 L2	Due to a software anomaly in the Level 0 processor, the <i>Cycle</i> , <i>orbit relative</i> and <i>orbit absolute</i> fields in all the product headers are incorrectly set. Those values are annotated in the headers of all the higher level products. The anomaly was fixed on 1 <sup>st</sup> September 2016 with the deployment in the processing facility of a new version (v308) of the L0 processor.
From: 18 <sup>th</sup> of August 2016 (16:36z) To:	L1	Brightness temperature generated with calibration occurred on 2 <sup>nd</sup> July instead of calibration occurred on 18 <sup>th</sup> August. The impact of wrongly consolidated calibrated visibilities



20 <sup>th</sup> September 2016 (08:26z)		(UAVD1A) is negligible. In relation to the impact in the brightness temperature of the degraded PMS gain and offset (CRSD1A) the analysis had shown a small bias of +/- 0.25K in the image
From: 21 <sup>st</sup> June 2017 (06:05:53z) To: 21 <sup>st</sup> June 2017 (07:28:07z)	L1	Due to CCU reset side effect science data was acquired with instrument pointing in external target looking at deep sky.



## 5. LONG-TERM ANALYSIS

### 5.1 Calibration Analysis

The calibration parameters are under monitoring. During the reporting period, there have been three Warm-NIR calibrations event on the 06<sup>th</sup>, 20<sup>th</sup> and 29<sup>th</sup> of December 2017.

On 29<sup>th</sup> December an acquisition on deep sky was executed to monitor the instrument Flat Target response.


The evolution of the noise temperature of the reference noise diodes Tna and Tnr computed with processor baseline V62x since the beginning of the mission is shown from figures from Figure 1 to Figure 4. The evolution of the temperature parameters, which are related to the internal diode stability, are stable in particular for the NIR CA which is the only one used for the level 1 data calibration. The small deviation in the NIR calibration on 3<sup>rd</sup> June 2015 and on 2<sup>nd</sup> August 2017 was due to a Radio Frequency Interference (RFI) that has corrupted the measurement. This calibration should not be used for the scientific processing of the data from 2015-06-03 06:43z to 2015-06-12 08:14z. Deviations in NIR calibration can be also seen on 2016-04-06, 2016-04-20, 2016-05-04, 2016-05-18, 2016-08-24, 2016-09-07, 2017-02-11, 2017-02-17, 2017-03-29 due to proximity of the equinox. These calibrations have failed the quality control checks and were not used for the scientific processing of the data.

The seasonal evolution of the calibration parameters: Tna and Tnr present in the previous processor baseline V5xx (see for an example the monthly report for April 2015) had been largely mitigated by the new calibration algorithm which decouple the variation of the antenna losses and the drift of the reference diode. This approach allows to compensate each drift separately improving the diode stability monitoring and increasing the accuracy of the consequent calibration correction. Further improvements in the calibration stability were achieved by implementing the “warm NIR calibration” since 15<sup>th</sup> of October 2014. During “warm NIR calibration” the Noise Injection Radiometer (NIR) calibration is performed with a Sun elevation of 10 degrees above the antenna plane in order to maintain a stable thermal environment of the instrument through the calibration sequence. The impact on the final brightness temperature is a more stable long term measurement.


Figure 5 and Figure 6 present the evolution of the NIR Observed brightness temperature (BT) since the beginning of the mission for the V620x baseline. Small variation of few Kelvin, in the observed BT are due to slightly different region of the Sky sensed during the calibration manoeuvre. This parameter is used only for monitoring purpose.

The leakage and cross-coupling factors of the NIR channels shown in Figure 7 and Figure 8 remain small and no problems can be observed apart from a peak in the phase of the NIR-AB cross-coupling term on 11 April 2012. That peak corresponds to an anomaly in the NIR-AB that did not have impact on the data.


**Figure 1 Tna evolution of NIR AB (blue), NIR BC (green) and NIR CA (red) in the H-channel since the beginning of the mission. Thresholds in dashed lines**

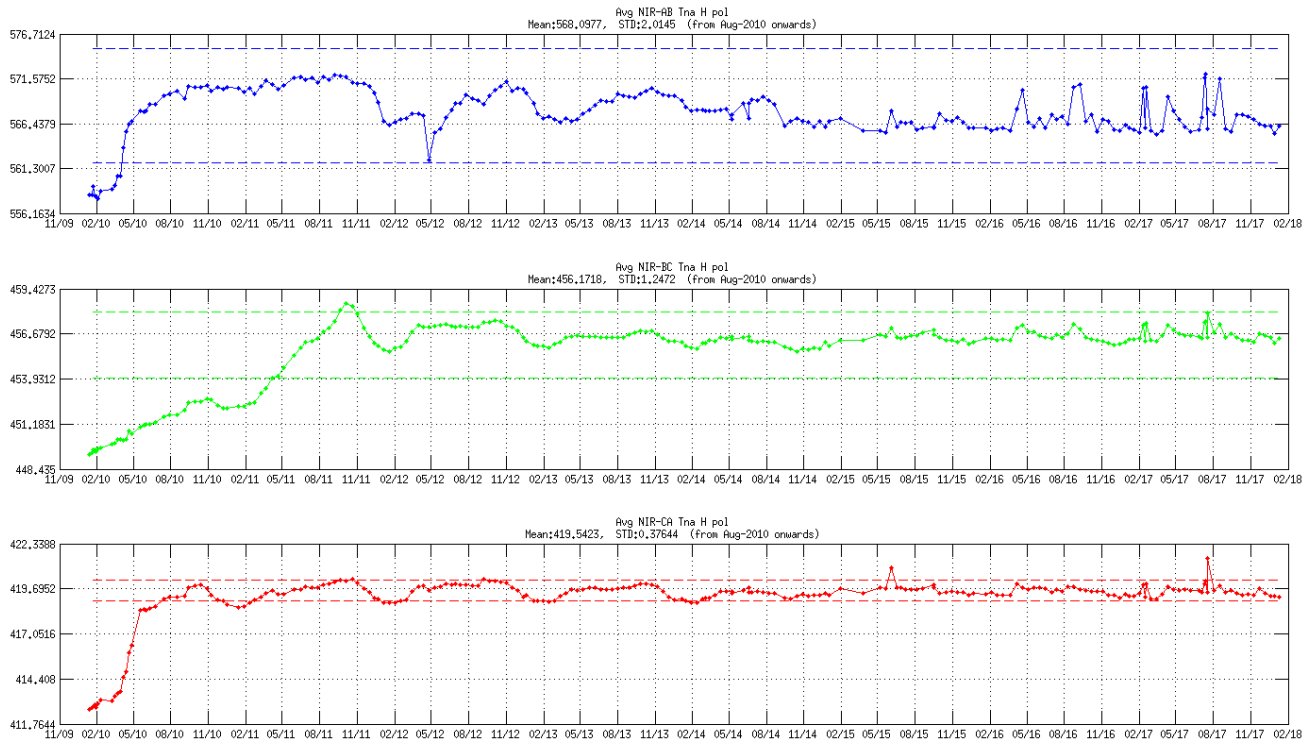


**Figure 2 Tna evolution of NIR AB (blue), NIR BC (green) and NIR CA (red) in the V-channel since the beginning of the mission. Thresholds in dashed lines**

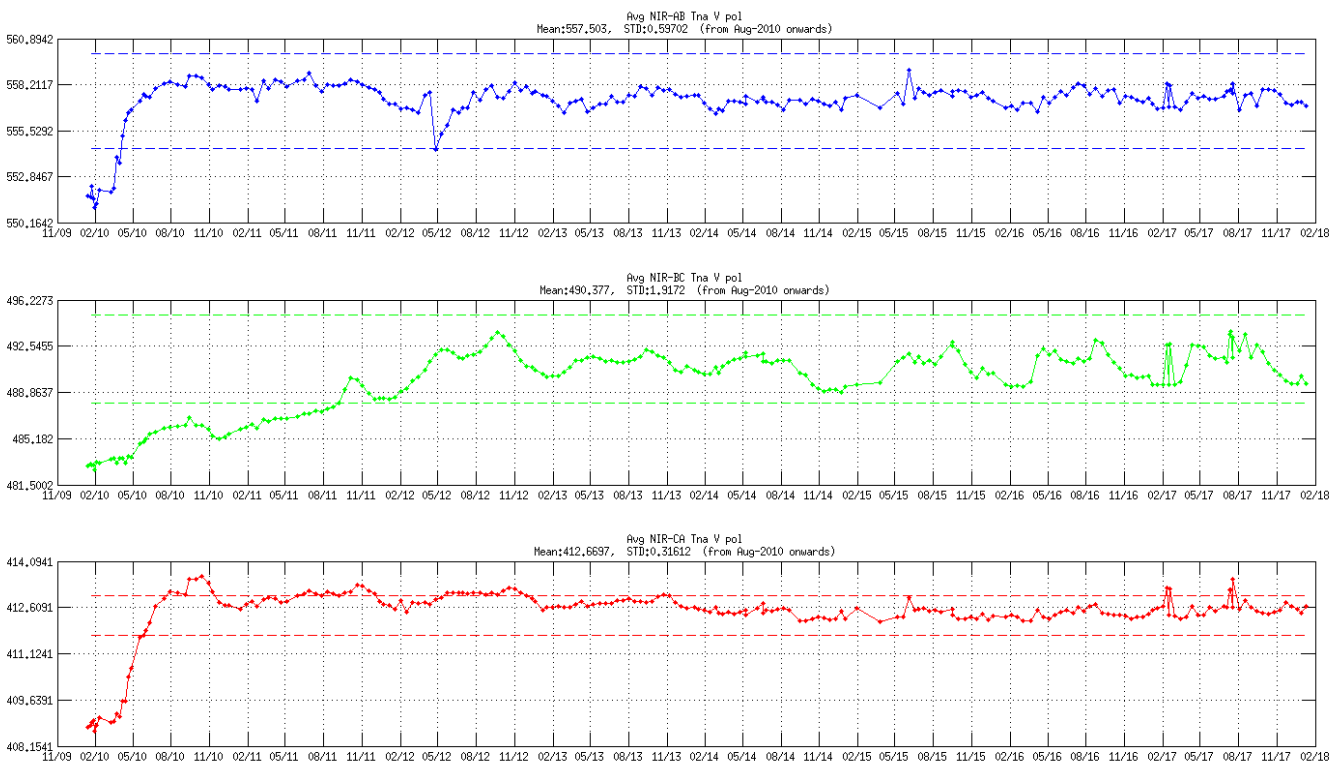

**Figure 3 Tnr evolution of NIR AB (blue), NIR BC (green) and NIR CA (red) in the H-channel since the beginning of the mission.**

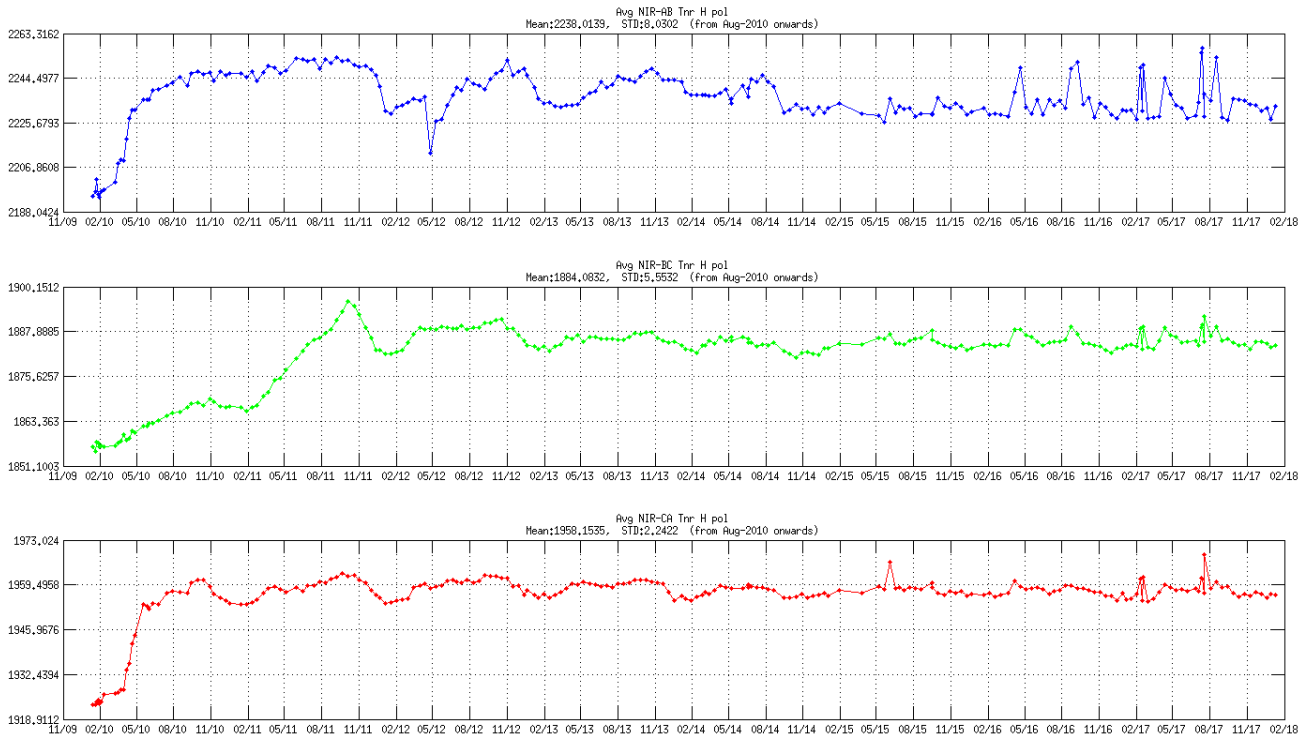


**Figure 4 Tnr evolution of NIR AB (blue), NIR BC (green) and NIR CA (red) in the V-channel since the beginning of the mission.**

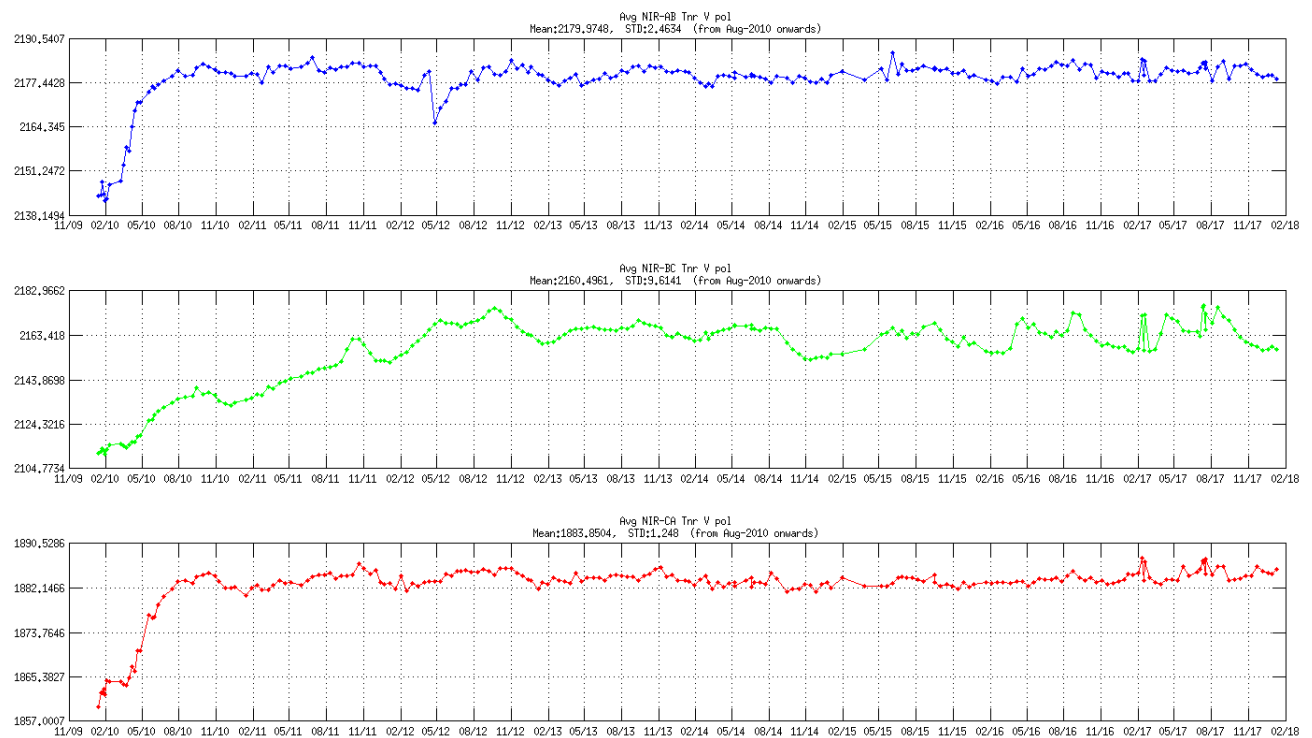





**Figure 5 NIR Observed BT evolution of NIR AB (blue), NIR BC (green) and NIR CA (red) in the H-channel since the beginning of the mission. Thresholds in dashed lines**

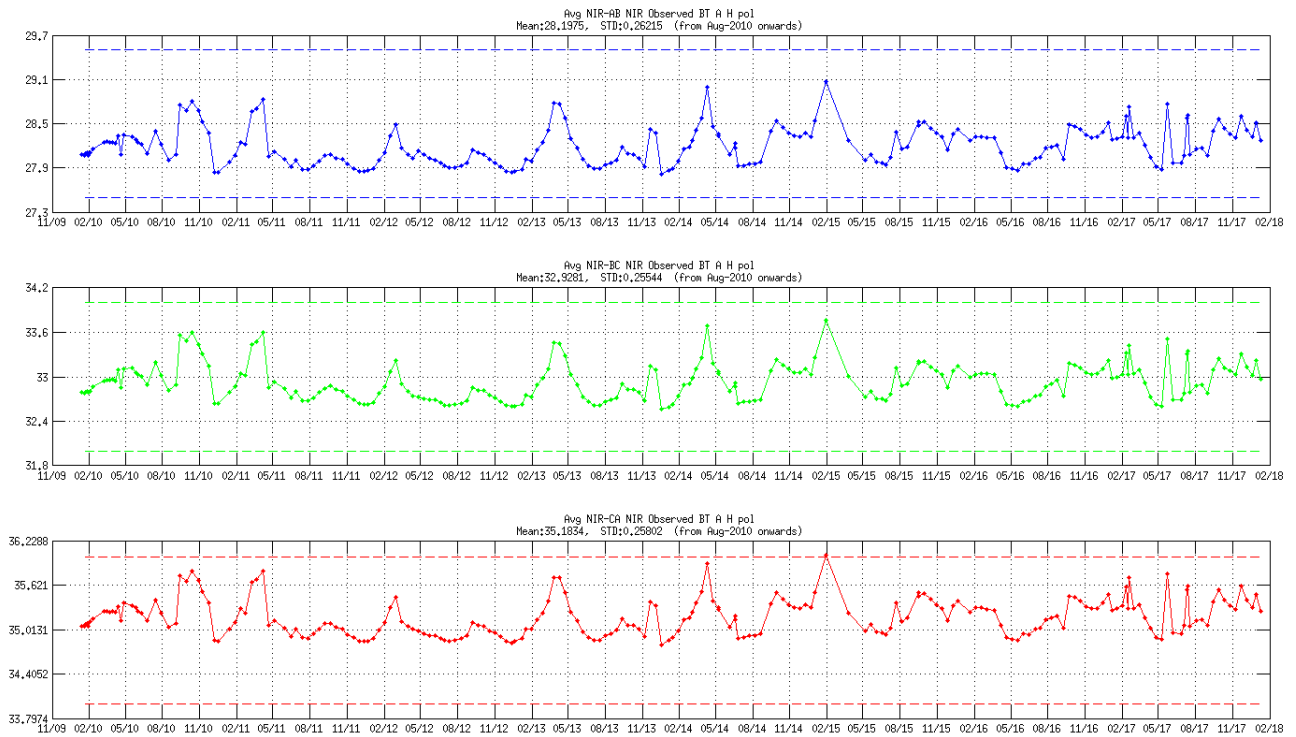


**Figure 6 NIR Observed BT evolution of NIR AB (blue), NIR BC (green) and NIR CA (red) in the V-channel since the beginning of the mission. Thresholds in dashed lines**

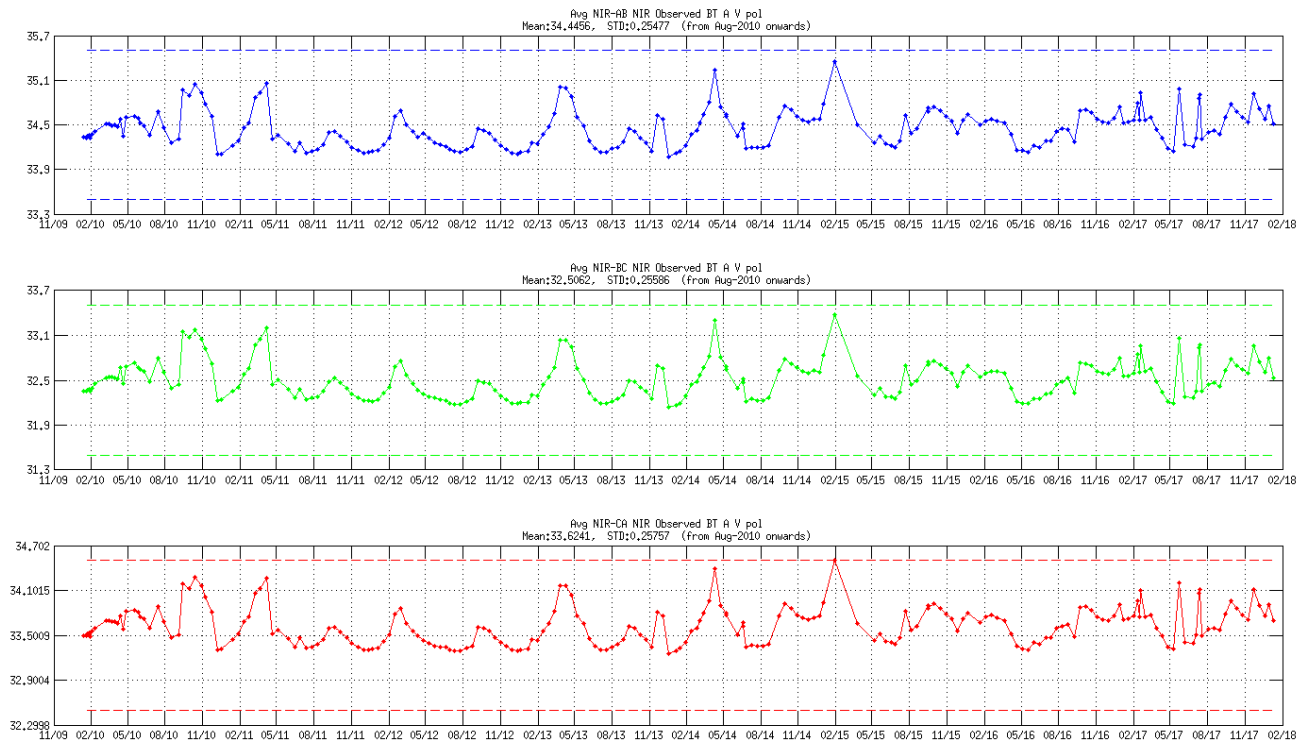

**Figure 7 Cross-coupling evolution in amplitude and phase of NIR AB (blue), NIR BC (green) and NIR CA (red) since the beginning of the mission**

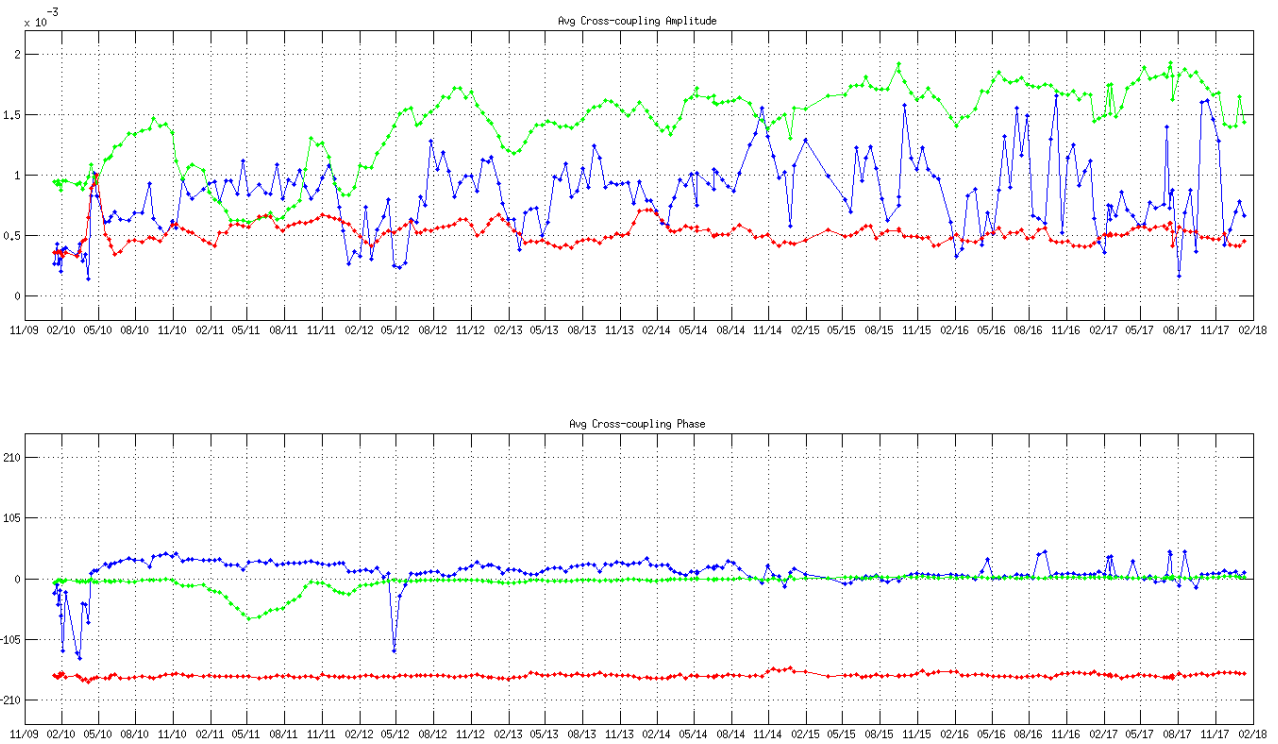

**Figure 8 Leakage factor evolution in amplitude and phase of NIR AB (blue), NIR BC (green) and NIR CA (red) since the beginning of the mission**

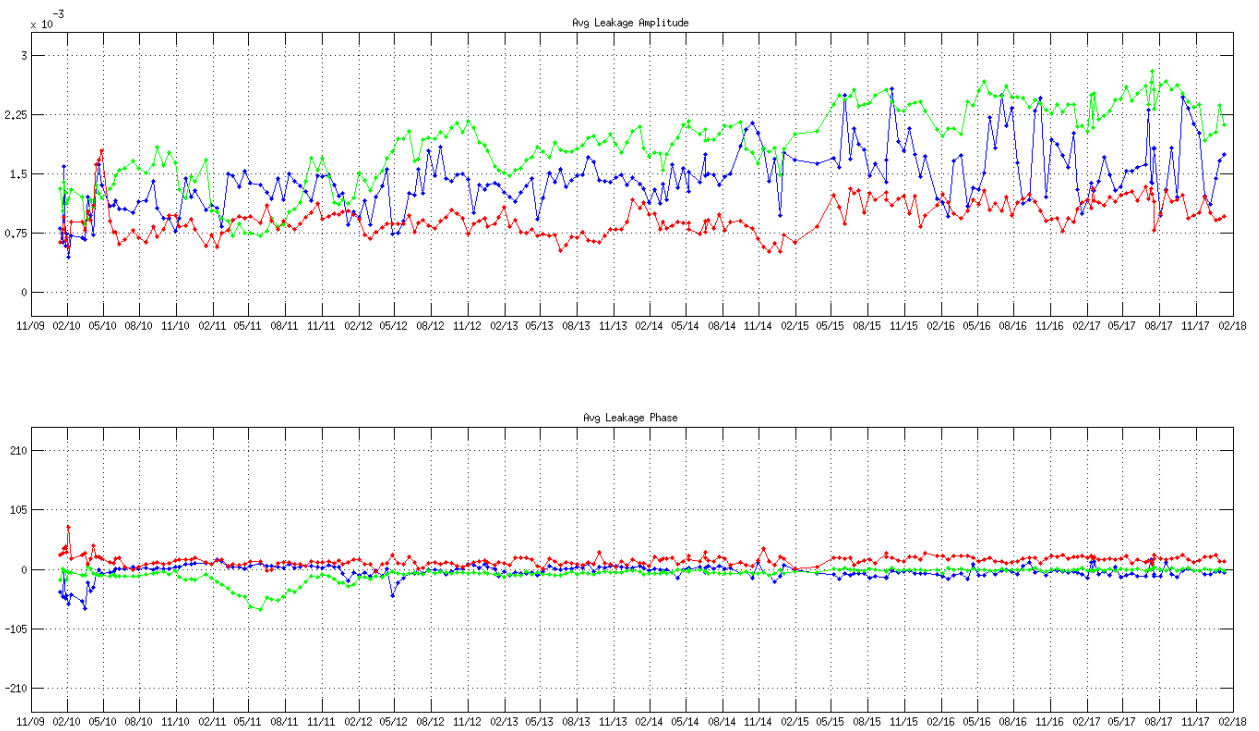



The LICEF calibration status is updated by long (every 8 weeks) and short (weekly) on-board calibration activities. Two Long calibration have been executed one the 14<sup>th</sup> of December and other the 30<sup>th</sup> of December.

LICEF PMS gain is derived during the long calibration activity and figures from Figure 9 to Figure 20 show the evolution (V62x algorithm baseline) of the deviations of the PMS gain with respect to its average over time. Note that PMS gain depends on the physical temperature of the receivers, PMS calibration is performed at slightly different physical temperature due to calibration time (season effect) and position of the receiver (LICEF) in the instrument (arms and central hub). In order to compare the calibration results the gains and offsets obtained during the calibration are normalised to 21 degrees Celsius temperature by using the receiver PMS gain and offset temperature sensitivity parameter (one value for each LICEF).

Apart from receiver (LICEF) LCF\_A\_18, LCF\_C\_11, LCF\_C\_19, which have shown a clear evolution from the main trend (see Figure 12, 19, 20) the others PMS gains are stable. The seasonal PMS gain variation present in some LICEFs is mainly due to the PMS gain temperature sensitivity parameters which needs refinement for some LICEFs.

The LCF\_A\_10 PMS gain evolution in the period January-March 2016 as been further analysed. The evolution in the PMS gain computed at 21C is mainly due to the usage of the temperature sensitivity parameter for that LICEF rather than a change in the receiver itself due to the slightly temperature increase occurred on 10<sup>th</sup> January 2016. The computation of the PMS gain at 21C with a more refined temperature sensitivity parameter does not show such evolution.


The usage of refined temperature sensitivity parameters for all the LICEFs is under evaluation by the calibration team and it might be introduced in the next version of the level 1 processor to further improve the level 1 data calibration.

Figures from Figure 21 to Figure 32 show the evolution of the PMS offsets (V62x algorithm baseline) derived during the short calibration activity.

Figure 33 shows the evolution of the average over all the baselines of the Fringe Washing Function (FWF) amplitude in the origin derived during the long calibration. The amplitude of the FWF at the origin does not show any drift and their values are inside the ranges defined in the routine calibration plan.


The evolution of the visibility average offsets (Figure 34 and Figure 35) had an unexpected peak on the 2<sup>nd</sup> of February 2017. Accordingly to preliminary analysis, this seems related to RFI. The quality impact on the data is small with a peak-to-peak bias of about 0.1K in brightness temperature.

**Figure 9 Evolution of the  $\Delta$  PMS Gain of the LICEFS in CMN H1**

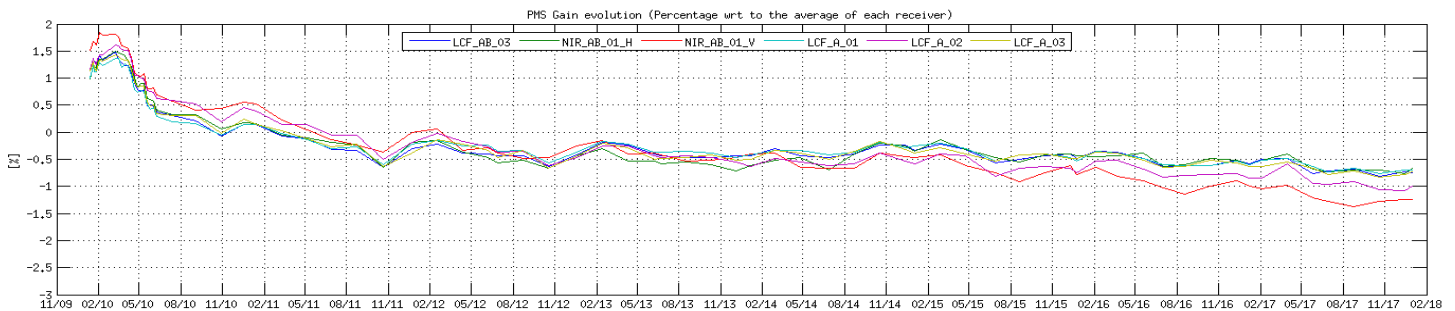





**Figure 10 Evolution of the  $\Delta$  PMS Gain of the LICEFS in CMN A1**

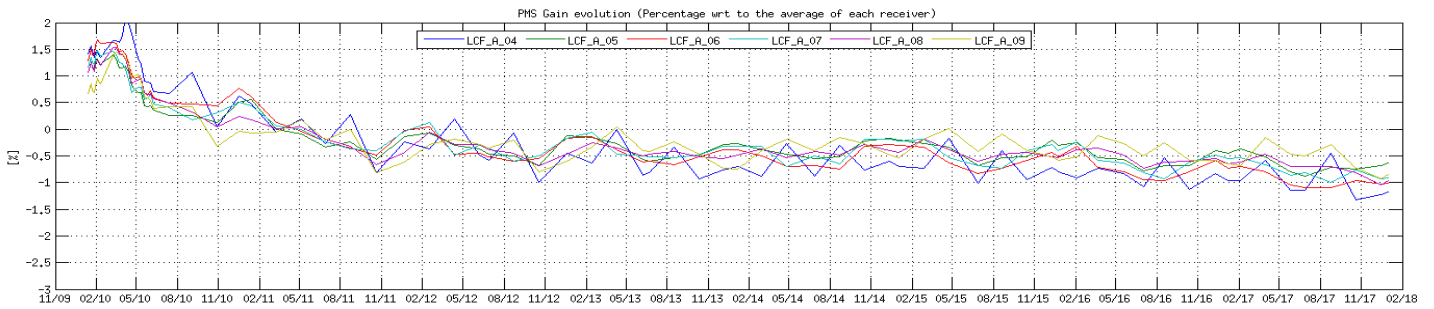

**Figure 11 Evolution of the  $\Delta$  PMS Gain of the LICEFS in CMN A2**

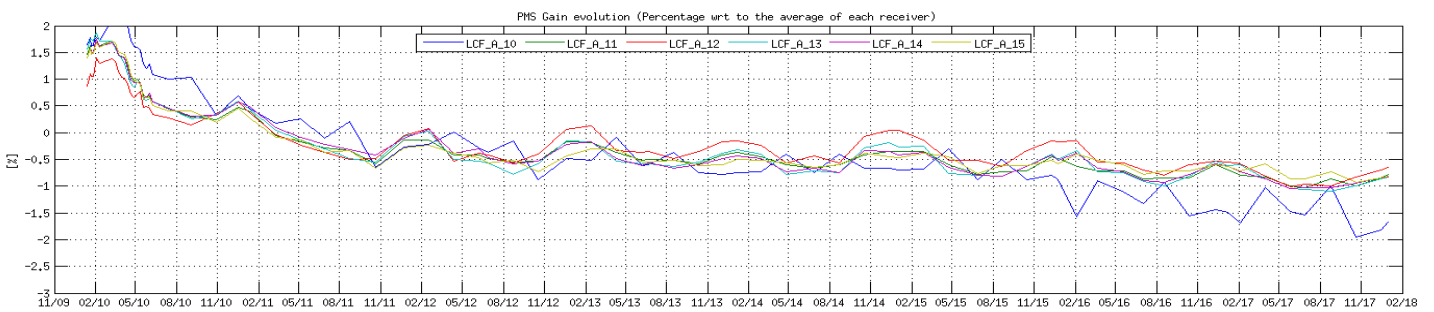

**Figure 12 Evolution of the  $\Delta$  PMS Gain of the LICEFS in CMN A3**

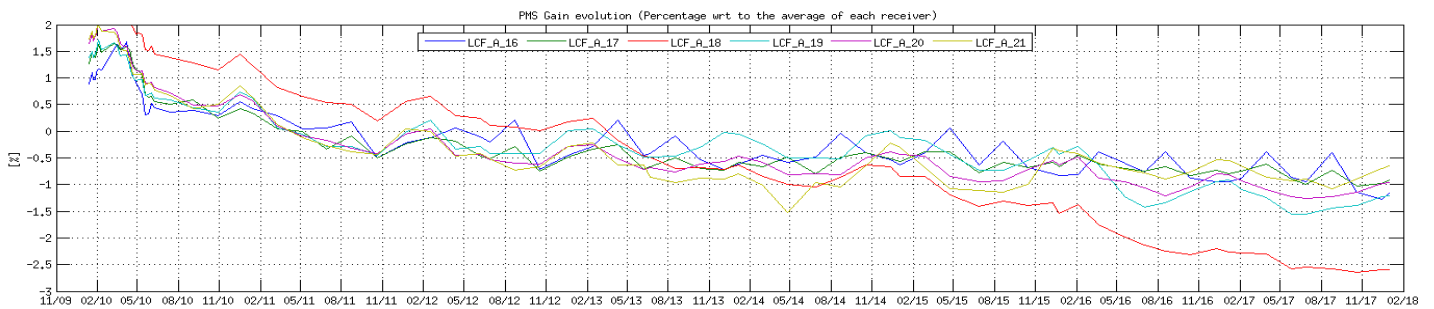

**Figure 13 Evolution of the  $\Delta$  PMS Gain of the LICEFS in CMN H2**

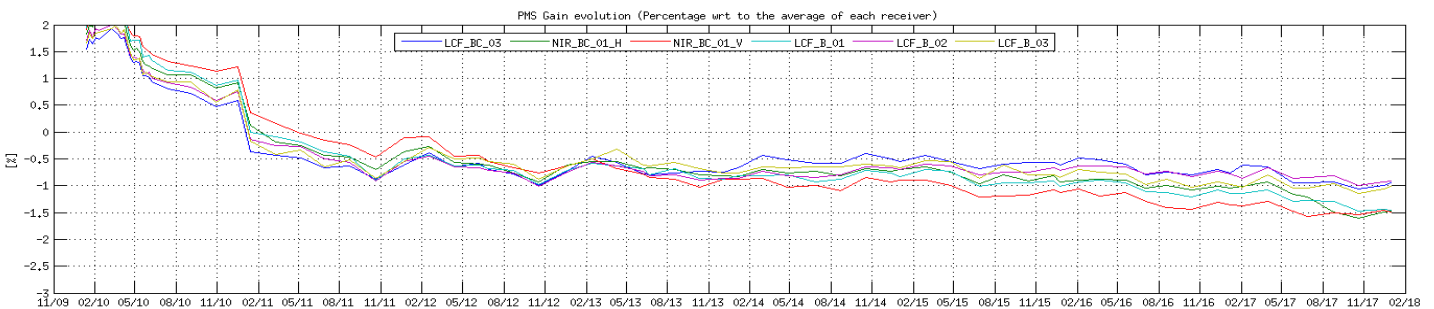




Figure 14 Evolution of the  $\Delta$  PMS Gain of the LICEFS in CMN B1

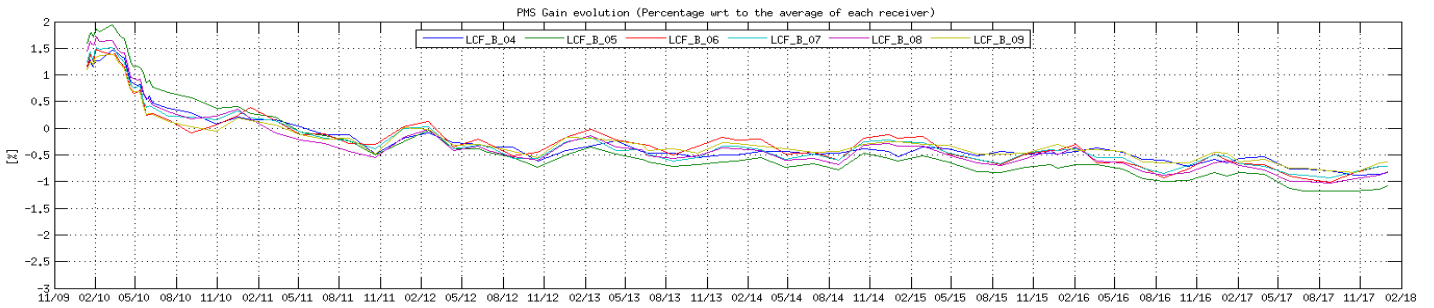


Figure 15 Evolution of the  $\Delta$  PMS Gain of the LICEFS in CMN B2

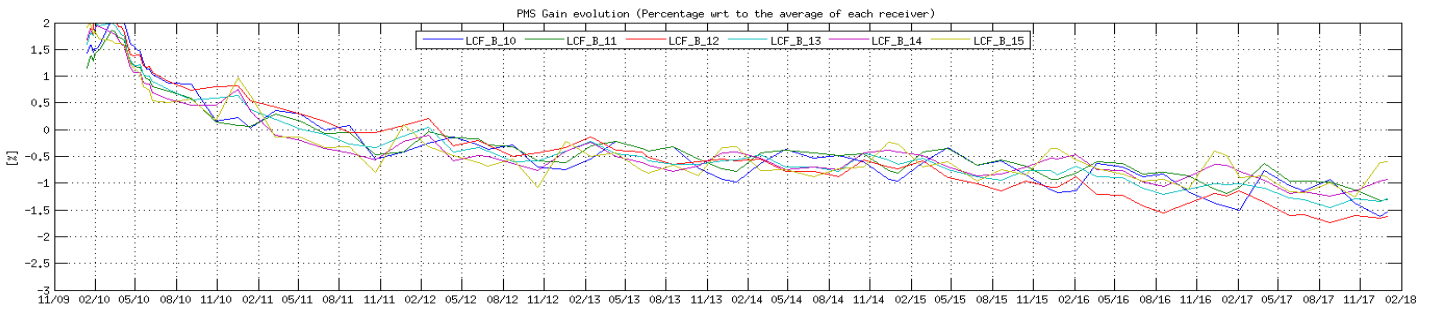


Figure 16 Evolution of the  $\Delta$  PMS Gain of the LICEFS in CMN B3



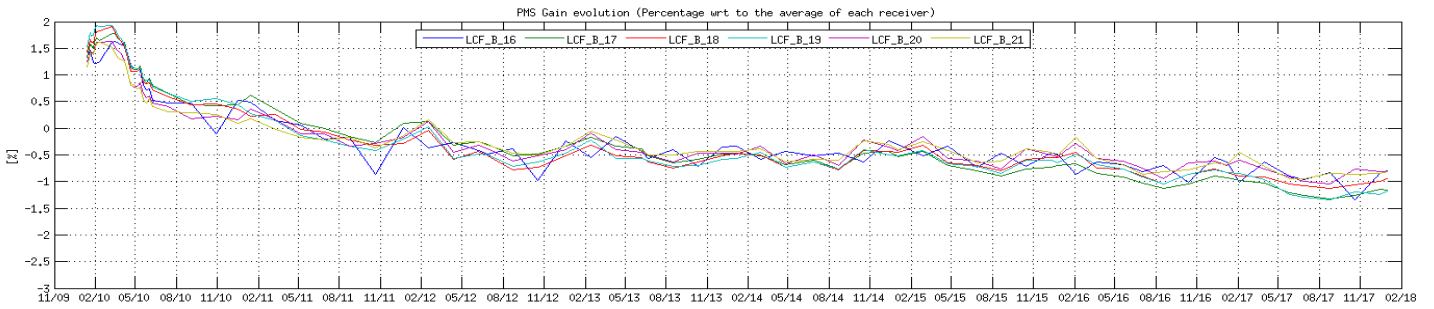



Figure 17 Evolution of the  $\Delta$  PMS Gain of the LICEFS in CMN H3

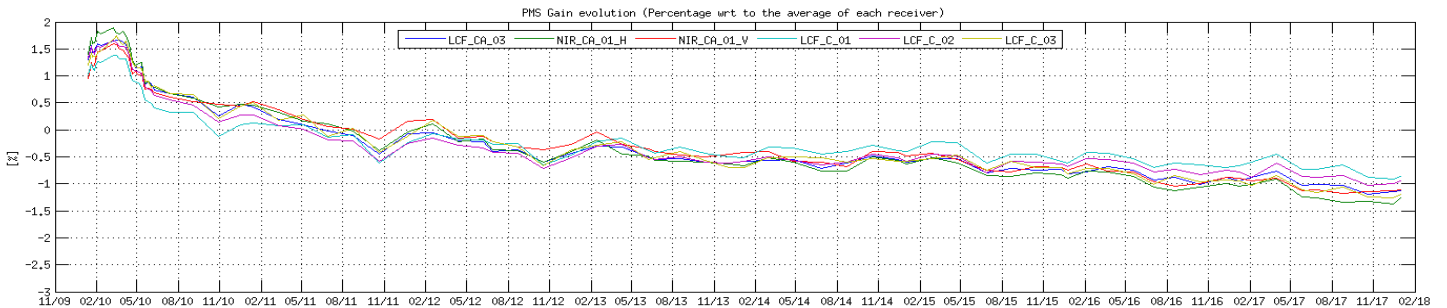


**Figure 18 Evolution of the  $\Delta$  PMS Gain of the LICEFS in CMN C1**

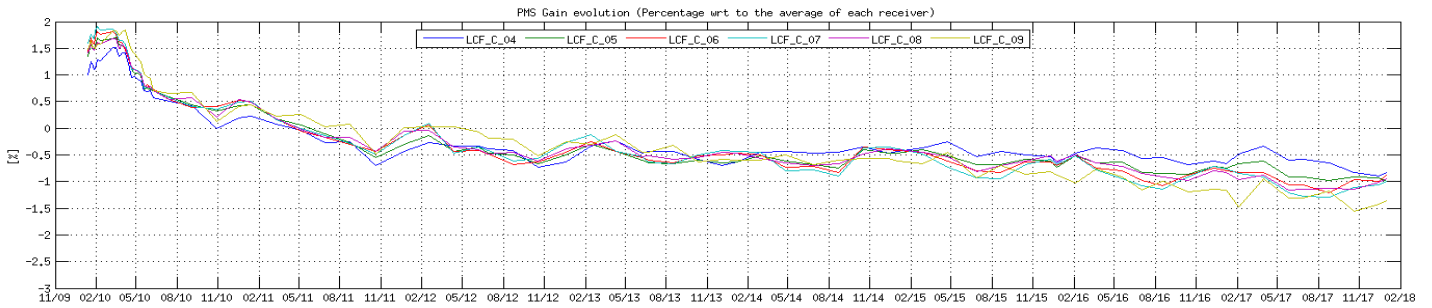

**Figure 19 Evolution of the  $\Delta$  PMS Gain of the LICEFS in CMN C2**

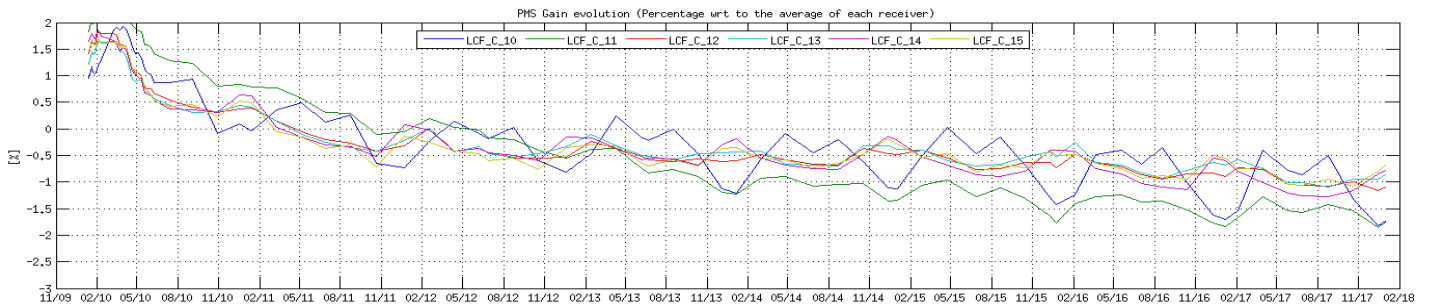

**Figure 20 Evolution of the  $\Delta$  PMS Gain of the LICEFS in CMN C3**

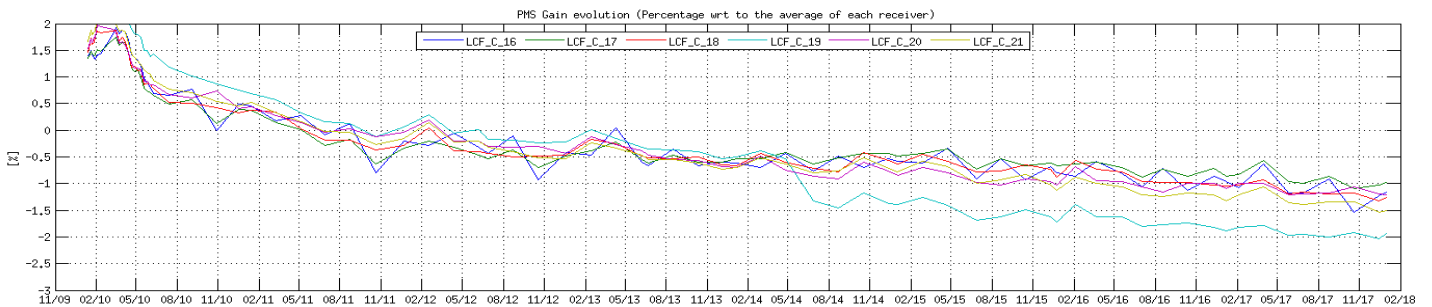

**Figure 21 Evolution of the  $\Delta$  PMS Offset of the LICEFS in CMN H1**

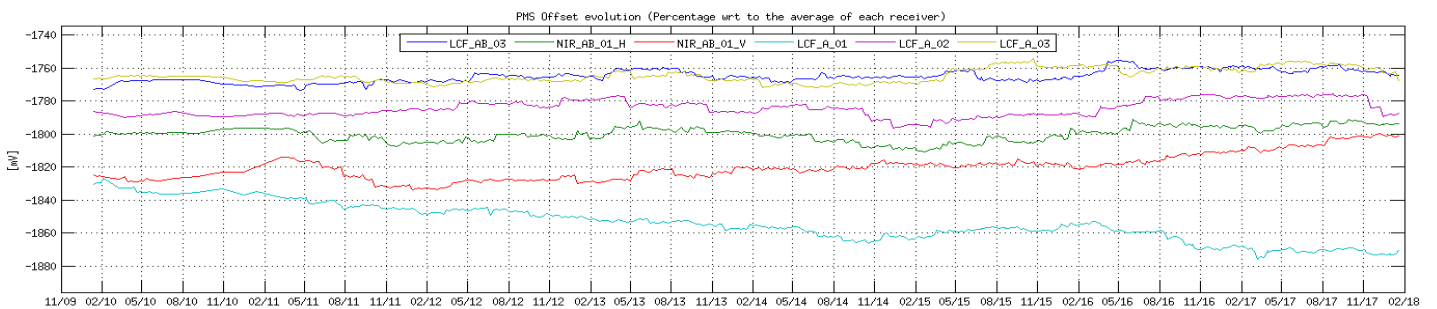


Figure 22 Evolution of the  $\Delta$  PMS Offset of the LICEFS in CMN A1

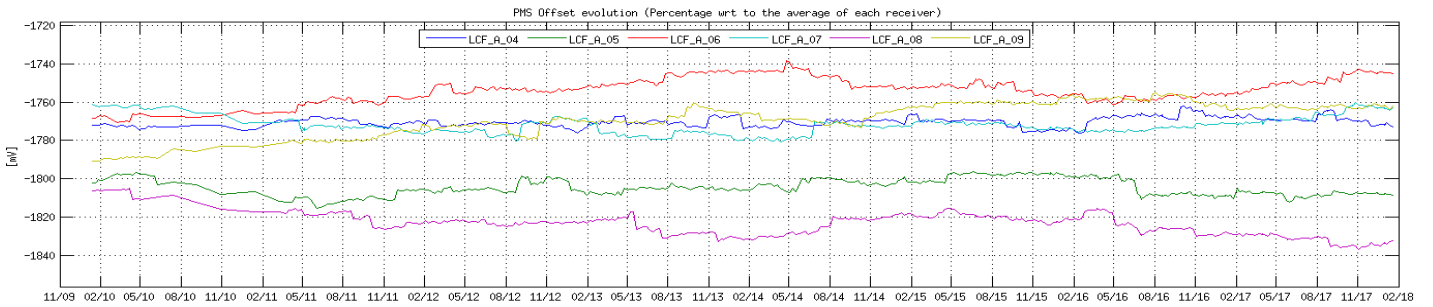


Figure 23 Evolution of the  $\Delta$  PMS Offset of the LICEFS in CMN A2

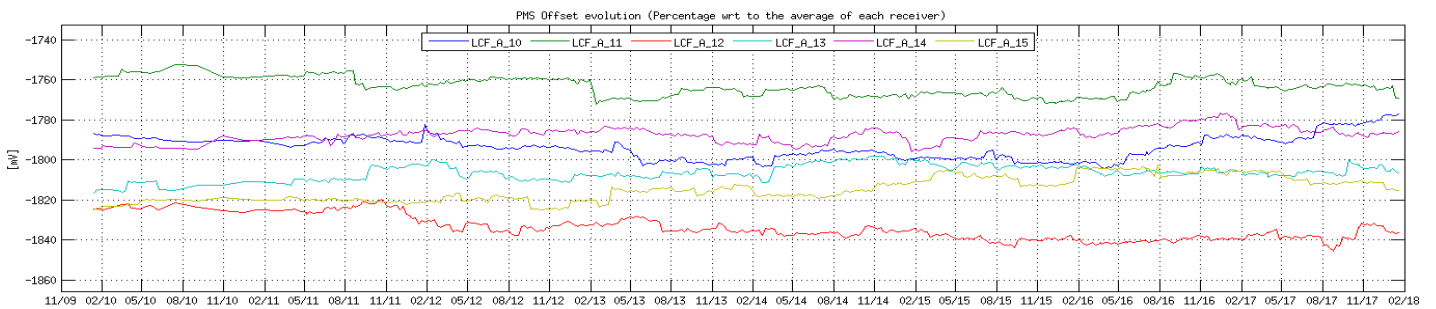


Figure 24 Evolution of the  $\Delta$  PMS Offset of the LICEFS in CMN A3



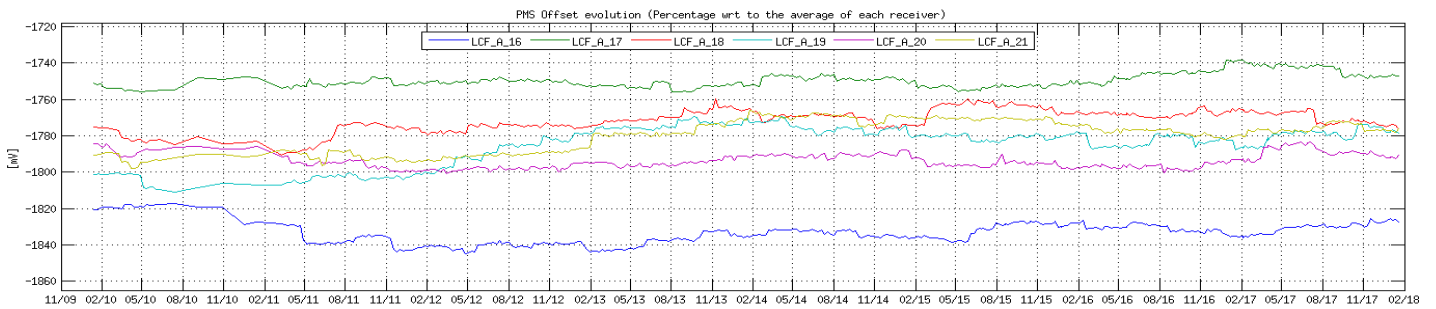



Figure 25 Evolution of the  $\Delta$  PMS Offset of the LICEFS in CMN H2

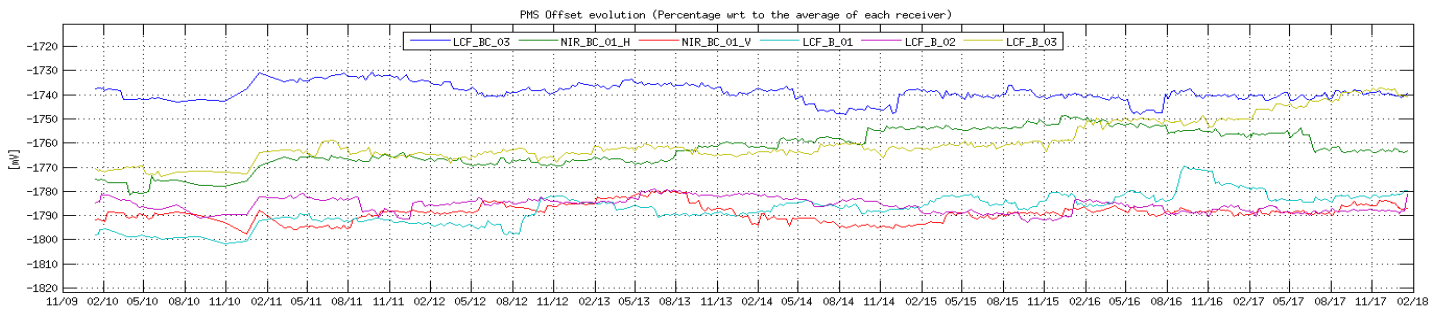


**Figure 26 Evolution of the  $\Delta$  PMS Offset of the LICEFS in CMN B1**

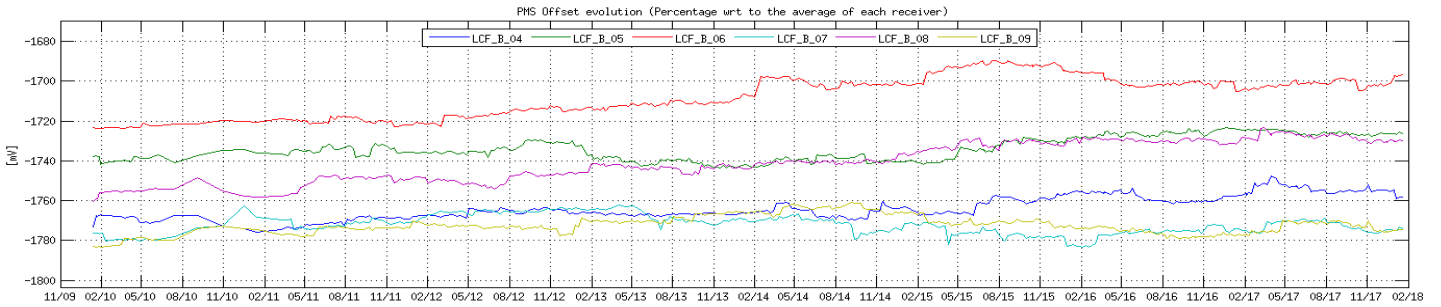

**Figure 27 Evolution of the  $\Delta$  PMS Offset of the LICEFS in CMN B2**

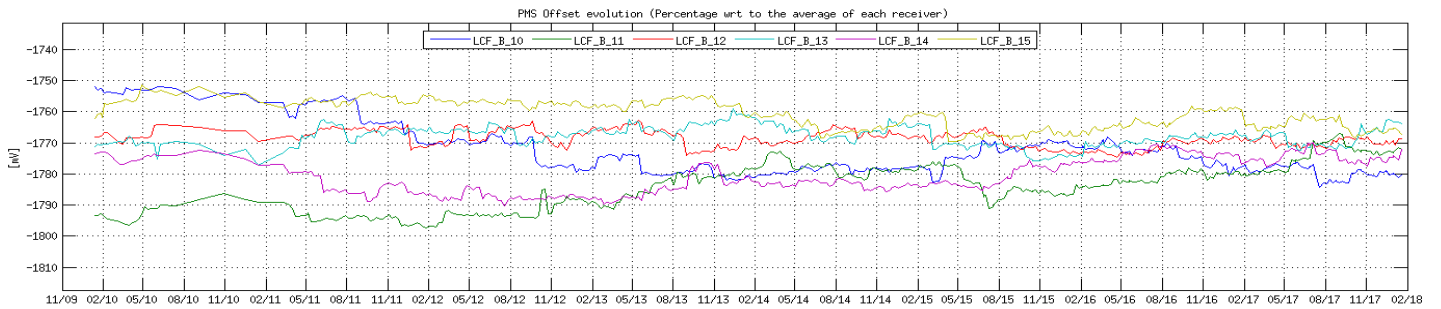

**Figure 28 Evolution of the  $\Delta$  PMS Offset of the LICEFS in CMN B3**

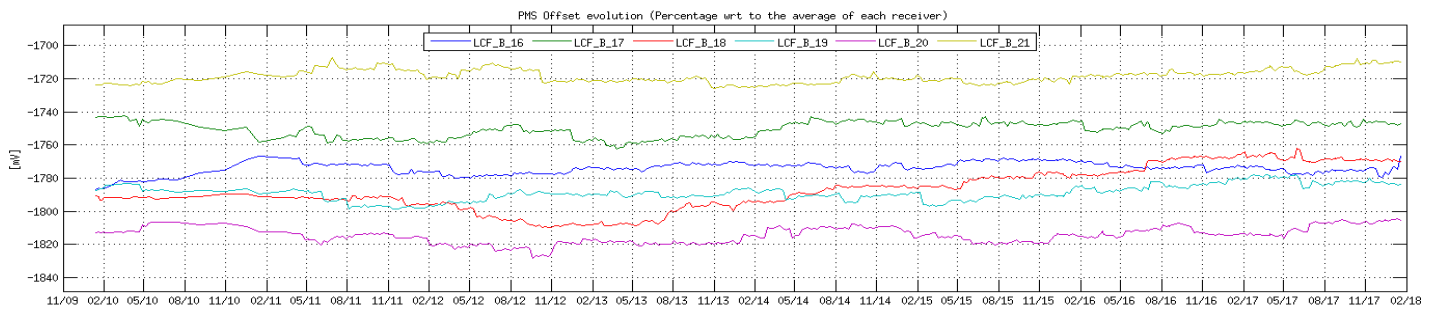

**Figure 29 Evolution of the  $\Delta$  PMS Offset of the LICEFS in CMN H3**

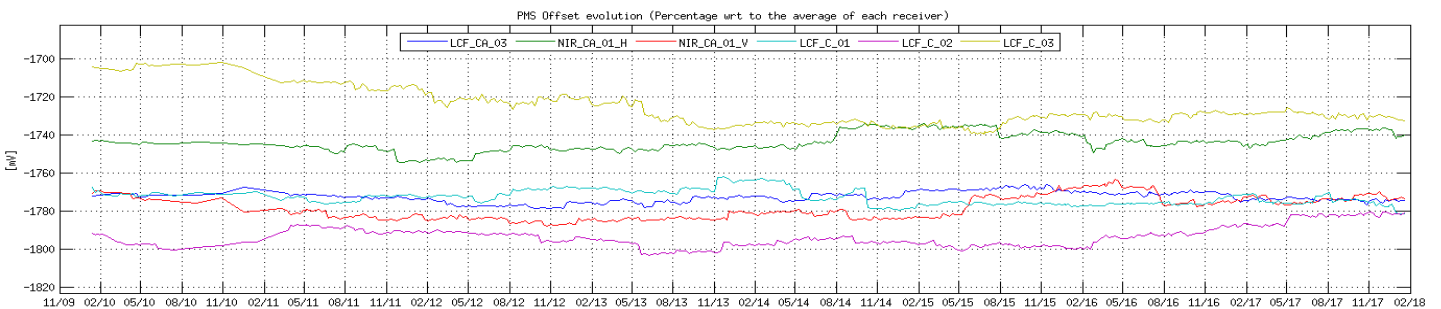




Figure 30 Evolution of the  $\Delta$  PMS Offset of the LICEFS in CMN C1

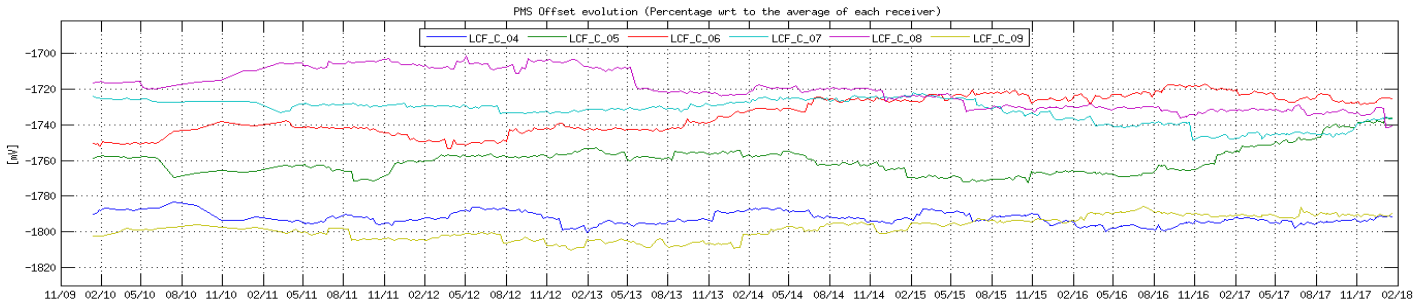


Figure 31 Evolution of the  $\Delta$  PMS Offset of the LICEFS in CMN C2



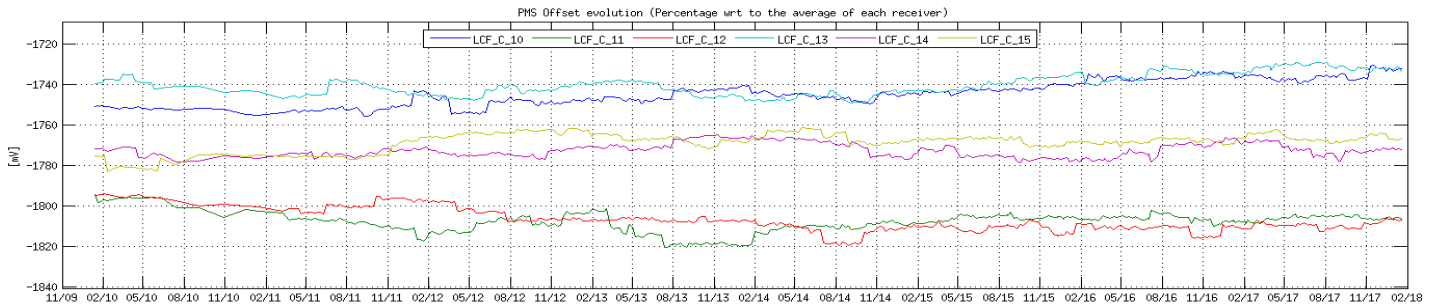



Figure 32 Evolution of the  $\Delta$  PMS Offset of the LICEFS in CMN C3

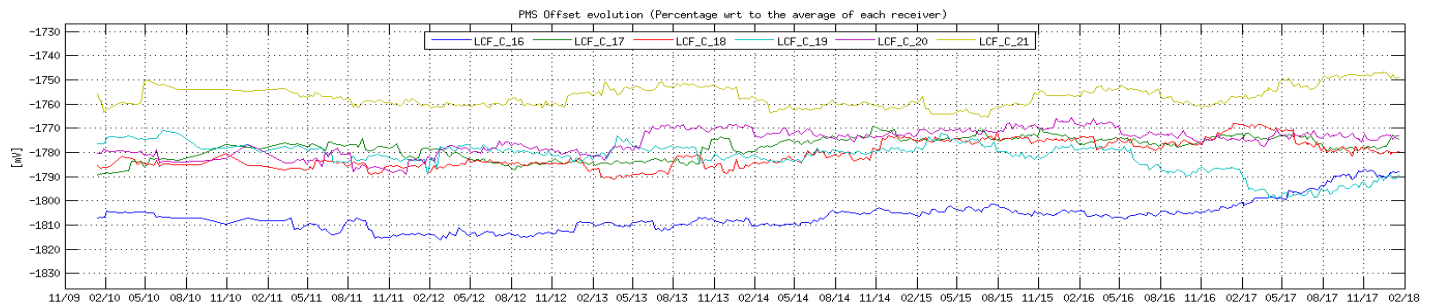


**Figure 33 Evolution of the average of the FWF Amplitude at the origin**

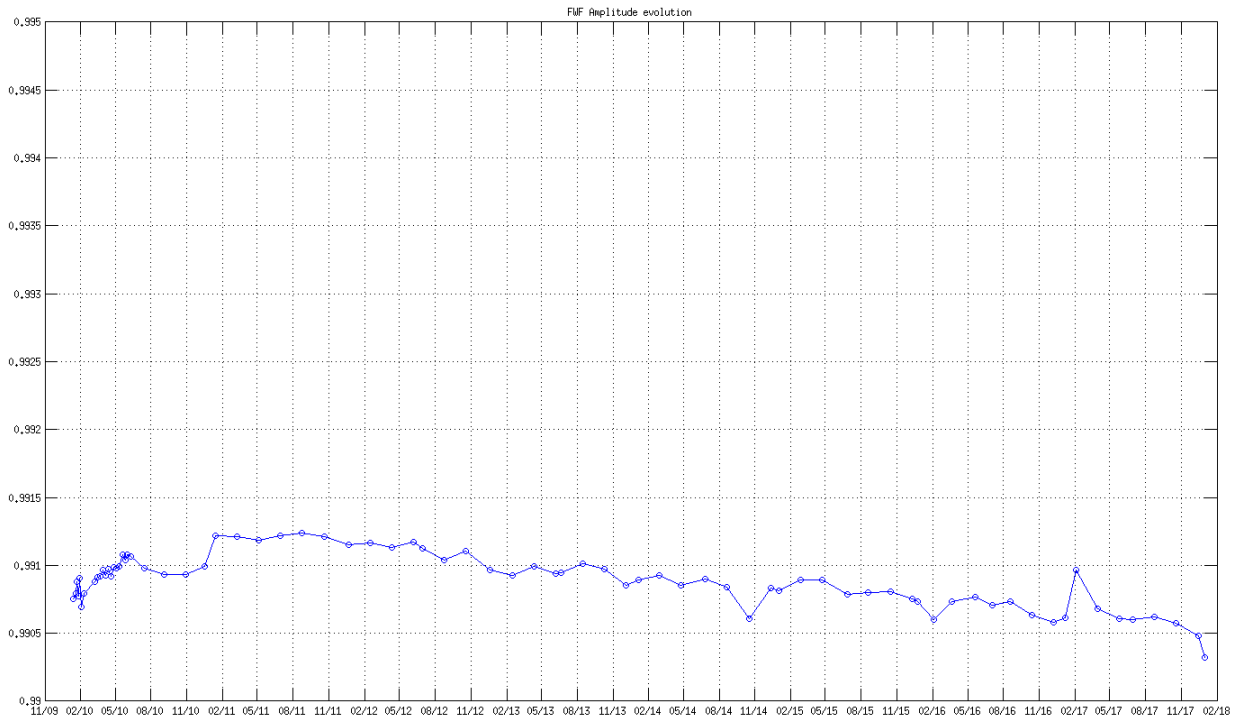

The evolution of the average of the correlator offsets does not show any significant drift. Also, the correlation offsets between receivers that do not share local oscillator remains much smaller than the correlation offsets between receivers sharing local oscillator. This result is expected since any residual correlated signal arriving to a pair of receivers, arrives through the local oscillator signal.

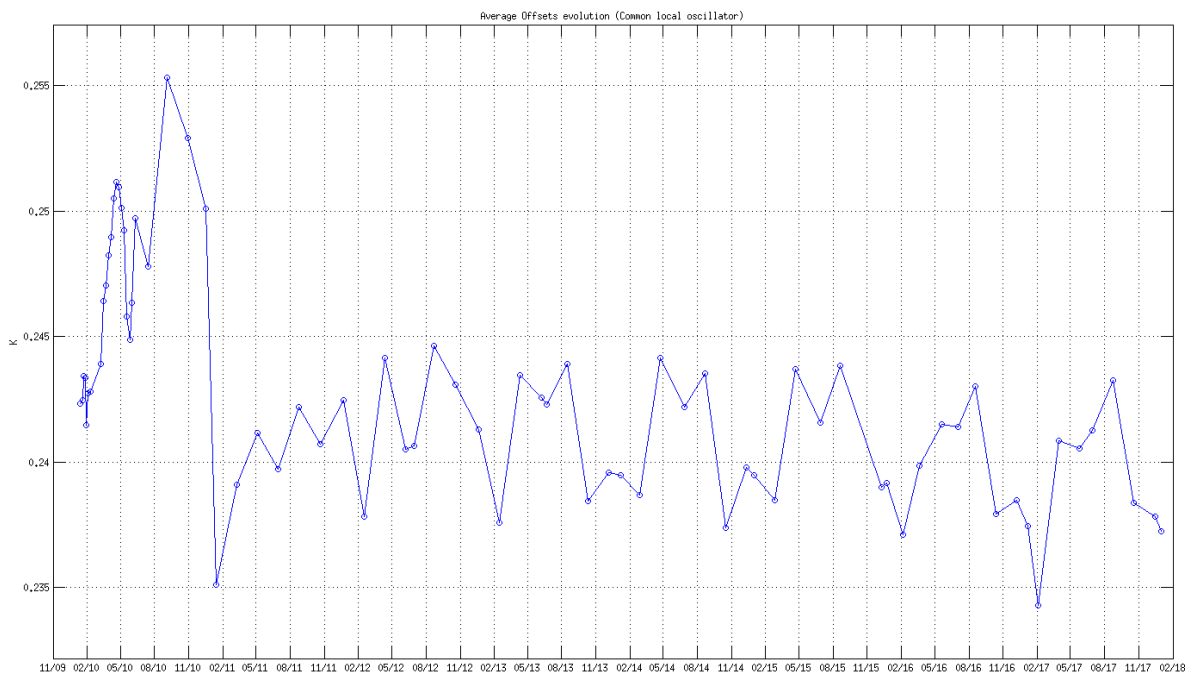

**Figure 34 Evolution of the average of the Correlator offsets for the baselines which share local oscillator**

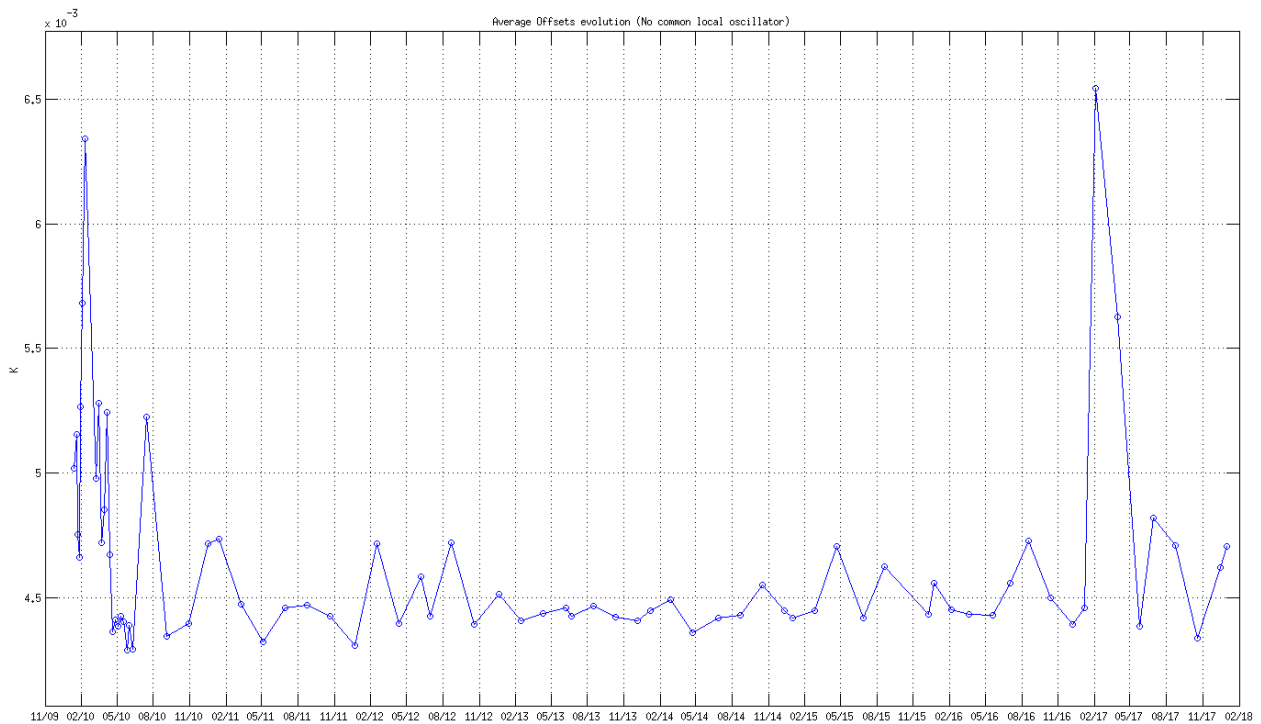

**Figure 35 Evolution of the average of the Correlator offsets for the baselines which do not share local oscillator**

## 5.2 Brightness Temperatures Trends over Dome-C Point (Antarctic)

The result of the monitoring of the evolution of the SMOS brightness temperature over Dome-C is shown in the Figure 36 (X and Y polarization at antenna frame for all the incidence angles) and in Figure 37, Figure 38 (H and V polarization at surface level for 42.0 degrees incidence angle for different areas of the Field Of View). The values are averaged every 18 days to reduce the noise and the value for July 2010 is subtracted and used as relative reference. In figure 37 are also shown in situ measurements (dome-C) from the DOMEX experiment averaged on the same period of the SMOS data.

The evolution of the brightness temperature trend over Dome-C does not show any significant drift except for the beginning of 2015 in H polarization. This drift was due to a change on surface geophysical condition: accumulation of snow since November 2014 and rapidly evolution of snow density on 22 March 2015 when a strong wind has changed the surface condition. This event has impacted the emissivity of the ice that was confirmed by on-site L-band measurement (Dome-x experiment) and from the Aquarius data set.

The brightness temperature V polarization measurements are quite stable since the beginning of the mission. The brightness temperature H polarization measurements are less stable and impacted by geophysical condition at surface level.



Figure 36: Dome-C X and Y polarization trends (all incidence angles)

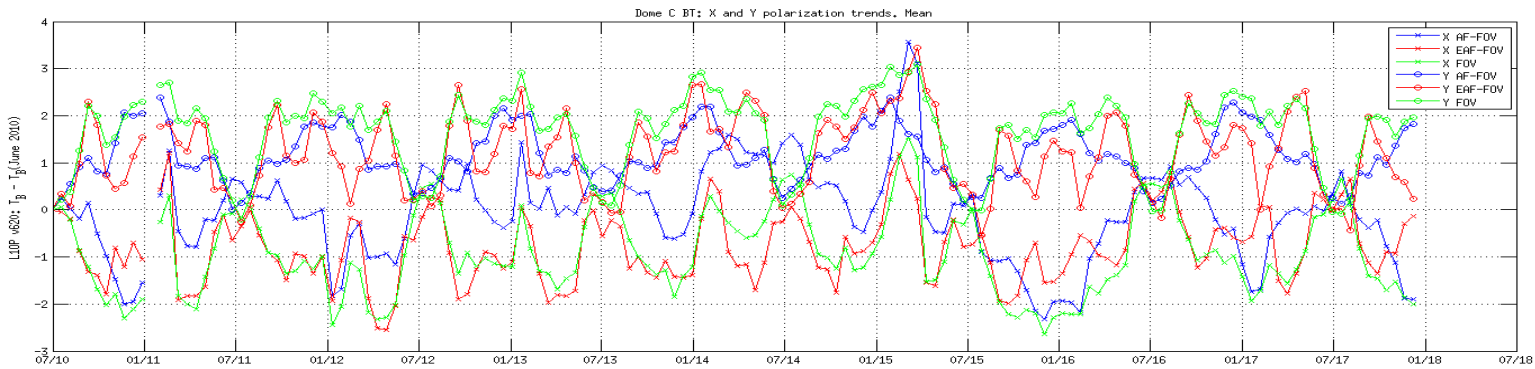


Figure 37: Dome-C H and V polarization trends in Alias Free zone (incidence angle 42°)


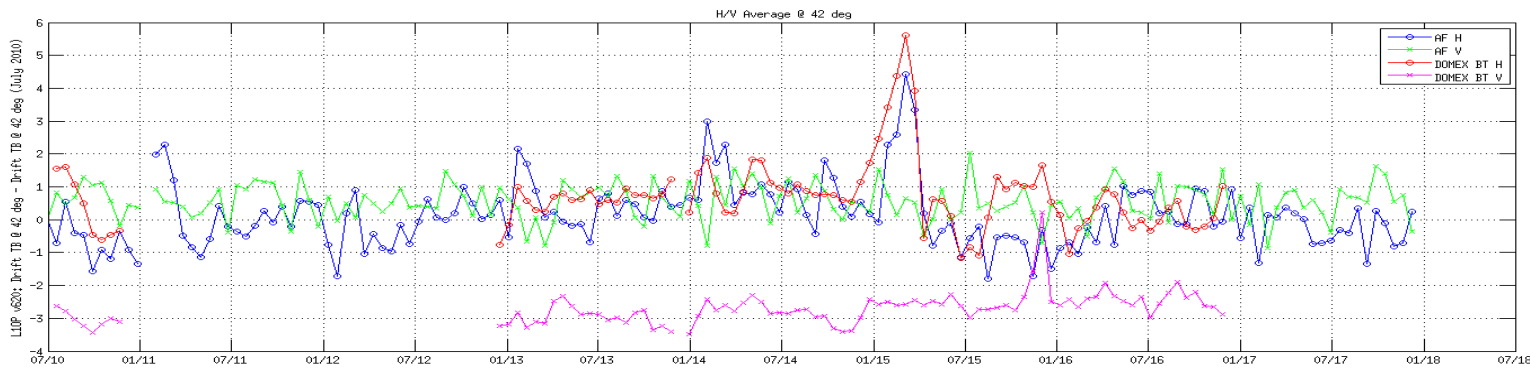


Figure 38: Dome-C H and V polarization trends in Extended Alias Free zone (incidence angle 42°)



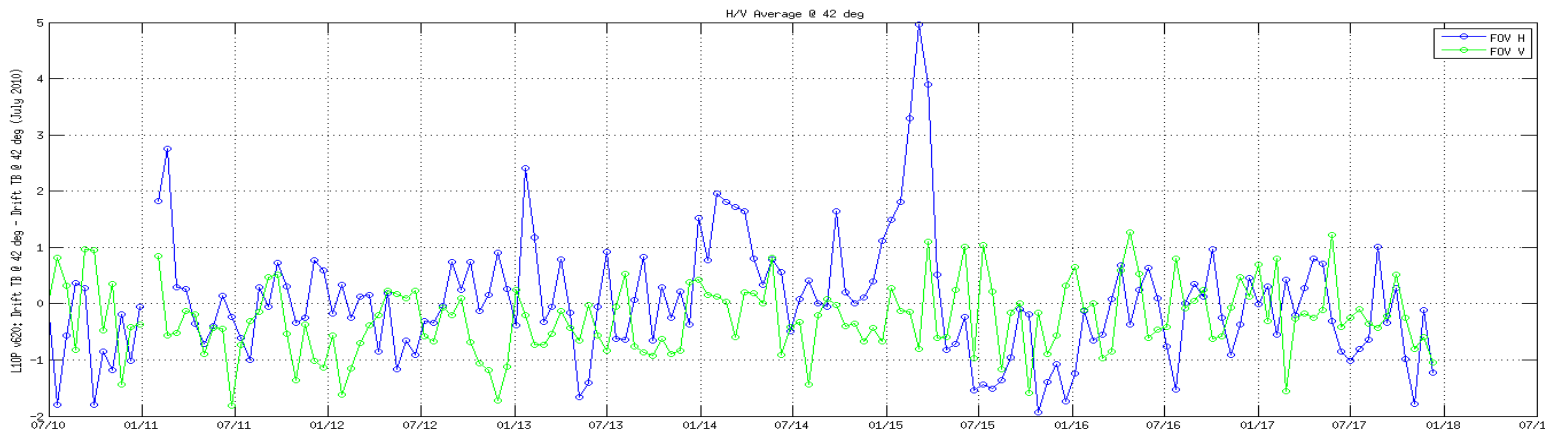

### 5.3 L2OS Ocean Target Transformation (OTT) Orchestration Analysis

The OTT correction is used by the L2OS processor for sea surface salinity retrieval. The correction is computed roughly on a daily basis by accumulating previous SMOS L1C measurements. The proper usage of the OTT correction is monitored and results are present in Figure-39 since June 2010. Figure-39 shows the OTT delay defined as the delta time between the L2OS science product sensing time and the OTT correction validity time and averaged over 1 day period. As the validity time of the OTT correction depends on the dataset used to compute the correction, this OTT delay represents a quality indicator for the selection of the best OTT correction (i.e. the better correction is achieved by using an OTT with validity time closer to the L2OS sensing time).

Nominal OTT delay interval goes from 4 to 8 days of delay. The most of the OTT delays fall in the middle of such values, 5-6 days. OTT delays outside the nominal interval reveals anomalies either in the data selection policy or problems in accumulating L1C dataset (i.e. data rejection due to bad quality or presence of RFI).

For the current SMOS L2OS v662 dataset, the next anomaly periods affecting the OTT delay (i.e. delay above 8 days) have been found:

- 1) From 21/12/2010 to 08/01/2011: Electrical Stability Test and Temperature Reading anomalies with consequent unavailability of L1C data and increased OTT delay
- 2) From 01/04/2014 to 08/04/2014 OTT delays above 8 days due to L1C rejected data for OTT correction. Data rejection was due to corrupted L1C measurement affected by RFI.

A detailed list of OTT delays is available in the L2OS Quality Control reprocessing report accessible [here](#).

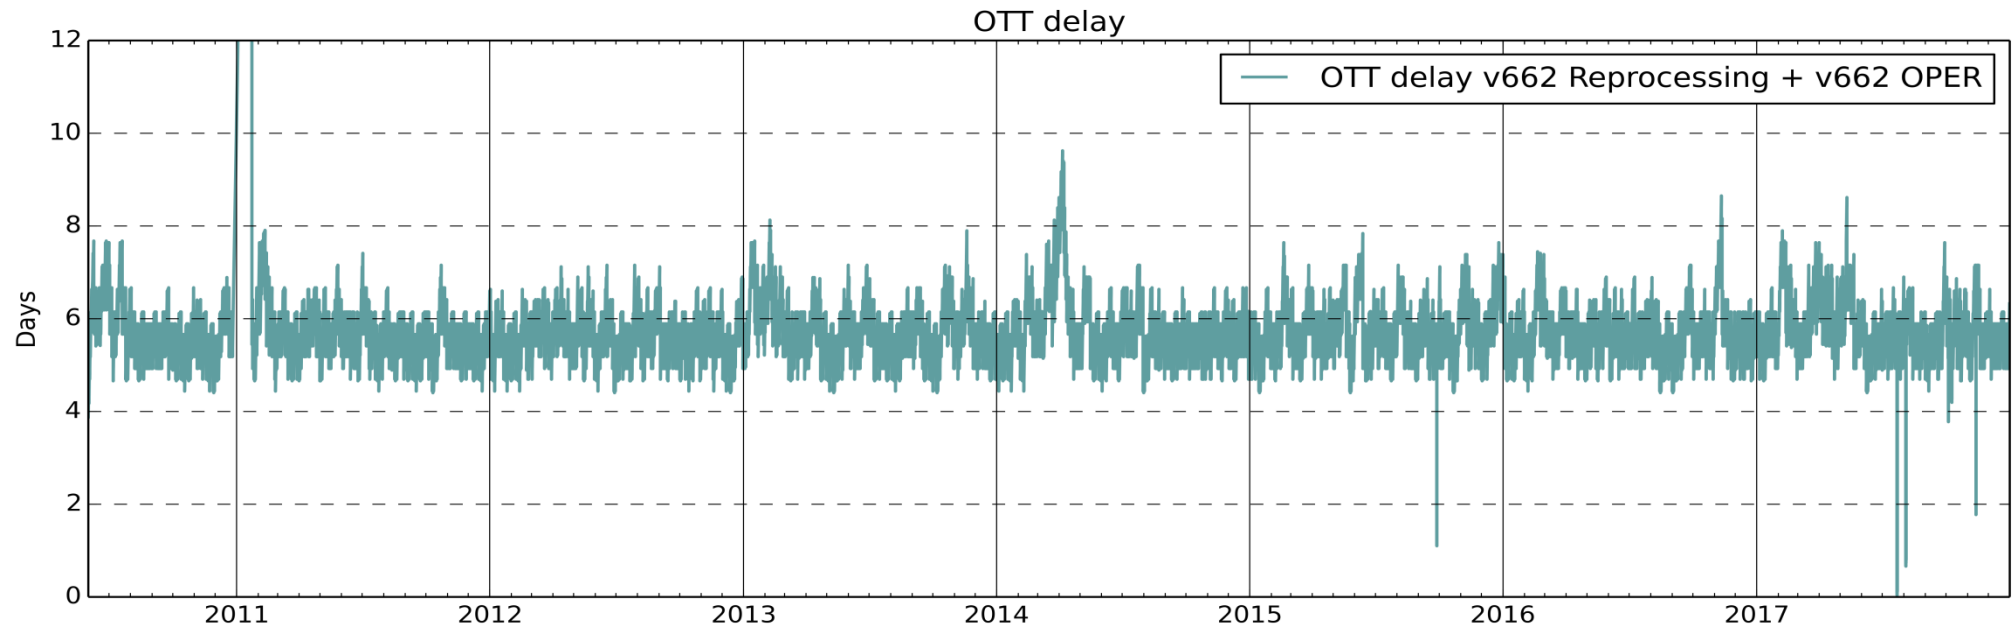


Figure 39: OTT delay per semi-orbit (Delta time between each L2OS product start time and the OTT correction validity start time file).




## 5.4 L2OS Retrievals assessment

Analysis on the overall quality of the L2OS dataset is based on the evolution of the number of 'good quality' retrievals as shown in Figure-40 (ascending orbits) and in Figure-41 (descending orbits).


These 'Good Quality' retrievals are taken into account for two different areas: Open Ocean (more than 800km away from coastline) and Near Coast (within 800 km from the coastline).

Also, retrievals have been computed for the land-sea contamination corrected and uncorrected Sea Surface Salinity (SSS\_corr, SSS\_uncorr) and averaged on a 4-day basis, providing an estimation of the average number of retrievals per product. The average number of good quality retrievals is around 25k in open ocean and 4k near coast, as expected by the ESL. The seasonal variation is more evident in near coast than in open ocean.

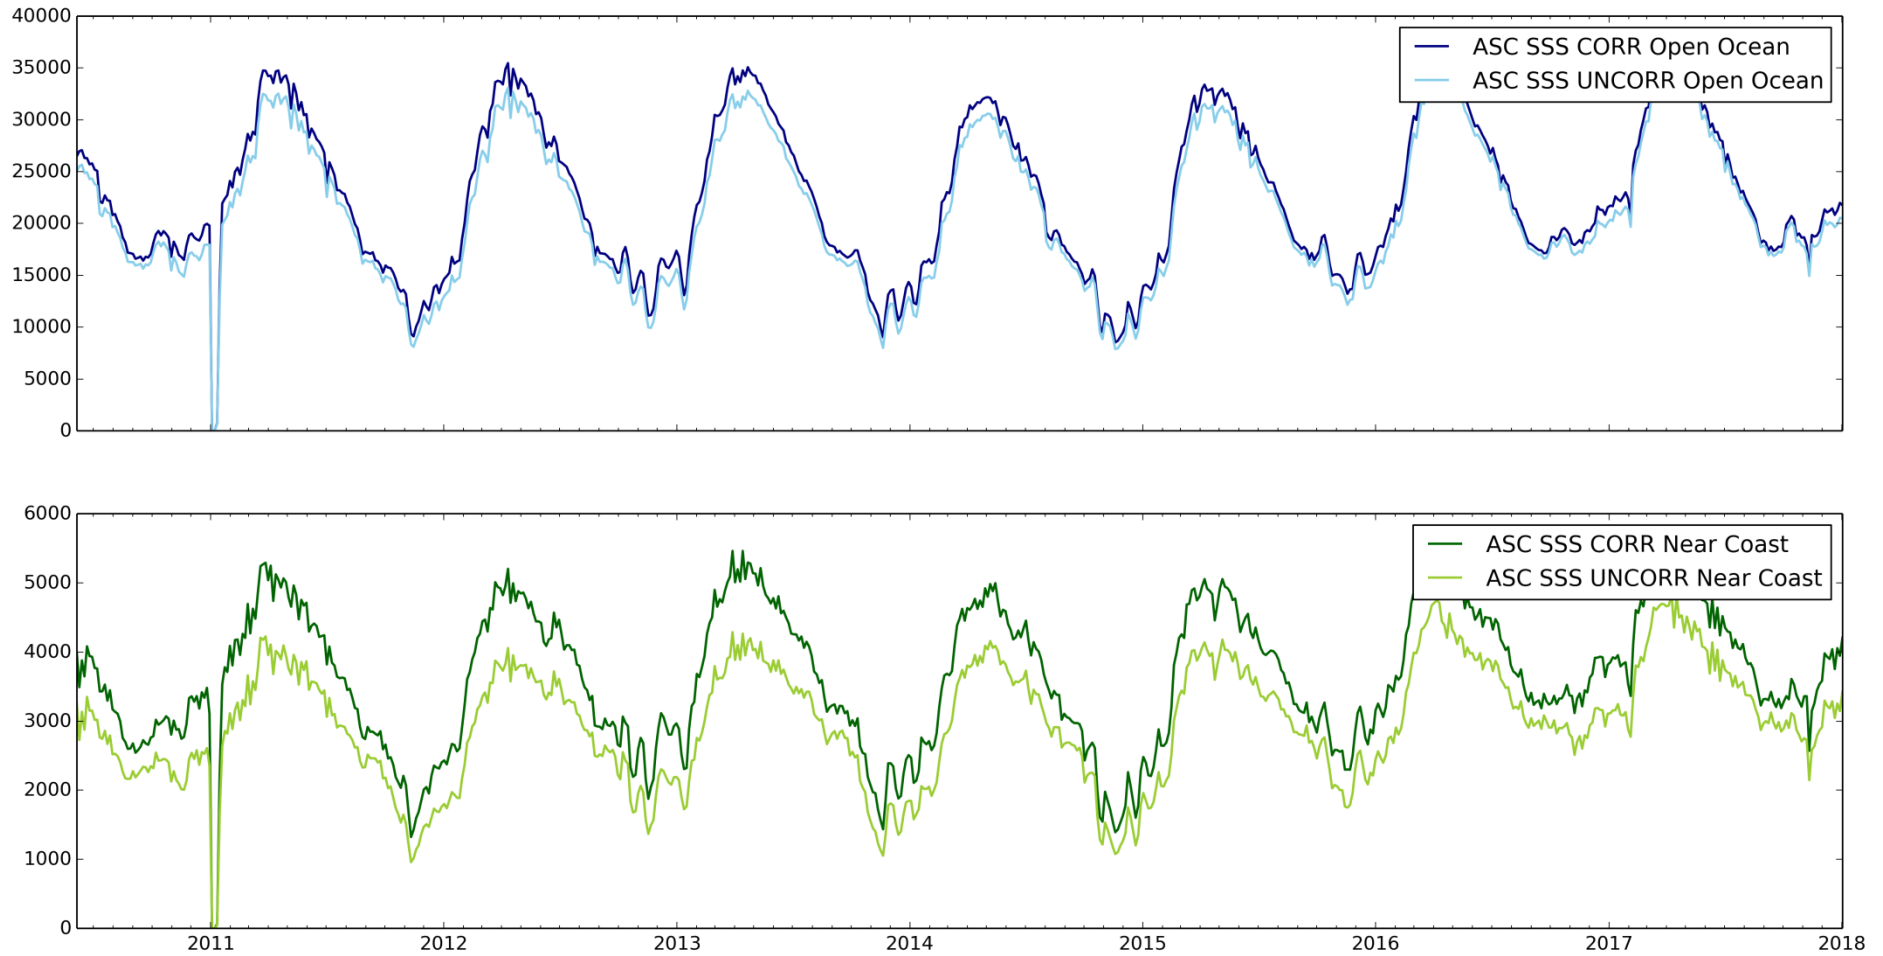

Number of successful salinity retrievals per retrieval case (Open Ocean and Near Coast). Computed as 4-day per product average.

**Figure 40: ASC Open Ocean and Near Coast L2OS Good Quality Retrievals**

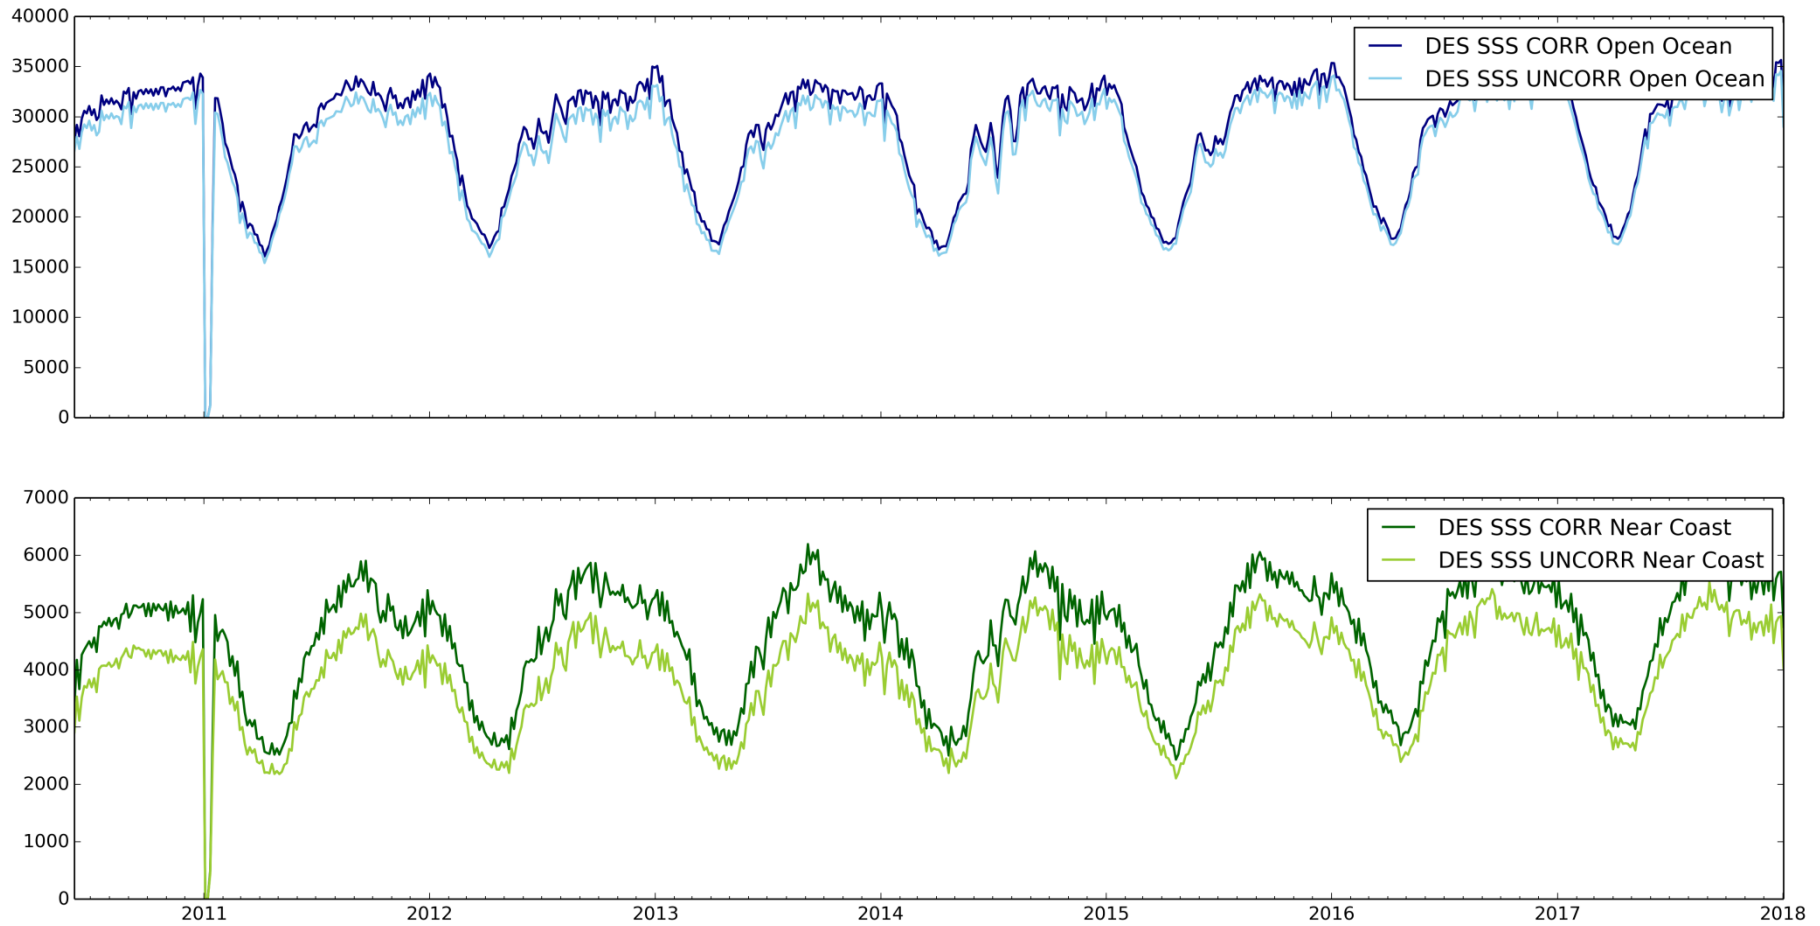

Number of successful salinity retrievals per retrieval case (Open Ocean and Near Coast). Computed as 4-day per product average.

**Figure 41: DES Open Ocean and Near Coast L2OS Good Quality Retrievals**



## 5.5 L2SM Retrievals assessment

Analysis on the overall quality of the L2SM v650 dataset is based in the number of successful retrievals annotated in the SMUDP2 header file.

Such parameter is extracted for each retrieval branch. For some of the retrieval branches (i.e. Soil and Forest cover) this means a successful Soil Moisture retrieval. For the rest of branches, however, the parameter retrieved could be surface dielectric constant, optical depth, surface roughness or surface temperature. Please, refer to L2SM processor product specification for more details at this respect.

The metric is aggregated every 4 days in order to remove rapid variations originated due to geophysical changes in the surface. Also, it is provided as an average value per product, both in absolute value and in percentage with respect the total retrievals per branch. The metric is computed separately between ASC and DES semi-orbits, as the time of the overpass is different (ascending pass equator crossing at 06.00UTC a.m. , descending pass equator crossing at 06.00UTC p.m.) .

An increase on the number of retrievals for the 3 first years of operations is apparent. The origin of this is the reduction of RFI sources as a consequence of reporting the RFI case to the Spectrum Management Authorities since launch. In addition, V650 shows a higher number of retrievals with respect to v620. This is expected due to the change in the land cover auxiliary information especially relevant for Forest cover, but it is also apparent for other retrieval branches (e.g. Soil).

The relative total number of successfully retrievals presents some seasonal behaviour specially for descending semi-orbits. For some of the parameters (i.e. Forest, Snow) this bearing is especially clear for both ascending and descending, and may be related with surface changes across the seasons..



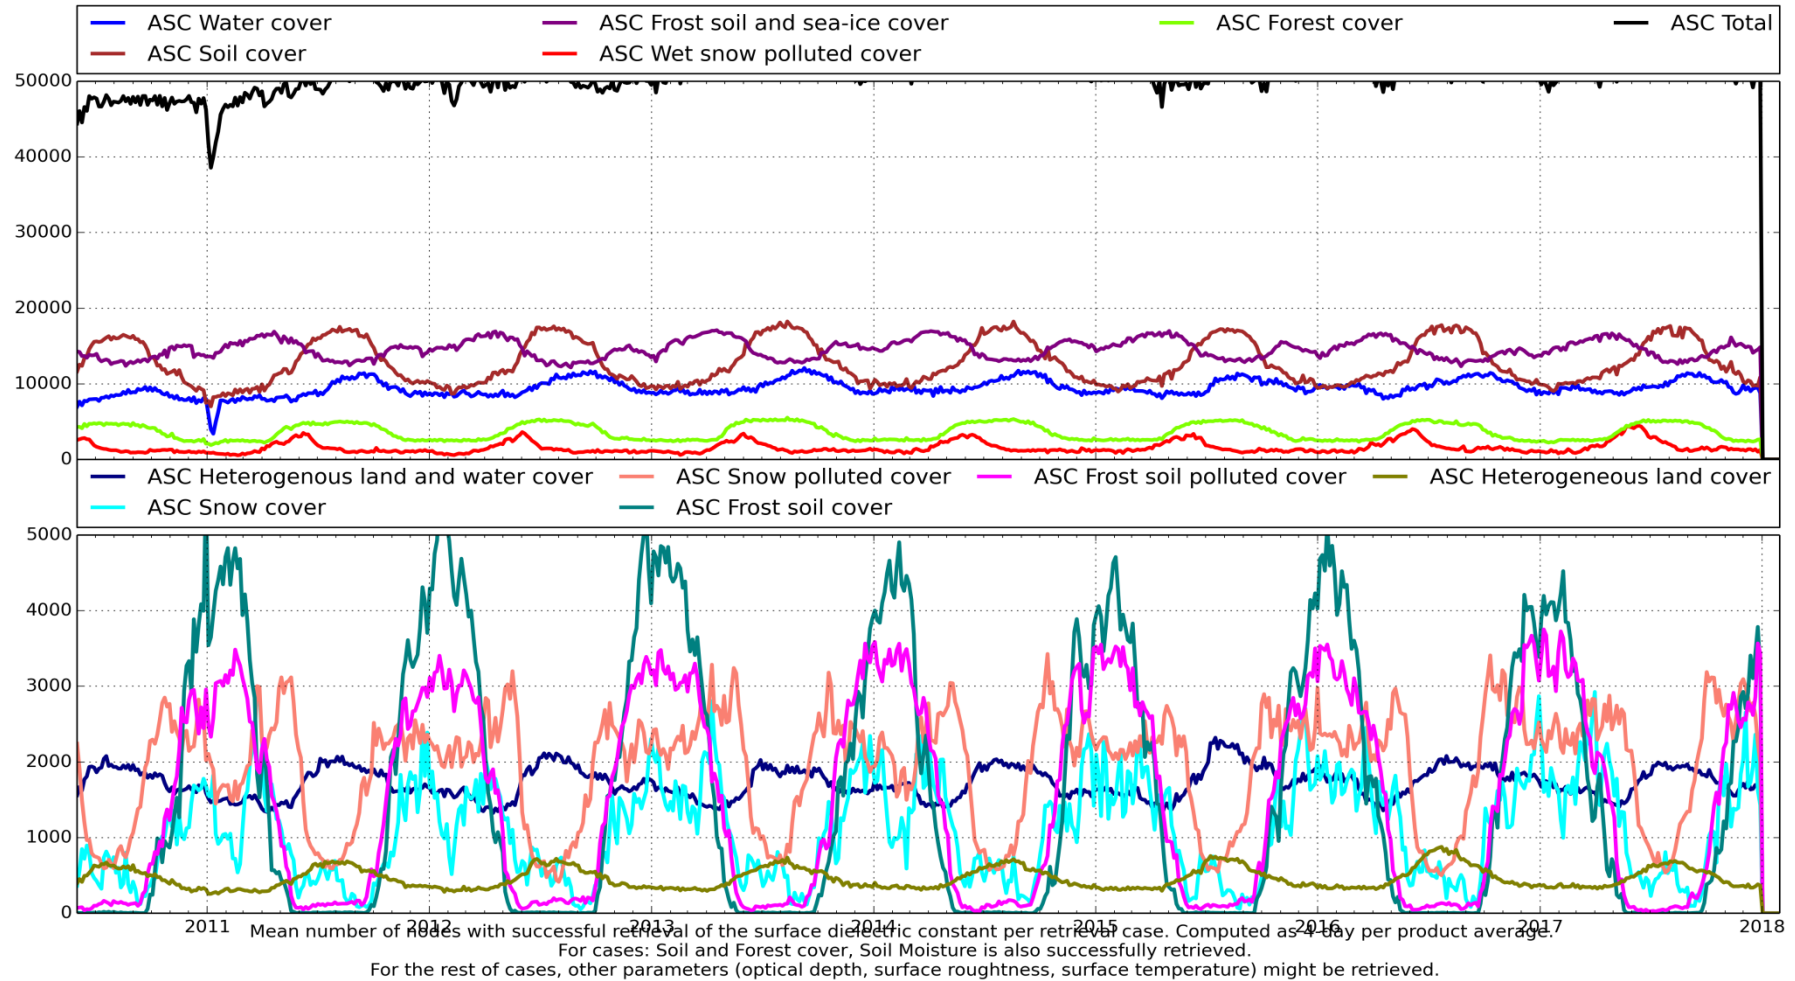


Figure 42: L2SM v650 Mean Retrievals Absolute - ASC



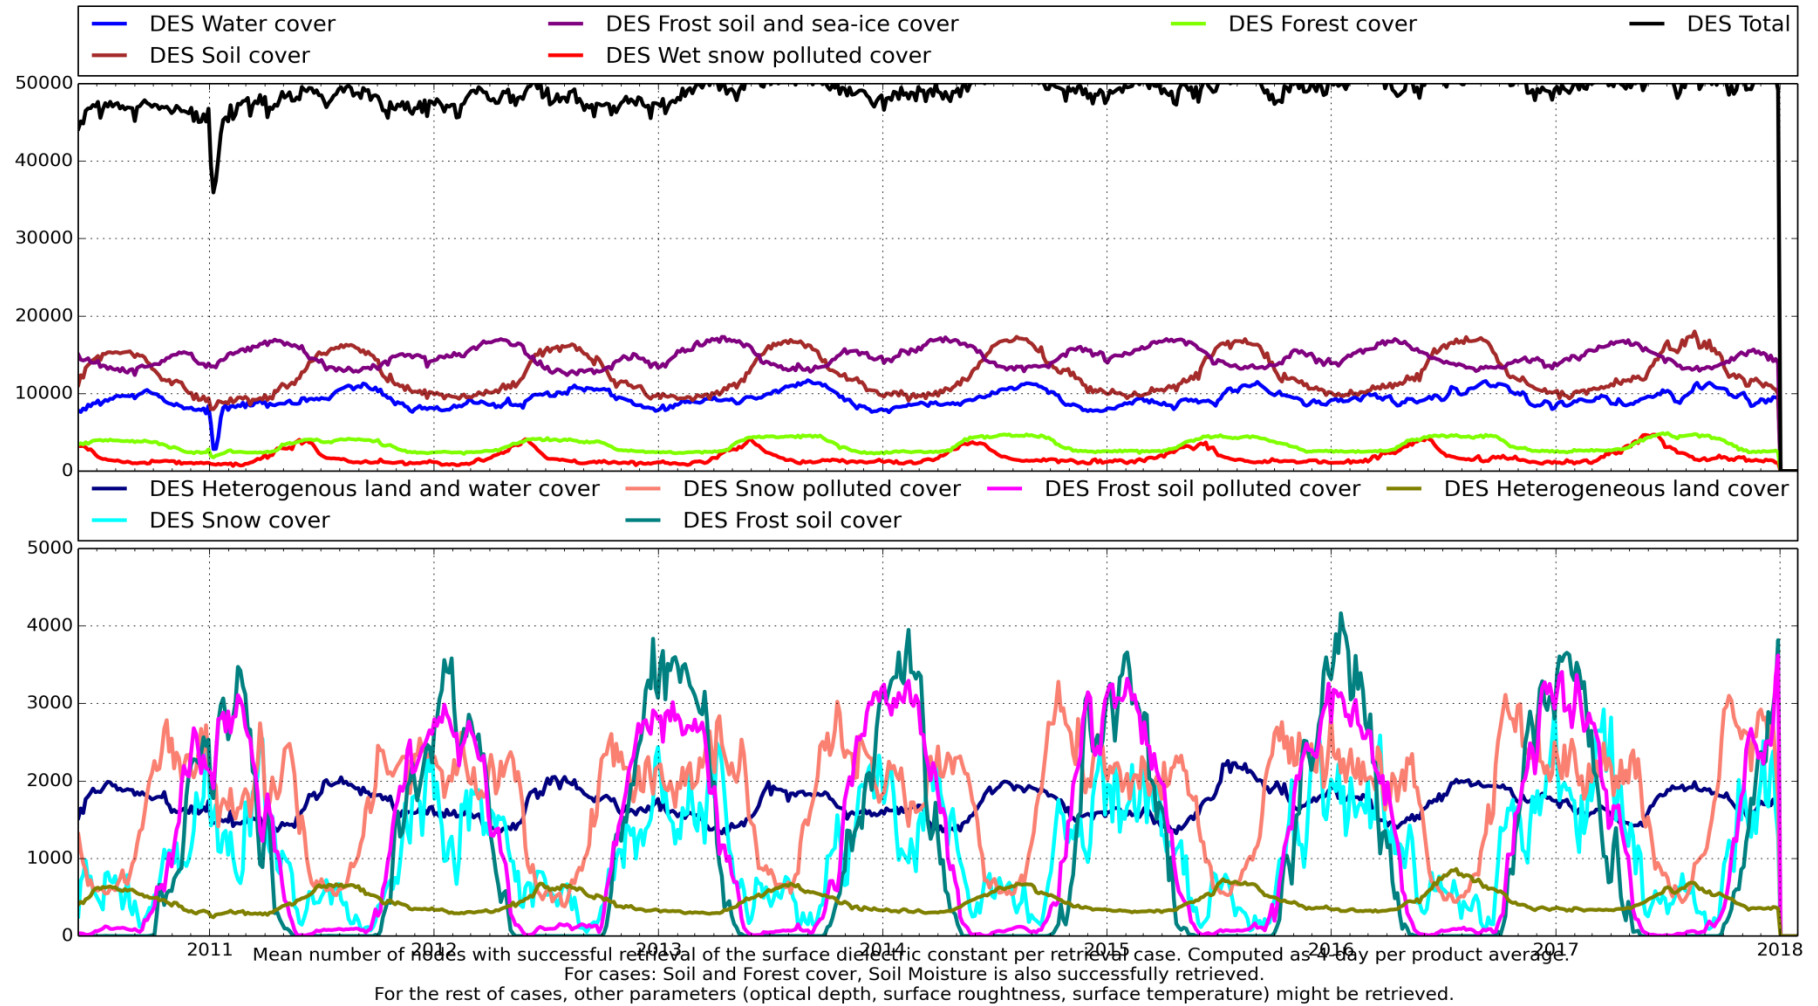


**Figure 43: L2SM v650 Mean Retrievals Absolute - DES**

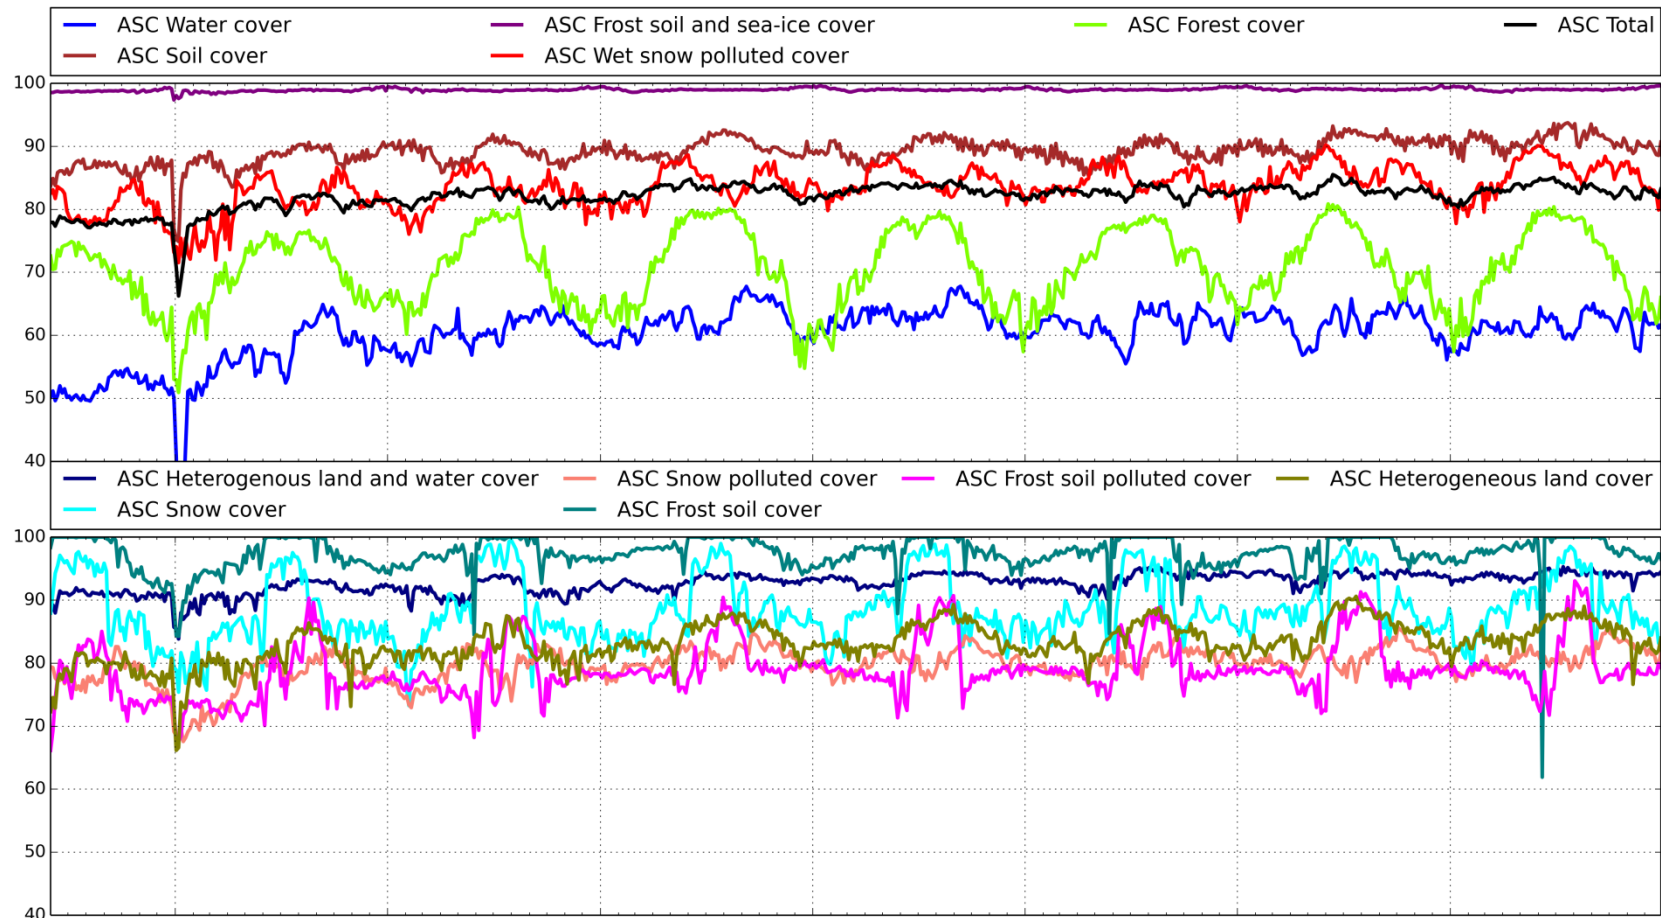

% number of nodes with successful retrieval of the surface dielectric constant per retrieval case, with respect to the total number of nodes for such retrieval case. Computed as 4-day per product average.  
For cases: Soil and Forest cover, Soil Moisture is also successfully retrieved.  
For the rest of cases, other parameters (optical depth, surface roughness, surface temperature) might be retrieved.

**Figure 44: L2SM v650 Mean Retrievals Relative - ASC**

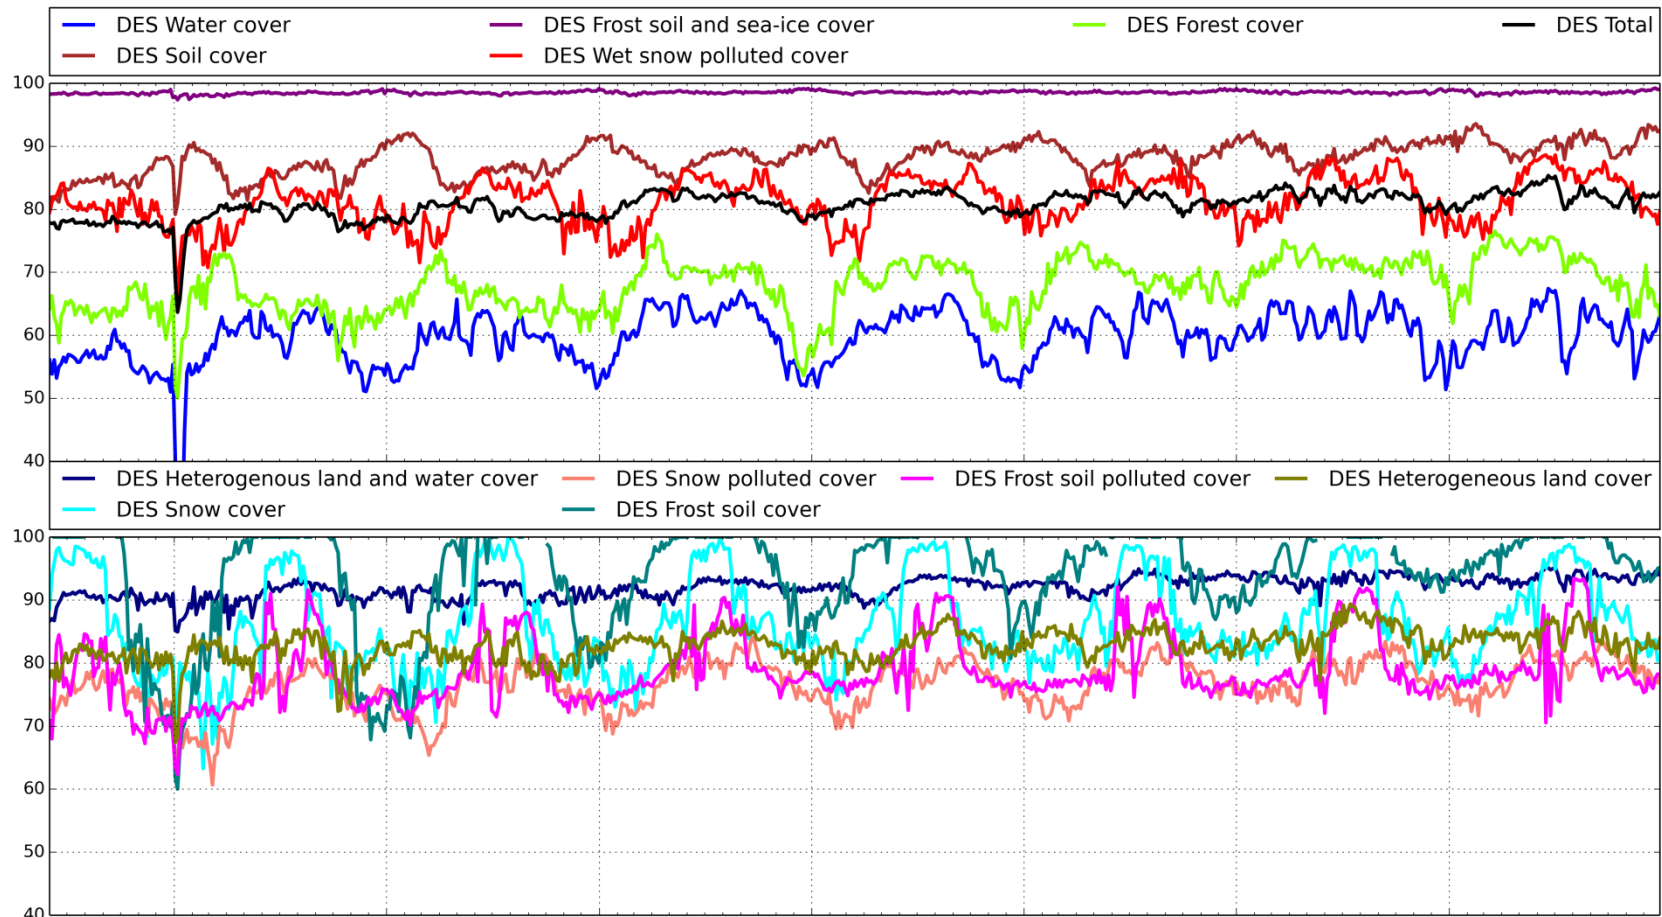

% number of nodes with successful retrieval of the surface dielectric constant per retrieval case, with respect to the total number of nodes for such retrieval case. Computed as 4-day per product average.  
For cases: Soil and Forest cover, Soil Moisture is also successfully retrieved.  
For the rest of cases, other parameters (optical depth, surface roughness, surface temperature) might be retrieved.

**Figure 45: L2SM v650 Mean Retrievals Relative - DES**



## 6. PRODUCT QUALITY ANALYSIS

Level 1 data quality for December has found to be nominal except in the time intervals listed in the section 4.5. Weekly maps for ascending and descending passes for the Stokes 1, Stokes 3 and Stokes 4 in videos format can be found at:

[https://earth.esa.int/web/guest/missions/esa-operational-eo-missions/smos/content/-/asset\\_publisher/t5Py/content/data-quality-7059](https://earth.esa.int/web/guest/missions/esa-operational-eo-missions/smos/content/-/asset_publisher/t5Py/content/data-quality-7059)

All the artificial patterns in the maps can be explained by the presence of RFIs.

Level 2 Soil Moisture data quality for December has found to be nominal. Weekly maps for ascending and descending passes for the soil moisture in videos format can be found at:

[https://earth.esa.int/web/guest/missions/esa-operational-eo-missions/smos/content/-/asset\\_publisher/t5Py/content/data-quality-7059](https://earth.esa.int/web/guest/missions/esa-operational-eo-missions/smos/content/-/asset_publisher/t5Py/content/data-quality-7059)

Since 19<sup>th</sup> December 2016 auxiliary dataset from the NOAA Interactive Multisensor Snow and Ice Mapping System (IMS) is used by the SMOS soil moisture level 2 processor to represent the snow cover extent. The NOAA IMS, based on data acquired by various sensors, provides a better representation of the snow cover compared to previously snow density information from ECMWF forecast. Globally the impact in terms of soil moisture is not significant.

Level 2 Sea Surface Salinity data quality is nominal in the reporting period. Weekly maps for ascending and descending passes for good retrieved sea surface salinity in videos format can be found at:

[https://earth.esa.int/web/guest/missions/esa-operational-eo-missions/smos/content/-/asset\\_publisher/t5Py/content/data-quality-7059](https://earth.esa.int/web/guest/missions/esa-operational-eo-missions/smos/content/-/asset_publisher/t5Py/content/data-quality-7059)

The lack of good retrieval at descending passes during the boreal winter season is less evident for winter season 2015/2016, 2016/2017 and 2017/2018, This fact points out that thermal effect on the instrument due to eclipse is only one contributor and others sources (e.g. L-band Sun signal direct or reflected) impacting the number of good retrieval are under investigation by the calibration team and level 2 expert support laboratory.

For more details on soil moisture and sea surface salinity retrieval algorithms and caveats in data usage see the level 2 Algorithm Theoretical Baseline Documents and the read-me-first note available here:

[https://earth.esa.int/web/guest/missions/esa-operational-eo-missions/smos/content/-/asset\\_publisher/t5Py/content/data-processors-7632](https://earth.esa.int/web/guest/missions/esa-operational-eo-missions/smos/content/-/asset_publisher/t5Py/content/data-processors-7632)



## 7. ADF CONFIGURATION AT THE END OF THE REPORTING PERIOD

ADF File Type	Operational ADF Version (DPGS Baseline)	Updated
AUX_APDL	SM_OPER_AUX_APDL__20050101T000000_20500101T000000_300_004_3.EEF	No
AUX_APDNRT	SM_OPER_AUX_APDNRT_20050101T000000_20500101T000000_208_001_6.EEF	No
AUX_APDS	SM_OPER_AUX_APDS__20050101T000000_20500101T000000_300_004_3.EEF	No
AUX_ATMOS	SM_OPER_AUX_ATMOS_20050101T000000_20500101T000000_001_010_3.EEF	No
AUX_BFP	SM_OPER_AUX_BFP__20050101T000000_20500101T000000_340_004_3.EEF	No
AUX_BNDLST	SM_OPER_AUX_BNDLST_20050101T000000_20160308T000000_303_004_3 SM_OPER_AUX_BNDLST_20160308T000000_20500101T000000_303_004_3	No
AUX_BSCAT	SM_OPER_AUX_BSCAT__20050101T000000_20500101T000000_300_003_3	No
AUX_BULL_B	<b>SM_OPER_AUX_BULL_B_20171002T000000_20500101T000000_120_001_3</b>	Yes
AUX_BWGHT	SM_OPER_AUX_BWGHT__20050101T000000_20500101T000000_340_006_3.EEF	No
AUX_CNFFAR	SM_OPER_AUX_CNFFAR_20050101T000000_20500101T000000_100_002_3.EEF	No
AUX_CNFL0P	SM_OPER_AUX_CNFL0P_20050101T000000_20500101T000000_001_005_3.EEF	No
AUX_CNFL1P	SM_OPER_AUX_CNFL1P_20110206T010100_20500101T000000_620_054_3.EEF	No
AUX_CNFNRT	SM_OPER_AUX_CNFNRT_20050101T000000_20500101T000000_620_012_3.EEF	No
AUX_CNFOSD	SM_OPER_AUX_CNFOSD_20050101T000000_20500101T000000_001_027_3.EEF	No
AUX_CNFOSF	SM_OPER_AUX_CNFOSF_20050101T000000_20500101T000000_001_030_3.EEF	No
AUX_CNFSMD	SM_OPER_AUX_CNFSMD_20050101T000000_20500101T000000_001_016_3.EEF	No
AUX_CNFSMF	SM_OPER_AUX_CNFSMF_20050101T000000_20500101T000000_001_016_3.EEF	No
AUX_DFFFRA	SM_OPER_AUX_DFFFRA_20050101T000000_20500101T000000_001_006_3	No
AUX_DFFLMX	SM_OPER_AUX_DFFLMX_20050101T000000_20500101T000000_001_006_3	No
AUX_DFFSOI	SM_OPER_AUX_DFFSOI_20050101T000000_20500101T000000_001_002_3	No
AUX_DFFXYZ	SM_OPER_AUX_DFFXYZ_20050101T000000_20500101T000000_001_003_3	No
AUX_DGG	SM_OPER_AUX_DGG__20050101T000000_20500101T000000_300_003_3	No
AUX_DGGXYZ	SM_OPER_AUX_DGGXYZ_20050101T000000_20500101T000000_001_004_3	No
AUX_DISTAN	SM_OPER_AUX_DISTAN_20050101T000000_20500101T000000_001_011_3	No
AUX_DTBCUR	SM_OPER_AUX_DTBCUR__20120504T203936_20500101T000000_624_001_1 Initialization file for the deployment of the L2OS V62x processor.	No
AUX_ECOLAI	SM_OPER_AUX_ECOLAI_20050101T000000_20500101T000000_305_006_3	No
AUX_ECMCDF	SM_OPER_AUX_ECMCDF_20101109T000000_20500101T000000_001_003_3.EEF SM_OPER_AUX_ECMCDF_20050101T000000_20101109T000000_001_003_3	No
AUX_FAIL	SM_OPER_AUX_FAIL__20050101T000000_20500101T000000_300_004_3.EEF	No
AUX_FLTSEA	SM_OPER_AUX_FLTSEA_20050101T000000_20500101T000000_001_010_3.EEF	No
AUX_FOAM	SM_OPER_AUX_FOAM__20050101T000000_20500101T000000_001_011_3	No
AUX_GAL_OS	SM_OPER_AUX_GAL_OS_20050101T000000_20500101T000000_001_011_3	No
AUX_GAL_SM	SM_OPER_AUX_GAL_SM_20050101T000000_20500101T000000_001_003_3	No
AUX_GAL2OS	SM_OPER_AUX_GAL2OS_20050101T000000_20500101T000000_001_016_3	No
AUX_GALAXY	SM_OPER_AUX_GALAXY_20050101T000000_20500101T000000_300_004_3	No
AUX_GALNIR	SM_OPER_AUX_GALNIR_20050101T000000_20500101T000000_300_003_3	No
AUX_LANDCL	SM_OPER_AUX_LANDCL_20050101T000000_20500101T000000_001_005_3.EEF	No
AUX_LCF	SM_OPER_AUX_LCF__20050101T000000_20500101T000000_500_016_3.EEF	No
AUX_LSMASK	SM_OPER_AUX_LSMASK_20050101T000000_20500101T000000_300_003_3	No
AUX_MASK	SM_OPER_AUX_MASK__20050101T000000_20500101T000000_300_002_3	No
AUX_MISP	SM_OPER_AUX_MISP__20050101T000000_20500101T000000_300_004_3.EEF	No
AUX_MN_WEF	SM_OPER_AUX_MN_WEF_20050101T000000_20500101T000000_001_002_3	No
AUX_MOONT	SM_OPER_AUX_MOONT__20050101T000000_20500101T000000_300_002_3	No
AUX_MSOTT	SM_OPER_AUX_MSOTT__20050101T000000_20500101T000000_001_001_3	No



AUX_N256__	SM_OPER_AUX_N256__20050101T000000_20500101T000000_504_002_3	No
AUX_NIR__	SM_OPER_AUX_NIR__20050101T000000_20500101T000000_500_010_3.EEF	No
AUX_NRTMSK	SM_OPER_AUX_NRTMSK_20050101T000000_20500101T000000_207_001_6	No
AUX_OTT1D_	SM_OPER_AUX_OTT1D__20120504T203936_20500101T000000_624_001_1 Initialization file for the deployment of the L2OS V662 processor. Since level 2 OS processor V62x the new file is generated on routine basis by the level 2 post processor	No
AUX_OTT1F_	SM_OPER_AUX_OTT1F__20170502T085844_20500101T000000_625_001_1 Initialization file for the deployment of the L2OS V662 processor. Since level 2 OS processor V62x the new file is generated on routine basis by the level 2 post processor	No
AUX_OTT2D_	SM_OPER_AUX_OTT2D__20120504T203936_20500101T000000_624_001_1 Initialization file for the deployment of the L2OS V662 processor. Since level 2 OS processor V62x the new file is generated on routine basis by the level 2 post processor	No
AUX_OTT2F_	SM_OPER_AUX_OTT2F__20170502T085844_20500101T000000_625_001_1 Initialization file for the deployment of the L2OS V662 processor. Since level 2 OS processor V62x the new file is generated on routine basis by the level 2 post processor	No
AUX_OTT3D_	SM_OPER_AUX_OTT3D__20120504T203936_20500101T000000_624_001_1 Initialization file for the deployment of the L2OS V662 processor. Since level 2 OS processor V62x the new file is generated on routine basis by the level 2 post processor	No
AUX_OTT3F_	SM_OPER_AUX_OTT3F__20170502T085844_20500101T000000_625_001_1 Initialization file for the deployment of the L2OS V662 processor. Since level 2 OS processor V62x the new file is generated on routine basis by the level 2 post processor	No
AUX_PATT__	SM_OPER_AUX_PATT__20050101T000000_20500101T000000_320_003_3	No
AUX_PLM__	SM_OPER_AUX_PLM__20050101T000000_20500101T000000_600_008_3.EEF	No
AUX_PMS__	SM_OPER_AUX_PMS__20050101T000000_20500101T000000_600_011_3.EEF	No
AUX_RFI__	SM_OPER_AUX_RFI__20050101T000000_20500101T000000_300_003_3	No
AUX_RFILST	Since level 1 processor version V62x the file is generated by CATDS on monthly basis	No
AUX_RGHNS1	SM_OPER_AUX_RGHNS1_20050101T000000_20500101T000000_001_016_3	No
AUX_RGHNS2	SM_OPER_AUX_RGHNS2_20050101T000000_20500101T000000_001_013_3	No
AUX_RGHNS3	SM_OPER_AUX_RGHNS3_20050101T000000_20500101T000000_001_016_3.EEF	No
AUX_SGLINT	SM_OPER_AUX_SGLINT_20050101T000000_20500101T000000_001_012_3	No
AUX_SOIL_P	File discontinued since level 2 SM processor V62x SM_OPER_AUX_SOIL_P_20050101T000000_20500101T000000_001_002_3	No
AUX_SPAR__	SM_OPER_AUX_SPAR__20110112T091500_20500101T000000_340_012_3.EEF SM_OPER_AUX_SPAR__20100111T120700_20110112T091500_340_011_3.EEF SM_OPER_AUX_SPAR__20050101T000000_20100111T120700_340_010_3.EEF	No
AUX_SSS__	SM_OPER_AUX_SSS__20050101T000000_20500101T000000_001_014_3	No
AUX_SUNT__	SM_OPER_AUX_SUNT__20050101T000000_20500101T000000_300_002_3	No
AUX_WEF__	SM_OPER_AUX_WEF__20050101T000000_20500101T000000_001_003_3	No
MPL_ORBSCT	SM_OPER_MPL_ORBSCT_20091102T031142_20500101T000000_410_001_1	No



## **APPENDIX A. CONFIGURATION DOCUMENT LIST**

The list of internal documents used for the generation of this report is:

- Unavailability.xls
- Details\_Calibrations.xls
- SMOS-CEC-VEG-IPF-REP-0609\_v2.00\_SMOS\_Auxiliary\_Data\_File\_List.pdf



***This Page Is Intentionally Blank***





***End of Document***