
	EAS Daily Report for NRT	<u>data:</u> <u>01-Aug-2013</u>	IDEAS 9
		1. Overview	
		Check	Status
		Server check: science-pds.cryosat.esa.int	Nominal
		Server check: calval-pds.cryosat.esa.int	Nominal
		Product Software Check	Nominal
Report Production Date	: 02-Aug-2013	Product Format Check	Nominal
Report Froduction Date	. 02-Aug-2013	Product Header Analysis	Nominal
Data Used:	L1 and L2 Fast Delivery Marine	Auxiliary Data File Usage	See Section 5.3 and 6.3
Data Useu.	Mode (FDM), and CAL Data	Correction Error Flags	See Sections 5.4 and 6.4
		Measurement Confidence Flags	See Sections 5.5, 6.5, 6.6 and 6.8
	— —		
Mission / Instrument News			
31-Jul-2013 None			
01-Aug-2013 None	-Aug-2013 None		
02-Aug-2013 Nothing plan	ned		

2. G	ilobal Coverage
Global Coverage (north pole view)	Global Coverage (south pole view)
01-	hal Couprage

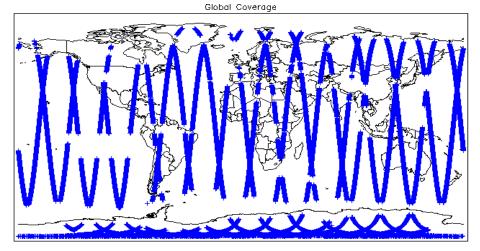

3. Instrument Configuration

The SIRAL instrument configuration for the day of acquisition is provided below.

SIRAL instrument(s) in use:	SIRAL - A
Star Tracker(s) in use:	Star Tracker 1

4. Level 1B Calibration Data Quality Check

4.1 L1 CAL Product Format Check

Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL). Number of products with errors: 0

4.2 L1 CAL Product Header Analysis

For all products, a series of pre-defined checks are carried out on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the processing chain.

Number of products with errors:

0

4.3 L1 CAL Auxiliary Data File Usage Check

Each product is checked for missing Data Set Descriptors wrt a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct.

Number of products with errors:

4.4 L1 CAL Measurement Confidence Flags

CryoSat Cal1 and Cal2 data includes a measurement confidence flag word (field 11) for each measurement record. The bit value of this flag indicates any problems when set.

Number of products with errors:

5. Level 1B FDM Data Quality Check

5.1 L1B FDM Product Format Check

Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL).

Number of products with errors:

5.2 L1B FDM Product Header Analysis

For all products, a series of pre-defined checks are carried out on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain. Number of products with errors: 0

5.3 L1B FDM Auxilary Data File Usage Check

Each product is checked for missing Data Set Descriptors wrt a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct.

Number of products with errors: 42		
Product	AUX File	Comment
All SIR_FDM_1B products up to 20130801T062457 (37 products)	CS_OPER_AUXISEAMPS_20130801T000000_20130801T000000_ 0001; CS_OPER_AUXISEAMPS_20130801T060000_20130801T060000_ 0001	Missing Forecast Auxiliary Files:
All SIR_FDM_1B products up to 20130801T080453 (42 products)	CS_OPER_AUXIIONGIM_20130801T000000_20130801T235959_0 001	Missing Forecast Auxiliary File: CS_OPER_AUXIIONGIM

5.4 L1B Correction Error Flags

Each product is checked to detect auxiliary corrections flagged by the ground-station processing chain as missing or containing errors.

Number of products with errors:	42		
Product	۲	Fest Failed	Description
All SIR_FDM_1B products up to 20130801T062457 (37 pro		Dry tropospheric correction error, Wet tropospheric	Due to a missing Forecast Auxiliary File, there was an error with the Dry tropospheric, Wet tropospheric and Inverse barometric corrections
All SIR_FDM_1B products up to 20130801T080453 (42 pro	ducts) C		Due to a missing Forecast Auxiliary File, there was an error with the GIM lonospheric correction

5.5 L1B FDM Measurement Confidence Flags

CryoSat L1B data includes a measurement confidence flag word (field 14) for each measurement record. The bit value of this flag indicates any problems when set.

Number of products with errors:

Product	Test Failed	Description
CS_OFFL_SIR_FDM_1B_20130801T130101_20130801T130117_B001	Attitude correction missing	The attitude has not been corrected
CS_OFFL_SIR_FDM_1B_20130801T143728_20130801T143733_B001	Attitude correction missing	The attitude has not been corrected
CS_OFFL_SIR_FDM_1B_20130801T161401_20130801T161533_B001	Attitude correction missing	The attitude has not been corrected
CS_OFFL_SIR_FDM_1B_20130801T193041_20130801T193810_B001	Attitude correction missing	The attitude has not been corrected
CS_OFFL_SIR_FDM_1B_20130801T200943_20130801T201135_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo.
CS_OFFL_SIR_FDM_1B_20130801T223441_20130801T223718_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo.
CS_OFFL_SIR_FDM_1B_20130801T230843_20130801T231842_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo.

6. Level 2 FDM Data Quality Check

6.1 L2 FDM Product Format Check

Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL)

Number of products with errors:

6.2 L2 FDM Product Header Analysis

For all products, a series of pre-defined checks are carried out on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the processing chain.

Currently there is a high number of processing error flags set within the Level 2 FDM products (Product_Err and L2_Proc_Flag). These flags are set within L2 Header files (MPH field #19 and SPH field #29) and also within the L2 Product files (MPH field #35 and SPH field #33). They are set by the FDM processor when an error is detected during the L2 processing and also when the percentage of Data Set Records free of processing errors is below the minimum acceptable threshold set within the processor (currently set to 5%).

This issue is under investigation.

6.3 L2 FDM Auxiliary Data File Usage Check

Each product is checked for missing Data Set Descriptors wrt a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct.

Number of products with errors:	42		
Product		AUX File	Comment
All SIR_FDM_2 products up to 20130801T062457 (37 pro	oducts)	CS_OPER_AUXISEAMPS_20130801T000000_20130801T000000_ 0001; CS_OPER_AUXISEAMPS_20130801T060000_20130801T060000_ 0001	Missing Forecast Auxiliary Files:
All SIR_FDM_2 products up to 20130801T080453 (42 pro	oducts)	CS_OPER_AUXIIONGIM_20130801T000000_20130801T235959_0 001	Missing Forecast Auxiliary File: CS_OPER_AUXIIONGIM

6.4 L2 FDM Correction Error Flags

Each product is checked to detect auxiliary corrections flagged by the ground-station processing chain as missing or containing errors.

Number of products with errors: 42		
Product	Test Failed	Description
All SIR_FDM_2 products up to 20130801T062457 (37 products)	Dry tropospheric correction error, wet tropospheric	Due to a missing Forecast Auxiliary File, there was an error with the Dry tropospheric, Wet tropospheric and Inverse barometric corrections
All SIR_FDM_2 products up to 20130801T080453 (42 products)		Due to a missing Forecast Auxiliary File, there was an error with the GIM lonospheric correction

6.5 L2 FDM Measurement Confidence Flags

CryoSat L2 data includes a quality flag word (field 8) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chain.

Number of products with errors: 7		
Product	Test Failed	Description
CS_OFFL_SIR_FDM_220130801T130101_20130801T130117_B001	Attitude correction missing	The attitude has not been corrected
CS_OFFL_SIR_FDM_220130801T143728_20130801T143733_B001	Attitude correction missing	The attitude has not been corrected
CS_OFFL_SIR_FDM_220130801T161401_20130801T161533_B001	Attitude correction missing	The attitude has not been corrected
CS_OFFL_SIR_FDM_220130801T193041_20130801T193810_B001	Attitude correction missing	The attitude has not been corrected
CS_OFFL_SIR_FDM_220130801T200943_20130801T201135_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo.
CS_OFFL_SIR_FDM_220130801T223441_20130801T223718_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo.
CS_OFFL_SIR_FDM_220130801T230843_20130801T231842_B001	Echo error	The Echo Rx1 Error flag is set, indicating a degraded raw echo.

6.6 L2 FDM Range Measurement Flags

Each product is checked to detect range measurements flagged by the processing chain as missing or containing errors. 2

Number of products with errors:

Product	Test Failed	Description
CS_OFFL_SIR_FDM_220130801T163539_20130801T170828_B001		The master fail flag is set by the OCOG call, for one or more records, indicating the values stored in fields #18, #19, #20 and #21 should be ignored for these records.
CS_OFFL_SIR_FDM_220130801T190433_20130801T193018_B001		The master fail flag is set by the OCOG call, for one or more records, indicating the values stored in fields #18, #19, #20 and #21 should be ignored for these records.

6.7 L2 FDM SWH and Backscatter Measurement Flags

Each product is checked to detect parameters related to SWH and sigma0 that are flagged by the processing chain as missing or containing errors. Number of products with errors:

6.8 L2 FDM Geophysical Measurement Flags

Each product is checked to detect geophysical measurements flagged by the processing chain as missing or containing errors. 38

ducts with errors:

Product	Test Failed	Description
All SIR_FDM_2 products up to 20130801T062457 (37 products)	U-Wind component error, V-Wind component error	Due to a missing Forecast Auxiliary File, there was an error with the U-Wind and V-wind components of the ECMWF model wind vector.
CS_OFFL_SIR_FDM_220130801T041048_20130801T044315_B001	Ocean Retracking Quality Flag	The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.
CS_OFFL_SIR_FDM_220130801T045815_20130801T050322_B001	Ocean Retracking Quality Flag	The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.
CS_OFFL_SIR_FDM_220130801T054909_20130801T062457_B001	Ocean Retracking Quality Flag	The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.
CS_OFFL_SIR_FDM_220130801T161533_20130801T162013_B001	Ocean Retracking Quality Flag	The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.

7. QCC Check

The QCC is a CryoSat facility that performs a primary survey of data products immediately after production by the PDS and LTA processing facilities. A list of the tests which raised errors or warnings is provided below.

Product type	Nb. Products	Nb. QCC Reports	Nb. Valid	Nb. Warnings	Nb. Errors
SIR_FDM_1B	135	134	93	41	0
SIR_FDM_2	135	134	0	134	0
7.1 QCC Errors					
Number of QCC reports with errors:	0				

Number of products with missing QCC reports: 2

Product name CS_OFFL_SIR_FDM_1B_20130731T235833_20130801T000637_B001 CS_OFFL_SIR_FDM_2_20130731T235833_20130801T000637_B001