

IDEAS Daily Report for OFFLINE data: 15


<u>15/10/2013</u>



		Check	Status
		Server check: science-pds.cryosat.esa.int	Nominal
		Server check: calval-pds.cryosat.esa.int	Nominal
		Product Software Check	Nominal
Report Production Date:	15-Nov-2013	Product Format Check	Nominal
		Product Header Analysis	Nominal
Data Used:	OFFLINE L1B and L2 Science	Auxiliary Data File Usage	See Section 5.3
	Data	Auxiliary Correction Check	See Section 4.4 and 5.4
	•	Measurement Data Set Check	Nominal

1. Overview

Mission / Instrument News		
14-Oct-2013	None	
15-Oct-2013	SIRAL unavailability on 15-Oct-2013 from 00:01:43 to 05:56:43 due to a planned collision avoidance manoeuvre.	
16-Oct-2013	Nothing planned	

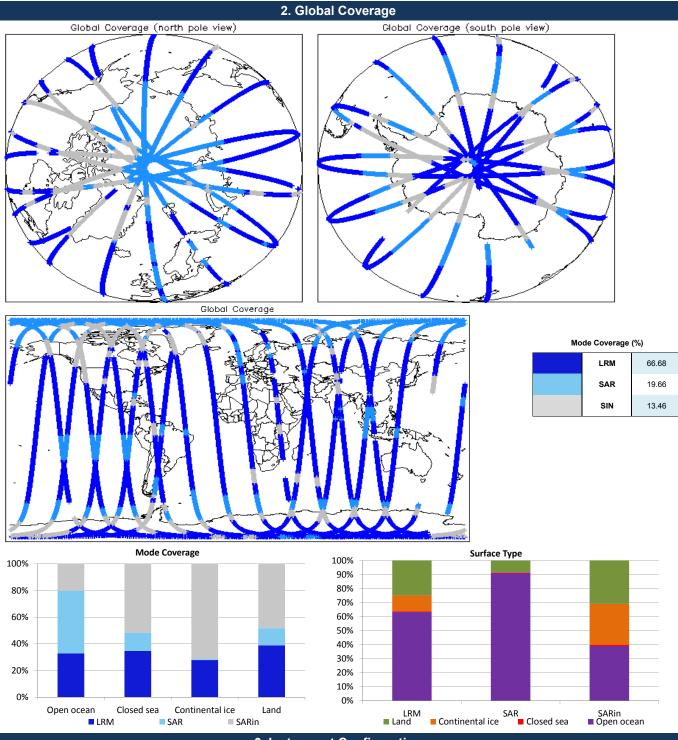

3. Instrument Configuration

The SIRAL instrument configuration for the day of acquisition is provided below.

SIRAL instrument(s) in use:	SIRAL - A	
Star Tracker(s) in use:	Star Tracker 1	

4. Level 1B Data Quality Check

4.1 L1B Product Format Check

Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (.HDR) and a product file (.DBL).

Number of products with errors:

4.2 L1B Product Header Analysis

For all products, a series of pre-defined checks are carried out on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain.

Number of products with errors:

4.3 L1B Auxilary Data File Usage Check

Each product is checked for missing Data Set Descriptors wrt a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct. Number of products with errors: 0

4.4 L1B Flagged Auxiliary Correction Error Check

Each product is checked to spot auxiliary corrections flagged by the ground-station processing chain as missing or containing errors

Number of products with errors:

Product	Test Failed
CS_OFFL_SIR_LRM_1B_20131014T235705_20131015T000144_B001	Dynamic atmosphere correction error
CS_OFFL_SIR_LRM_1B_20131015T055645_20131015T061306_B001	Dynamic atmosphere correction error
CS_OFFL_SIR_LRM_1B_20131015T115422_20131015T120009_B001	Dynamic atmosphere correction error
CS_OFFL_SIR_LRM_1B_20131015T175036_20131015T180457_B001	Dynamic atmosphere correction error

4.5 L1B Measurement Confidence Data Check

CryoSat L1B data includes a measurement confidence flag word (field 14) for each measurement record. The bit value of this flag indicates any problems when set.

Number of products with errors:

5. Level 2 Data Quality Check

5.1 L2 Product Format Check

Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (.HDR) and a product file (.DBL). Number of products with errors:

5.2 L2 Product Header Analysis

For all products, a series of pre-defined checks are carried out on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the ground-segment processing chain Number of products with errors: 0

5.3 L2 Auxiliary Data File Usage Check

Each product is checked for missing Data Set Descriptors wrt a pre-determined baseline and also to check the validity of Auxiliary Data Files is correct

Number of products with errors:

Product AUX File Comment CS_OFFL_SIR_GDR_2A_20131014T224726_20131015T002640_B001 CS_OPER_AUX_ORBDOR_20131013T215525_20131015 Coverage missing for intervals [2013-10-1002325_0001

5.4 L2 Flagged Auxiliary Correction Error Check

Each product is checked to spot auxiliary corrections flagged by the ground-station processing chain as missing or containing errors

Number of products with errors: 3	
Product	Test Failed
CS_OFFL_SIR_LRM_220131015T055645_20131015T061306_B001	Dynamic atmosphere correction error
CS_OFFL_SIR_LRM_220131015T115422_20131015T120009_B001	Dynamic atmosphere correction error
CS_OFFL_SIR_LRM_220131015T175036_20131015T180457_B001	Dynamic atmosphere correction error

5.5 L2 Measurement Quality Flag Check

CryoSat L2 data includes a quality flag word (field 43) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the ground-segment processing chains

Presently, there are several common data Quality Flag errors raised by the Level 2 products which are either expected due to changes made to the IPF processor in Baseline B or else are due to known issues with the data processors. The investigation of the known issues are on-going and are due to be resolved with the next update of the Level 2 processors. All common known issues are summarised in the list below, followed by a table highlighting any additional issues which may arise from this test.

Freeboard Error: This Quality Flag is correctly set in all products as this parameter is currently not provided in the L2 products and the Freeboard value is presently set to the default value of -9999.

SARin x-track angle error: Currently there is an on-going investigation into the high number of errors from the 'SARIn x-track Error' Quality Flag over Antarctica.

Height error and Backscatter error: It has been noted that the number of errors arising from the 'Backscatter Error' and 'Height Error' Quality Flag is much higher than expected over land areas and this is currently part of an on-going investigation by expert teams.

6. QCC Check

The QCC is a CryoSat facility that performs a primary survey of data products immediately after production by the PDS and LTA processing facilities. A list of the tests which raised errors or warnings is provided below.

Nb. There is currently a discrepancy between the number of QCC reports and the number of products reported. This is a known issue and investigation is on-going.

0

Product type	Nb. Products	Nb. QCC Reports	Nb. Valid	Nb. Warnings	Nb. Errors
SIR_GDR_2A	12	0	0	0	0
SIR_LRM_1B	105	0	0	0	0
SIR_LRM_2	104	0	0	0	0
SIR_SAR_1B	69	0	0	0	0
SIR_SAR_2A	69	0	0	0	0
SIR_SIN_1B	72	0	0	0	0
SIR_SIN_2	69	0	0	0	0

6.1 QCC Errors

Number of products with QCC errors:

6.2 Missing QCC Reports

Number of products with missing QCC reports: All