


# IDEAS+ Daily Report for NRT data:

# <u>25/07/2014</u>

| 1. | Overviev | v |
|----|----------|---|
|    |          | - |

| Demant Draduation Data  | 28-Jul-2014  | Check                                     | Status                             |
|-------------------------|--|---|------------------------------------|
| Report Production Date: |  | Server check: science-pds.cryosat.esa.int | Nominal                            |
| Data Used:              | L1 and L2 Fast Delivery Marine Mode<br>(FDM), and CAL Data | Server check: calval-pds.cryosat.esa.int  | Nominal                            |
| Data Used:              |  | Product Software Check                    | Nominal                            |
|                         |  | Product Format Check                      | Nominal                            |
|                         |  | Product Header Analysis                   | Nominal                            |
|                         |  | Auxiliary Data File Usage                 | Nominal                            |
|                         |  | Correction Error Flags                    | Nominal                            |
|                         |  | Measurement Confidence Flags              | See Sections 5.5, 6.5, 6.6 and 6.8 |

| N | Mission / Instrument News |                 |  |
|---|---------------------------|-----------------|--|
|   | 24-Jul-2014               | None            |  |
|   | 25-Jul-2014               | None            |  |
|   | 26-Jul-2014               | Nothing planned |  |

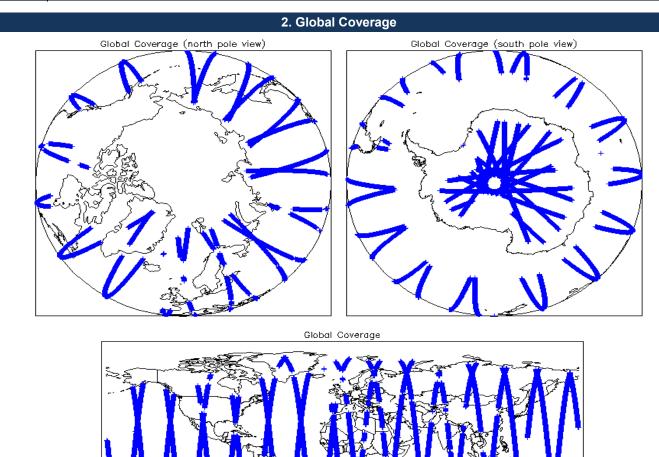

# 3. Instrument Configuration

The SIRAL instrument configuration for the day of acquisition is provided below.

| SIRAL instrument(s) in use: | SIRAL - A          |
|-----------------------------|--------------------|
| Star Tracker(s) in use:     | Star Tracker 1 & 2 |

# 4. Level 1B Calibration Data Quality Check

## 4.1 L1 CAL Product Format Check

Each product, retrieved and unpacked from the science server, is checked to ensure it consists of both an XML header file (.HDR) and a binary product file (.DBL).

Number of products with errors:

### 4.2 L1 CAL Product Header Analysis

For all products, a series of pre-defined checks are carried out on the MPH and SPH in order to identify any inconsistencies and/or errors raised by the processing chain.

0

| 4.3 L1 CAL Auxiliary Data File Usage Check   |  |  |
|--|--|--|
| 4.5 LT CAL Auxiliary Data File Usage Check   |  |  |
| Each product is checked for missing Data Set Descriptors wrt a pre-determined ba   | aseline and also to check the validity o   | f Auxiliary Data Files is correct.   |
| Number of products with errors: 0  |  |  |
| 4.4 L1 CAL Measurement Confidence Flags  |  |  |
| CryoSat Cal1 and Cal2 data includes a measurement confidence flag word (field 1  | 1) for each measurement record. The  | bit value of this flag indicates any problems when set.  |
| Number of products with errors: 0  |  |  |
|  |  |  |
| 5. Leve  | I 1B FDM Data Quality  | / Check  |
| 5.1 L1B FDM Product Format Check   |  |  |
| Each product, retrieved and unpacked from the science server, is checked to ensu   | ure it consists of both an XML header  | file (.HDR) and a binary product file (.DBL).  |
| Number of products with errors: 0  |  |  |
|  |  |  |
| 5.2 L1B FDM Product Header Analysis  |  |  |
| For all products, a series of pre-defined checks are carried out on the MPH and SF   | PH in order to identify any inconsisten  | cies and/or errors raised by the ground-segment processing chain.  |
| Number of products with errors: 0  |  |  |
| 5.3 L1B FDM Auxilary Data File Usage Check   |  |  |
| Each product is checked for missing Data Set Descriptors wrt a pre-determined ba   | aseline and also to check the validity o   | f Auxiliary Data Files is correct.   |
| Number of products with errors: 0  |  |  |
| 5.4 L1B Correction Error Flags   |  |  |
|  | ian processing chain as missing or as  |  |
| Each product is checked to detect auxiliary corrections flagged by the ground-station<br>Number of products with errors: 0   | on processing chain as missing or co   | taning errors.   |
|  |  |  |
| 5.5 L1B FDM Measurement Confidence Flags   |  |  |
| CryoSat L1B data includes a measurement confidence flag word (field 14) for each   | h measurement record. The bit value of   | of this flag indicates any problems when set.  |
| Number of products with errors: 7  |  |  |
| Product  | Test Failed  | Description  |
| CS_OFFL_SIR_FDM_1B_20140725T022708_20140725T022746_B001  | Attitude correction missing  | The attitude has not been corrected  |
| CS_OFFL_SIR_FDM_1B_20140725T053436_20140725T054023_B001  | Echo error   | The Echo Rx1 Error flag is set, indicating a degraded raw echo   |
| CS_OFFL_SIR_FDM_1B_20140725T071800_20140725T072146_B001  | Echo error   | The Echo Rx1 Error flag is set, indicating a degraded raw echo   |
| CS_OFFL_SIR_FDM_1B_20140725T185821_20140725T185901_B001  | Attitude correction missing  | The attitude has not been corrected  |
| CS_OFFL_SIR_FDM_1B_20140725T203241_20140725T203504_B001  | Attitude correction missing  | The attitude has not been corrected  |
| CS_OFFL_SIR_FDM_1B_20140725T221125_20140725T221245_B001  | Attitude correction missing  | The attitude has not been corrected  |
| CS_OFFL_SIR_FDM_1B_20140725T235007_20140725T235203_B001  | Echo error   | The Echo Rx1 Error flag is set, indicating a degraded raw echo   |
| 6. Leve  | el 2 FDM Data Quality  | Check  |
| 6.1 L2 FDM Product Format Check  |  |  |
|  |  |  |
|  |  |  |
| Each product, retrieved and unpacked from the science server, is checked to ensu   | ure it consists of both an XML header  | file (.HDR) and a binary product file (.DBL)   |
|  | ure it consists of both an XML header  | file (.HDR) and a binary product file (.DBL)   |
| Each product, retrieved and unpacked from the science server, is checked to ensu   | ure it consists of both an XML header  | file (.HDR) and a binary product file (.DBL)   |
| Each product, retrieved and unpacked from the science server, is checked to ensu<br>Number of products with errors: 0  |  |  |
| Each product, retrieved and unpacked from the science server, is checked to ensu<br>Number of products with errors: 0<br>6.2 L2 FDM Product Header Analysis  | PH in order to identify any inconsisten<br>DM products (Product_Err and L2_Pro<br>are set by the FDM processor when a  | cies and/or errors raised by the processing chain.<br>c_Flag). These flags are set within L2 Header files (MPH field #19 and SPH field<br>an error is detected during the L2 processing and also when the percentage of                    |
| Each product, retrieved and unpacked from the science server, is checked to ensure the science server the science server, is checked to ensure the science server the science serve | PH in order to identify any inconsisten<br>DM products (Product_Err and L2_Pro<br>are set by the FDM processor when a  | cies and/or errors raised by the processing chain.<br>c_Flag). These flags are set within L2 Header files (MPH field #19 and SPH field<br>an error is detected during the L2 processing and also when the percentage of                    |
| Each product, retrieved and unpacked from the science server, is checked to ensu-<br>Number of products with errors: 0  6.2 L2 FDM Product Header Analysis  For all products, a series of pre-defined checks are carried out on the MPH and SP Currently there is a high number of processing error flags set within the Level 2 FD #29) and also within the L2 Product files (MPH field #35 and SPH field #33). They Data Set Records free of processing errors is below the minimum acceptable three   | PH in order to identify any inconsisten<br>DM products (Product_Err and L2_Pro<br>are set by the FDM processor when a  | cies and/or errors raised by the processing chain.<br>c_Flag). These flags are set within L2 Header files (MPH field #19 and SPH field<br>an error is detected during the L2 processing and also when the percentage of                    |
| Each product, retrieved and unpacked from the science server, is checked to ensu-<br>Number of products with errors: 0<br><b>6.2 L2 FDM Product Header Analysis</b><br>For all products, a series of pre-defined checks are carried out on the MPH and SP<br>Currently there is a high number of processing error flags set within the Level 2 FD<br>#29) and also within the L2 Product files (MPH field #35 and SPH field #33). They<br>Data Set Records free of processing errors is below the minimum acceptable three.<br>This issue is under investigation.  | PH in order to identify any inconsisten<br>DM products (Product_Err and L2_Pro<br>are set by the FDM processor when a  | cies and/or errors raised by the processing chain.<br>c_Flag). These flags are set within L2 Header files (MPH field #19 and SPH field<br>an error is detected during the L2 processing and also when the percentage of                    |
| Each product, retrieved and unpacked from the science server, is checked to ensu<br>Number of products with errors: 0<br>6.2 L2 FDM Product Header Analysis<br>For all products, a series of pre-defined checks are carried out on the MPH and SP<br>Currently there is a high number of processing error flags set within the Level 2 FD<br>#29) and also within the L2 Product flies (MPH field #35 and SPH field #33). They<br>Data Set Records free of processing errors is below the minimum acceptable threes<br>This issue is under investigation.<br>Number of products with errors: 0   | PH in order to identify any inconsisten<br>DM products (Product_Err and L2_Pro<br>are set by the FDM processor when a<br>shold set within the processor (current | cies and/or errors raised by the processing chain.<br>c_Flag). These flags are set within L2 Header files (MPH field #19 and SPH field<br>an error is detected during the L2 processing and also when the percentage of<br>ity set to 5%). |
| Each product, retrieved and unpacked from the science server, is checked to ensume the science server, is checked to ensure the science server the scince servere server the science server the scince server                                | PH in order to identify any inconsisten<br>DM products (Product_Err and L2_Pro<br>are set by the FDM processor when a<br>shold set within the processor (current | cies and/or errors raised by the processing chain.<br>c_Flag). These flags are set within L2 Header files (MPH field #19 and SPH field<br>an error is detected during the L2 processing and also when the percentage of<br>ity set to 5%). |
| Each product, retrieved and unpacked from the science server, is checked to ensu<br>Number of products with errors: 0<br>6.2 L2 FDM Product Header Analysis<br>For all products, a series of pre-defined checks are carried out on the MPH and SF<br>Currently there is a high number of processing error flags set within the Level 2 FD<br>#29) and also within the L2 Product files (MPH field #35 and SPH field #33). They<br>Data Set Records free of processing errors is below the minimum acceptable threes<br>This issue is under investigation.<br>Number of products with errors: 0<br>6.3 L2 FDM Auxiliary Data File Usage Check<br>Each product is checked for missing Data Set Descriptors wrt a pre-determined bar  | PH in order to identify any inconsisten<br>DM products (Product_Err and L2_Pro<br>are set by the FDM processor when a<br>shold set within the processor (current | cies and/or errors raised by the processing chain.<br>c_Flag). These flags are set within L2 Header files (MPH field #19 and SPH field<br>an error is detected during the L2 processing and also when the percentage of<br>ity set to 5%). |

Each product is checked to detect auxiliary corrections flagged by the ground-station processing chain as missing or containing errors.

0

Number of products with errors:

#### 6.5 L2 FDM Measurement Confidence Flags

CryoSat L2 data includes a quality flag word (field 8) for each 20-Hz measurement record. The bit value of this flag is an assessment of the measurement quality by the processing chain.

| Number of products with errors: 7                     |                             |  |
|---|-----------------------------|--|
| Product   | Test Failed                 | Description  |
| CS_OFFL_SIR_FDM_220140725T022708_20140725T022746_B001 | Attitude correction missing | The attitude has not been corrected                            |
| CS_OFFL_SIR_FDM_220140725T053436_20140725T054023_B001 | Echo error                  | The Echo Rx1 Error flag is set, indicating a degraded raw echo |
| CS_OFFL_SIR_FDM_220140725T071800_20140725T072146_B001 | Echo error                  | The Echo Rx1 Error flag is set, indicating a degraded raw echo |
| CS_OFFL_SIR_FDM_220140725T185821_20140725T185901_B001 | Attitude correction missing | The attitude has not been corrected                            |
| CS_OFFL_SIR_FDM_220140725T203241_20140725T203504_B001 | Attitude correction missing | The attitude has not been corrected                            |
| CS_OFFL_SIR_FDM_220140725T221125_20140725T221245_B001 | Attitude correction missing | The attitude has not been corrected                            |
| CS_OFFL_SIR_FDM_220140725T235007_20140725T235203_B001 | Echo error                  | The Echo Rx1 Error flag is set, indicating a degraded raw echo |

### 6.6 L2 FDM Range Measurement Flags

Each product is checked to detect range measurements flagged by the processing chain as missing or containing errors.

2

Number of products with errors:

| Product   | Test Failed               | Description  |
|---|---------------------------|--|
| CS_OFFL_SIR_FDM_220140725T093054_20140725T094229_B001 | OCOG Retracked Range Flag | The master fail flag is set by the OCOG call, for one or more records,<br>indicating the values stored in fields #18, #19, #20 and #21 should be<br>ignored for these records. |
| CS_OFFL_SIR_FDM_220140725T235506_20140725T235533_B001 | OCOG Retracked Range Flag | The master fail flag is set by the OCOG call, for one or more records,<br>indicating the values stored in fields #18, #19, #20 and #21 should be<br>ignored for these records. |

### 6.7 L2 FDM SWH and Backscatter Measurement Flags

Each product is checked to detect parameters related to SWH and sigma0 that are flagged by the processing chain as missing or containing errors.

Number of products with errors:

#### 6.8 L2 FDM Geophysical Measurement Flags

Each product is checked to detect geophysical measurements flagged by the processing chain as missing or containing errors.

0

All

8

#### Number of products with errors:

| Product   | Test Failed                   | Description   |
|---|-------------------------------|---|
| CS_OFFL_SIR_FDM_220140725T034816_20140725T040446_B001 | Ocean Retracking Quality Flag | The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.    |
| CS_OFFL_SIR_FDM_220140725T051505_20140725T052302_B001 | Ocean Retracking Quality Flag | The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.    |
| CS_OFFL_SIR_FDM_220140725T073645_20140725T073730_B001 | Ocean Retracking Quality Flag | The Ocean Retracking Quality Flag is set indicating the CFI Ocean Retracker was not successfully executed for one or more records.    |
| CS_OFFL_SIR_FDM_220140725T093054_20140725T094229_B001 | Ocean Retracking Quality Flag | The Ocean Retracking Quality Flag is set indicating the CFI Ocean<br>Retracker was not successfully executed for one or more records. |
| CS_OFFL_SIR_FDM_220140725T152206_20140725T154138_B001 | Ocean Retracking Quality Flag | The Ocean Retracking Quality Flag is set indicating the CFI Ocean<br>Retracker was not successfully executed for one or more records. |
| CS_OFFL_SIR_FDM_220140725T174813_20140725T175209_B001 | Ocean Retracking Quality Flag | The Ocean Retracking Quality Flag is set indicating the CFI Ocean<br>Retracker was not successfully executed for one or more records. |
| CS_OFFL_SIR_FDM_220140725T215126_20140725T215750_B001 | Ocean Retracking Quality Flag | The Ocean Retracking Quality Flag is set indicating the CFI Ocean<br>Retracker was not successfully executed for one or more records. |
| CS_OFFL_SIR_FDM_220140725T235506_20140725T235533_B001 | Ocean Retracking Quality Flag | The Ocean Retracking Quality Flag is set indicating the CFI Ocean<br>Retracker was not successfully executed for one or more records. |

### 7. QCC Check

The QCC is a CryoSat facility that performs a primary survey of data products immediately after production by the PDS and LTA processing facilities. A list of the tests which raised errors or warnings is provided below.

| Product type | Nb. Products | Nb. QCC Reports | Nb. Valid | Nb. Warnings | Nb. Errors |
|--------------|--------------|-----------------|-----------|--------------|------------|
| SIR_FDM_1B   | 143          | 0               | 0         | 0            | 0          |
| SIR_FDM_2    | 143          | 0               | 0         | 0            | 0          |

### 7.1 QCC Errors

Number of QCC reports with errors:

### 7.2 Missing QCC Reports

Number of products with missing QCC reports: