

REPORT OF 040305

1. [Introduction](#)
2. [Summary](#)
 - [Instrument Unavailability](#)
 - [Browse Visual Inspection](#)
 - [Module Stepping Results](#)
 - [Data Analysis](#)
3. [Module Stepping](#)
4. [Internal Calibration pulses](#)
 - [Daily statistics](#)
 - [Cyclic statistics](#)
 - [cal pulses monitoring \(all rows\)](#)
5. [Raw Data Statistics](#)
 - [raw data mean I and Q](#)
 - [raw data stdev I and Q](#)
 - [raw gain imbalance](#)
6. [Wave Doppler analysis](#)
 - [Unbiased Doppler Error](#)
 - [Absolute Doppler](#)
 - [Doppler evolution versus ANX](#)

1 - Introduction

This report is based on the analysis of wave mode level-1 cross spectra (ASA_WVS_1P) products, which are the available few hours after the acquisition, on the high rate browse (BP) products and on the Module Stepping (MS) product.

2 - Summary

2.1 - Instrument Unavailability

No unavailabilities during the reported period.

2.2 - Browse Visual Inspection

No anomalies observed on available browse products

2.3 - Data Analysis

- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.

-Nominal Doppler behavior.

3 - Module Stepping Mode

The MS mode provides an internal health check on an individual module basis. The purpose of this mode is to identify any malfunctioning modules and to identify modules for which calibration offsets are to be applied.

No anomalies observed on available MS products:

- ASA_MS__0PNPDK20040304_202419_000000152024_00443_10517_0250.N1
- ASA_MS__0PNPDK20040304_202539_000000152024_00443_10517_0249.N1

| Polarisation | Start Time |
|--------------|-----------------|
| V | 20040304 202539 |
| H | 20040304 202419 |

MSM in V/V polarisation

| Pre-launch Reference | DDS-B (2003-06-12) reference |
|--------------------------|------------------------------|
| <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> |

MSM in H/H polarisation

| Pre-launch Reference | DDS-B (2003-06-12) reference |
|--------------------------|------------------------------|
| <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> |
| <input type="checkbox"/> | <input type="checkbox"/> |

4 - Internal calibration Results

No anomalies observed.

4.1 - Daily statistics



4.2 - Cyclic statistics



4.3 - cal pulses monitoring (all rows)



5 - RAW data statistics

No anomalies observed.

5.1 - Input mean I/Q

| channel | stat | DSS-B |
|---------|-------|-------------|
| MEAN I | mean | 0.000456629 |
| | stdev | 2.55236e-07 |
| MEAN Q | mean | 0.000440337 |
| | stdev | 2.95227e-07 |



5.2 - Input stdev I/Q

| channel | stat | DSS-B |
|---------|-------|------------|
| STDEV I | mean | 0.123991 |
| | stdev | 0.00122836 |
| STDEV Q | mean | 0.124222 |
| | stdev | 0.00124192 |



5.3 - Gain imbalance I/Q



6 - Wave Doppler Analysis

Preliminary report. The data is not yet controlled

6.1 - Unbiased Doppler Error

Evolution of unbiased Doppler error (Real - Expected)

| |
|-----------|
| Ascending |
|-----------|

| |
|------------|
| Descending |
|------------|

6.2 - Absolute Doppler

Evolution of Absolute Doppler

| |
|-----------|
| Ascending |
|-----------|


| |
|------------|
| Descending |
|------------|

6.3 - Doppler evolution versus ANX


Evolution Doppler error versus ANX




Average P1

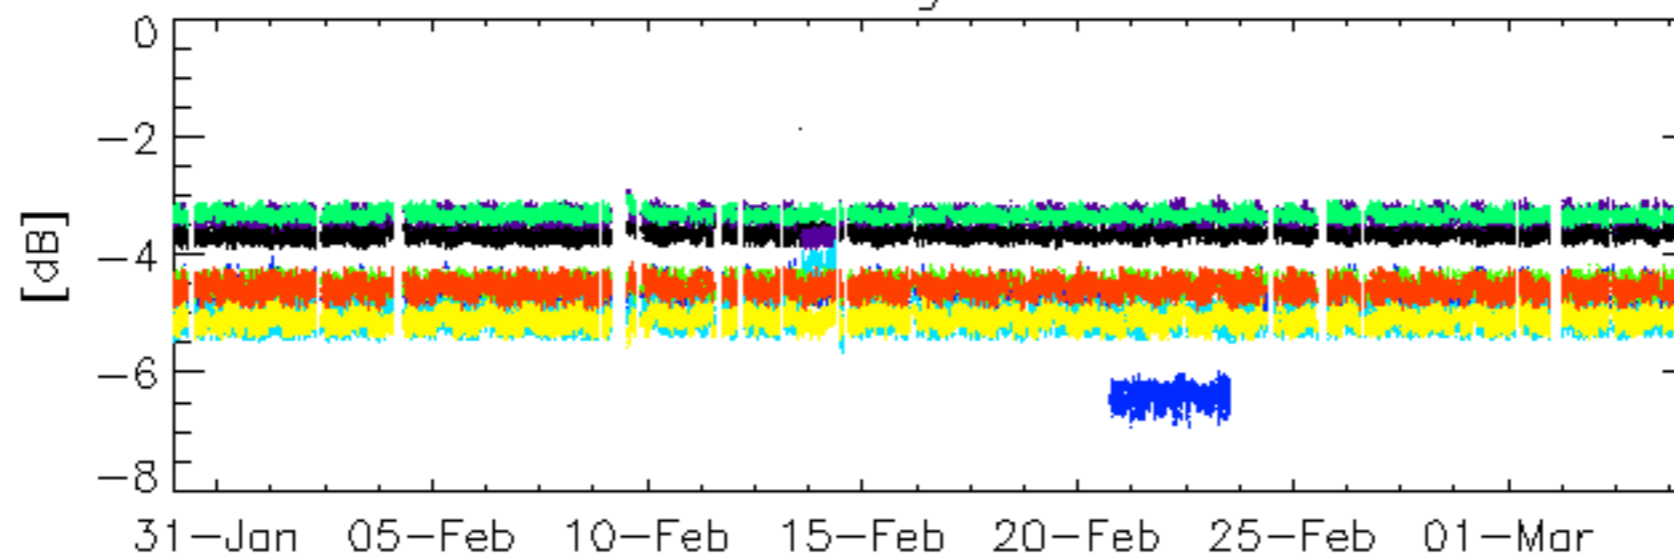


Average p2

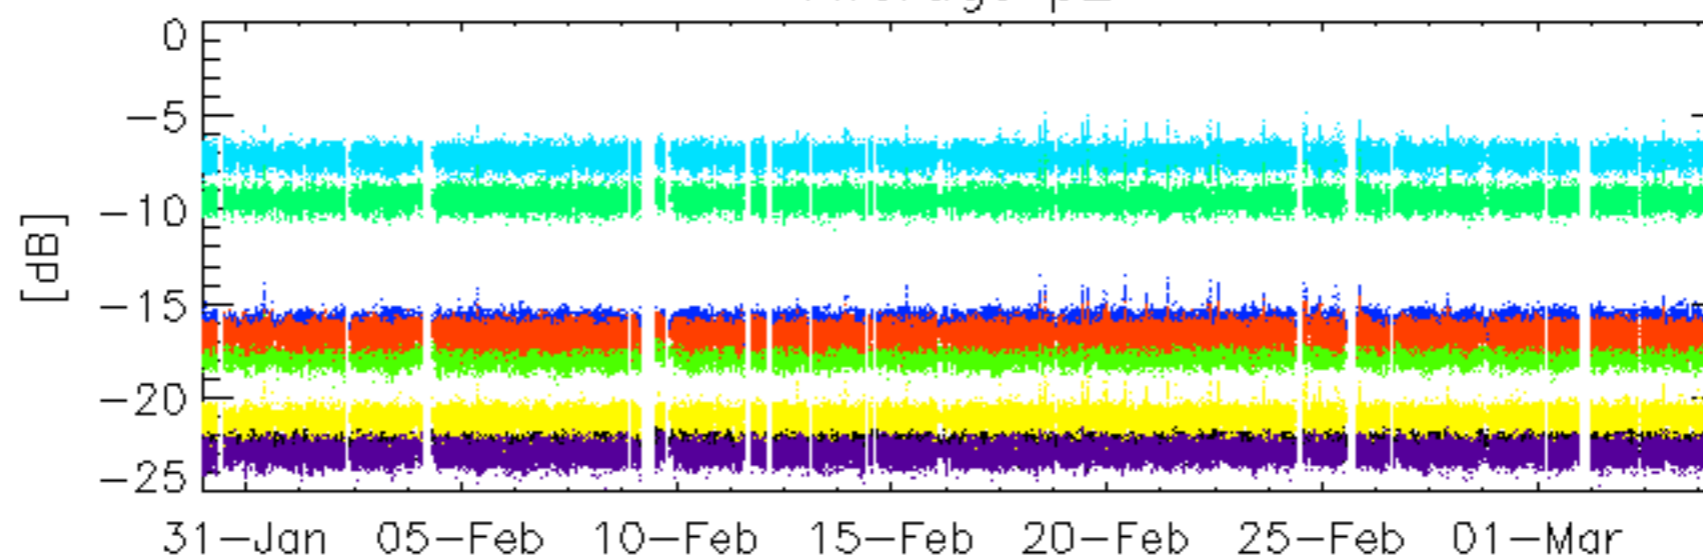

Average p3

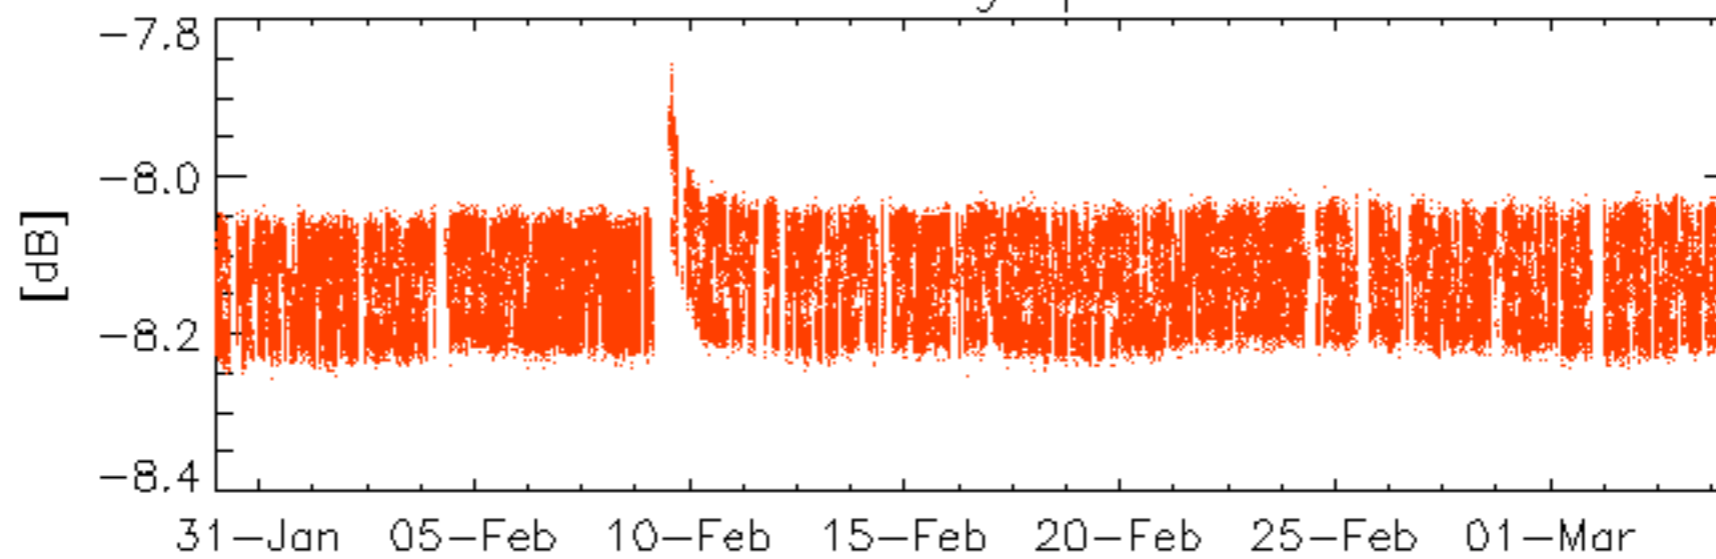


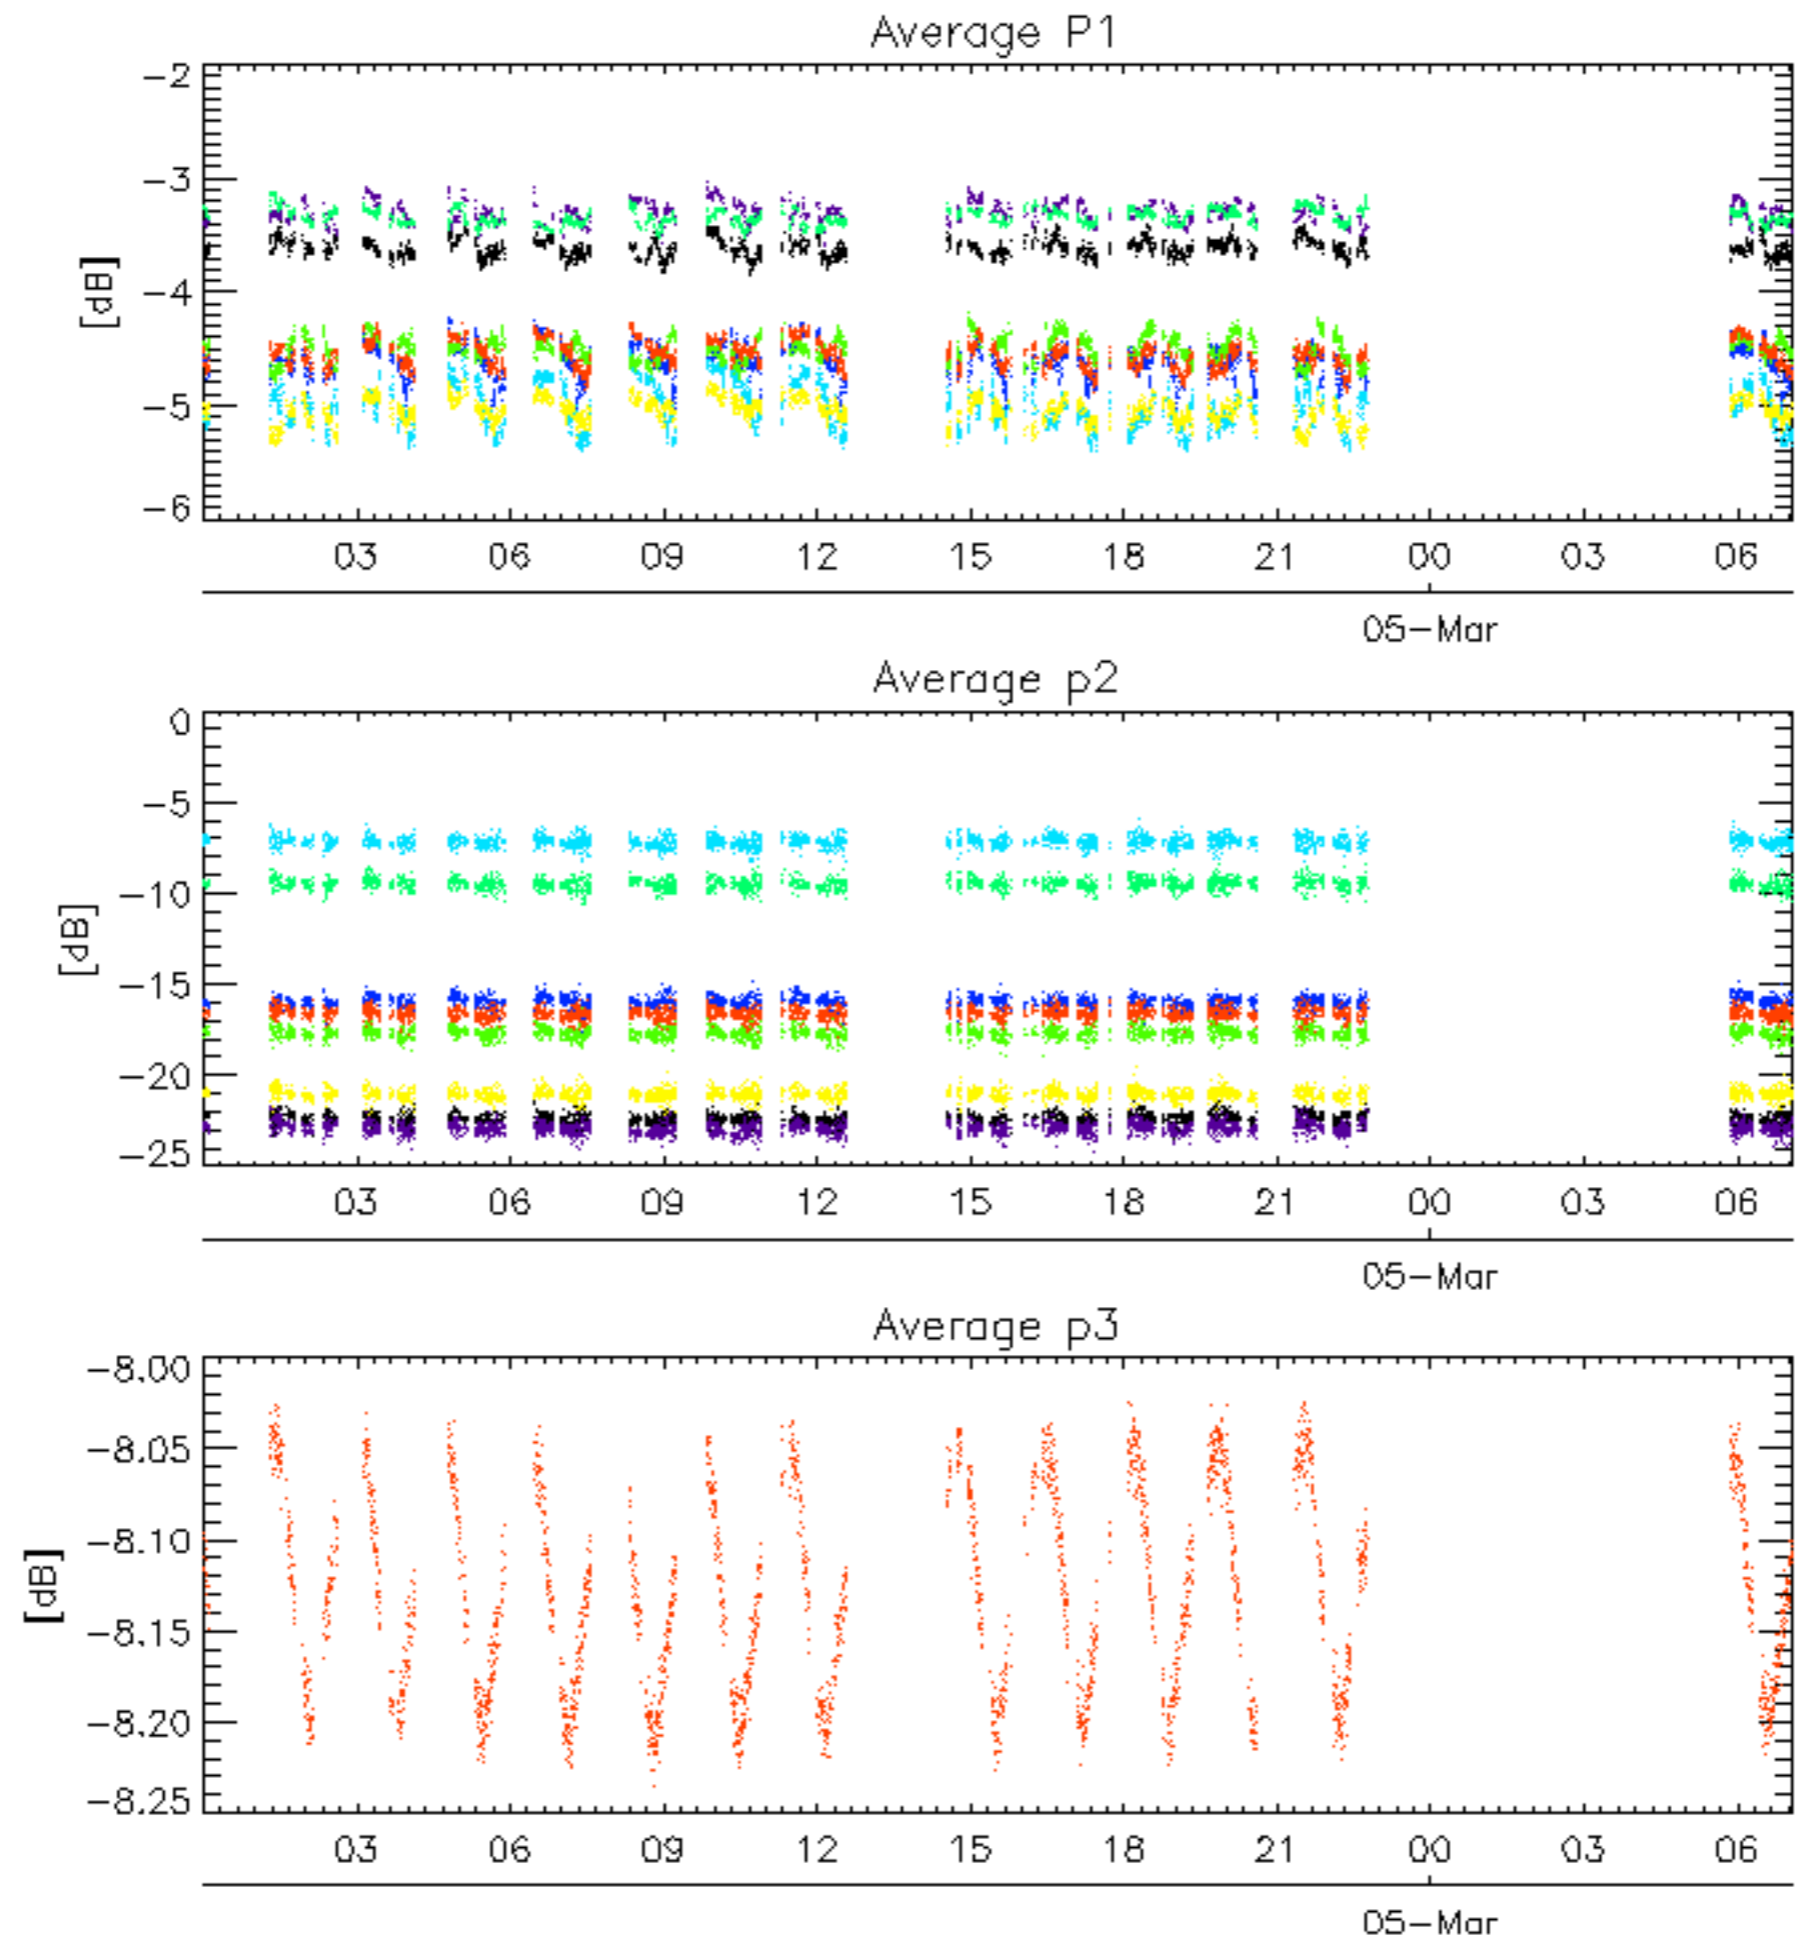

rows: **3** **7** **11** **15** **19** **22** **24** **28**


No anomalies observed on available browse products

No anomalies observed.

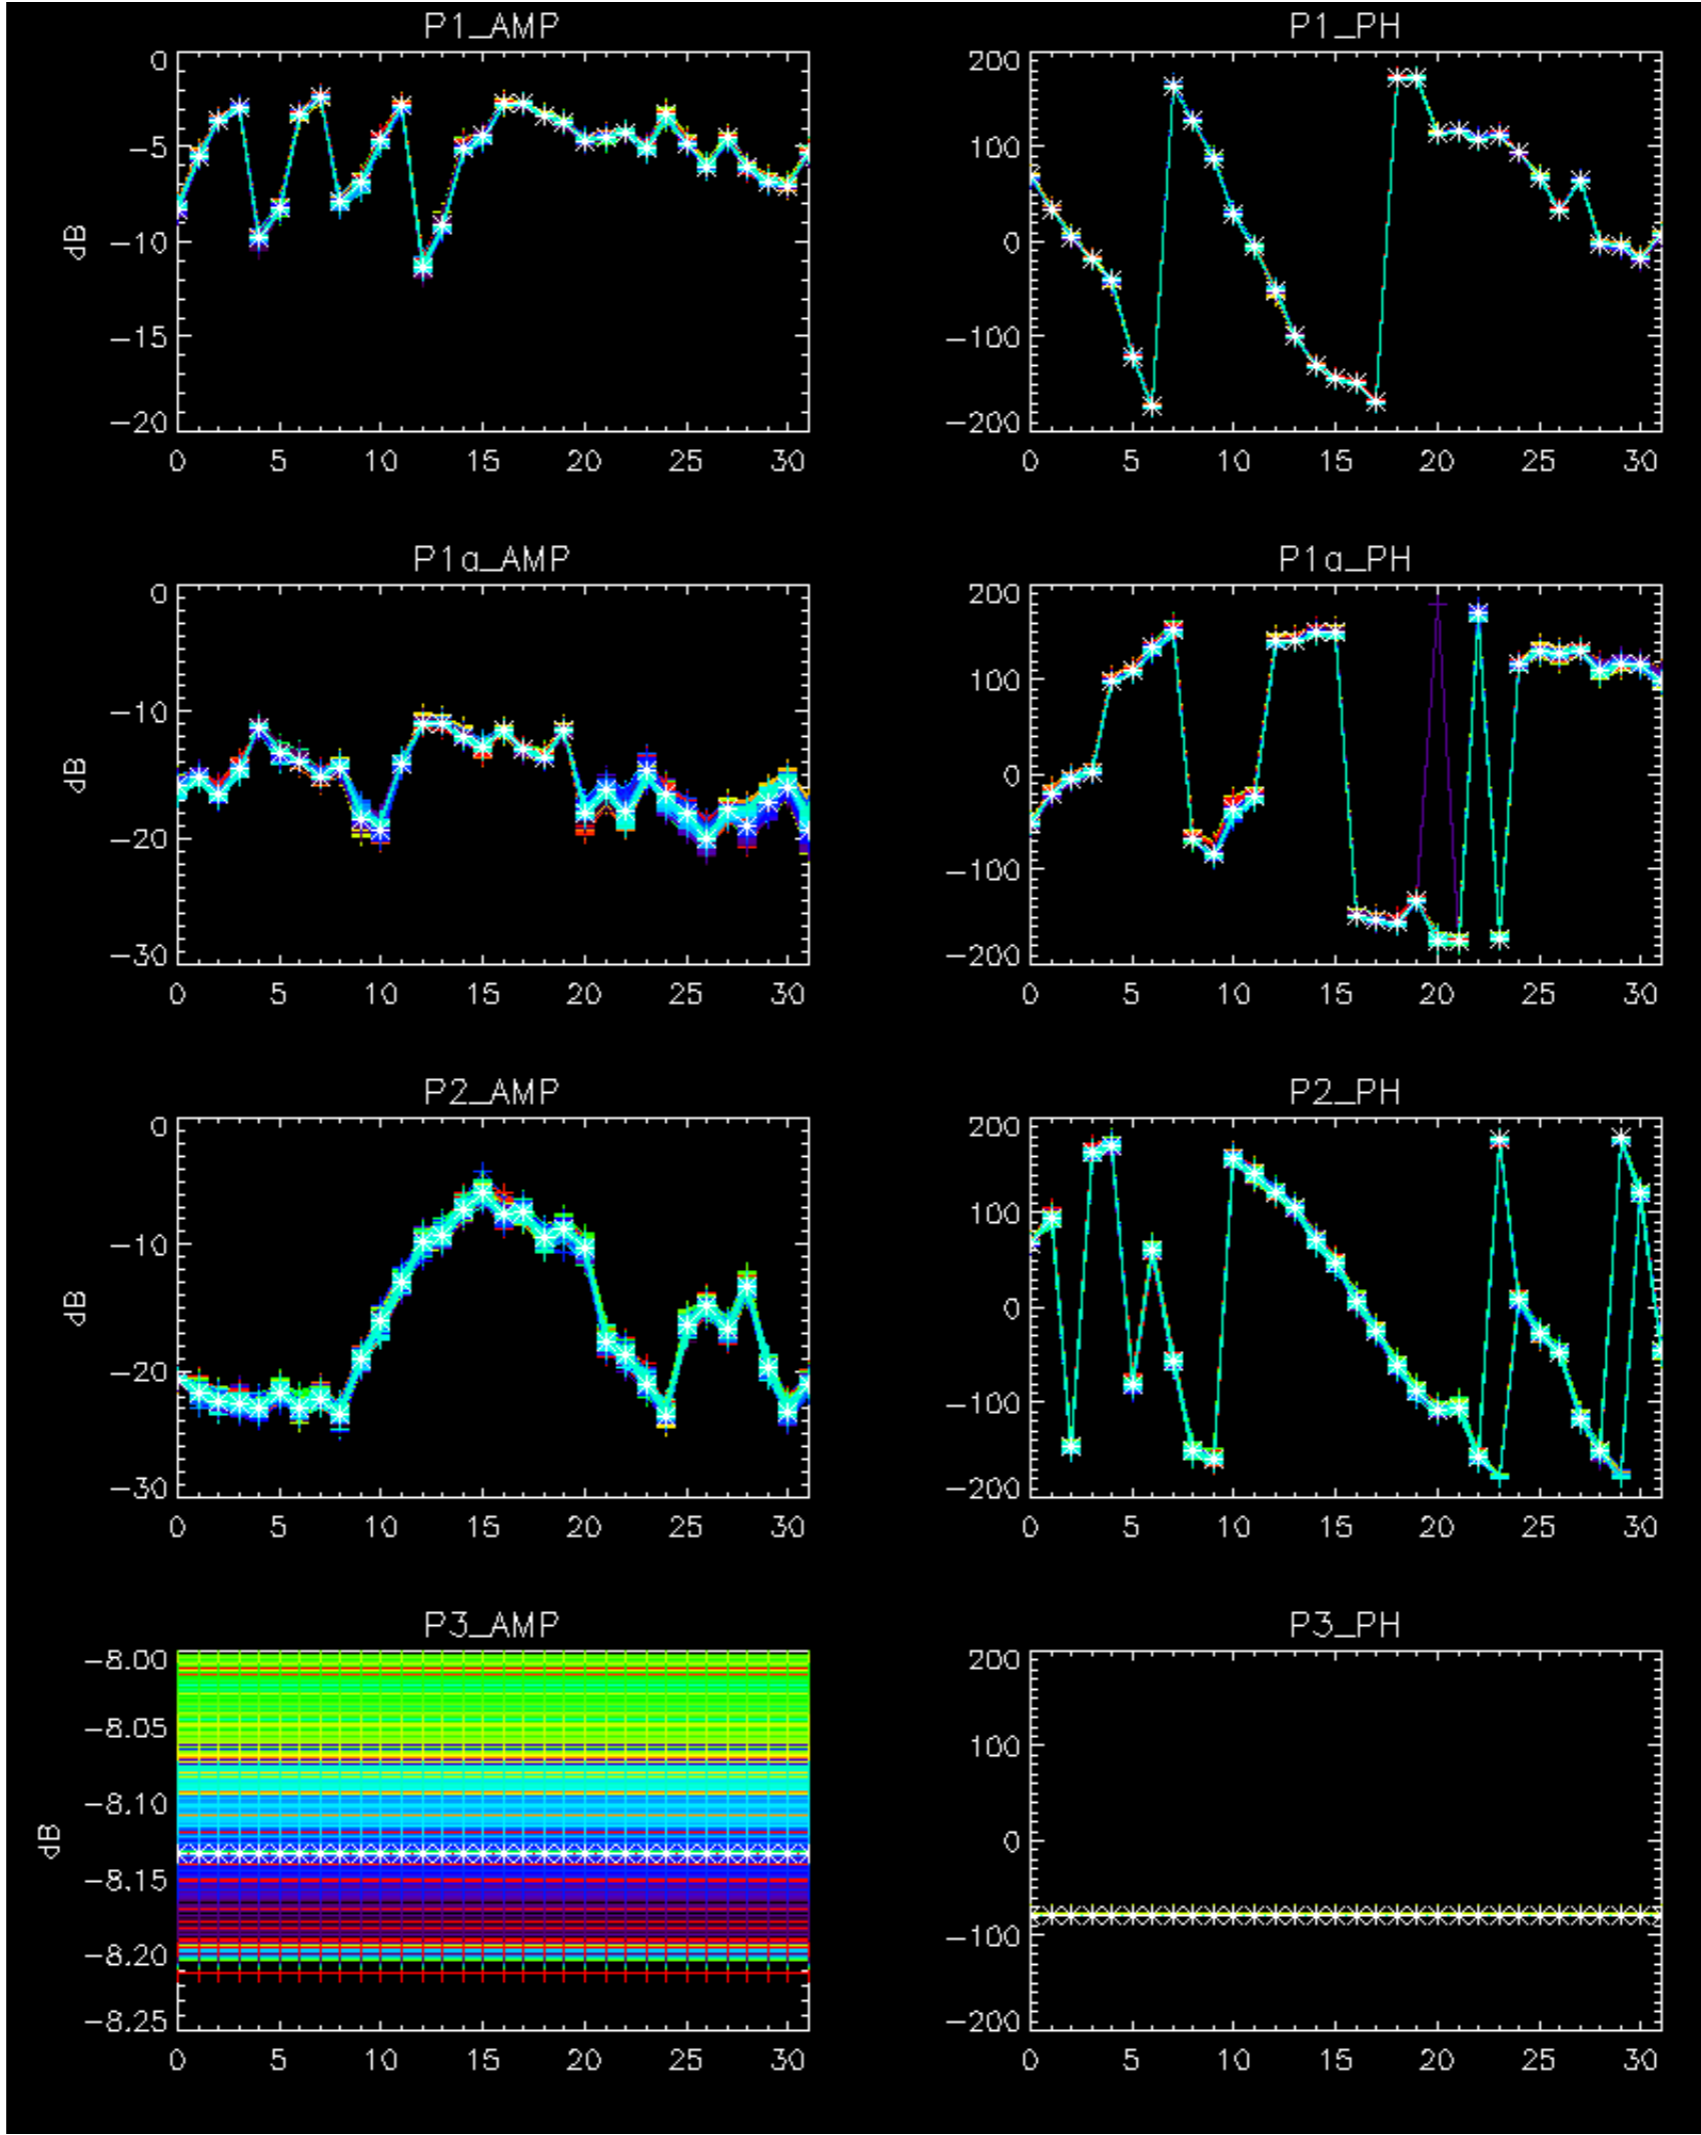




- Stable wave internal calibration pulses gain and phase.
- Stable raw data statistics.
- Nominal Doppler behavior.

Doppler 'WVS' 'IS2' 'H/H'

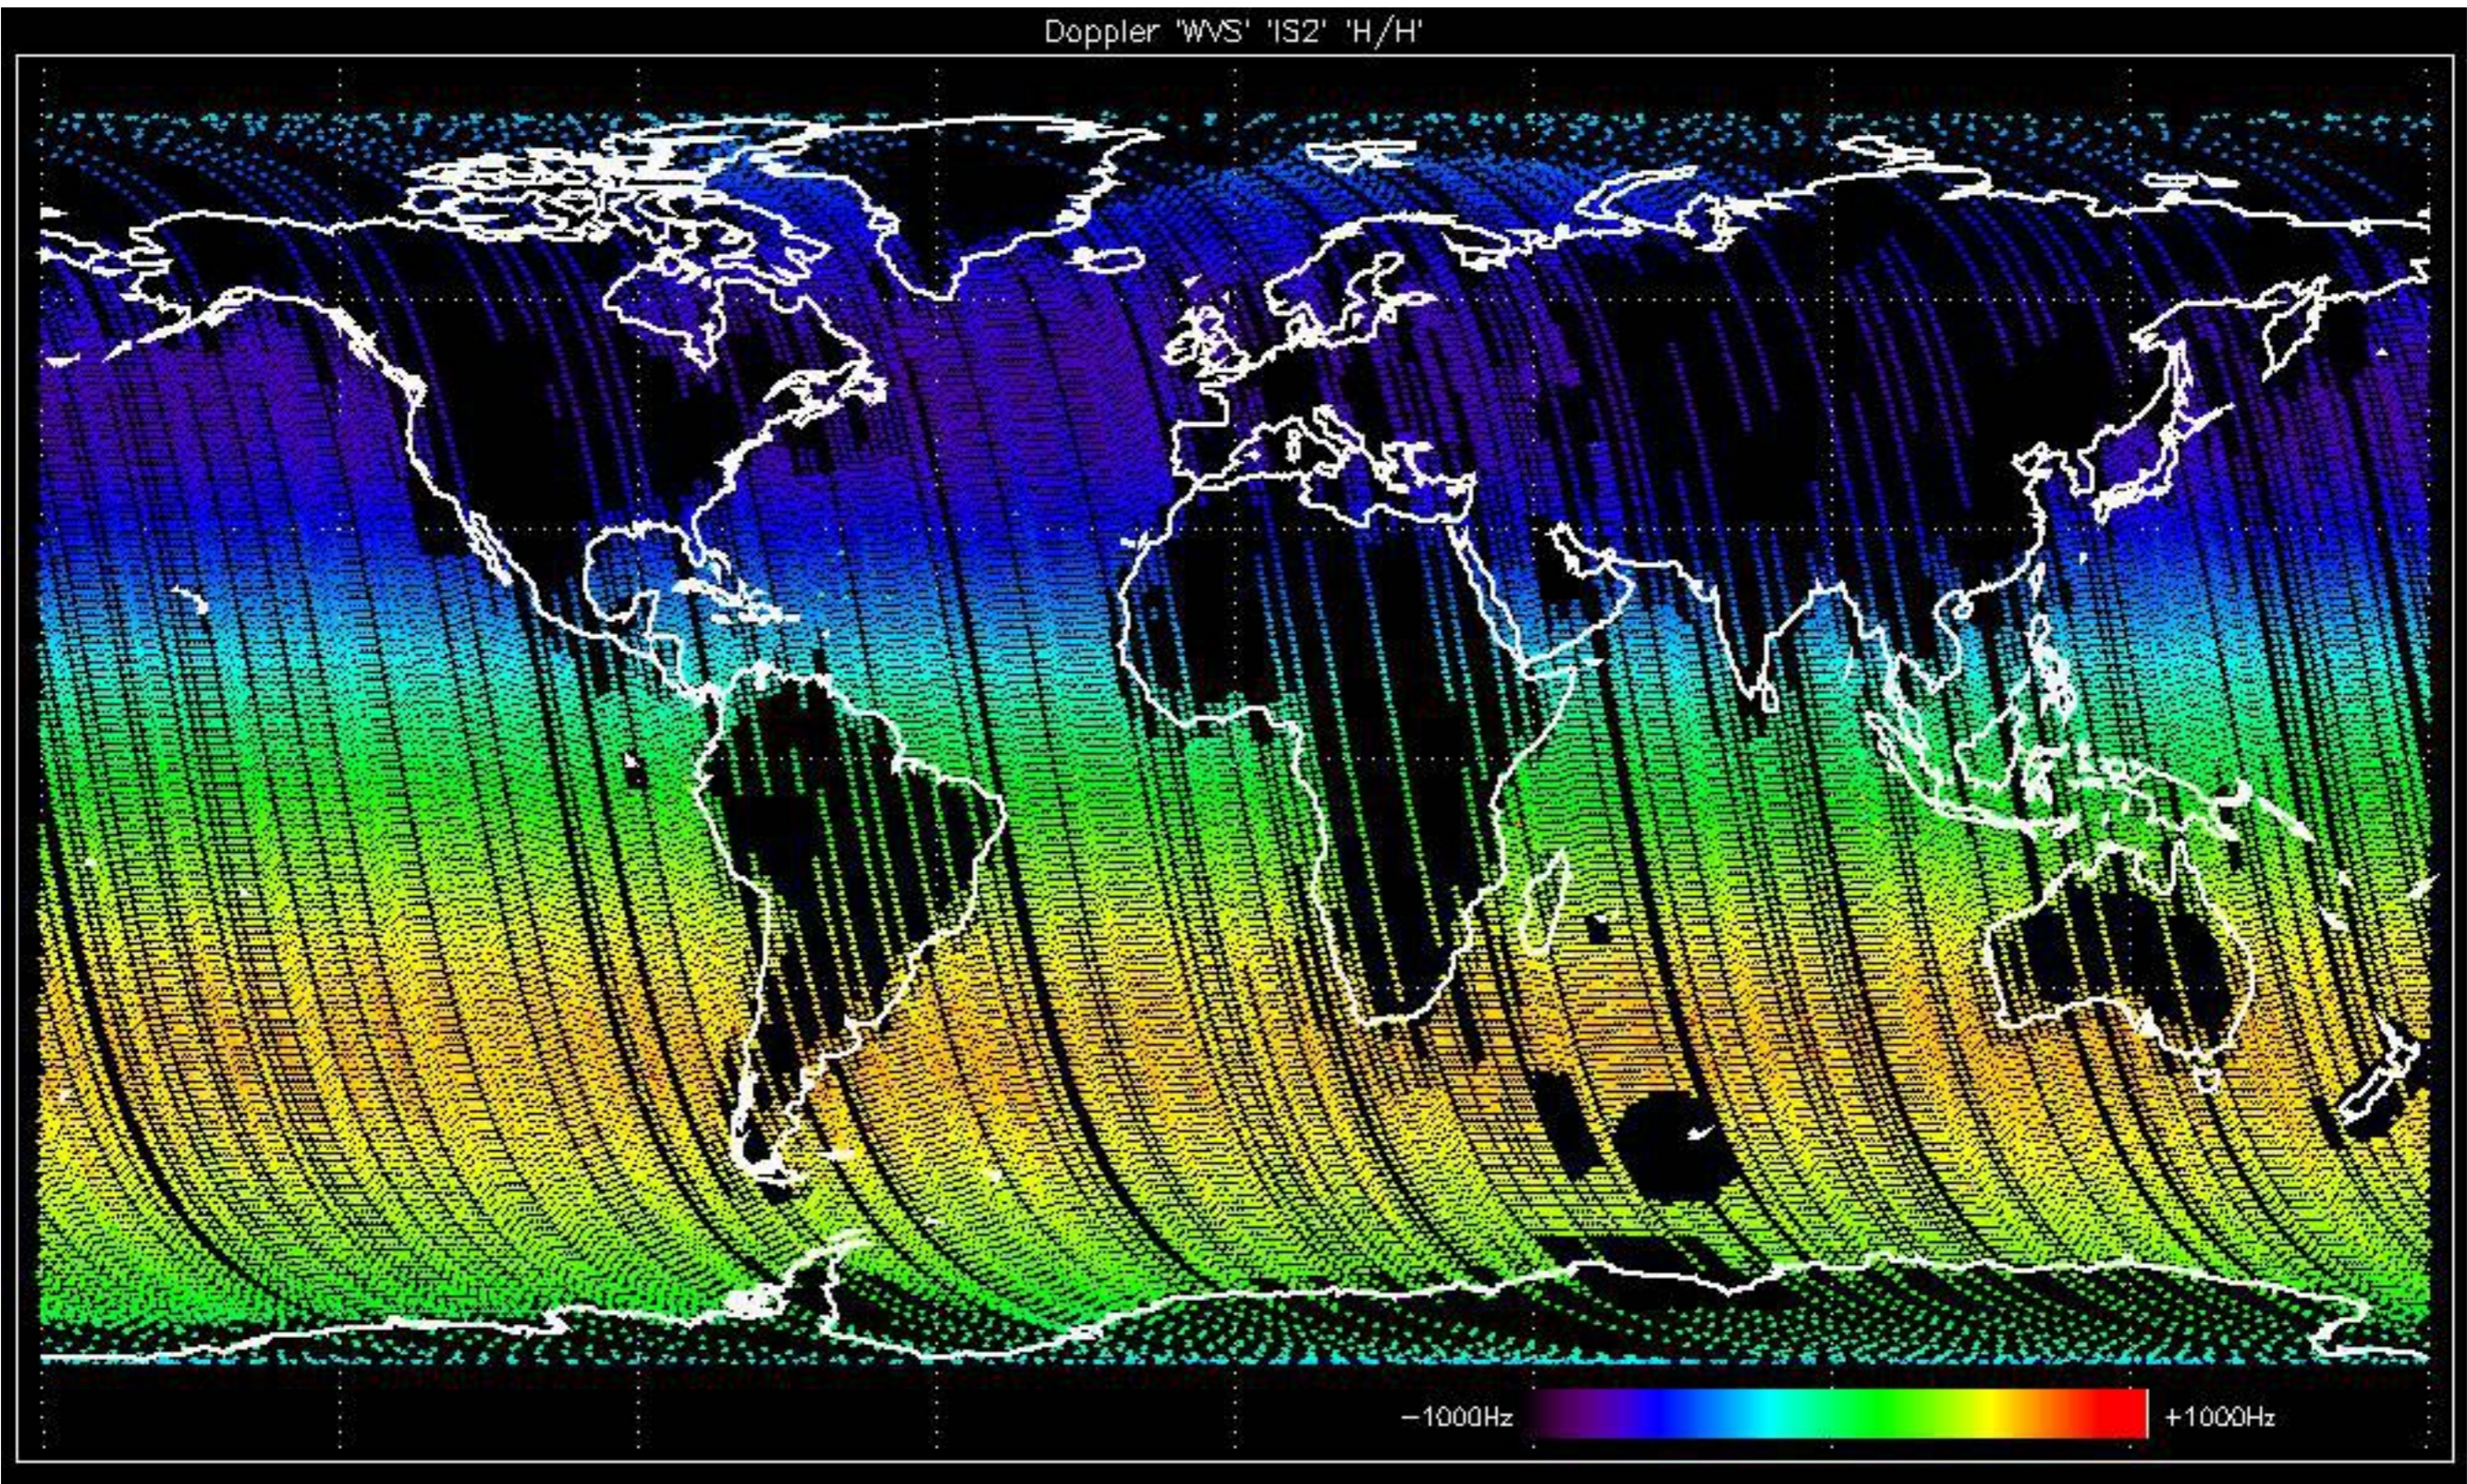


Doppler 'WVS' 'IS2' 'V/V'

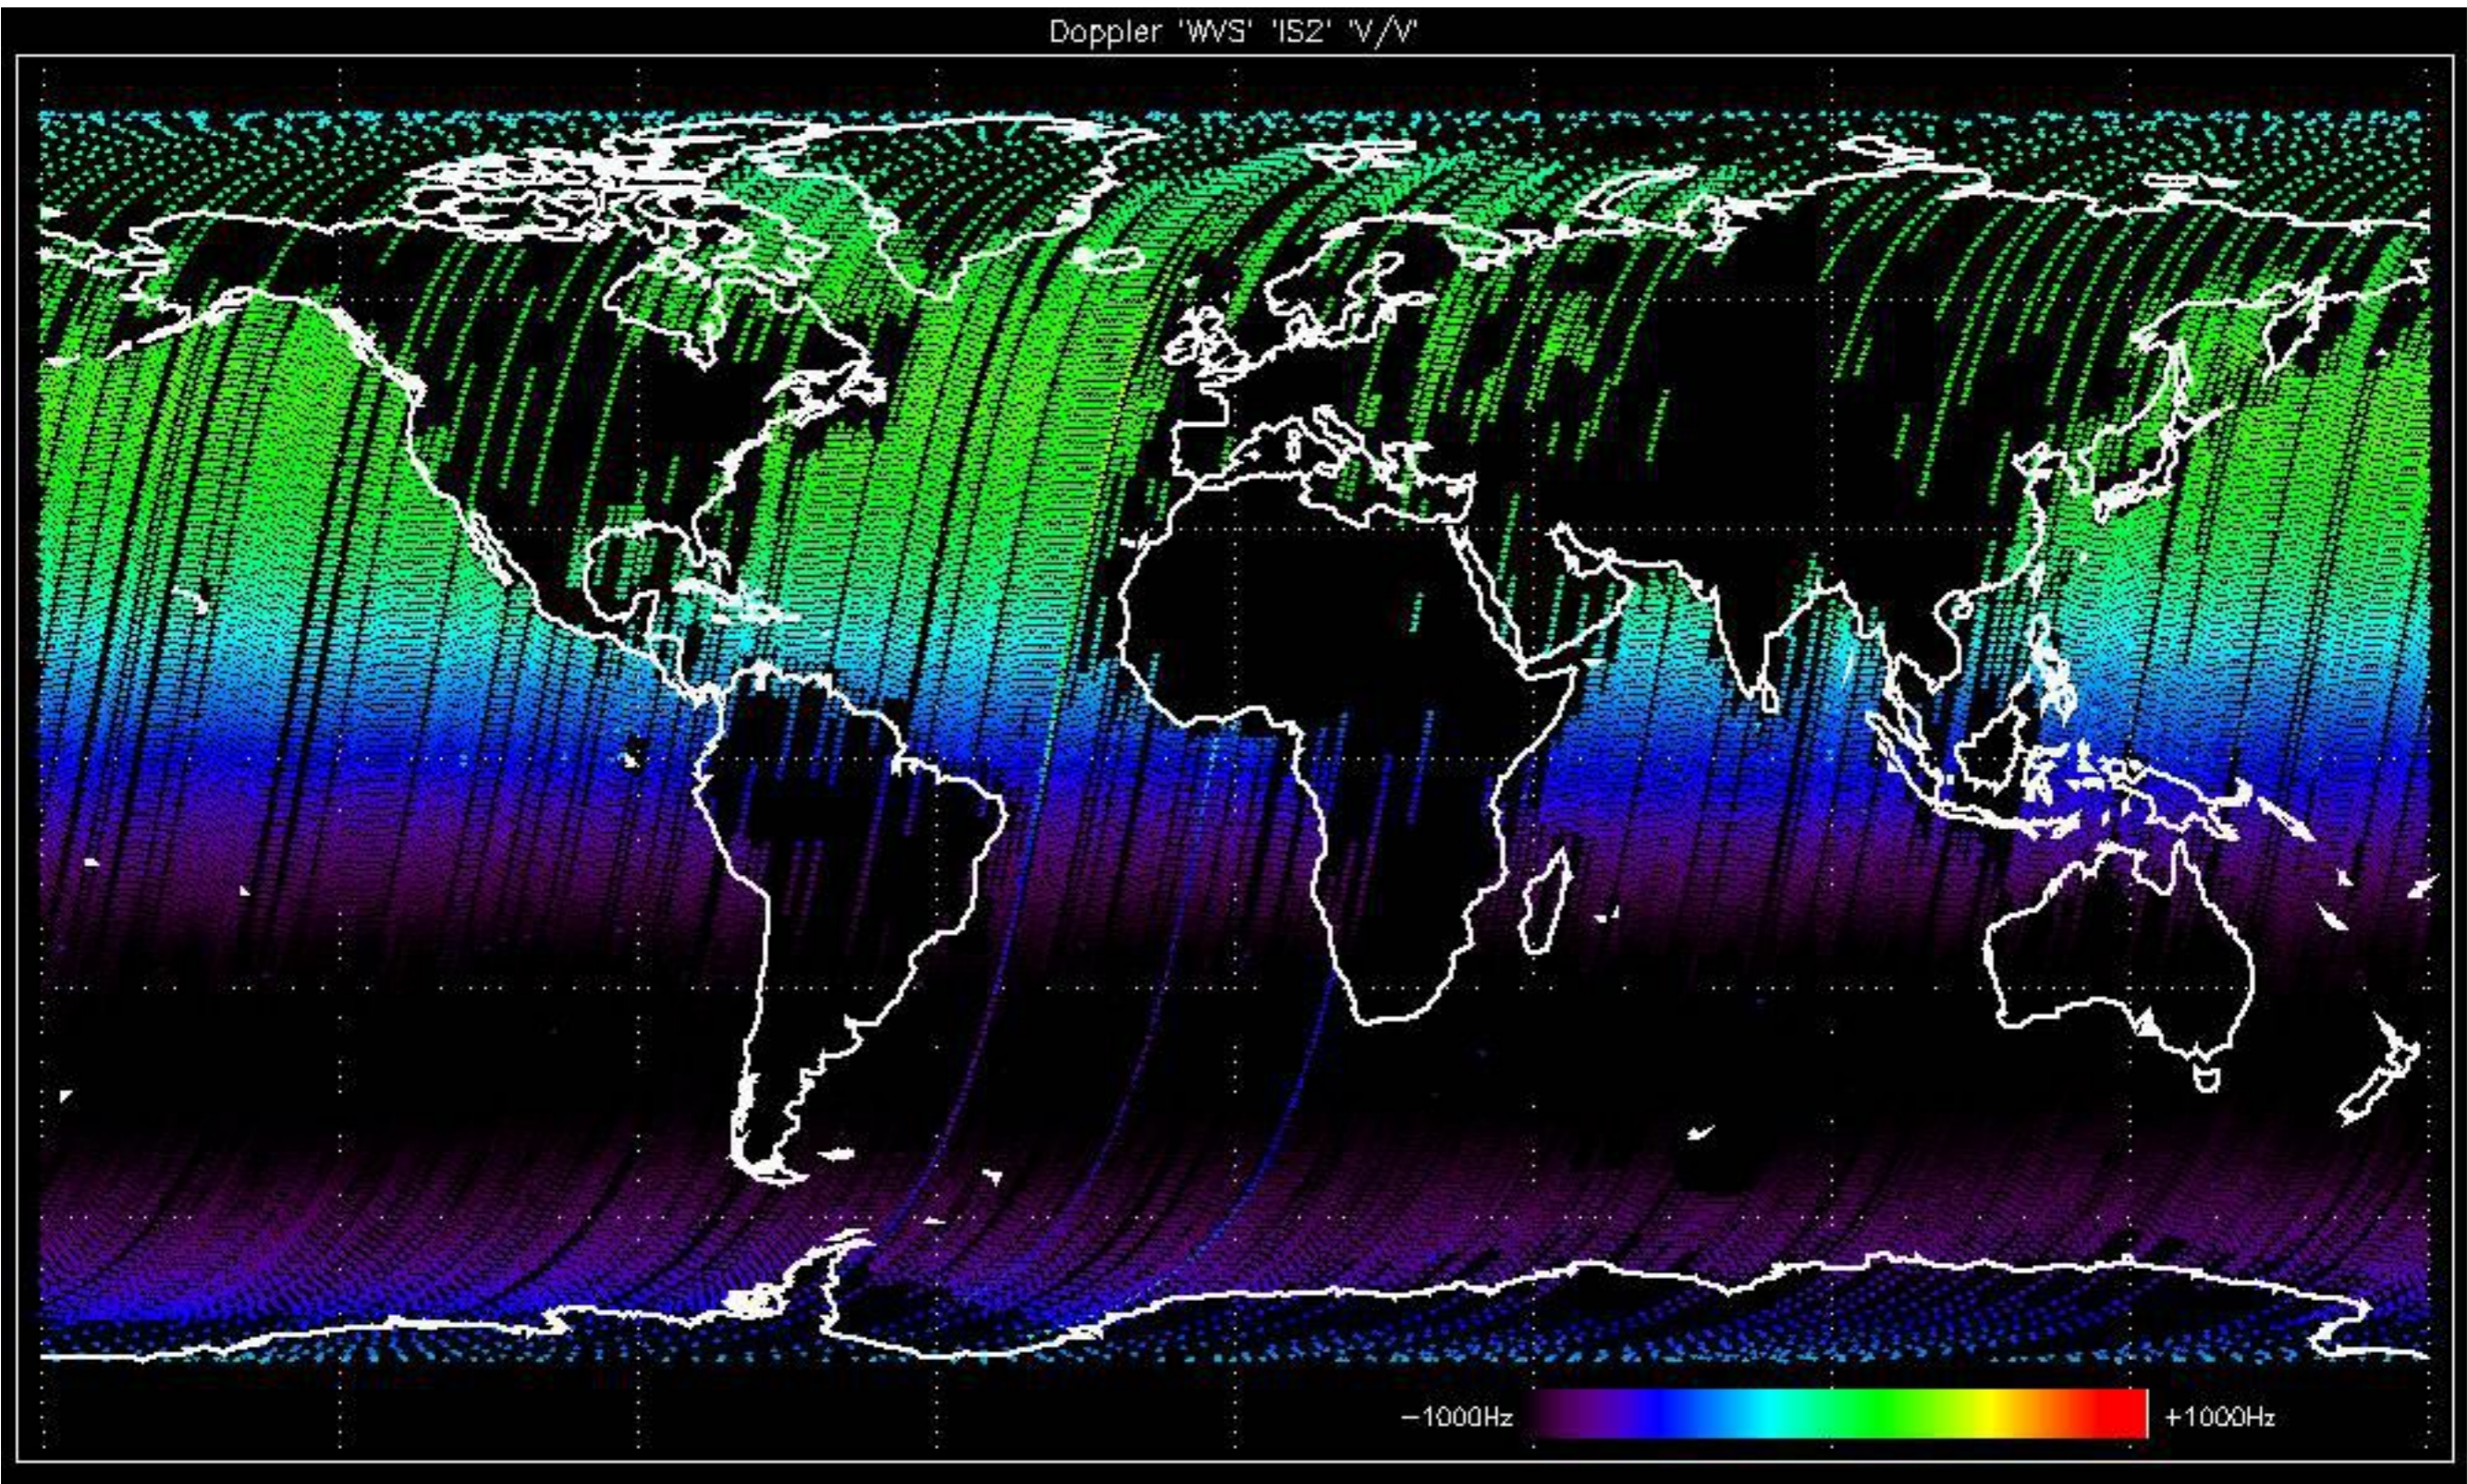


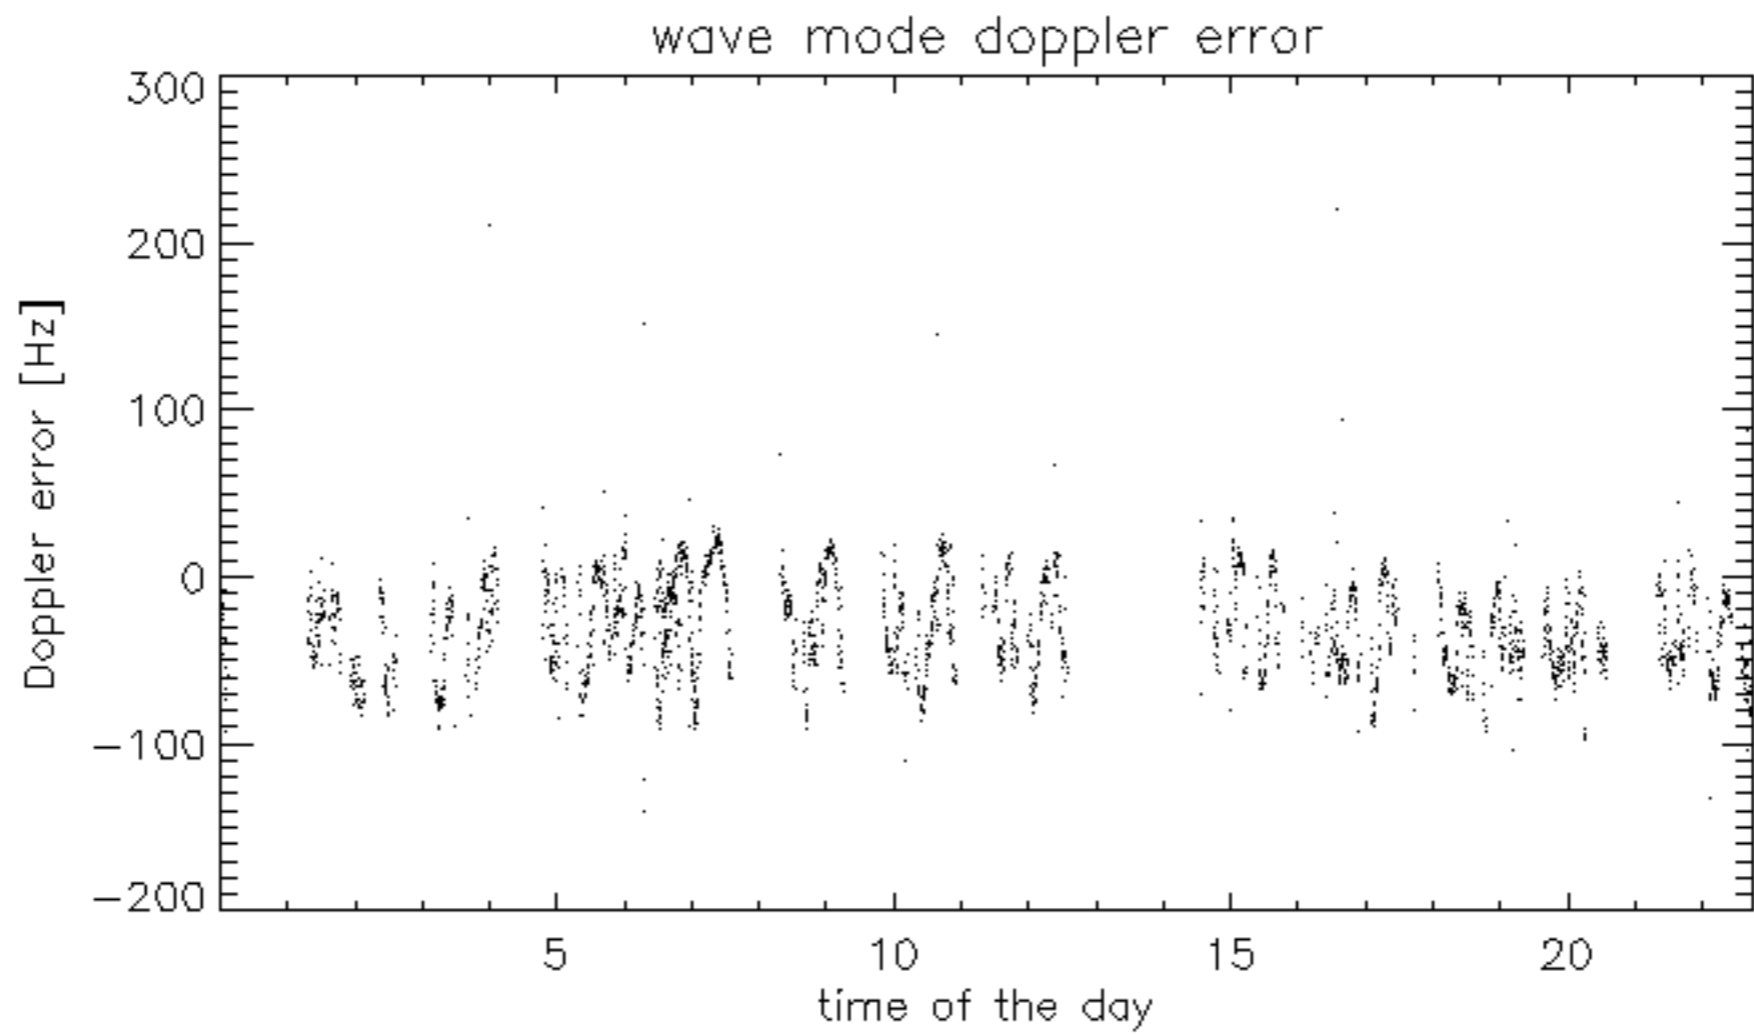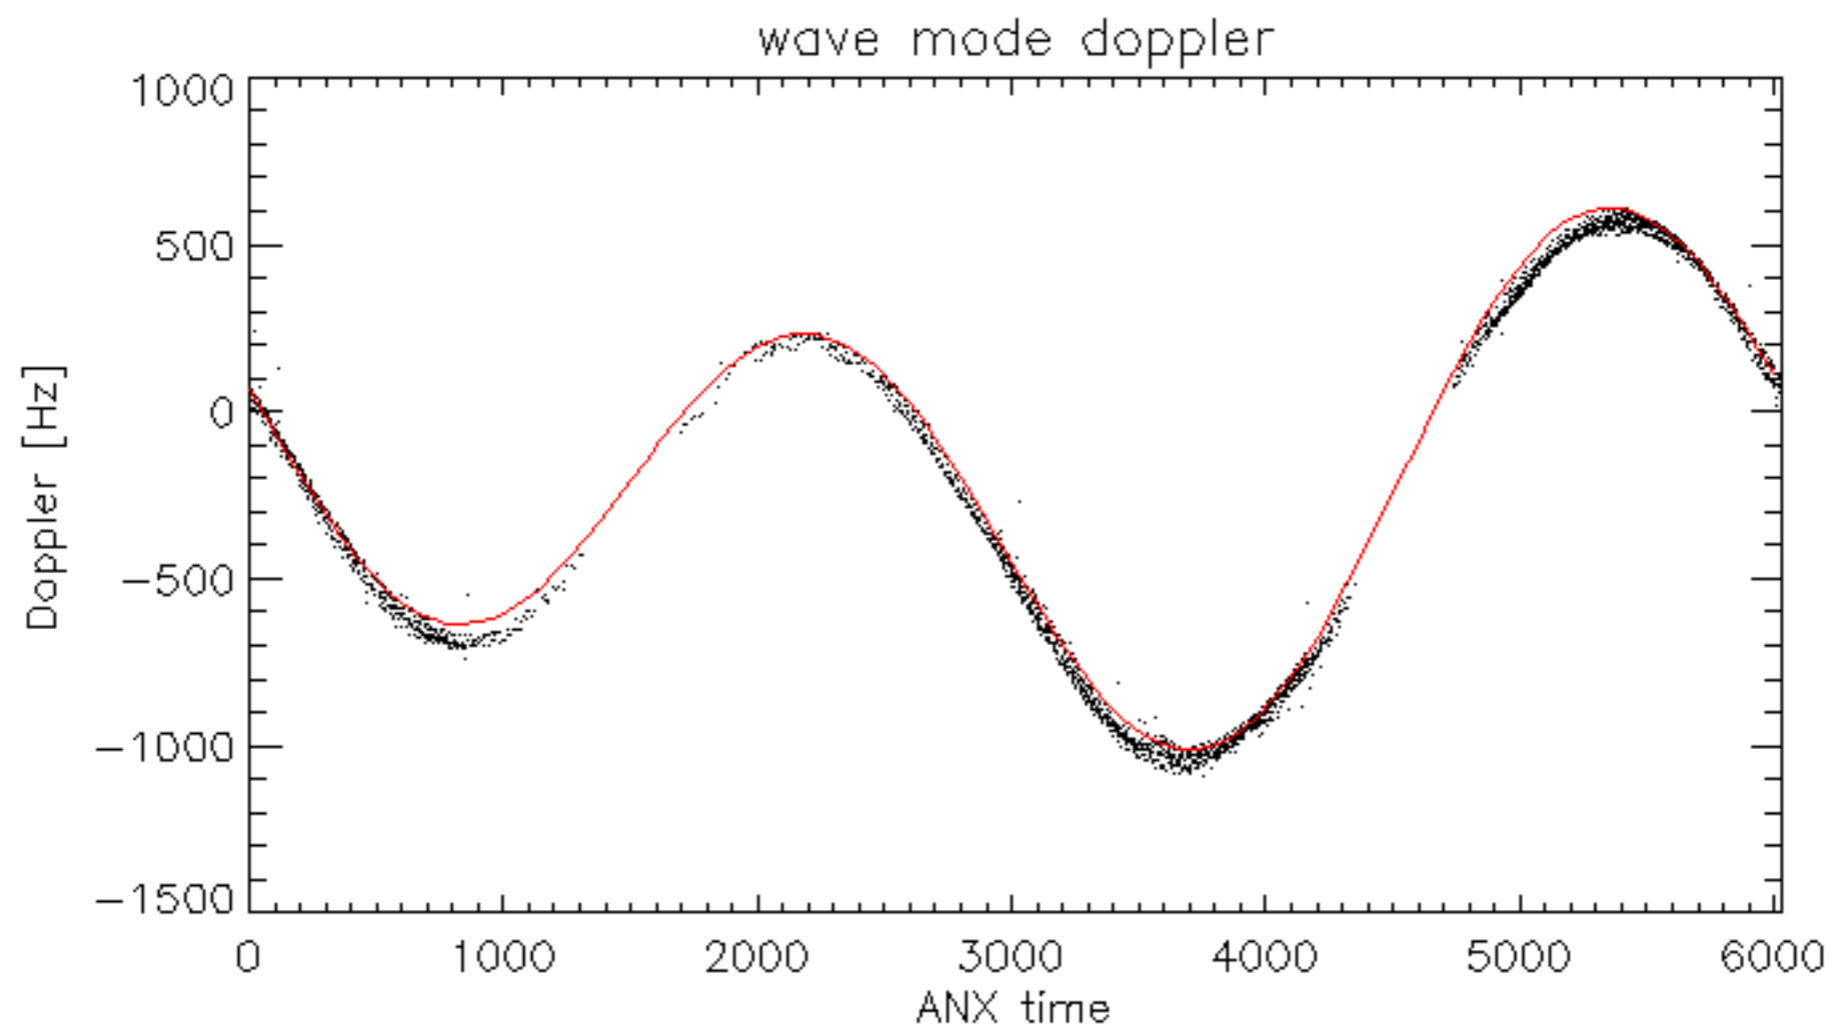

Doppler difference, estimated-predicted 'WVS' 'IS2' 'H/H' -error mean of -30.654424 Hz

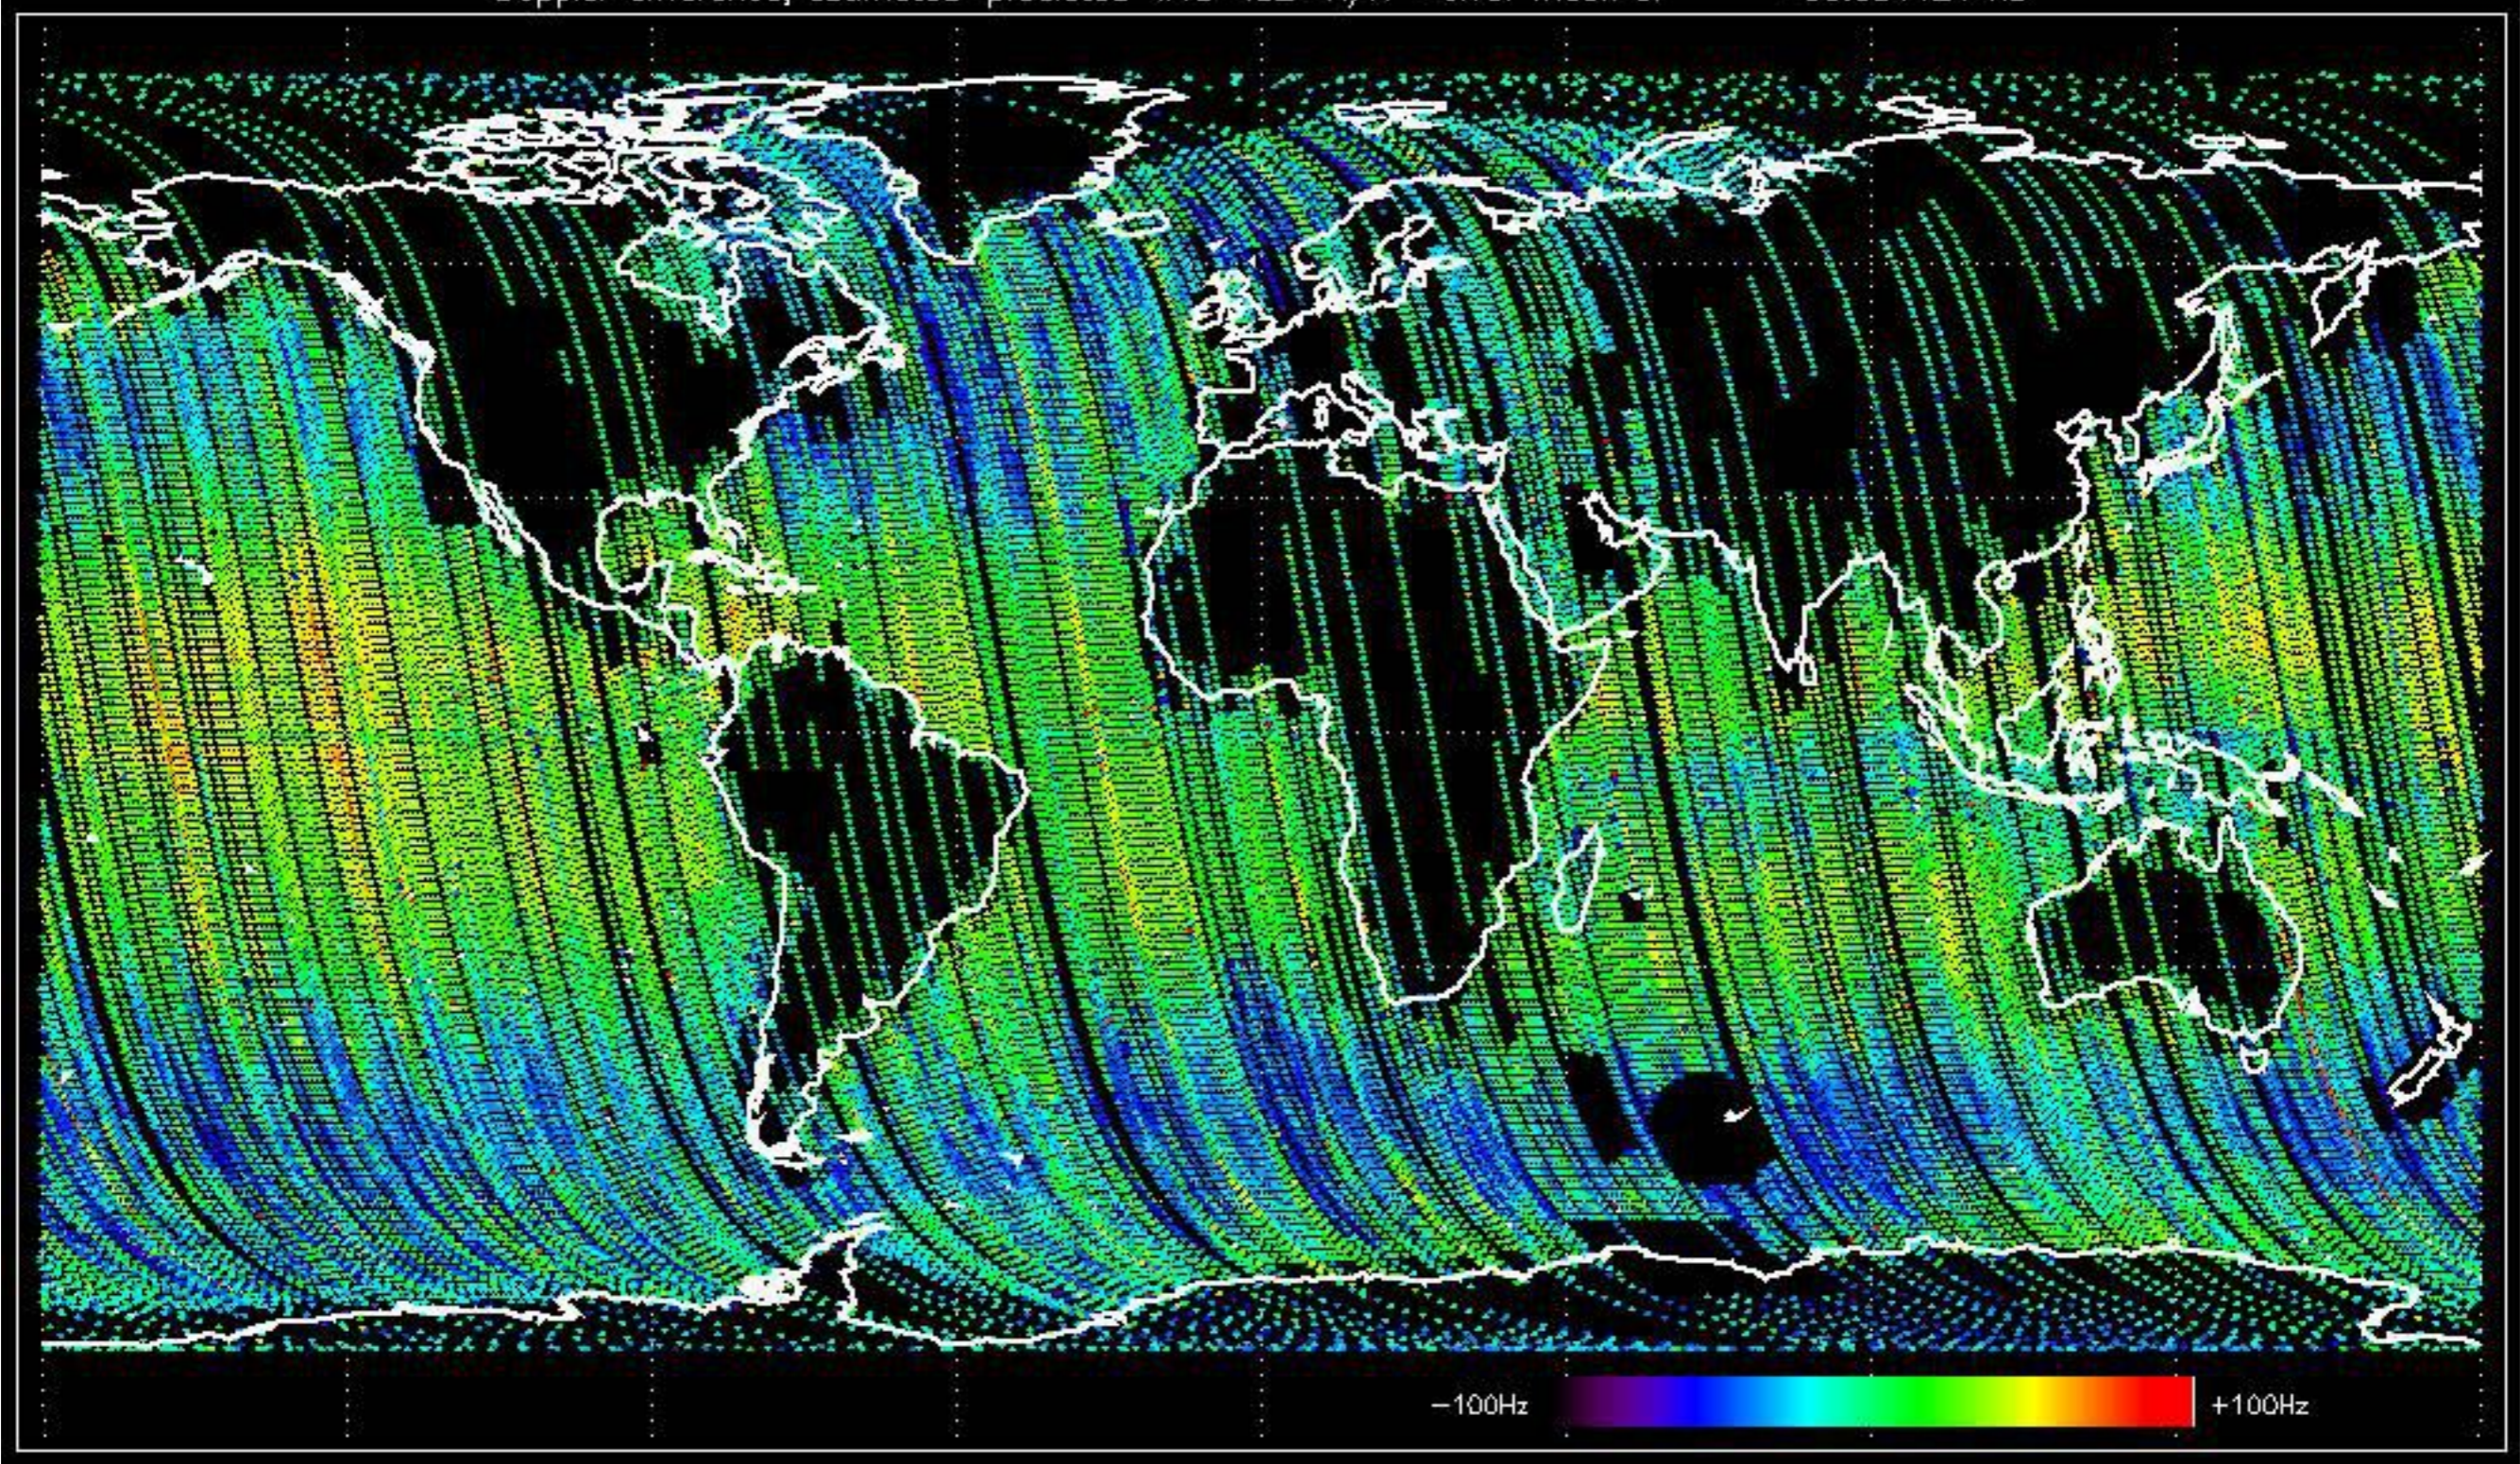


Doppler difference, estimated-predicted 'WVS' 'IS2' 'V/V' -error mean of -27.902789 Hz



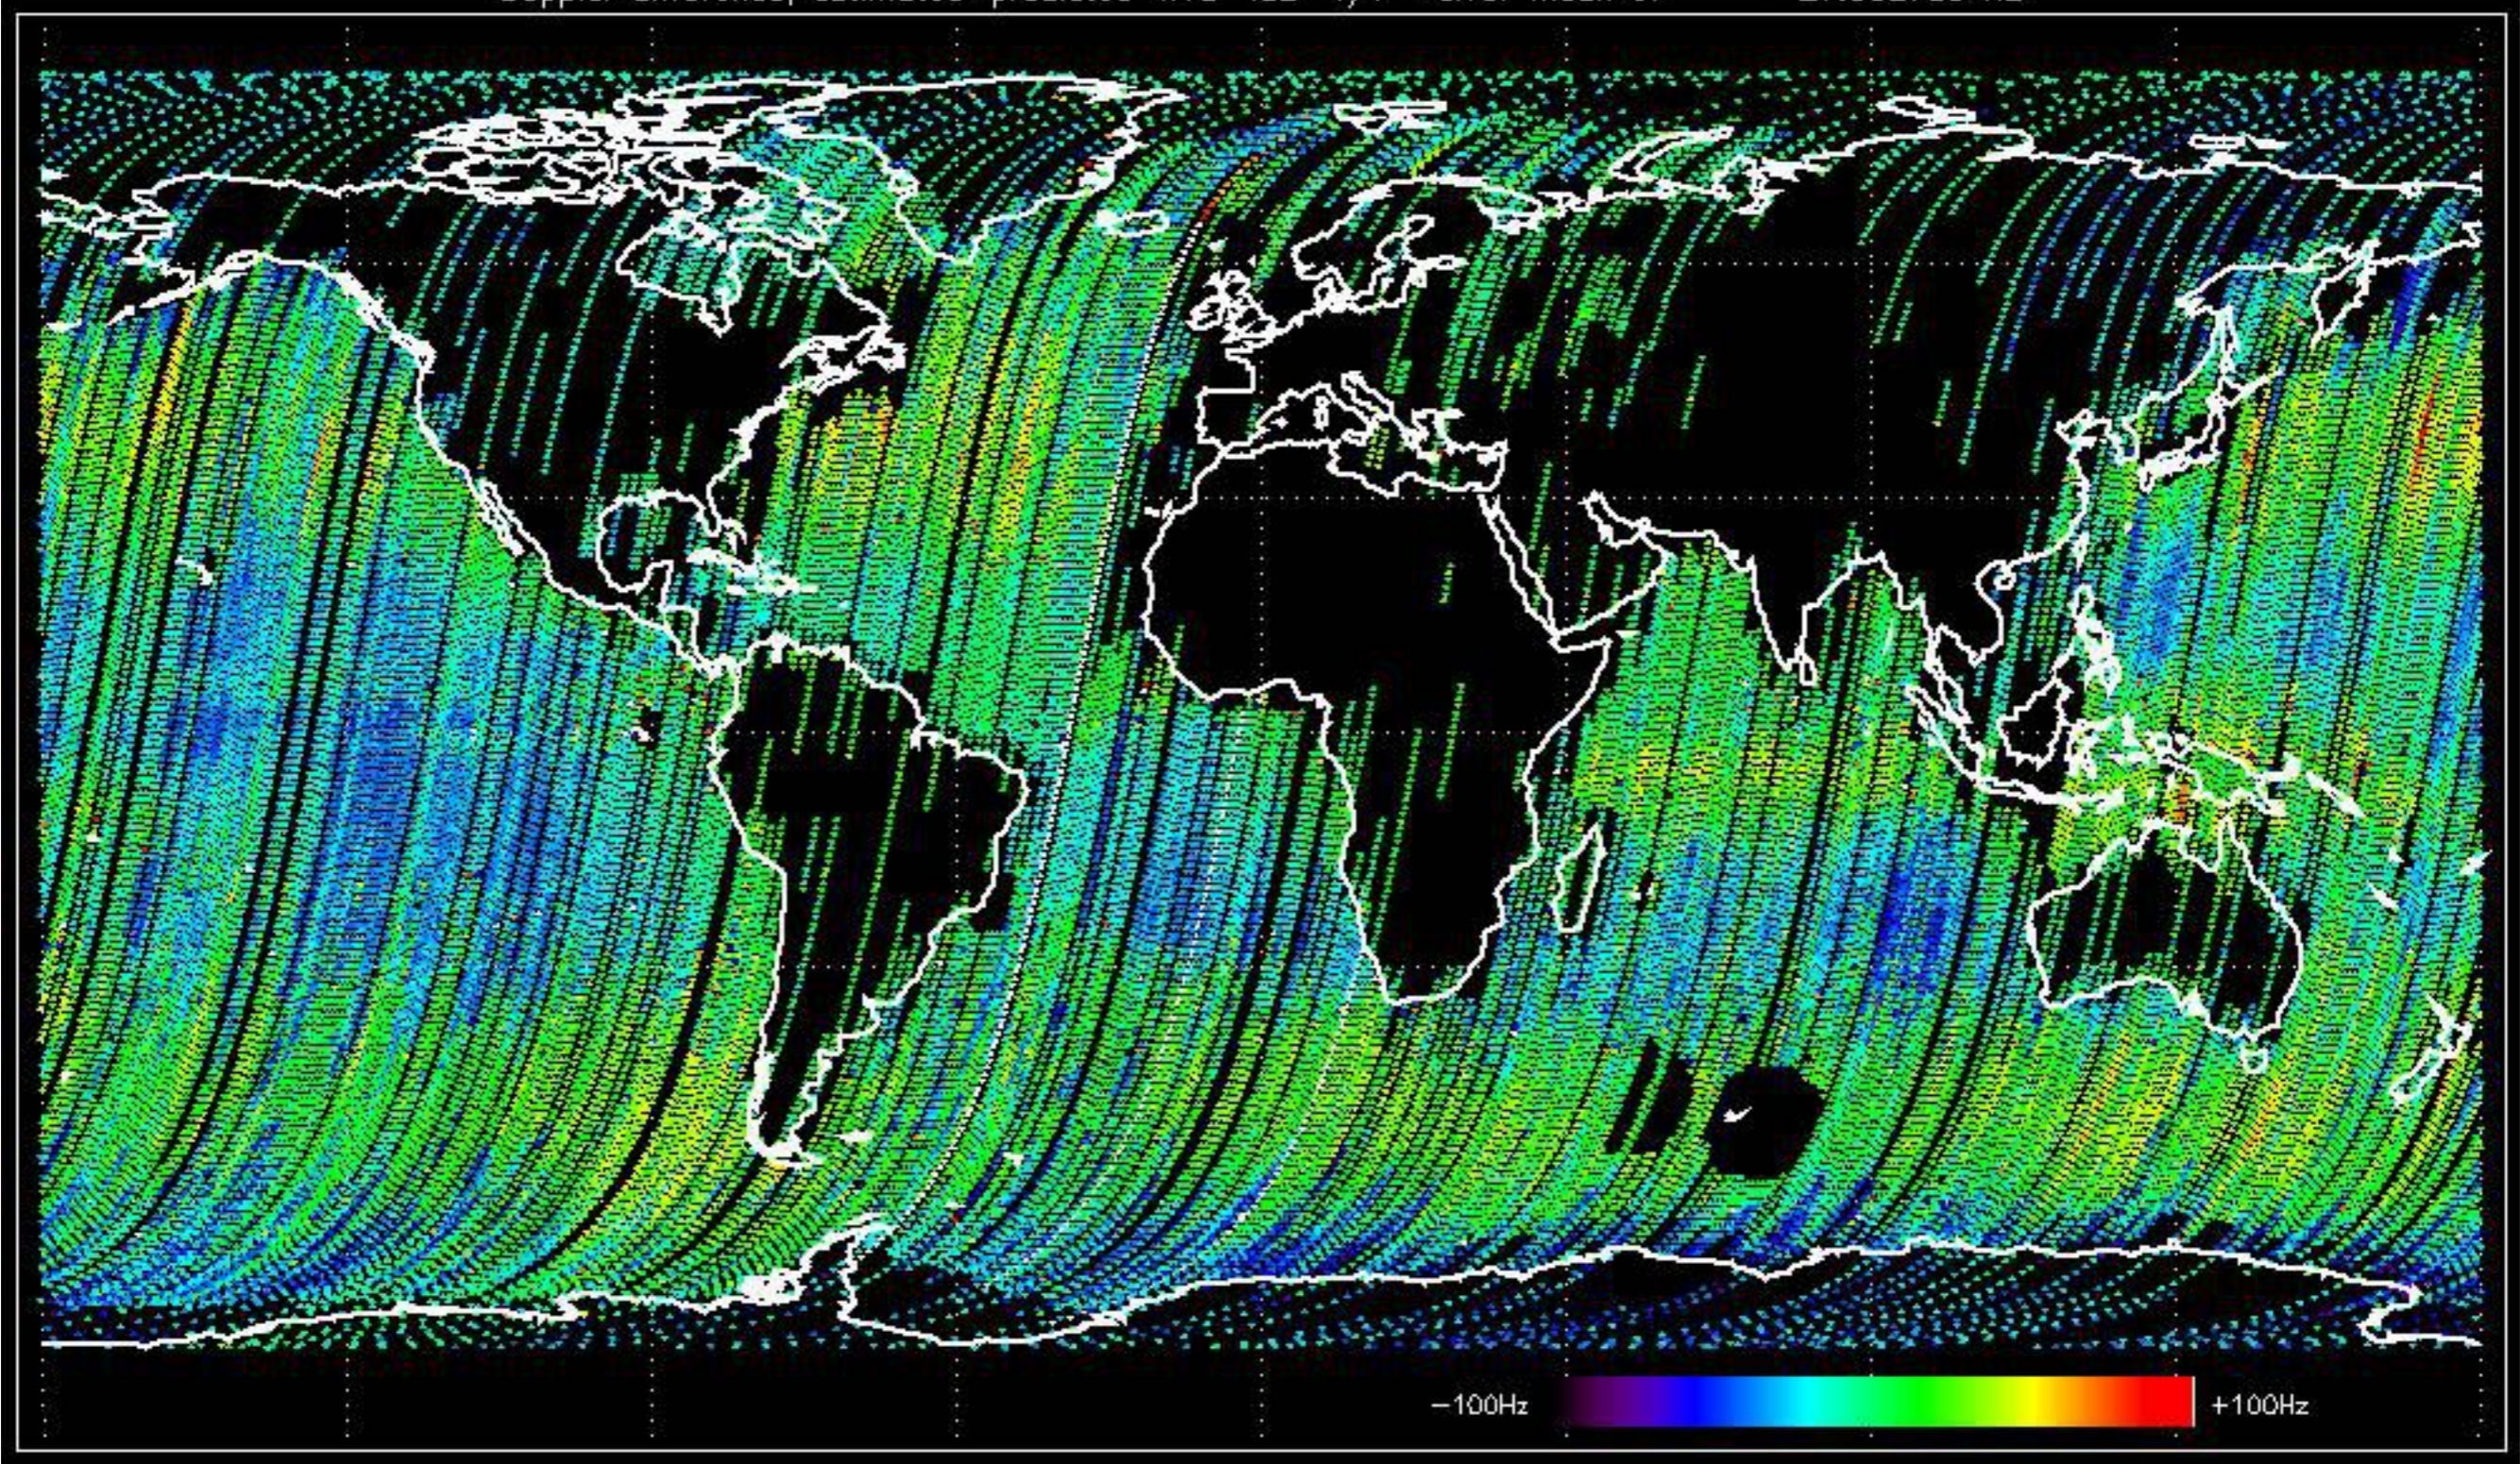





The MS mode provides an internal health check on an individual module basis.
The purpose of this mode is to identify to identify any malfunctioning modules and
to identify modules for which calibration offsets are to be applied.
No anomalies observed on available MS products:

- ASA_MS__0PNPDK20040304_202419_000000152024_00443_10517_0250.N1
- ASA_MS__0PNPDK20040304_202539_000000152024_00443_10517_0249.N1

No anomalies observed.

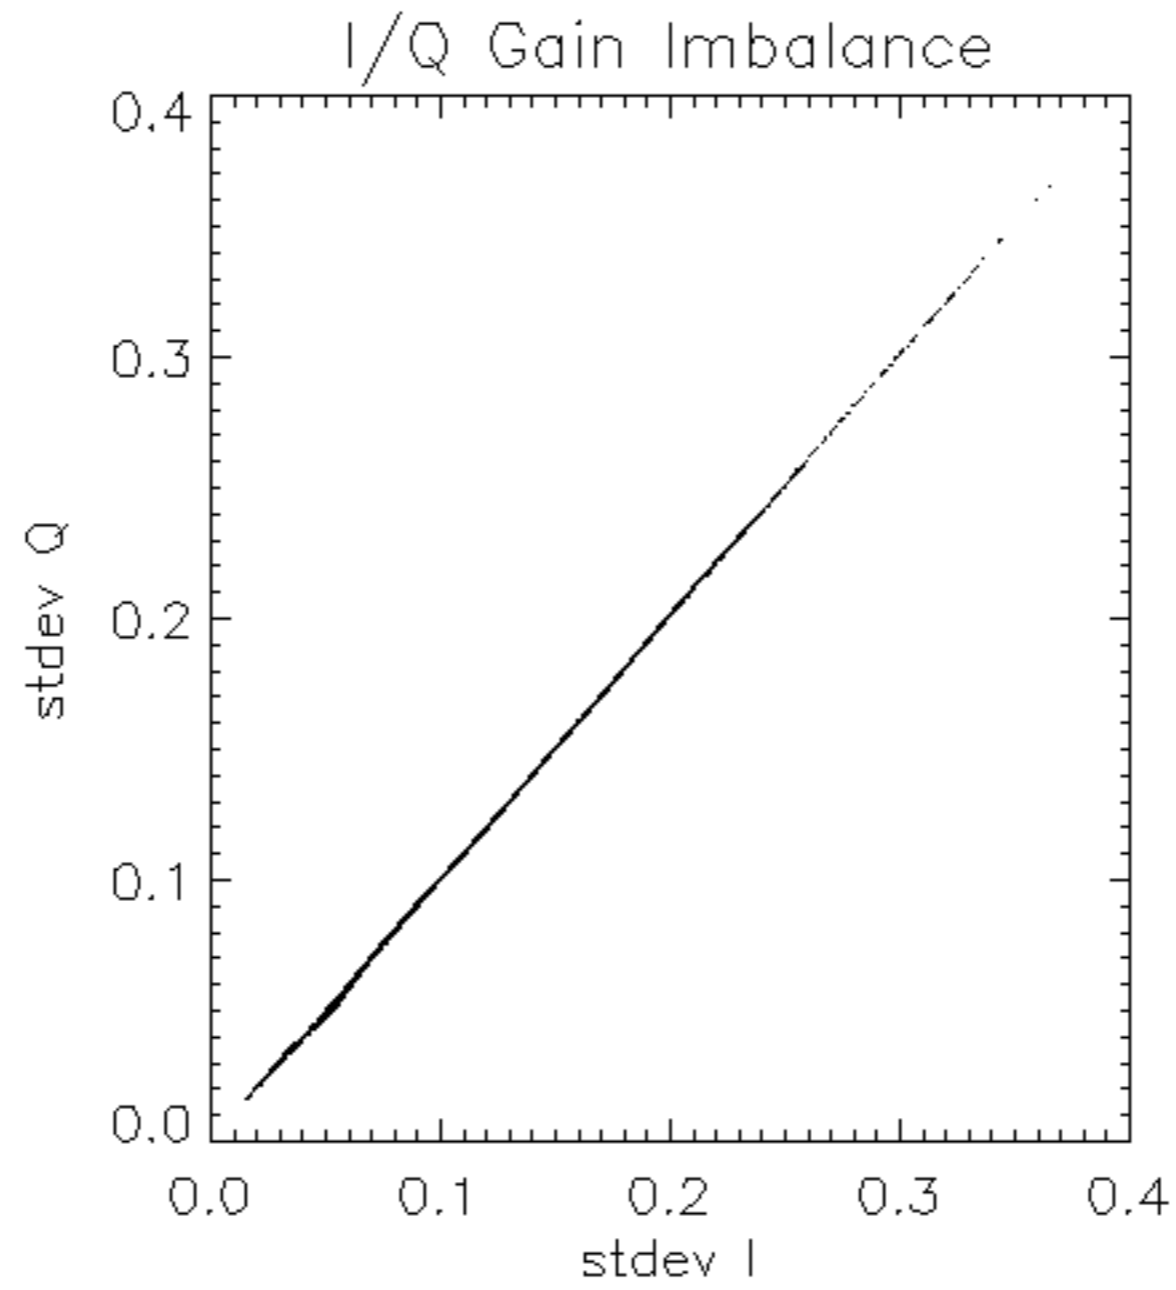

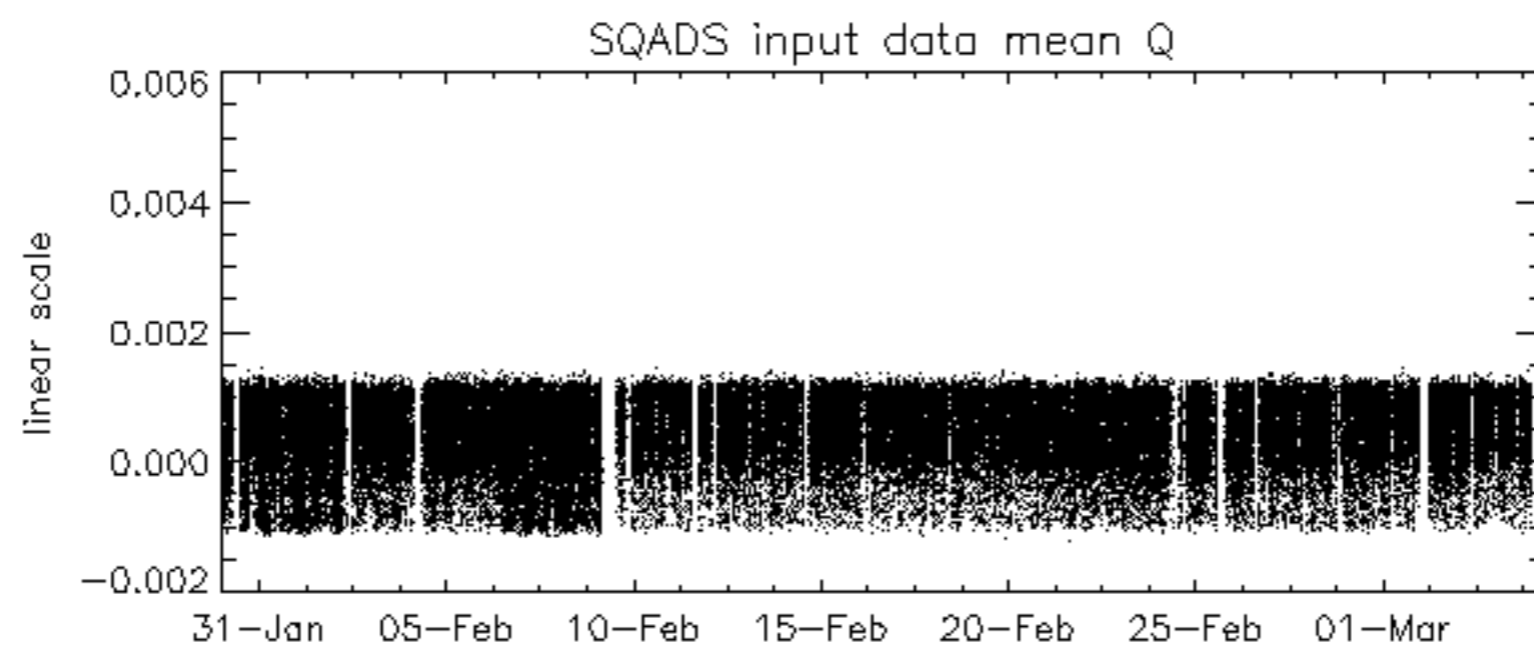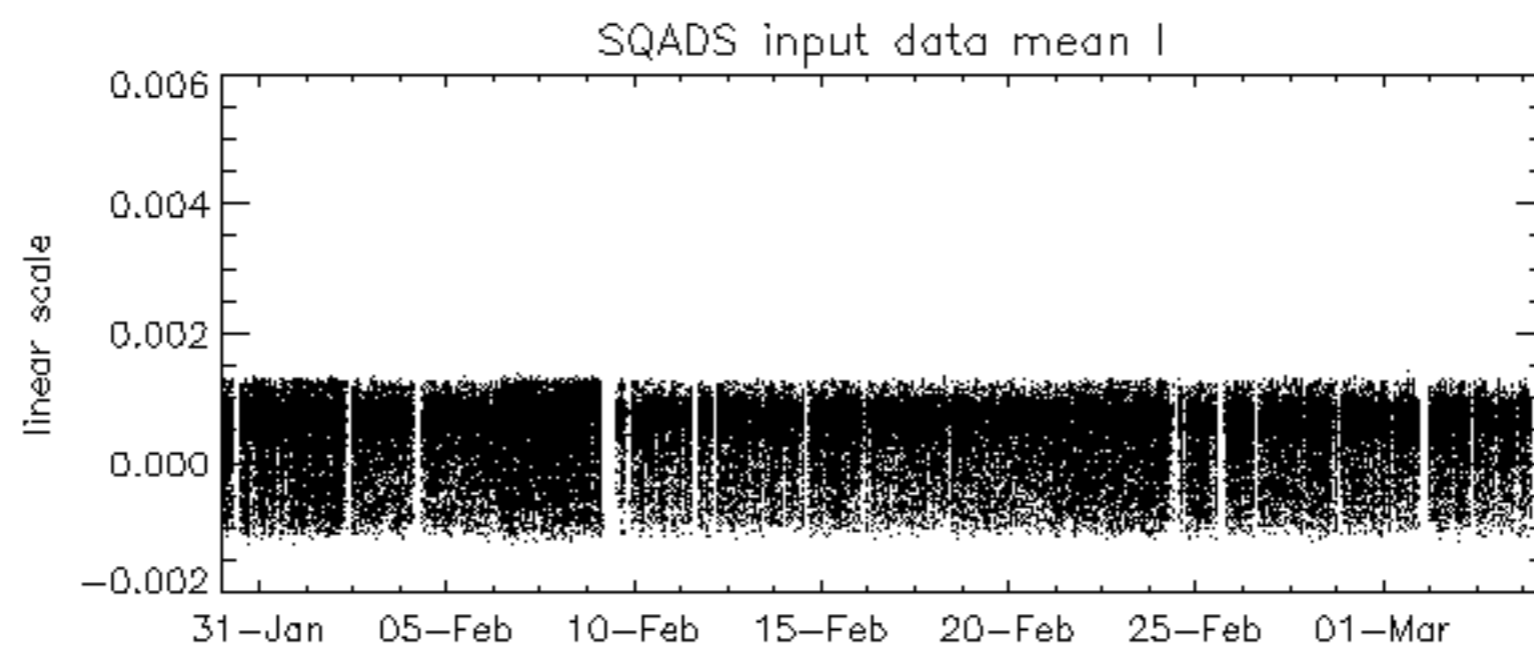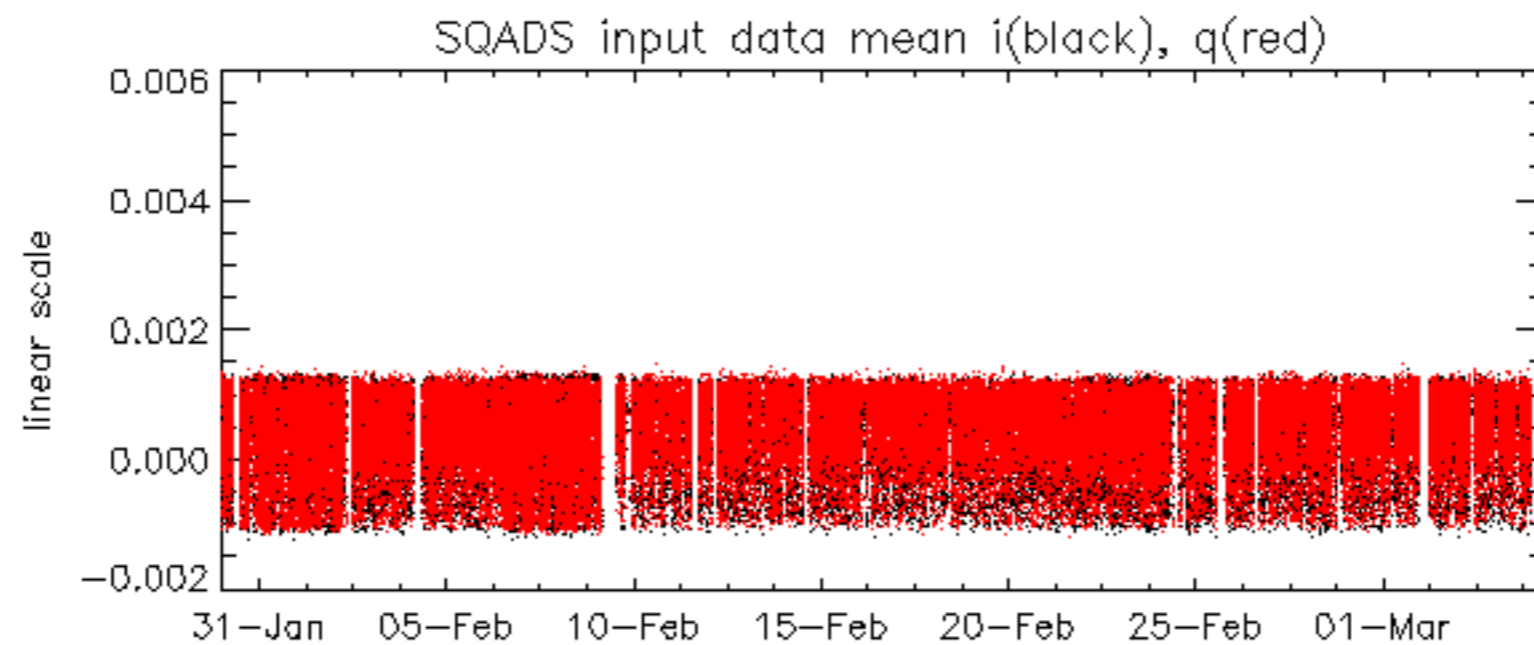

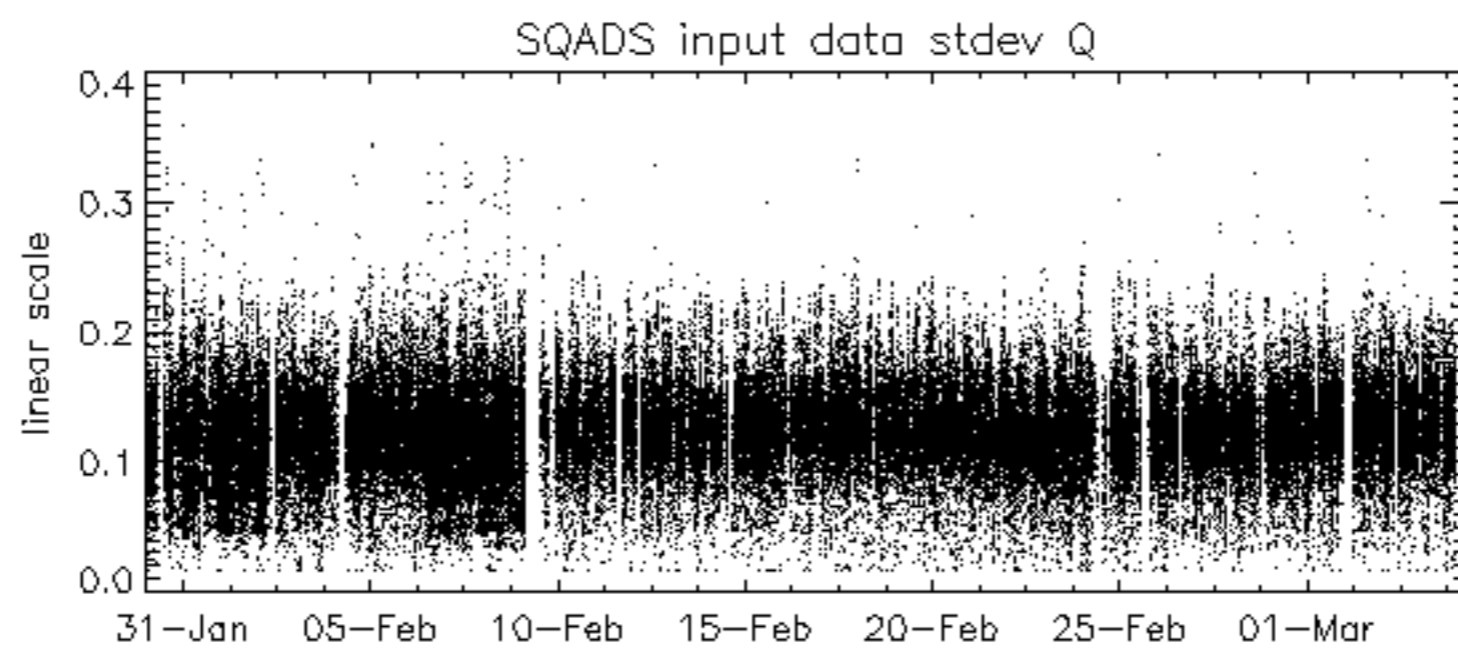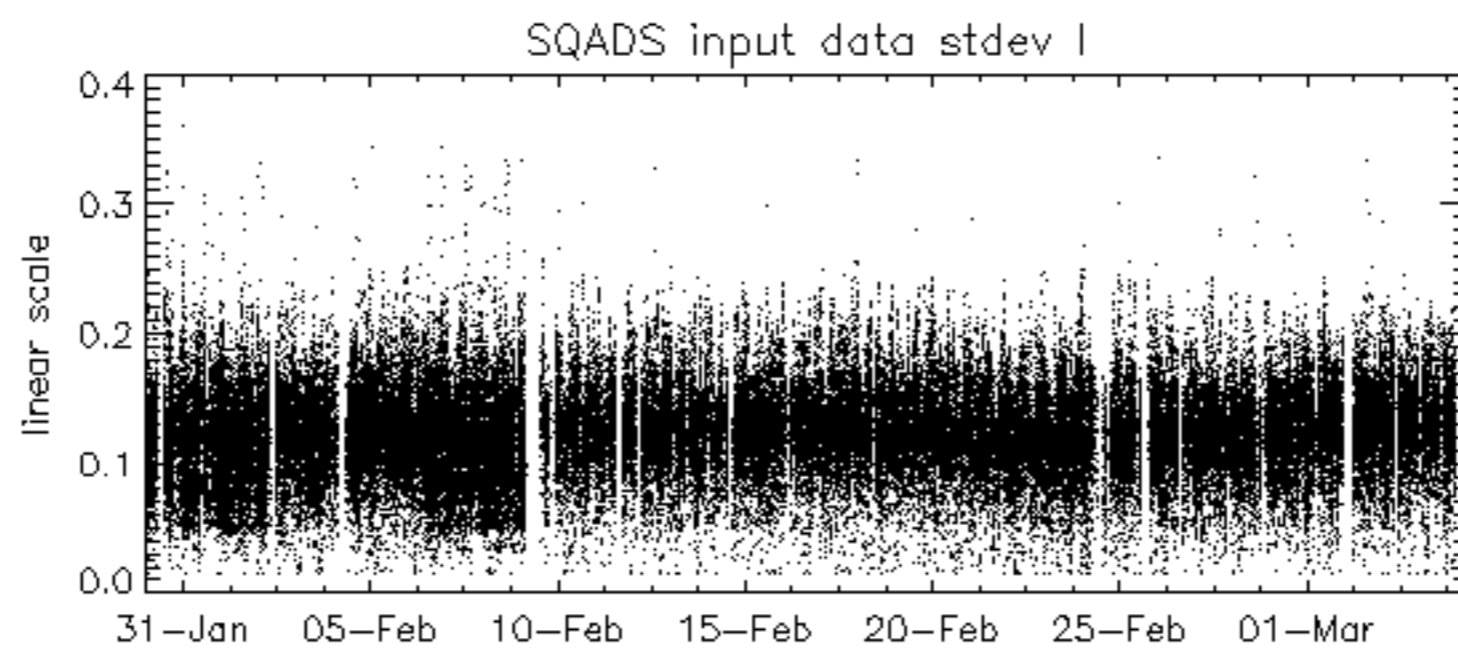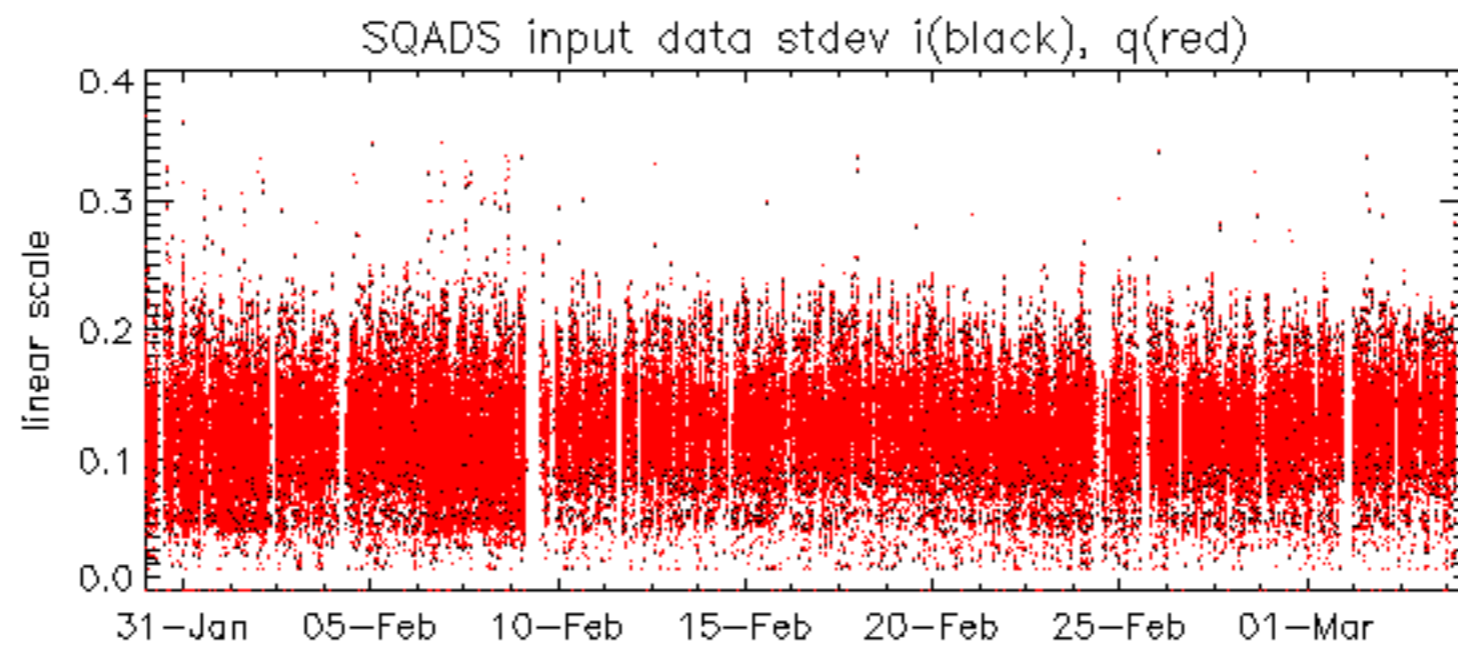

No unavailabilities during the reported period.