

ENVISAT Microwave Radiometer Assessment Report

Cycle 055

23-01-2007 – 26-02-2007

Prepared by :	L. EYMARD, LOCEAN/IPSL B. PICARD, CLS E. OBLIGIS, CLS OZ. ZANIFE, CLS	
Checked by :	OZ. ZANIFE, CLS	
Approved by :	P. FEMENIAS, ESA	



Contents

1	Introduction	5
2	Synthesis	6
2.1	Conclusion for cycle 055	6
2.2	Long term monitoring	6
3	Notable events during cycle 055	8
3.1	Gain survey	8
3.2	Sky horn and hot load counts survey	9
3.3	Residual temperature survey	10
3.4	Cold ocean Tb monitoring	10
4	Long-term trends and former notable events	12
4.1	Gain survey	12
4.2	Sky horn and hot load counts survey	13
4.3	Residual temperature survey	14
A	Monitoring of the radiometer internal parameters	15

List of Figures

1	Time evolution of the gain (zoom on the last 3 cycles).	8
2	Time evolution of the sky horn (top) and hot load (bottom) counts (zoom on the last 3 cycles).	9
3	Time evolution of the residual temperature TE (zoom on the last 3 cycles). . . .	10
4	Cold Ocean brightness temperature for the 23.8 Ghz channel (top) and the 36.5 GHz channel (bottom) (90 days running average).	11
5	Time evolution of the gain since Envisat launch.	12
6	Time evolution of the sky horn (top) and hot load (bottom) counts since Envisat launch.	13
7	Time evolution of the residual temperature TE since Envisat launch.	14
8	Scheme of one channel of the MWR	15

References

- [1] Bernard et al, *The microwave radiometer aboard ERS-1: Part 1 - characteristics and performances*, IEEE Trans. Geosci. Remote Sensing, 31(6), 1186-1198, 1993.
- [2] Eymard et al, *Intercomparison of TMR and ERS/MWR calibrations and drifts*, SWT TOPEX-JASON, New Orleans, Oct. 2002.
- [3] Eymard et al, *Reports on activities performed in 2001 on the ERS2/MWR survey*, May 2002.
- [4] Eymard et Obligis, *Preliminary report on long-term stability of ERS2/MWR over continental areas*, 1999.
- [5] Obligis et al, *An assessment of ENVISAT/MWR measurements and products*, *Envisat QWG meeting*, 26-27 September 2005, Toulouse, France.
- [6] Obligis et al, *Envisat/MWR: 36.5 GHz channel drift status*, March 2003.
- [7] Ruf, *Detection of calibration drifts in spaceborne microwave radiometers using a vicarious cold reference*, IEEE Trans. Geosci. Remote Sens., 38(1), 44-52, 2000.
- [8] Tran, Obligis, and Eymard, *Evaluation of Envisat MWR 36.5 GHz (updated status)*, CLS-DOS-NT-05-073 Report, 20 April 2005.

Editing modifications

Version	Date	Object
1.0	April 2007	Creation of the document.

1 Introduction

This document aims at reporting the behavior of ENVISAT Microwave Radiometer in terms of instrumental characteristics and quality of the brightness temperatures for cycle 055, from 23-01-2007 to 26-02-2007 (CNES Julian Day 20841 to day 20875).

It is performed on the MWR level 1B data product. The decoding and the pre-processing are done with the MWR level 1B reference processing chain located at CLS, using MWR level 0 data product as input (MWR_NL_OP). The data are from the ESA's ground stations in Kiruna, Sweden, and at ESRIN, Italy.

The objectives of this document are :

- to provide an instrumental status
- to check the stability of the instrument
- to report any change at the instrumental level likely to impact quality of the brightness temperatures

It is divided into the following topics:

- **Synthesis of cycle 055 events and long term monitoring**
- **Notable events during cycle 055**
- **Long-term trends and former notable events**

2 Synthesis

2.1 Conclusion for cycle 055

- **No notable events on the gain survey and on the counts survey.**
- **The residual temperature on both channels is stabilized.**
- **The cold ocean Tb on both channels are the coldest since launch. A geophysical origin is considered.**

2.2 Long term monitoring

The monitoring of the main instrumental parameters of the radiometer up to cycle 055 shows a drift of the 36.5 GHz channel. It appears that the gain, the sky horn counts, and the hot load counts have decreased between 3 and 20.91% since launch.

A big spike is also observed around day 20485 (**cycle 44**) for 23.8 GHz and 36.5 GHz channels.

A platform incident has occurred during **cycle 46**, between CNES Julian day 20549 and day 20552.

The residual temperature is now 3.50 times higher in absolute value than the one estimated at the beginning of the mission and 4-6 times higher than the one expected from ground testing. No explanation is provided to date.

These features should impact the 36.5 GHz brightness temperature as reported in (Obligis et al, 2003). But as seen in the monitoring of the cold ocean brightness temperatures through the different previous reports the slope of the derived regression line varies at each cycle which makes the quantification of the real impact difficult since the variation observed on the cold TB is a combination of the instrumental features and the annual natural cycle.

Updated status on the 36.5 GHz channel drift was performed in April 2005 from 2 years of data (Tran et al, 2005) corresponding to the period from cycle 11 to cycle 31. This assessment pointed out an impact on 36.5 GHz brightness temperatures of about +0.5 K/year for TB at 150 K (synthesis from different methods at the low end of the TB histogram) and of +0.9 K/year at 250 K (synthesis from different methods at the high end of the TB histogram). Transcription of these results in term of effect on wet tropospheric path delay showed a decrease of about -0.9 mm/year at 5 cm (dry atmosphere) and -0.6 mm/year at 30 cm (wet atmosphere). This leads to observe significant impact on the global sea level rise estimation.

Moreover, the drift characteristics induce geographical errors, we observe systematic overestimation of sea level for dry atmospheres (high latitudes) (Obligis et al, 2005).

The table below sums up main monitoring anomalies observed since ENVISAT cycle 36 :

Cycle Number	CNES Julian Days	Impacted Monitoring parameters
53	around 20787 and 20802	Two unavailable L0 MWR data periods.
51	around 20702	Two unavailable L0 MWR data periods.
46	around 20552	Gain loss, sky horn counts and hot load counts spikes for both channels.
44	around 20485	Big spike on gain and TE values for both channels.
41	around 20352	Spike on cold ocean TB values for both channels.
36	around 20202	Gain values and sky horn counts step down for 36.5 GHz channel.

Table 1 : Main monitoring anomalies observed from cycle 36

3 Notable events during cycle 055

To monitor the instrument behaviour during its lifetime, the key parameters are plotted in figures 1, 2 and 3: gain (after correction of the thermal variations, modeled as a parabolic function), hot load and sky horn counts, and the residual term TE (residual temperature contribution due to errors in the estimated coefficients). The instrument stability is ensured if none of these parameters do vary with time (see the following paragraphs 2.1, 2.2 and 2.3).

By the other hand, to assess the long term stability of the ERS2 radiometer, monitoring of the two brightness temperatures was performed by selecting the coldest measurements over ocean, as shown in figure 4. This method, derived from Ruf's one for TMR (Ruf, 2000), was found to be the most efficient to point out the slight trend of the ERS2 23.8 GHz channel (Eymard et Obligis, 1999; Eymard et al, 2002) (see the following paragraph 2.4).

3.1 Gain survey

Figure 1 represents the gains of the two channels 23.8 and 36.5 GHz since Envisat launch (top), and on the last three cycles (bottom).

The updated total decrease on channel 2 (36.8 GHz) is about 20.91% (from 10.4 at the beginning to about 8.225 now).

No notable events on gain survey for current cycle 055.

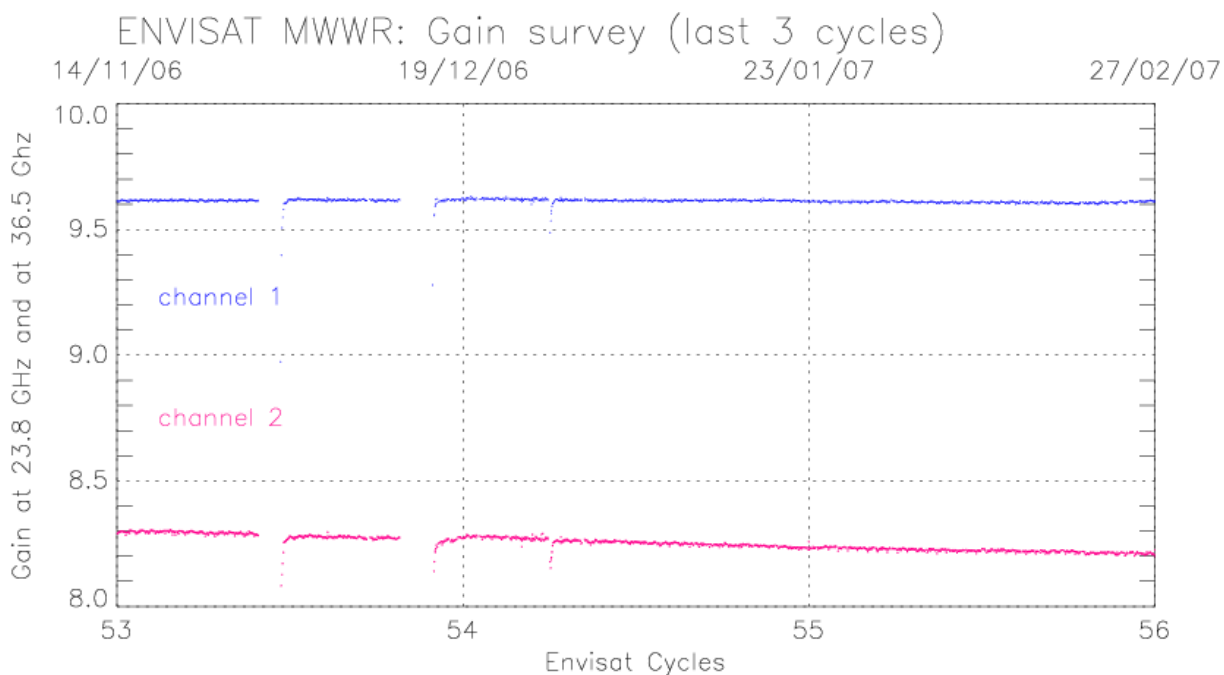


Figure 1: Time evolution of the gain (zoom on the last 3 cycles).

3.2 Sky horn and hot load counts survey


Figure 2 represents the counts of the two channels 23.8 and 36.5 GHz for the sky horn (top), and for the hot load (bottom).

The updated total decrease of sky horn counts on channel 2 (36.8 GHz) is about -17.94% (from 3600 at the beginning to about 2954 now).

The updated total decrease of hot load counts on channel 2 (36.8 GHz) is about -4.24% (from 660 at the beginning to about 632 now).

Since cycle 54, a small decrease of the hot load counts is observed on both channels, slightly larger on channel 2.

ENVISAT MWR sky horn counts (zoom on last 3 cycles)

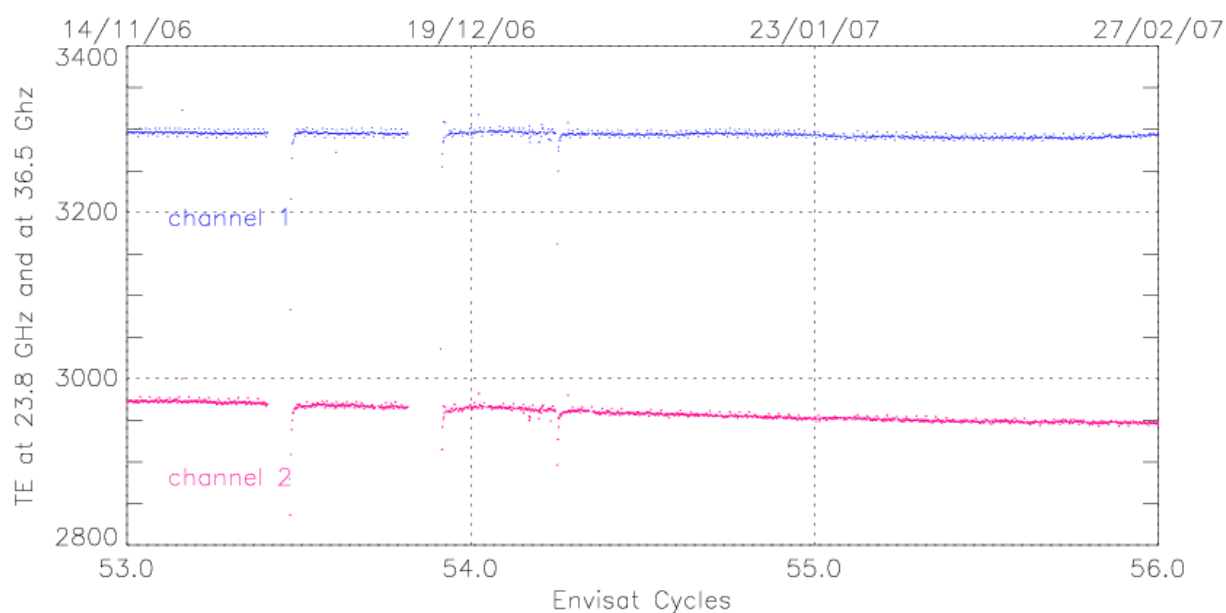

ENVISAT MWR Hot load counts (zoom on last 3 cycles)

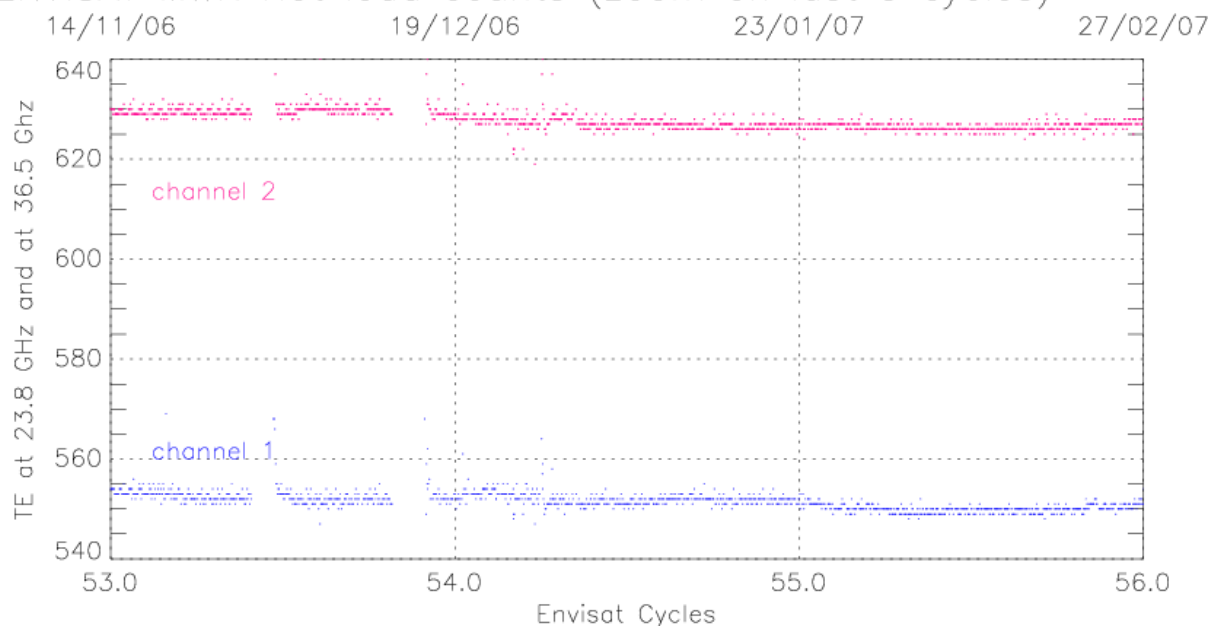


Figure 2: Time evolution of the sky horn (top) and hot load (bottom) counts (zoom on the last 3 cycles).

3.3 Residual temperature survey

Figure 3 represents the residual temperature of the two channels 23.8 and 36.5 GHz since Envisat launch (top), and on the last three cycles (bottom).

A notable decrease of the residual temperature has been observed on both channels, larger on channel 2 (36.8 GHz), during cycle 54.

This decrease has been stabilized at the beginning of cycle 55 and an increase is even observed at the end of the cycle.

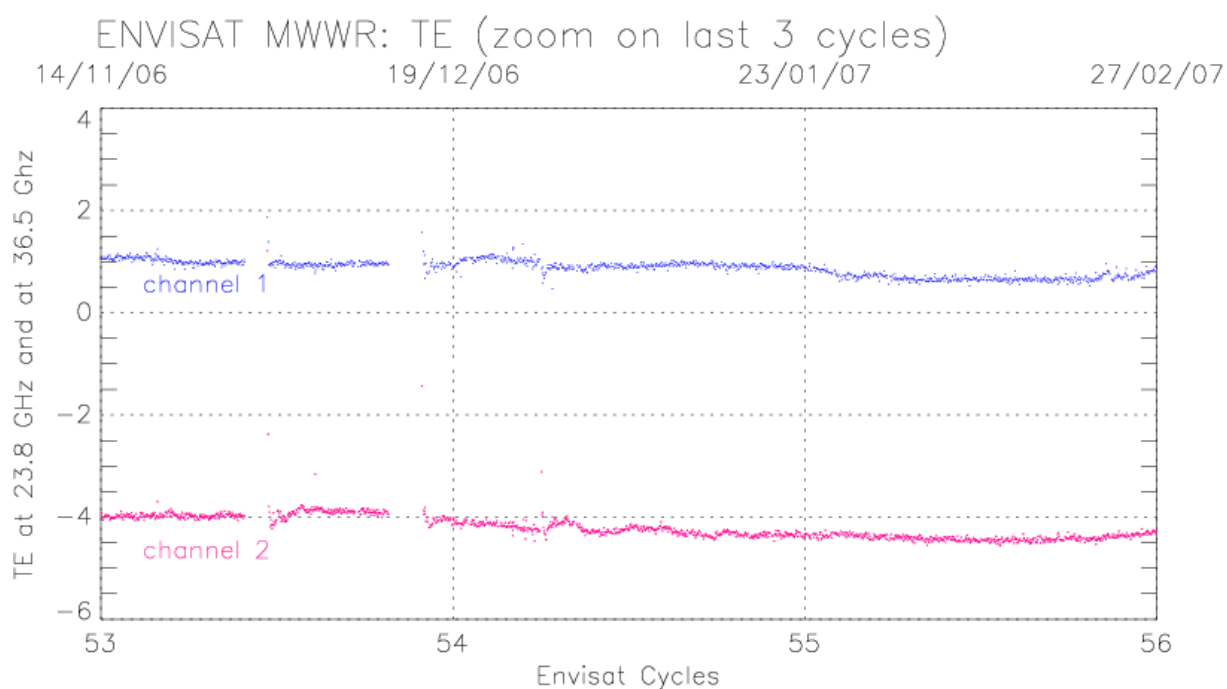


Figure 3: Time evolution of the residual temperature TE (zoom on the last 3 cycles).

3.4 Cold ocean Tb monitoring

Following the method explained above and using a threshold equal to the average minus the standard deviation, the Envisat resulting time series is plotted, after a 90-days running average, in **figure 4**.

For the first channel, the cold ocean TB values present a -0.024 K/year variation, while a variation of -0.032 K/year is observed for the second one.

On both channels, the cold ocean Tb are the most cold since cycle 29 for the 23.8 GHz channel and since cycle 43 for the 36.5 GHz channel (apart from the stabilization period, cycle 4 to 16). Since this phenomenon is observed on both channels, a geophysical origin is considered.

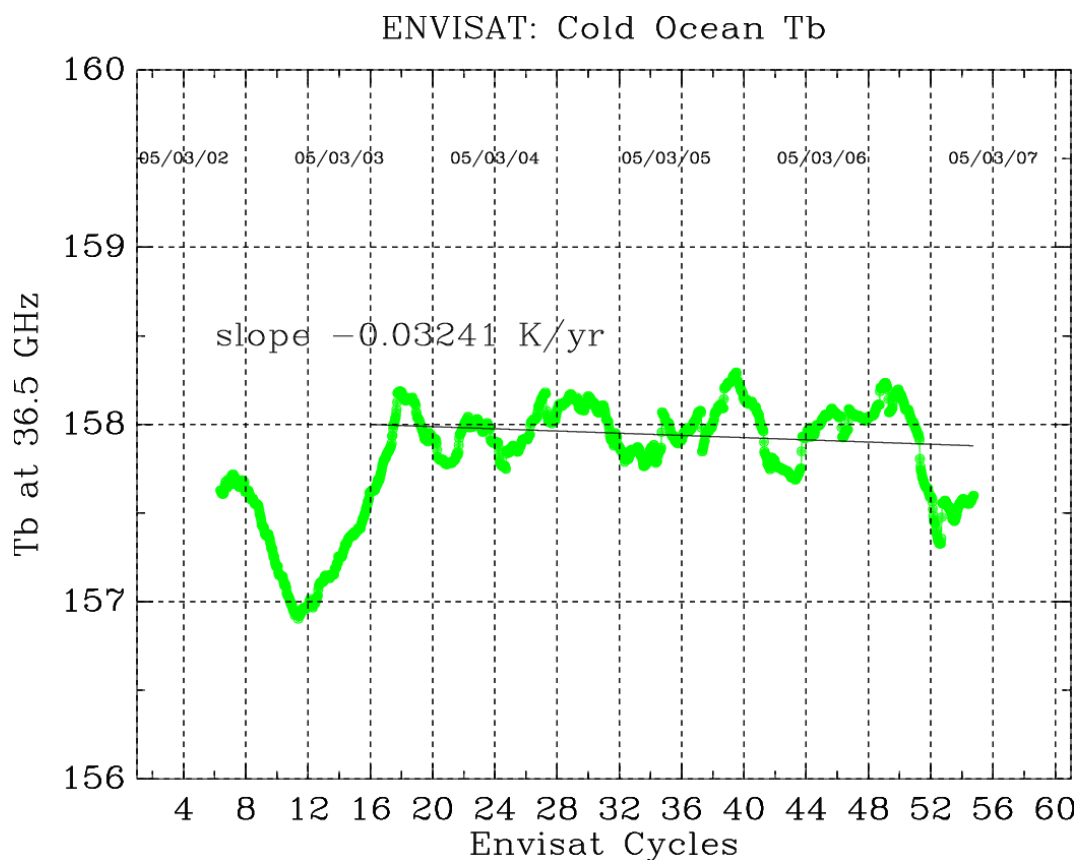
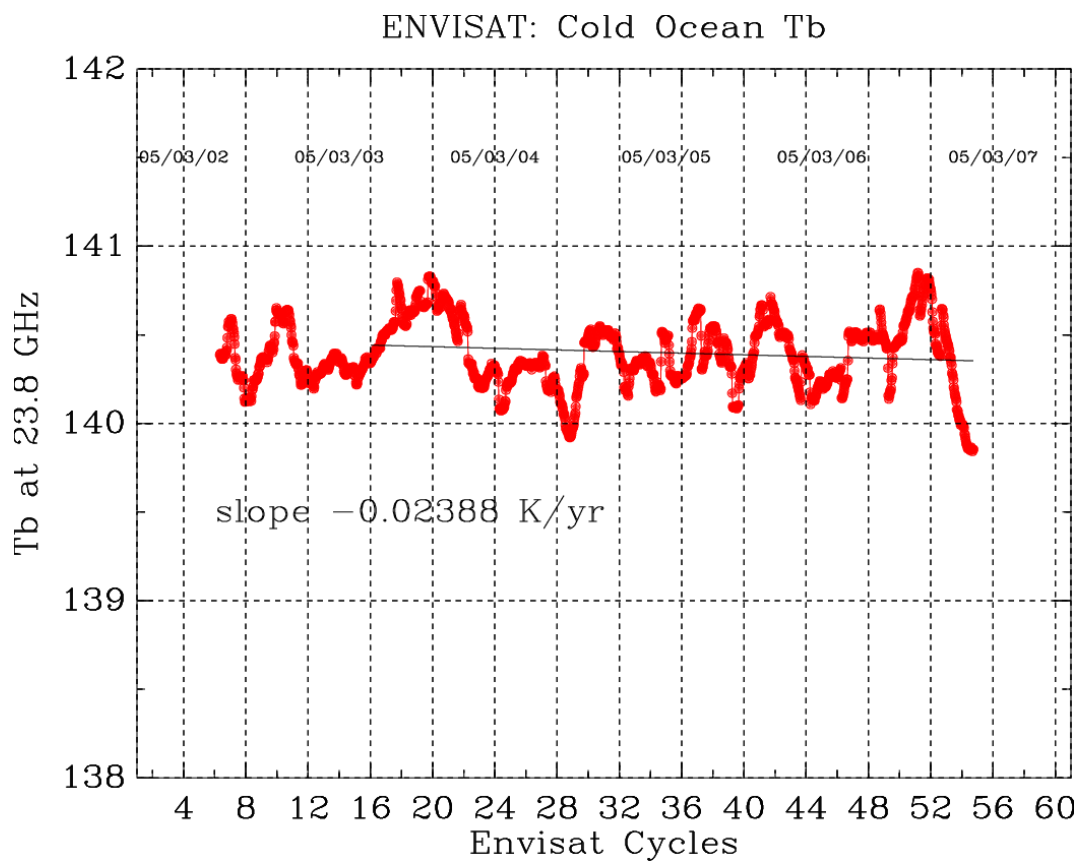


Figure 4: Cold Ocean brightness temperature for the 23.8 GHz channel (top) and the 36.5 GHz channel (bottom) (90 days running average).

4 Long-term trends and former notable events

4.1 Gain survey

Figure 5 shows that the gain in the 23.8 GHz channel remains stable around 9.6. For the second channel, the evolution shows two decreasing trends, small at the beginning and a stronger one since days around cycle 8. The total decrease is about 20.91% (at 10.4 at the beginning and about 8.225 now).

No level 0 data was available during **cycle 51**, between 7th, September 2006 and 11th, September 2006 first, and second, between 26th, September 2006 and 1st, October 2006. First unavailable period is related to Servive Module Anomaly, while second one refers to interruption of Envisat data transmission via the ESA Data Relay Satellite Artemis. Holes in gain representation (figure 5) are related to these both periods.

A platform deficiency has occurred from day 20549 to day 20552 (**cycle 46**). Then, gain loss is observed for both channels on figures. A spike is also observed around day 20557 for both channels.

For cycle 45, a slight jump in the very last days of **cycle 45** is observed.

A big spike occurs around day 20485 during **cycle 44** for both channels.

Note that a step down on the gain values occurs around **cycle 36** for 36.5 GHz channel.

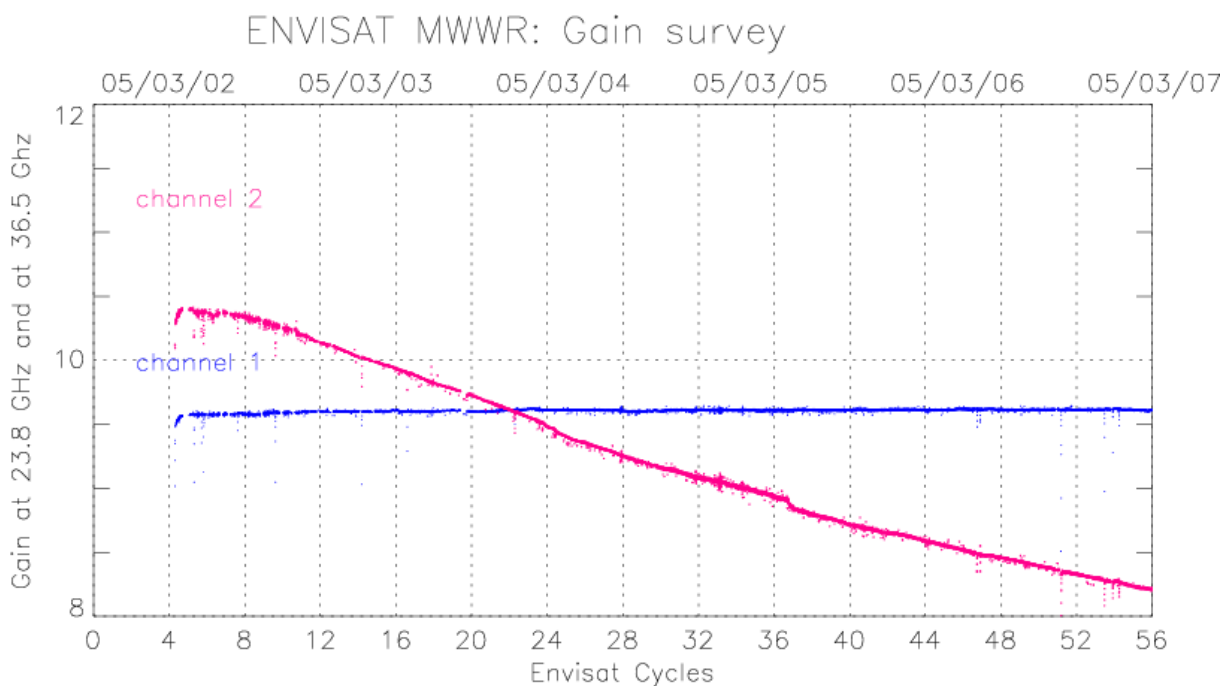


Figure 5: Time evolution of the gain since Envisat launch.

4.2 Sky horn and hot load counts survey

The sky horn counts on **figure 6** exhibit similar features than the gain for both channels. The counts present a very slight increase with time for the first channel. For the second one, the values drop from 3600 to 2954 (-17.94%).

The hot load counts on the same figure are stable for the first channel, around 553. They decrease for the second channel from 660 at launch time to about 632 (-4.24%).

Note that spikes observed between days 20552 and 20557 (**cycle 46**) are related to gain incidents invoked above.

A slight increase of hot load counts is observed in the very last days of **cycle 45** for first channel, while, for the second one, the increase is observed since the early days of this cycle.

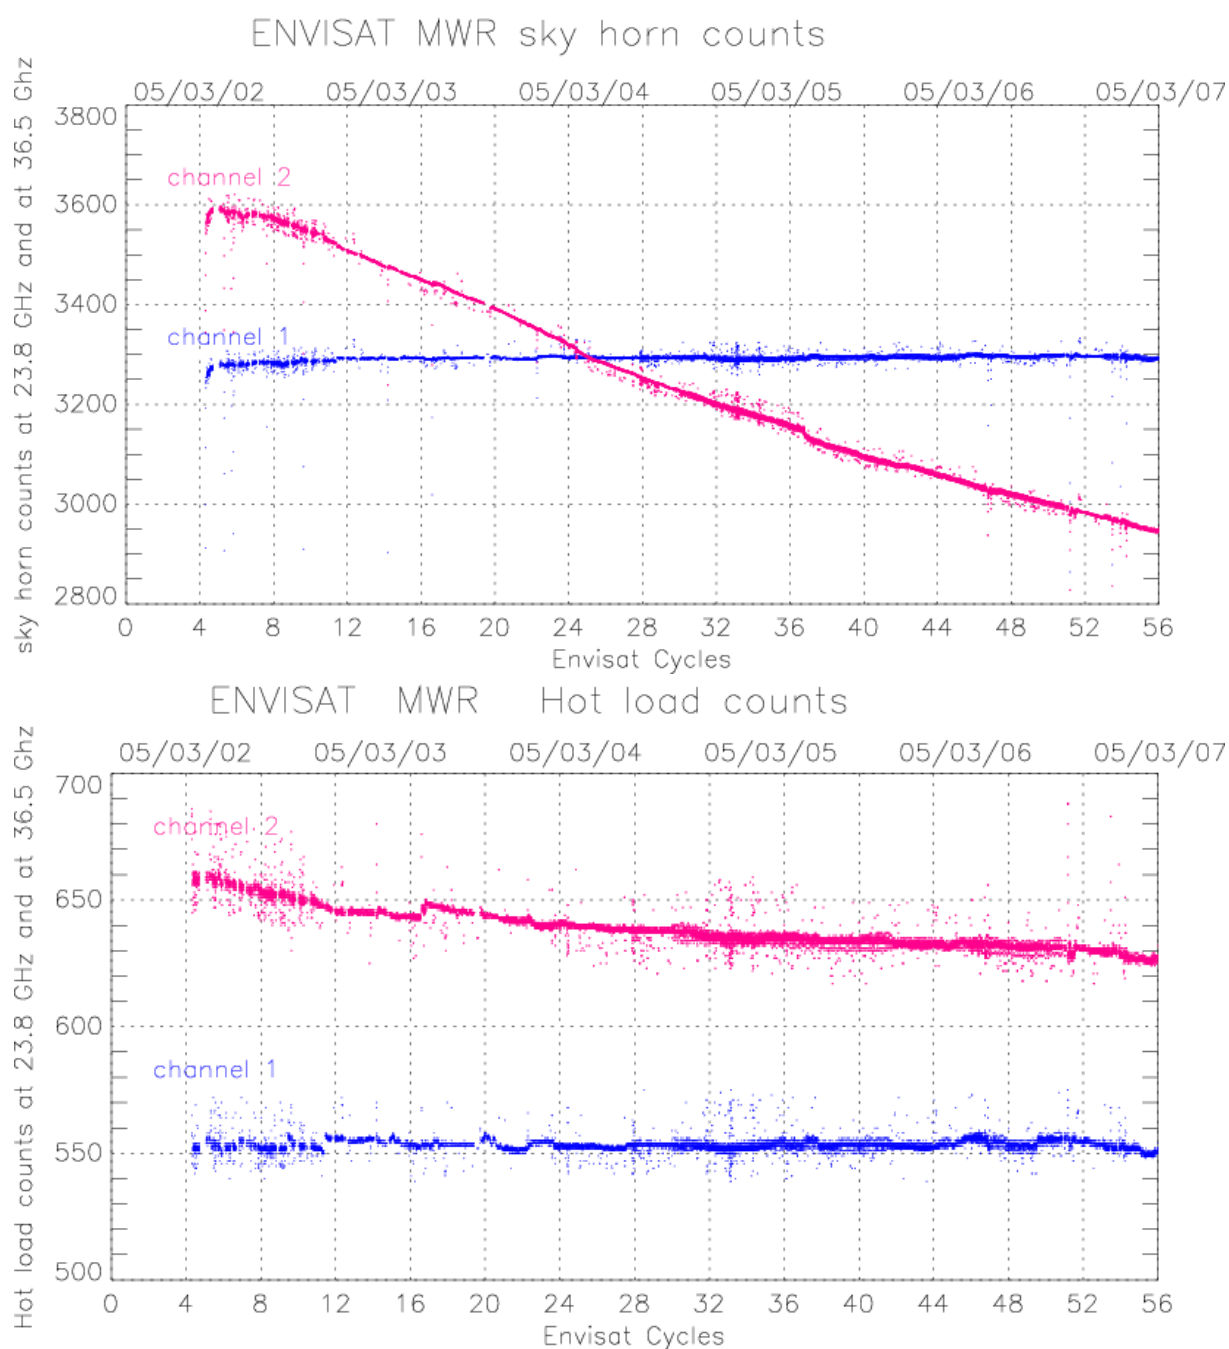


Figure 6: Time evolution of the sky horn (top) and hot load (bottom) counts since Envisat launch.

4.3 Residual temperature survey

Figure 7 shows the residual temperature. Since launch, the values are higher than evaluated from ground testing. The residual temperature was expected to be around 0.5 K for the first channel and a bit higher, 0.5-0.7 K for the second one, i.e. close to the ERS ones (Eymard et al, 2002).

Note that a big spike around day 20485 (**cycle 44**) for both channels are observed, as it is on gain values.

A residual temperature increase is observed after this spike for channel 1, during (**cycle 45**).

There are 4 particular features of this parameter to analyse:

- a drift of the residual temperature at 36.5 GHz, the values were down to -2.5 K with a regular linear decrease since 2-3 months after launch to cycle 16.
- a step is then observed with an increase of 0.5 K. The values were around -2.0 K and are decreasing again and are around -3.60 K.
- a step is observed at 23.8 GHz around cycle 11 with an increase of 0.5 K.
- a decrease is observed after the previous mentioned step for the 23.8 GHz channel. Since cycle 16, the values vary around 1.

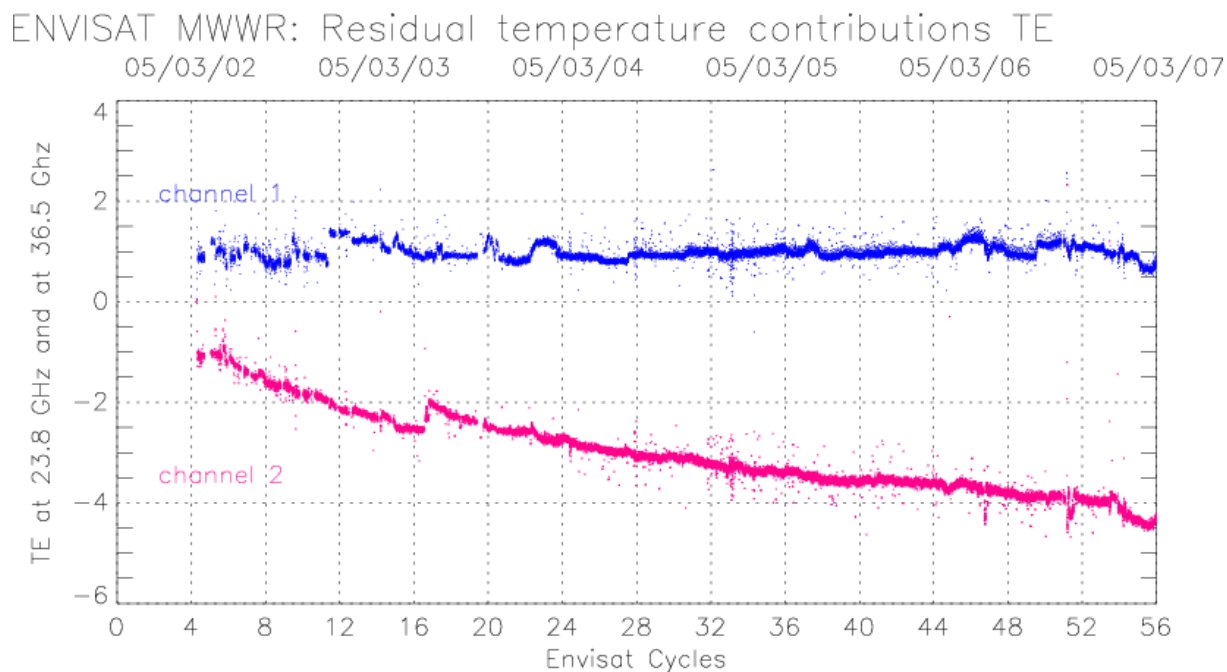


Figure 7: Time evolution of the residual temperature TE since Envisat launch.

A Monitoring of the radiometer internal parameters

The radiometer telemetry primarily contains the radiometer counts for each channel, which are related to the brightness temperatures of the main antenna and the two calibration loads, through the working model (Bernard et al, 1993) summarized below:

$$\mathbf{T_{fc}} = acc \, ah0 \, \mathbf{TC} + (1 - acc) \, ah0 \, \mathbf{T_{cc}} + (1 - ah0) \mathbf{T_h}$$

$$\mathbf{G} = (C_c - Cf) / [ao + af \, \mathbf{T_{fc}} - ac \, \mathbf{T_c} + ah \, \mathbf{T_h/c}]$$

$$\mathbf{TE} = (C_c - off) / \mathbf{G} - aref \, \mathbf{T_{ref}} - ad \, \mathbf{T_d} + a2 \, \mathbf{T_{fc}} + a3 \, \mathbf{T_h/c} + a4 \, \mathbf{T_c} + a6 \, \mathbf{T_{cal}} + a5$$

$$\mathbf{T'a} = b1 \, \mathbf{T_{ref}} + b2 \, \mathbf{T_d} - b3 \, \mathbf{T_{cal}} - b4 \, \mathbf{T_c} + \mathbf{TE} - (Ca - off) / \mathbf{G}$$

$$\mathbf{T_a} = c1 \, \mathbf{T'a} - c2 \, \mathbf{T_r}$$

where the coefficients are derived from the primary coefficients shown in **figure 2**. The brightness temperature is then derived from the antenna measurement, by accounting for the reflector losses and side lobe contributions.

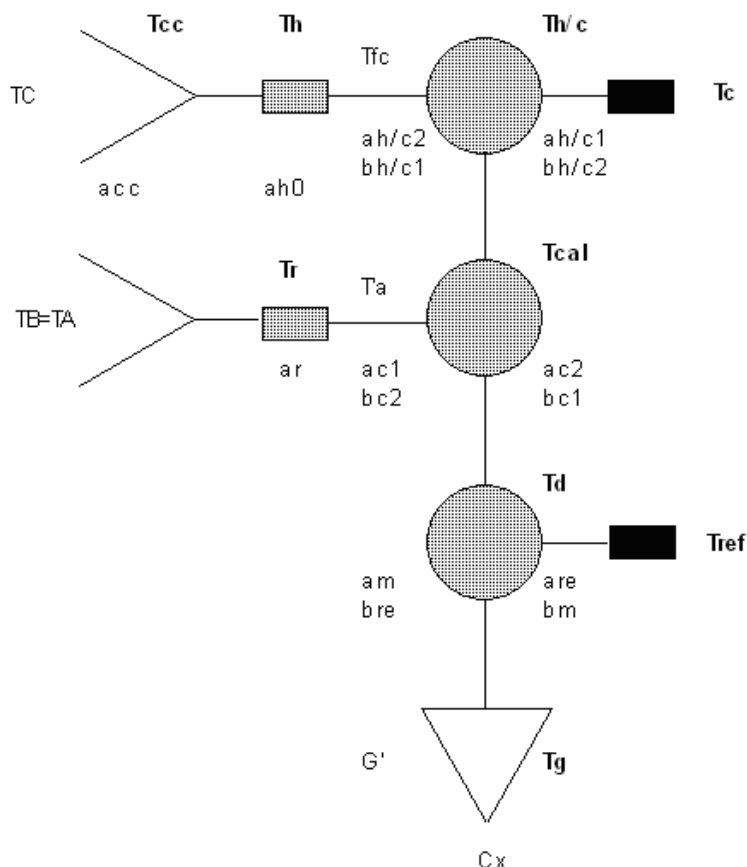


Figure 8: Scheme of one channel of the MWR, showing the main antenna, whose measurement is T_A , the two calibration loads, consisting of an internal hot load and a sky horn, the reference load (Dicke load - temperature T_{ref}) and internal switches to get every measurement. Each component is characterized by transmission and loss factors which are taken into account in the radiometer model, as well as their temperature.