



## **TABLE OF CONTENTS**

<b>1</b>	<b>INTRODUCTION .....</b>	<b>1</b>
<b>2</b>	<b>DISTRIBUTION LIST .....</b>	<b>1</b>
<b>3</b>	<b>ACRONYMS.....</b>	<b>1</b>
<b>4</b>	<b>REFERENCE DOCUMENTS .....</b>	<b>2</b>
<b>5</b>	<b>GENERAL QUALITY ASSESSMENT .....</b>	<b>3</b>
5.1	Cycle Overview.....	3
5.2	Payload status.....	4
5.2.1	Altimeter Events .....	4
5.2.1.1	RA-2 instrument planning.....	4
5.2.2	MWR Events.....	5
5.2.3	DORIS Events.....	6
5.3	Availability.....	6
5.4	Orbit quality .....	6
5.5	Ground Segment Processing Chain Status.....	6
5.5.1	IPF Processing Chain .....	6
5.5.1.1	Version.....	6
5.5.1.2	Auxiliary Data File.....	6
<b>6</b>	<b>INSTRUMENT PERFORMANCE .....</b>	<b>7</b>
6.1	RA-2 Performance .....	7
6.1.1	Tracking capability .....	7
6.1.2	IF Filter MASK.....	9
6.1.3	USO.....	12
6.1.4	Datation.....	15
6.1.5	In-Flight Internal Calibration .....	17
6.1.6	Sigma0 Transponder .....	22
6.1.7	Mispointing .....	23
6.1.8	S-Band anomaly .....	26
6.2	MWR Performance .....	28
6.3	DORIS Performance .....	28
<b>7</b>	<b>PRODUCT PERFORMANCE.....</b>	<b>28</b>
7.1	Product disclaimer.....	28
7.2	Data handling recommendations.....	28

7.2.1	S Band Power Drop.....	28
7.2.2	Sea-Ice flag .....	29
7.2.3	Ocean S-Band anomalies detection.....	29
7.2.4	Warning on IPF 4.56 Version Identification field .....	29
7.2.5	S-Band Backscattering Coefficient.....	29
7.2.6	USO Range Correction .....	29
7.2.7	Ku-Band Backscattering Coefficient calibration .....	31
7.2.8	RA-2 Radio Frequency Module switched BACK to a-side.....	31
7.3	Availability of data.....	32
7.3.1	RA-2.....	32
7.3.2	MWR.....	34
7.4	RA-2 Altimeter Parameters.....	35
7.4.1	Orbit .....	35
7.4.2	Altimeter range .....	37
7.3.3	Significant Wave Height.....	38
7.3.4	Backscatter coefficient – Wind Speed .....	41
<b>8</b>	<b>PARTICULAR INVESTIGATIONS .....</b>	<b>45</b>
	<b>APPENDIX 1: IPF UPGRADES.....</b>	<b>46</b>
	<b>APPENDIX 2: AVAILABILITY:.....</b>	<b>49</b>
	<b>APPENDIX 3: LEVEL 2 STATIC AUXILIARY DATA FILES.....</b>	<b>51</b>
	<b>APPENDIX 4: SIGMA0 ABSOLUTE CALIBRATION.....</b>	<b>51</b>
	<b>APPENDIX 5: S-BAND ANOMALY.....</b>	<b>53</b>
	<b>APPENDIX 6: IE SITES COORDINATES .....</b>	<b>53</b>

## 1 INTRODUCTION

This document aims at reporting on the performance of the EnviSat Radar Altimeter, Microwave Radiometer and DORIS sensors, on the data quality of the corresponding Fast Delivery products as well as on the main events which occurred during cycle 82.

This report covers the period from 24<sup>th</sup> August 2009 to 28<sup>th</sup> September 2009.

## 2 DISTRIBUTION LIST

This report is available in PDF format at the internet address

[http://earth.esa.int/pcs/envisat/ra2/reports/pcs\\_cyclic/](http://earth.esa.int/pcs/envisat/ra2/reports/pcs_cyclic/)

## 3 ACRONYMS

ADF	Auxiliary Data File
AGC	Automatic Gain Control
APC	Antenna Pointing Controller
DORIS	Doppler Orbitography and Radiopositioning Integrated by Satellite
DSR	Data Set Record
EPC	Electronic Power Converter
ERS	European Remote Sensing satellite
ESRIN	European Space Research Institute
ESOC	European Space Operations Centre
FD	Fast Delivery products
FDGDR	Fast Delivery Geophysical Data Record
GS	Ground Segment
GTS	Global Telecommunication System
HTL	Height Tracking Loop
ICU	Instrument Control Unit
IECF	Instrument Engineering Calibration Facility
IF	Intermediate Frequency
IE	Individual Echoes
IPF	Instrument Processing Facility
HSM	High Speed Multiplexer
LUT	Look Up Table
MCMD	MacroCommand
MPH	Main Product Header
MSS	Mean Sea Surface
MWR	MicroWave Radiometer
MPS	Mission Planning System
MR	Microwave Receiver

NRT	Near Real Time
OBT	On-Board Time
OCM	Orbit Control Mode/Manoeuvres
PCS	ERS Products Control Service
PCF	EnviSat Product Control Facility
PDHS-E	ESRIN Processing and Data Handling Station
PDHS-K	Kiruna Processing and Data Handling Station
PDS`	Payload Data Segment
PLSOL	Payload Switch-Off Line
PMC	Payload Main Computer
PSO	On-orbit Position
PTR	Point Target Response
RA-2	EnviSat Radar Altimeter bi-frequency
RSL	Resolution Selection Logic
SAD	Static Auxiliary Files
SBT	Satellite Binary Time
SEU	Single Event
SLA	Sea Level Anomalies
SFCM	Stellar Fine Control Mode
SPH	Specific Product header
SPSA	Signal Processing Sub-Assembly
SYSM	Stellar Yaw Steering Mode
S/W	Software
TM	Telemetry
TRP	Transponder
TWT	Traveling Wave Tube
UTC	Coordinated Universal Time
USO	Ultra Stable Oscillator
YSM	Yaw Stellar Mode

## 4 REFERENCE DOCUMENTS

- [R – 1] F-PAC MONTHLY REPORT, SALP-RP-M-OP-XXXX-CN
- [R – 2] ENVISAT Microwave Radiometer Assessment Report Cycle, CLS.DOS/07.182,  
<http://earth.esa.int/pcs/envisat/mwr/reports/>
- [R – 3] Envisat RA-2 IF Mask weird behavior: Investigation Report
- [R – 4] Instrument Performance Evaluation and Analysis Summary, PO-TR-ALS-RA-0042
- [R – 5] Instrument Corrections Applied on RA-2 Level 1b products, Paper presented at the ENVISAT Calibration Review in September 2002
- [R – 6] ENVISAT Phase E Cal/Val Acquisition Plan, ENVI-SPPA-EOPG-TN-03-0008
- [R – 7] RA-2 S-Band Anomaly Investigation, PO-TN-ESA-RA-1342,  
<http://earth.esa.int/pcs/envisat/ra2/articles/>
- [R – 8] RA-2 Performance Results, Paper presented at the ENVISAT Calibration Review in September 2002

- [R – 9a] ECMWF Report on ENVISAT RA- 2 for July 2005, Report on ENVISAT Radar Altimeter - 2 (RA- 2), Wind/ Wave Product with Height Information (RA2\_ WWV\_ 2P),
- [R – 9b] ECMWF Report on ENVISAT RA- 2 for August 2005, Report on ENVISAT Radar Altimeter - 2 (RA- 2), Wind/ Wave Product with Height Information (RA2\_ WWV\_ 2P), <http://earth.esa.int/pcs/envisat/ra2/reports/ecmwf/>
- [R – 10] Envisat GDR Quality Assessment Report, SALP-RP-P2-EX-21121-CLS015
- [R – 11] Envisat RA-2 Range Instrumental correction: USO clock period variations and associated auxiliary file, ENVI-GSEG-EOPG-TN-03-0009
- [R – 12] Defining a Rain flag for the Envisat altimeter, G. Quartly, study presented to the final CCVT plenary meeting, <http://earth.esa.int/pcs/envisat/ra2/articles/>
- [R – 13] ENVISAT Weekly Mission Operations Reports # 372-376, ENVI-ESOC-OPS-RP-1011-TOS-OF
- [R – 14] Envisat validation and cross calibration activities during the verification phase. Synthesis Report ESTEC contract No. 16243/02/NL/FF WP6, <http://earth.esa.int/pcs/envisat/ra2/articles/>
- [R – 15] ENVISAT-1 Products Specifications - Vol. 14: RA-2 Products Specifications, PO-RS-MDA-GS-2009, Iss 3, Rev. N, 24/05/2004
- [R – 16] Algorithm for Flag identification and waveforms reconstruction of RA-2 data affected by “S-Band anomaly”, ENVI-GSEG-TN-04-0004, Issue 1.4
- [R-17] Envisat Cyclic Report Cycle 28, ENVI-GSOP-EOPG-03-0011
- [R-18] ENVISAT RA-2 IF MASK AUX FILE - Updating Strategy: Investigation Report; C. Bignami and C.Loddo and N. Pierdicca.

## 5 GENERAL QUALITY ASSESSMENT

### 5.1 Cycle Overview

- RA-2 Ku Band is nominal.
- RA-2 S Band is no more available. The S Band Power Drop started on cycle 65, on 17<sup>th</sup> January 2008, 23:23:40, UTC (orbit nb 30759). Therefore the S Band parameters, as well as the dual Ionospheric correction in Ku Band are no more relevant and must not be used. Users are advised to use the Ionospheric correction from BENT model, available on FDGDR products;
- The RA-2 Ultra-Stable Oscillator (USO) was nominal on cycle 82;
- The overall number of valid IF masks was 35, representing 100 % of the acquired and processed IF masks. During cycle 82 RA2\_IFF\_AX was updated on the 16<sup>th</sup> September 2009;
- Tracking performances in the different resolutions are well in line with the output figures and objectives of the Commissioning Phase;
- During cycle 82 RA2\_SOL\_AX has been updated on the 25<sup>th</sup> August 2009;
- RA2 data availability was around 99.4 %.
- MWR data availability was around 99.5%
- DORIS data availability was around 94.3%



## 5.2 *Payload status*


### 5.2.1 ALTIMETER EVENTS

The Radar Altimeter 2, during cycle 82, was never unavailable.

#### 5.2.1.1 *RA-2 instrument planning*

On cycle 82 the IF Calibration was performed only over the Himalaya site, as is the now usual practice. The operational acquisition was performed on ascending passes with the NEW procedure for IF Calibration described below. The map in Figure 1 indicates the calibration site.

In-Flight Tests aimed to understand the origin of the IF Mask anomaly were carried out on cycle 66 and identified an occasional wrong setting of the AGC used for the IF Calibration Mode as the cause. The IF Calibration procedure now used in operational IF Calibration consists in setting all the AGC's to 3dB before entering the IF Calibration Mode. These parameters are restored to the original values when the IF Calibration mode has expires, before entering in the Measurement mode.

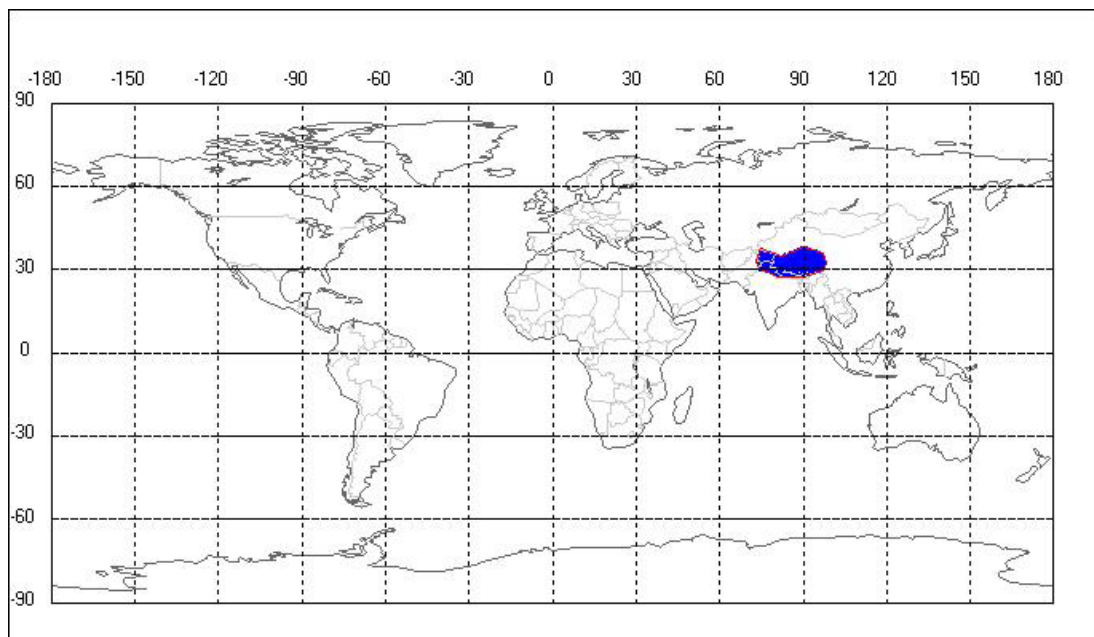

**Figure 1: IF Calibration Acquisition sites**

The RA-2 instrument planning was performed as follows:

- New procedure for IF calibration (through Digital BITE Mode command) over Himalaya for the entire cycle, 1 ascending pass per day
- No IF calibration on Rocky Mountains.


- Individual Echoes background planning: the buffering of 20 Data Blocks of Individual Echoes (1.114 sec.) transmitted every 160 Data Blocks starts after flying over the Himalayan region (both ascending and descending passes) and is operated for half a day.
- Individual Echoes acquisition (1 second length acquisition, 2 repetitions) over the following sites: Capraia, Toulon D, Vostok , Dome C.  
Appendix 6 contains a table with the coordinates.
- Individual Echoes acquisitions over the Uyuni Salar
- Preset Loop Output mode for GAVDOS Range transponders, located in Creta.
- Preset Loop Output mode over the ESA transponder located in Rome (permanent location); high chirp resolution.
- Individual Echoes acquisitions during PLO activity over ESA transponder located in Rome (1 second length acquisition, 1 repetition)

On 11<sup>th</sup> Sept 2009 a Svalbard transponder first test acquisition was planned in order to support CRYOSAT-2 pre-launch testing.

The requested acquisitions are the following:

- 1) PLO acquisition over Svalbard transponder with procedure P-H-N-07, medium chirp resolution
- 2) IE acquisitions over Svalbard transponder (1 second length acquisition, 2 repetitions)

The map in Figure 2A shows the three acquisition sites for both the Range and Sigma\_0 transponders.

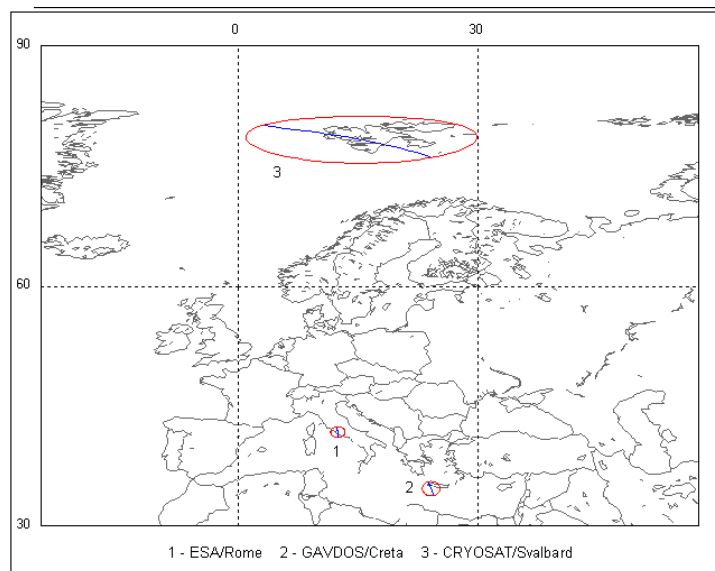

**Figure 2A: Transponder Acquisition sites**

## 5.2.2 MWR EVENTS

The MWR, during cycle 82, was never unavailable.



### 5.2.3 DORIS EVENTS

DORIS, during cycle 82, was never unavailable.

## 5.3 *Availability*

The summary of the RA-2 data products availability for the current cycle is reported in Appendix 2. Data availability was around 99.40% for RA-2 products, 99.52% for MWR products and 94.26% for DORIS products.

## 5.4 *Orbit quality*

During the period covered by this report (CW 35) the spacecraft ground track remained within the +/- 200 m deadband around the reference ground track at ascending node without any orbit control manoeuvre.

## 5.5 *Ground Segment Processing Chain Status*

### 5.5.1 IPF PROCESSING CHAIN

#### 5.5.1.1 *Version*

Cycle 82 was processed with IPF processing chain V5.06, installed in both PDHS-E and PDHS-K on 20<sup>th</sup> June 2007, orbit 27729.

IPF V5.06 contains the following main evolutions:

1. Increase performance in the usage of DORIS Navigator in NRT products due to DORIS Navigator threshold update to 900 seconds coverage RA2/DORIS;
2. Alignment of Chain B to Prod Spec 3/N

A complete table of IPF Level1b and Level2 upgrades is reported in Appendix 1.

#### 5.5.1.2 *Auxiliary Data File*

The Auxiliary files actually used by the IPF ground processing are reported in Appendix 3. The RA2\_POL\_AX, RA2\_SOL\_AX and RA2\_PLA\_AX have been regularly updated without problems. The RA2\_IFF\_AX has been updated during the reporting period. The RA2\_USO\_AX has never been updated during the reporting period. Data are corrected with the RA2\_USO\_AX estimated before the USO Clock anomaly (USO\_Clock\_Period = 12499999726, USO\_Range\_Correction= 17.3 mm).

The RA-2 Auxiliary Data Files (ADF) are accessible from the Envisat Web pages under:  
[http://www.envisat.esa.int/services/auxiliary\\_data/ra2mwr/current/](http://www.envisat.esa.int/services/auxiliary_data/ra2mwr/current/)

## 6 INSTRUMENT PERFORMANCE

### 6.1 RA-2 Performance

#### 6.1.1 TRACKING CAPABILITY

The percentages of acquisition in the different resolutions subdivided by surface type are given in the Table 1. The figures given for the RA-2 tracking performances during this cycle are in line with the ones recorded at the end of the Commissioning Phase reported in the second column and presented in [R – 8].

Surface type	320 MHz	Commissioning Phase objectives 320 MHz	80 MHz	20MHz
Open Ocean	99.99	>99%	0.01	0.00
Coastal Water (ocean depth < 200 m)	98.39	No specific requirement	1.45	0.16
Sea Ice	99.22	>95%	0.72	0.06
Ice Sheet	96.35	>95%	3.11	0.54
Land	81.32	No specific requirement	15.07	3.61
All world	95.17		3.93	0.90

**Table 1: RA-2 Tracking capability: Chirp ID percentages discriminated by surface type**

In Figure 2, Figure 3 and Figure 4 the cyclic tracking percentages for the three RA-2 bandwidths are reported.

The worsening in performance noticeable for cycle 20 was due to the up-load of wrong on-board software parameters which lasted for about three days whilst for cycle 47 a special operation has been performed to limit RA-2 Chirp Bandwidth to fixed values.

In general, even if a tiny evolution can be observed, the tracking performances are well in line with the output figures and objectives of the Commissioning Phase as given in Table 1.

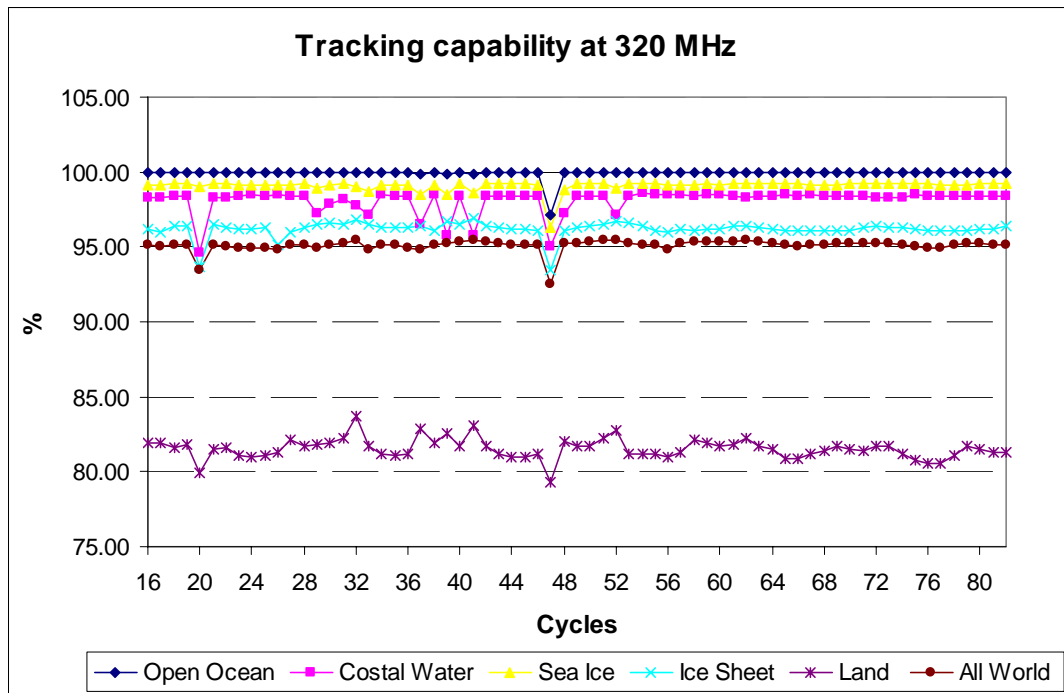


Figure 2: RA-2 Tracking percentage at 320MHz for different surfaces

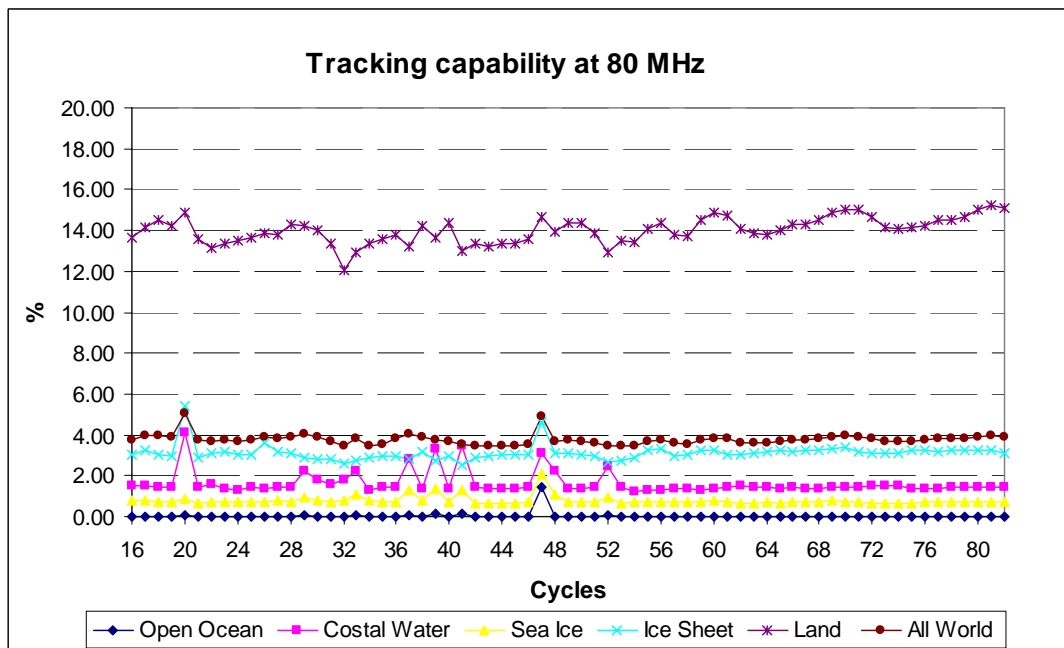


Figure 3: RA-2 Tracking percentage at 80MHz for different surfaces

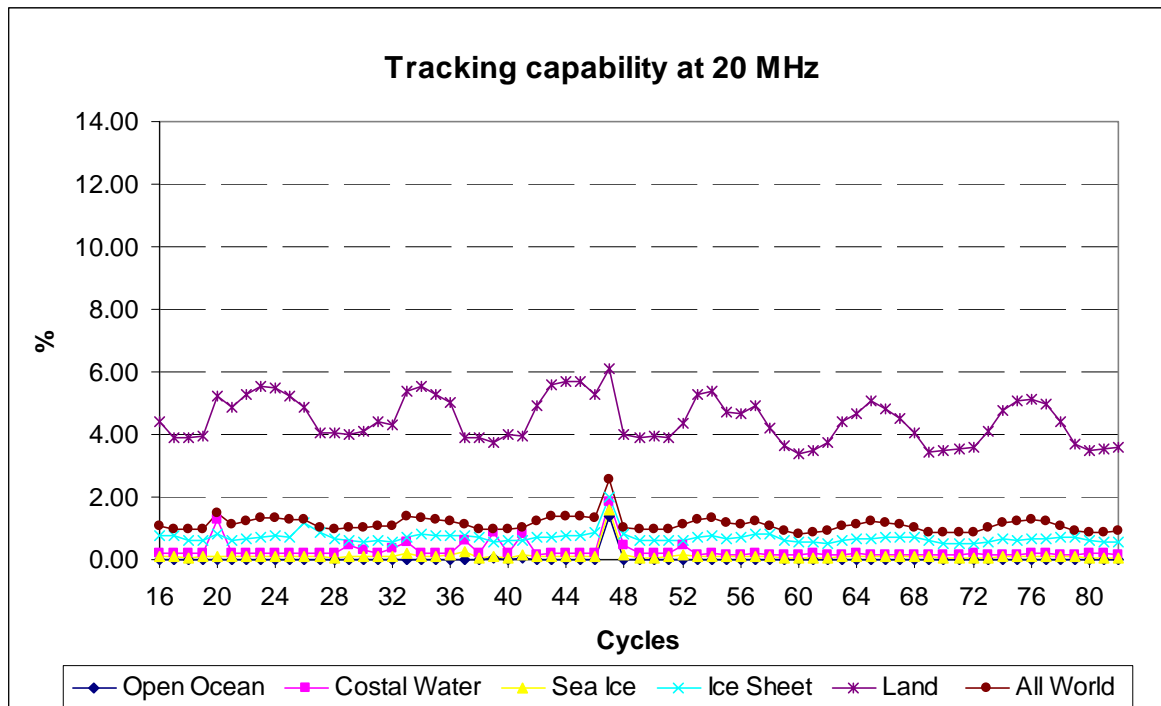


Figure 4: RA-2 Tracking percentage at 20MHz for different surfaces

### 6.1.2 IF FILTER MASK

In Figure 5 all IF masks retrieved during the current cycle are plotted in the left panel. The on-ground measured IF mask (ref [R – 4]) is also plotted in that panel with a solid line. In the right panel, the difference of each of the calculated IF masks with respect to the on-ground measured one is reported. The average difference with respect to the on-ground is used as the criteria for defining valid masks: if it is lower than 0.1 db, the mask is considered valid.

According to the planning defined for the IF Calibration acquisition on cycle 82 (ref. Par. 5.2.1.1), one daily pass over the Himalaya (ascending) has been performed with the New procedure for IF calibration.


The NEW procedure consists in setting all the AGC's to 3dB before entering the IF Calibration Mode and resetting all the parameters to the original values before entering in the Measurement mode. It is operationally used since cycle 66 for all IF Calibrations and this ensures 100% of valid IF Masks to be acquired.

The number of IF Masks acquired and processed on cycle 82 was 35. As expected, all 35 IF Masks acquired were valid:

- 100 % of the acquired and processed IF masks were valid.


All the IF masks are used to generate the final IF mask used in the Level 1B ground processing; the method used for generating it consists in a monthly average according to the strategy defined in

[R-18] with an editing criteria based on the comparison between each of the single IF masks and the reference one (on-ground).

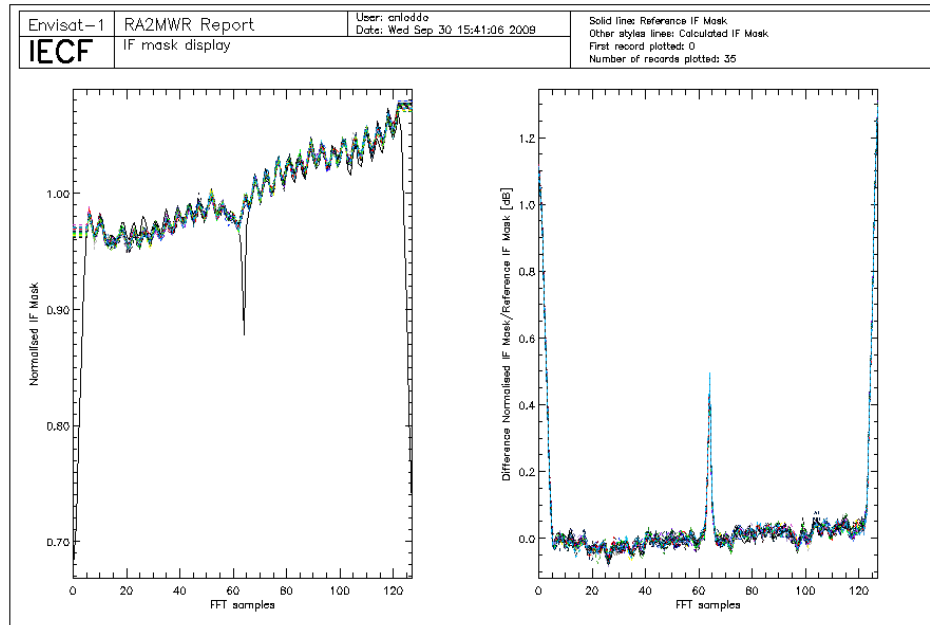

**Figure 5: Valid IF masks retrieved during cycle 82 plotted together with the on-ground reference.**

In Figure 6 the IF Mask, updated on the 16<sup>th</sup> September 2009, and the previous IF Masks used for processing are plotted.

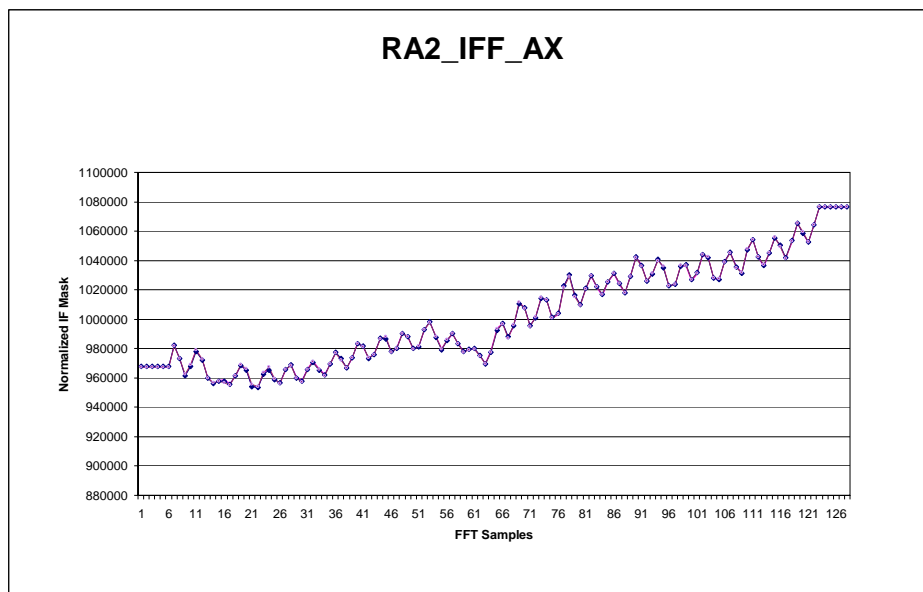


**Figure 6: Previous and IF Mask updated on 16<sup>th</sup> September 2009**

In Figure 7 the evolution of the IF mask quality parameters evaluated as in [R – 4] is reported only for valid data. It can be observed that the difference with respect to the on-ground reference presents an increasing trend due to the ageing of the instrument.

The differences have significantly increased since cycle 56. The masks obtained on the Rocky Mountains present a higher difference with respect to the on-ground mask. This is probably due to the fact that the calibration segments are shorter on this new site and therefore with more noise. However, the difference is always lower than 0.1 db and for this reason the masks are still valid

Some peaks are visible on the plot that correspond to the data acquired on September the 27<sup>th</sup> 2003 at 15:48, on October the 29<sup>th</sup> 2003 at 15:42, on May the 10<sup>th</sup> 2004 at 15:45, on April 9<sup>th</sup> 2006, on December 16<sup>th</sup> 2006 and on September 27<sup>th</sup>. The reason of this could be found in the instrument warming up considering that the IF Cal acquisition has been made, in the three first cases, only a couple of hours after an anomaly recovery. In the two last cases the unavailability was very long, more than two days, and the warming up effect lasted longer. The residual noise and the accuracy show a very constant behaviour over the whole period.

During the current cycle the IF Calibration Mode was nominal. The weird behaviour described in [R – 3] was no more present. According to the In-Flight Tests performed on cycle 62 63, 64 and 65 this problem, present since the beginning of the mission, seems to be related to the AGC used for the calibration mode.

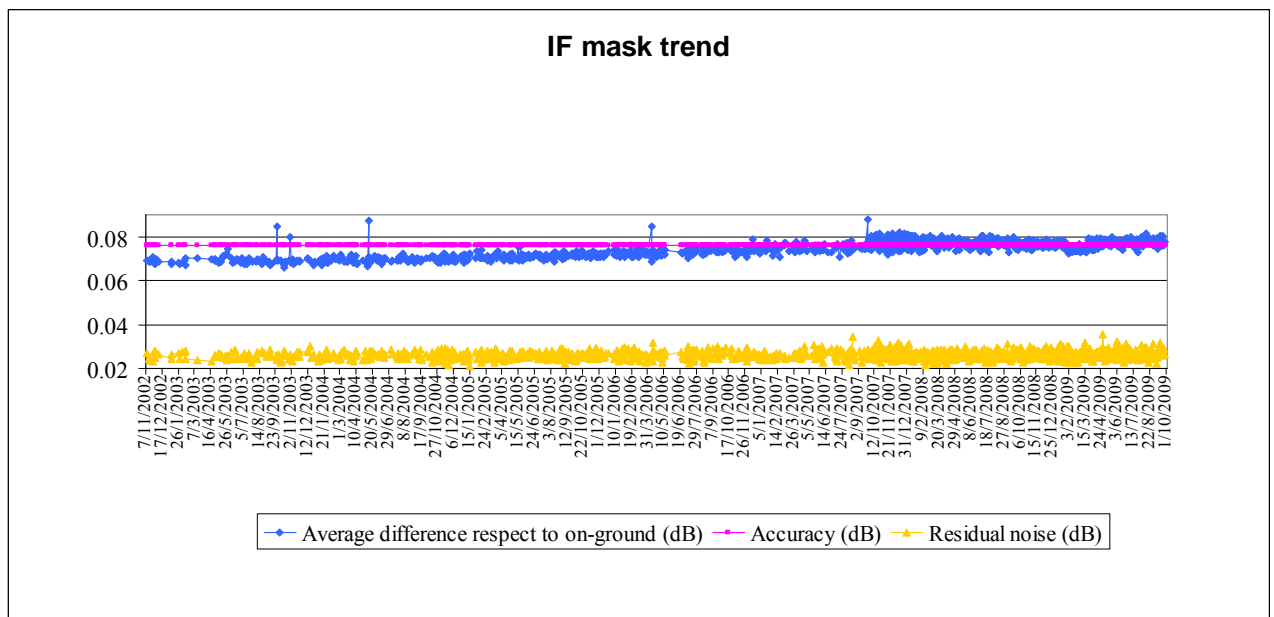


**Figure 7: Evolution of the IF mask related parameters for valid IF masks retrieved up to cycle 82**

In Figure 8 the percentages of valid IF masks from cycle 20 onwards is reported. This percentage is computed with reference to the acquired masks per cycle. The higher number of valid IF Masks in cycle 48 is a consequence of the special IF Calibration operations that took place on 8 and 9 June 2006 when the altimeter was on its side B. The number of valid IF Masks has decrease from cycle 56 until cycle 61. The high number of valid IF Masks in the last cycles is related to the NEW procedure for IF Calibration Mode applied from cycle 62 onwards, described at the beginning of




this chapter. Starting on cycle 66, 100 % of IF Masks were valid because all IF Calibrations were performed using this new procedure.

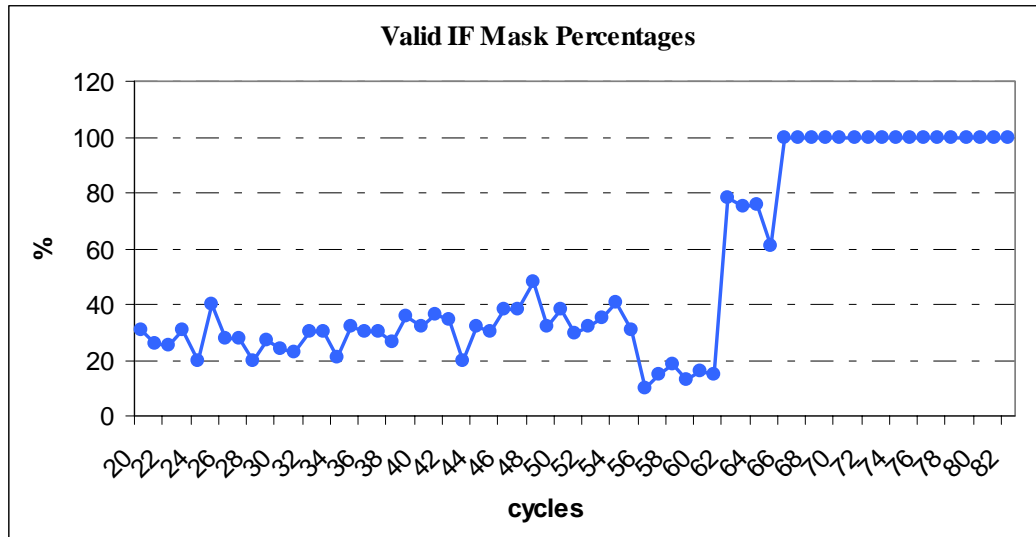

**Figure 8: Percentages of valid IF Mask up to cycle 82**

### 6.1.3 USO

The RA-2 Ultra-Stable Oscillator (USO) was nominal on cycle 82. In Figure 9 the USO clock period trend is reported. In order to make the variability visible, the difference of the actual USO clock period with respect to the nominal one has been plotted in the upper panel. In the lower panel the Range error due to the USO clock variability has been reported taking a satellite altitude of 800 Km as a nominal value.

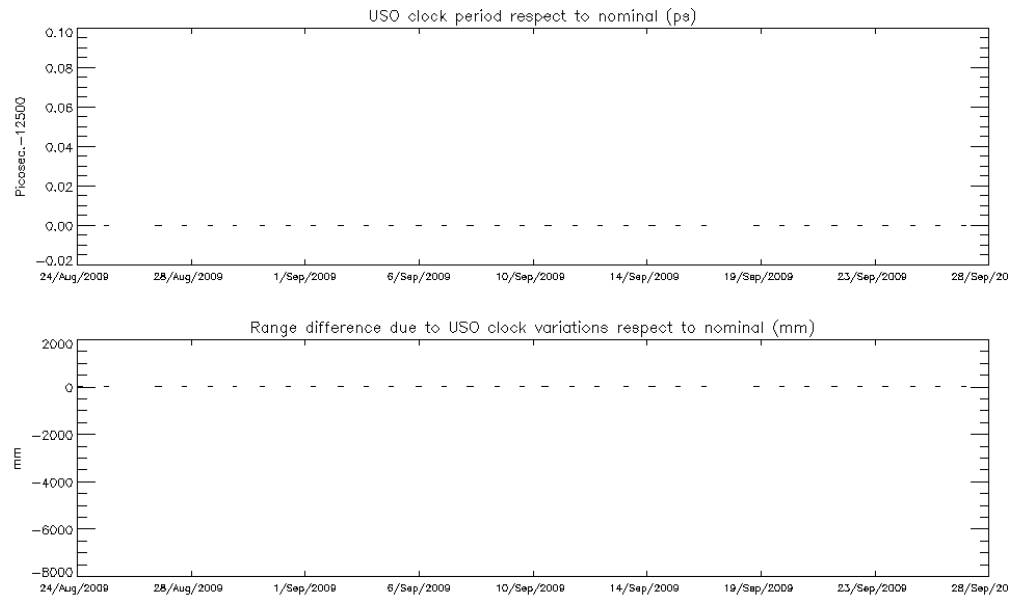


**Figure 9: USO clock period (top) and range difference with nominal (bottom) for cycle 82**

The USO Clock Period anomaly was almost permanently present during 2006 and 2007. It started in cycle 44, on date 1 Feb 2006 12:04:30, Orbit = 205181. It directly happened after the recovery of the RA-2 on-board anomaly which occurred on the 2006/02/01 at 05:17:56. During the anomalous period, the altimetric range jumped by several meters (about 5.6m) w.r.t. the Mean Sea Surface due to an anomaly in the USO clock period. Moreover, oscillations at the orbital period with an amplitude of 20-30 cm affect the Sea Level Anomaly making the range unusable for both Ku and S Band. The anomaly persisted intermittently until the 15<sup>th</sup> of May 2006 14:21:50, Orbit = 21994, when the instrument was configured to its RFSS B-side. It appeared again when the instrument was reconfigured to its nominal RFSS A-side on date 21 June 2006 13:20:15, Orbit = 22523. The anomaly reappeared after the instrument recovery on date 27<sup>th</sup> of September 2007 11:13:30 and disappeared again for an unknown reason on date 3<sup>rd</sup> of December 2007 03:00:00. The anomaly was back again on the 4<sup>th</sup> of December 2007 13:50:00 and it lasted until the 23<sup>rd</sup> January 2008 14:11:35, orbit nb 30840.


Note that the correction comes back to its nominal value in several steps, causing small uncertainties on the associated correction.

In Figure 10, the USO clock period trend retrieved from the beginning of the mission until the last week of cycle 49 is reported. In Figure 10A, the USO clock period trend retrieved from cycle 50 onwards is reported. The actual value of the USO clock period has been used within the L1b processing; only from the 24<sup>th</sup> of October 2005 (IPF V5.02) until the 1<sup>st</sup> of February 2006. This means that, during this period, the data are corrected for the bias and the drift correlated to the actual USO clock period. The evaluation of the actual USO clock period in this period was

performed off-line respect to the IPF processing and it was updated once per week in the auxiliary file RA2\_USO\_AX. The method to correct the data from the USO period changes outside of this period is detailed in Part 7.2.6.

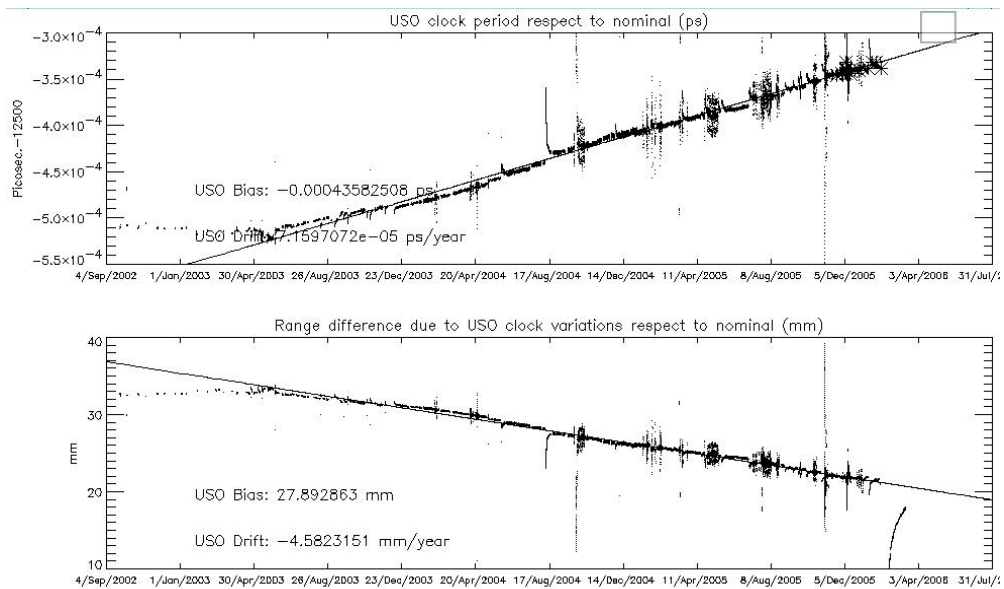

**Figure 10: USO clock period (top) and associated range difference (bottom) until cycle 49**

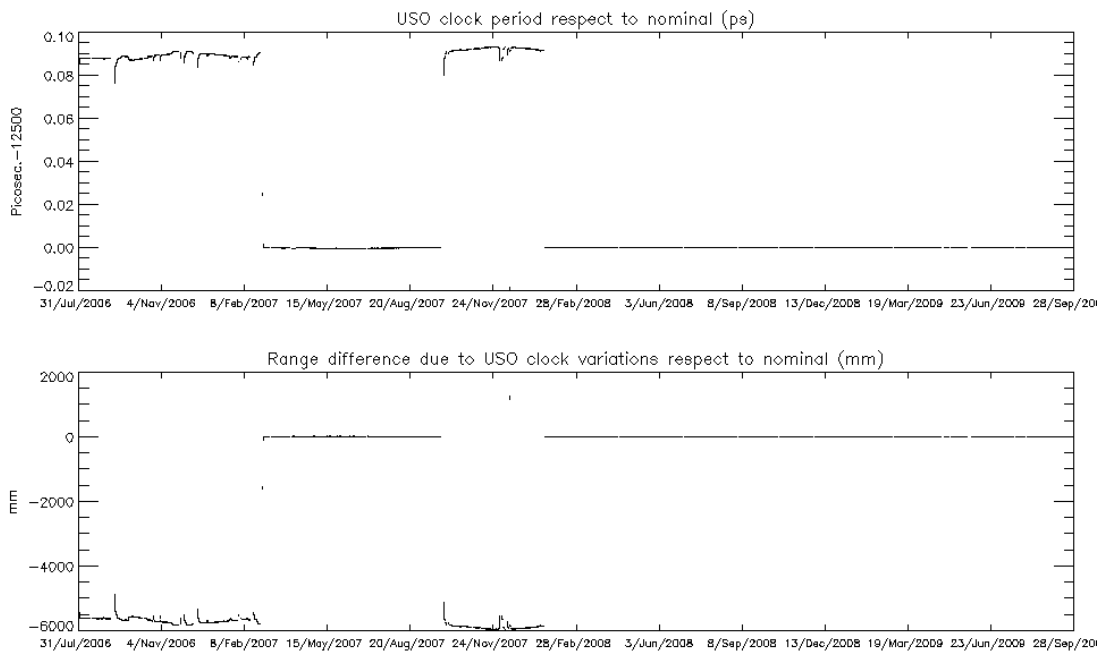


**Figure 10A: USO clock period (top) and associated range difference (bottom) from cycle 50 onwards**

### 6.1.4 DATATION

A significant part of an eventual error in the RA-2 products datation could result from imperfect synchronisation between the Satellite Binary Time and the UTC Time due to a drift of the ICU clock period. A correlation between those two times is performed at every Kiruna orbit dump and then extrapolated for the four non-Kiruna orbits. In the upper panel of Figure 11, the differences between the extrapolated UTC values and the corresponding real UTC values measured at the next Kiruna dump, are reported.

In the lower panel, the ICU clock step for the same period is shown.

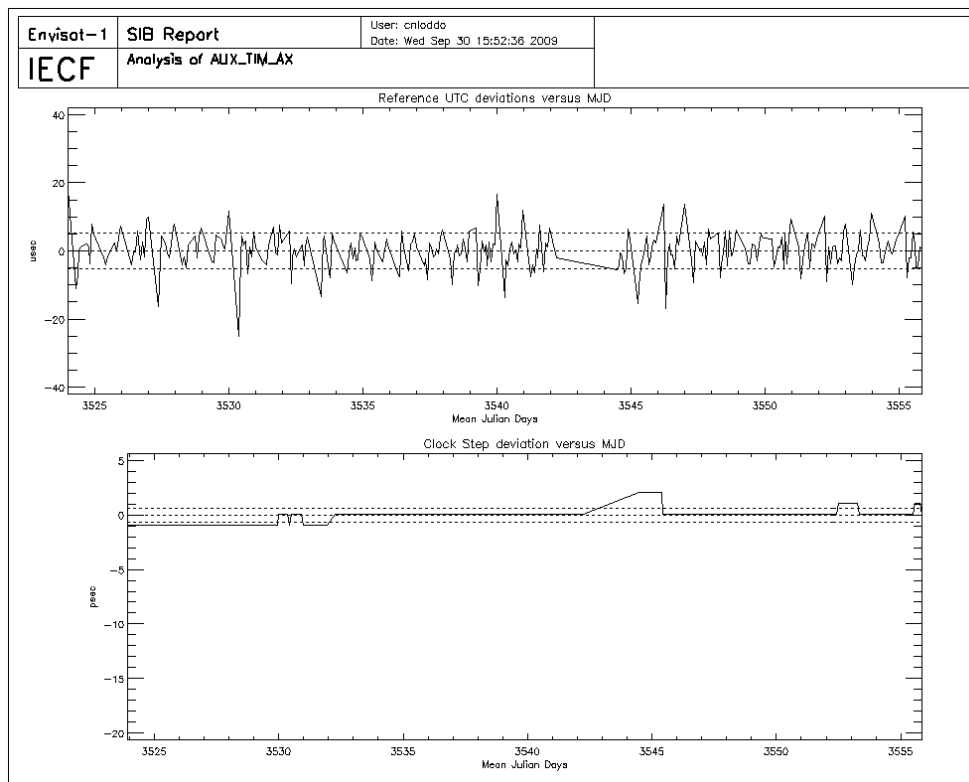


**Figure 11: UTC deviations and ICU clock period for cycle 82**


In Figure 12 (upper panel) the differences between the extrapolated UTC values and the corresponding real UTC values measured at the next Kiruna dump, are reported for data up to cycle 32. The UTC deviations for cycle 33 onwards reported in Figure 13.

Only a few anomalous events can be observed at the beginning of the period (cycles 16/17) for which the difference rises above the 20 microseconds warning threshold. However, starting from cycles 22/23, the number of small differences (10 microseconds plus or minus) has increased a lot. Furthermore, during the last ten days of the cycle 32 and for all cycle 33 and 34, the variability of the deviations has increased reporting many peaks just over the 20 microseconds threshold (first part of Figure 12); this phenomenon is now fixed. In the lower panel of both figures the ICU clock

step for the same period is shown where big variations are reported. The jump observed around MJD 2288 (07-APR-2006) on Figure 13 is related to the reconfiguration of the Precise Time Correlation process, which became blocked with invalid data after the Service Module anomaly and reconfiguration occurred on 6 April 2006. This is however not a problem because the ICU clock period variations are included in the algorithm for the SBT/UTC correlation evaluation.

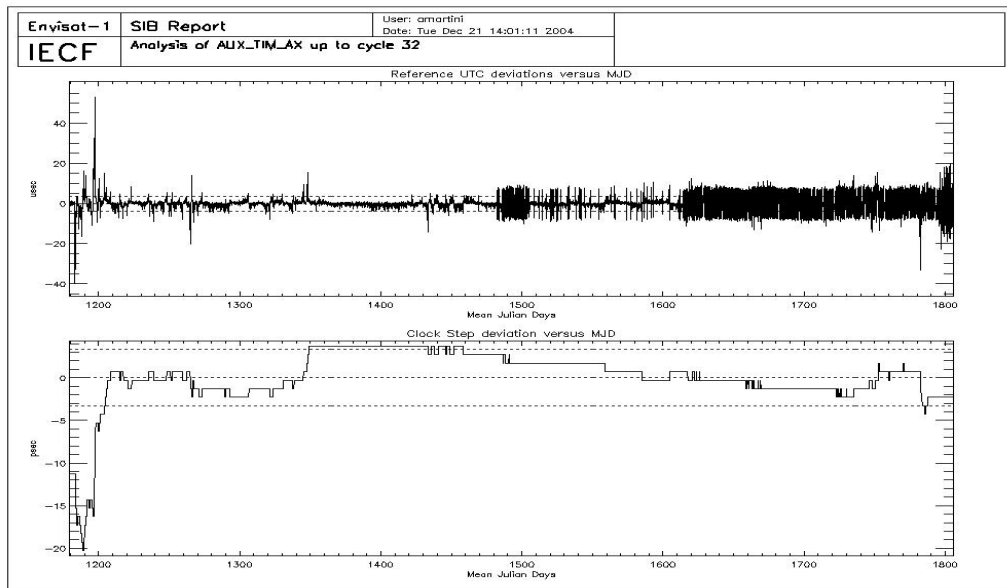

**Figure 12: UTC deviations and ICU clock period up to cycle 32**

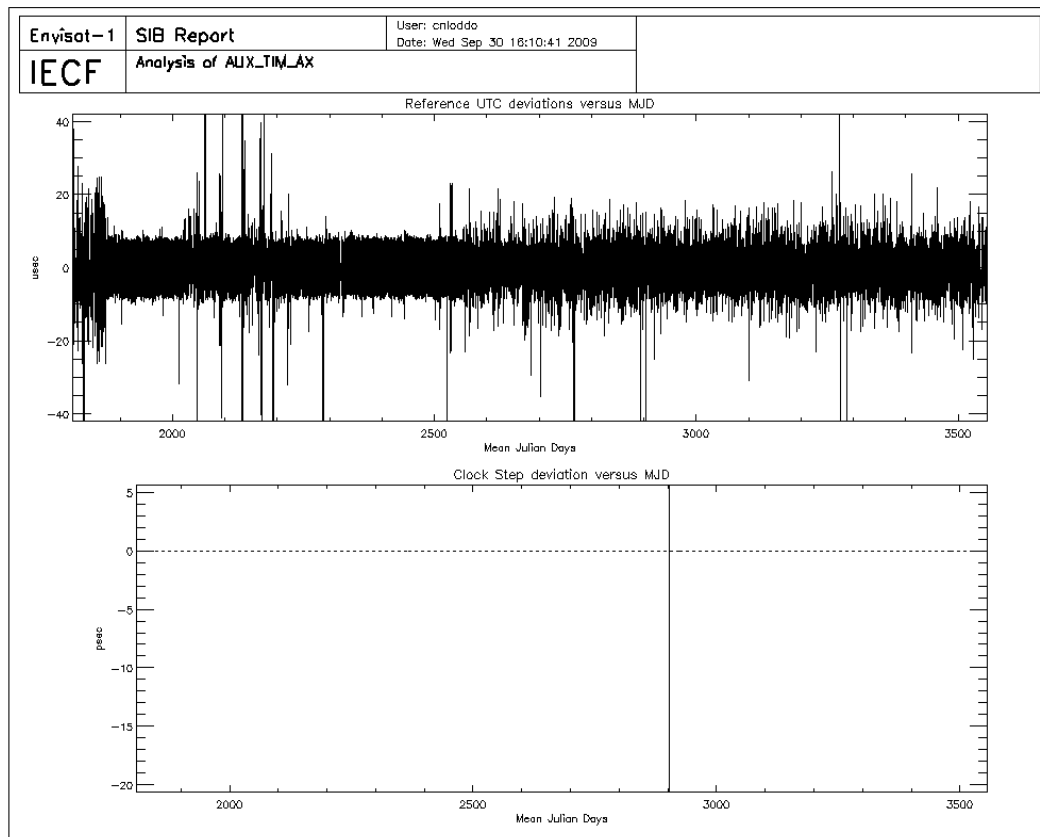

**Figure 13: UTC deviations and ICU clock period from cycle 33 onwards**


### 6.1.5 IN-FLIGHT INTERNAL CALIBRATION

The RA-2 Range and Sigma0 measurements are corrected to take into account the internal path delay and attenuation, respectively. This is done by measuring those two variables in relation to the internal Point Target Response. The two correction factors are calculated during the L1b processing and directly applied. They are also continuously monitored and the results for the current cycle (averaged per day) are reported in the next figures. The correction factors on S Band are no more being monitored from cycle 65 onwards due to the lost of the S-band transmission power, occurred on 17 January 2008, 23:23:40 (orbit 30759), see section 7.2.1.


The Ku Band Time delay in-flight calibration factor, reported in Figure 14, shows a regular behaviour as observed on previous cycles.

The Ku band Sigma0 calibration factor, reported in red in Figure15, is nominal.



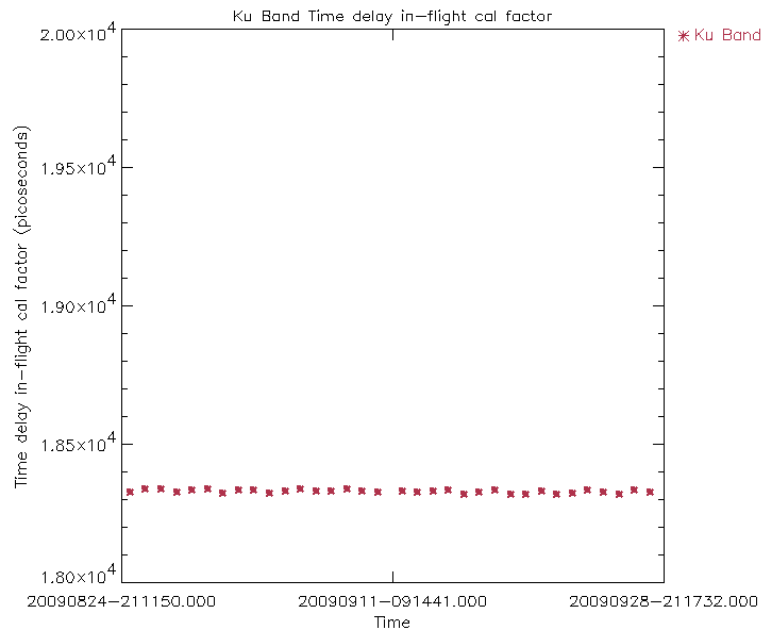


**Figure 14: Ku Band in-flight time delay calibration factor for cycle 82 (averaged per day)**

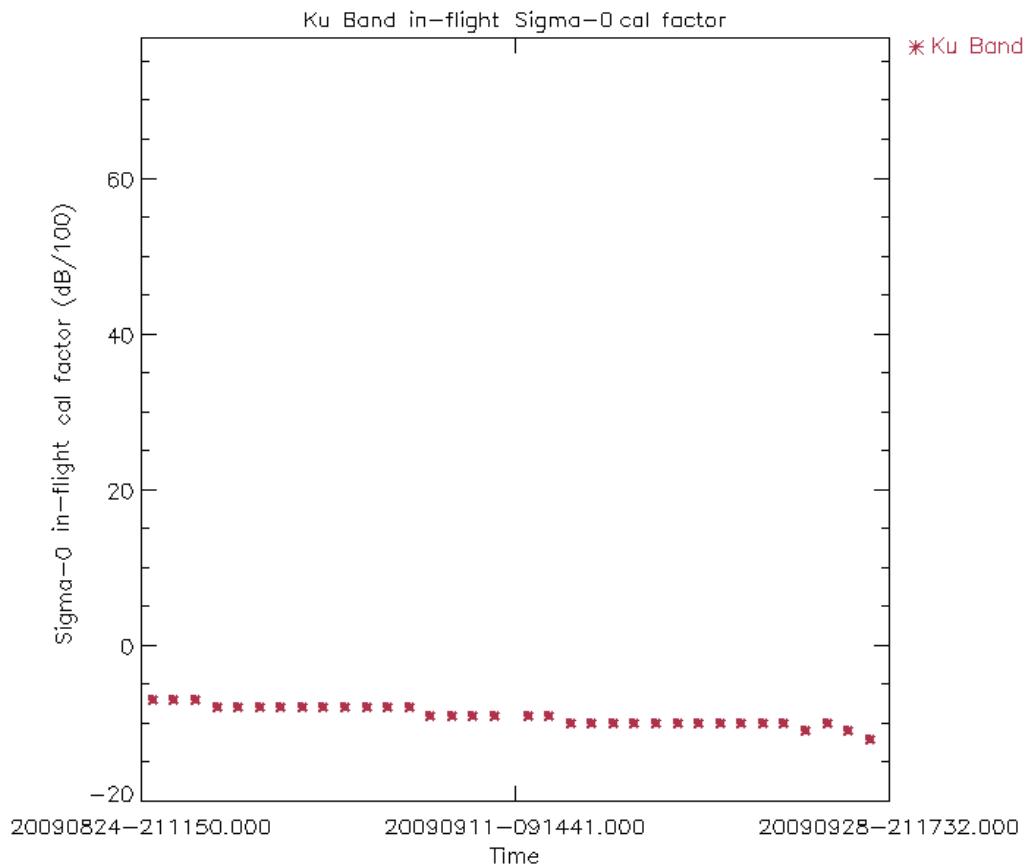


**Figure 15: Ku Band in-flight Sigma0 calibration factor for cycle 82 (averaged per day)**

Figure 16, Figure 16A, Figure 17 and Figure 17A report Ku and S Band in-flight calibration factors for Time Delay and Sigma0 respectively, daily averaged, up to the current cycle. The Time Delay factor is shown to be very stable for both the working frequencies. The Ku band Sigma0 factor reveals a decrease of about 0.5 dBs over the period starting from cycle 16. As this instability is quite small, it is not being considered a problem for the moment, since the calibration factor is indeed introduced especially to correct for eventual instrumental changes. However, special attention is kept on the monitoring of this parameter. The jump observed on the last part of the plot is related to the period on which the instrument sub-system Radio Frequency Module (RFM) was switched to its B-side, occurred between 15 May and 21 June 2006.


Since Cycle 72 (2 October 2008) a sudden drop of the Time Delay and Sigma 0 in-flight calibration factors has been observed. No impact has been observed on science data. An investigation to understand the origin is on-going.

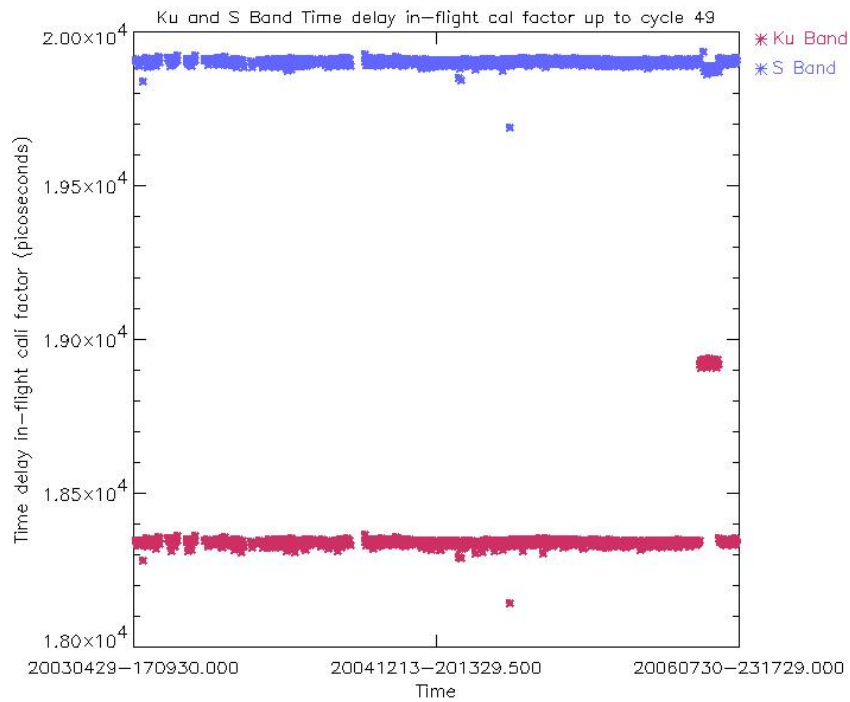


**Figure 16: Ku and S Band in-flight time delay calibration factor up to cycle 49 (averaged per day)**

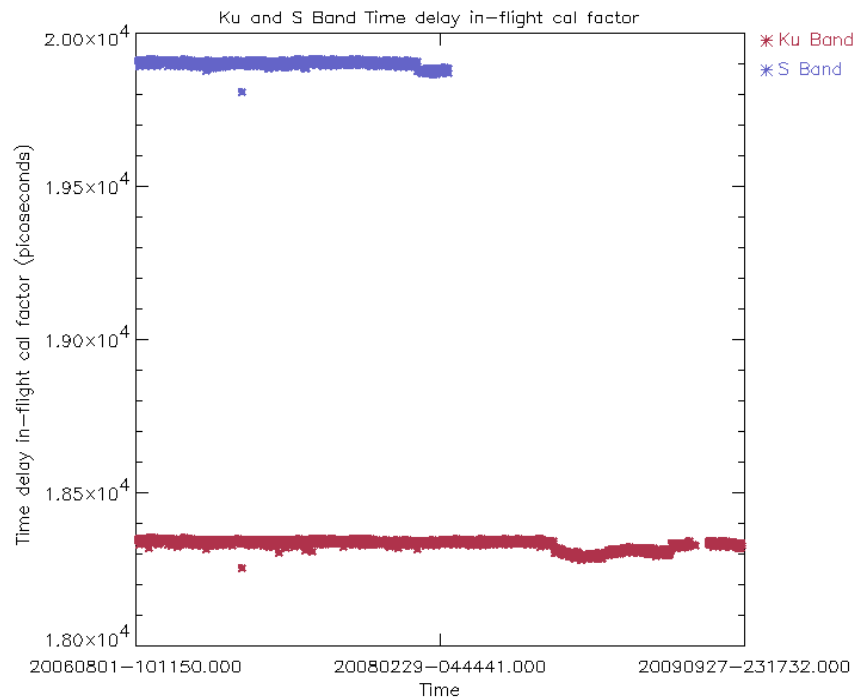

**Figure 16A: Ku and S Band in-flight time delay calibration factor from cycle 50 onwards (averaged per day)**

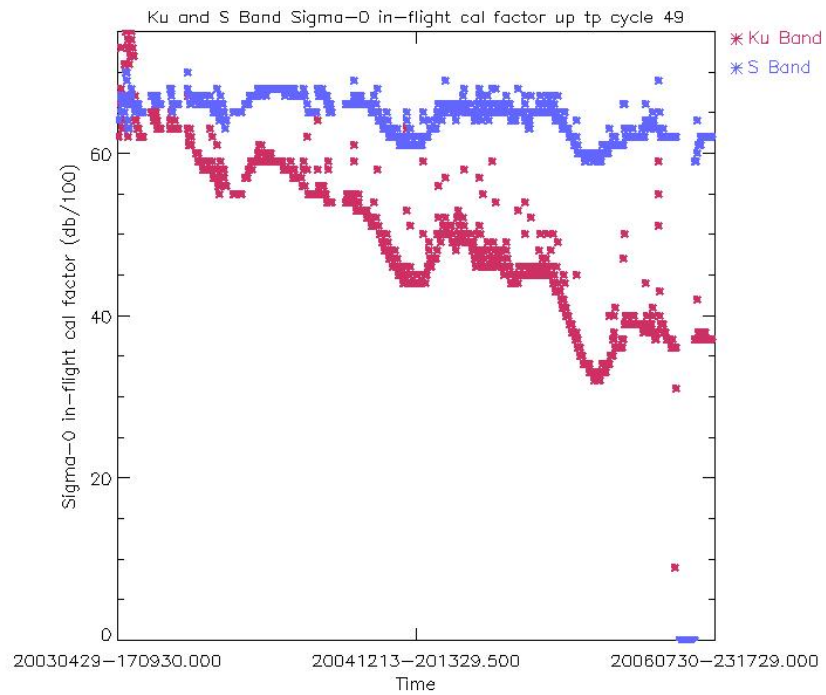

**Figure 17: Ku and S Band in-flight Sigma0 calibration factor up to cycle 49 (averaged per day)**

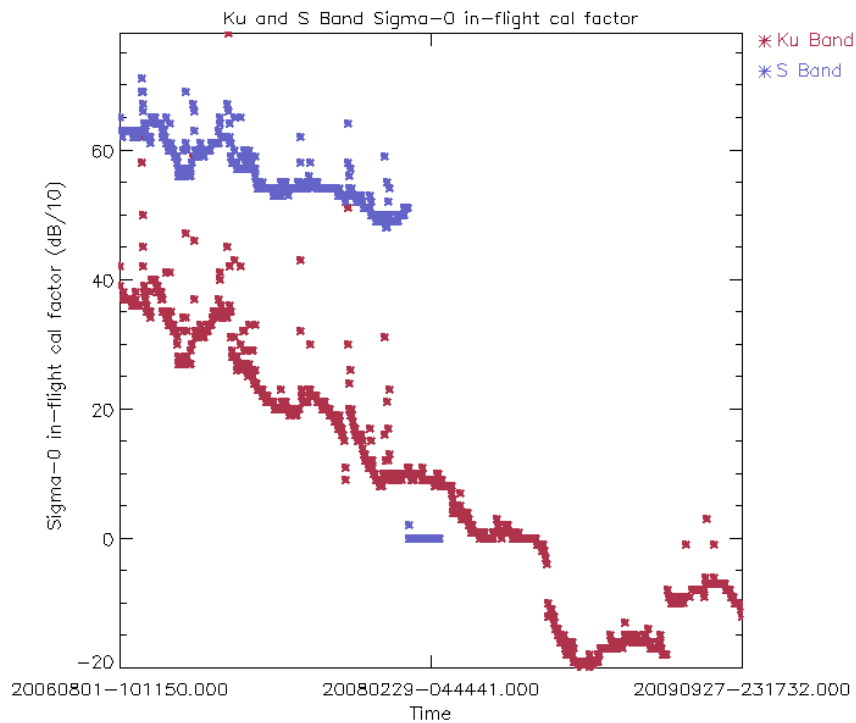

**Figure 17A: Ku and S Band in-flight Sigma0 calibration factor from cycle 50 onwards (averaged per day)**

### 6.1.6 SIGMA0 TRANSPONDER

The  $\sigma^0$  absolute calibration of the RA-2 is performed using a reference target given by a transponder that has been developed at ESTEC. This has been exploited during the 6 month Commissioning phase to generate early calibration results. In order to consolidate the calibration results and to monitor the RA-2 calibration of  $\sigma^0$  during the Envisat lifetime, continual monitoring is accomplished by operating the transponder for as many Envisat overpasses as possible. Since the 11<sup>th</sup> of October 2005 the transponder has been moved to a permanent site located in Rome.

A planned acquisition was performed on the 15<sup>th</sup> September 2009 but due to anomalous behaviour in the X-band antenna due to bad weather the acquired product has been corrupted. Therefore no calibrations results are available.

Absolute Orbit nb	Date of Measurement	Location / Rel. track	RA-2 resolution	Transponder Bias [dB]	ECMWF Wet Tropo. Corr. [dB]

Appendix 4 reports the transponder measurements from cycle 24 onwards.

The mean value of the estimated bias at High Resolution is 1.00 dB with a standard deviation of 0.09 dB. It is possible to notice that the Low Resolution measurements are coherent among themselves but there is a bias with respect to the High Resolution ones. This is due to a processing problem with the internal calibration factor not taken into account in Low Resolution Mode.

In Figure 18, the time behaviour of the bias is plotted for both Low and High Resolution. The green line represents the corrected bias for the internal calibration factor (only for the Low Resolution data) and the tropospheric attenuation. The latter is estimated by using the ECMWF meteorological data. The low value of the corrected bias for the orbit 14397 is due to the dew air condition and a probable underestimation of the tropo-attenuation.

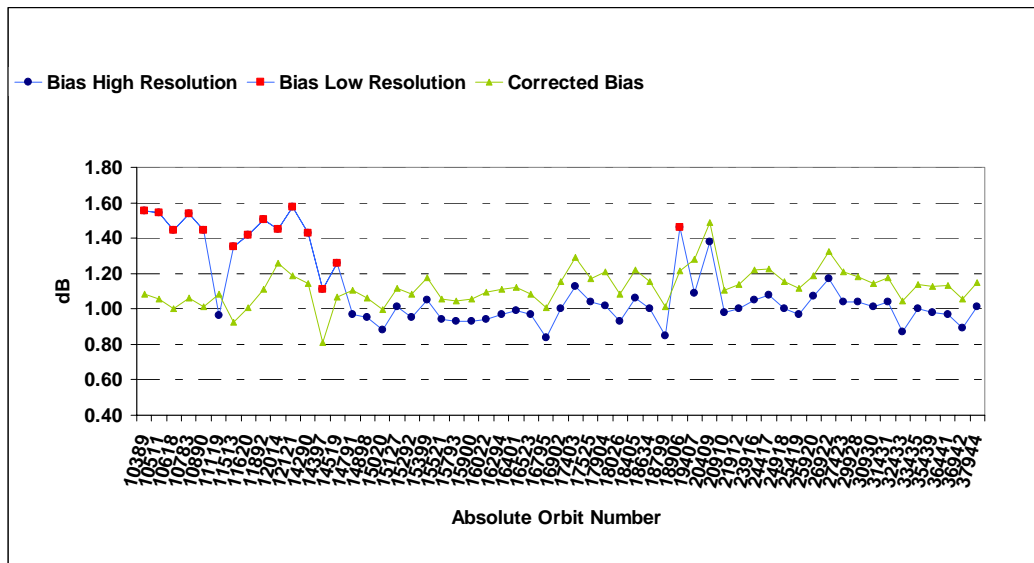



Figure 18: Time behaviour of the transponder bias

### 6.1.7 MISPOINTING

In Figure 19, the trend of the mispointing squared (averaged every orbit) is reported in  $\text{deg}^2 \cdot 10e-4$ .

The average squared mispointing value, as extracted from the FDGDR data products, has decreased from about  $0.028 \text{ deg}^2$ , to  $0.0075 \text{ deg}^2$ . This is due to the new algorithm currently used to retrieve the mispointing value from the RA-2 waveform data, see section 5.5.1.1.

Since IPF version 5.02, the mispointing is estimated through the waveform trailing edge slope using an optimum and fixed gate and no longer an adaptive window as defined previously. This allows avoidance of the filter bump effect that leads to high values of the mispointing.

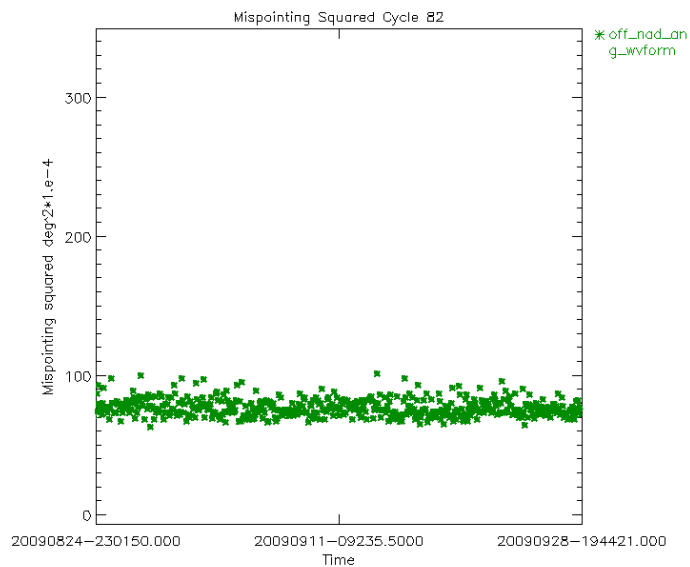




**Figure 19: Smoothed mispointing squared trend for cycle 82 ( $\text{deg}^2 \cdot 10^{-4}$ )**

In Figures 20 and 20A, the overall mispointing squared trend (averaged over each orbit) is plotted from cycle 16 onwards.


The low values at the end of the first plot are related to the acquisition in RFFS B-Side, occurred between 15 May and 21 June 2006.

The jump which occurred on date October 24<sup>th</sup> is related to the upload of IPF version 5.02. The abrupt decreasing of the mispointing squared value is related to the new algorithm, as described in the previous paragraph.

The jump which occurred on November the 26<sup>th</sup> 2003 is correlated to the upload of IPF version 4.56; the abrupt decrease of the mispointing squared value is due to the usage of a new RA2\_IFF\_AX IF mask auxiliary file. After the drop a very tiny increase of the mispointing squared could eventually be detectable. The most probable cause of this phenomenon could be a change in the Intermediate Frequency Filter slope due to ageing effects. For this reason, the RA2\_IFF\_AX will be updated regularly, once per month.

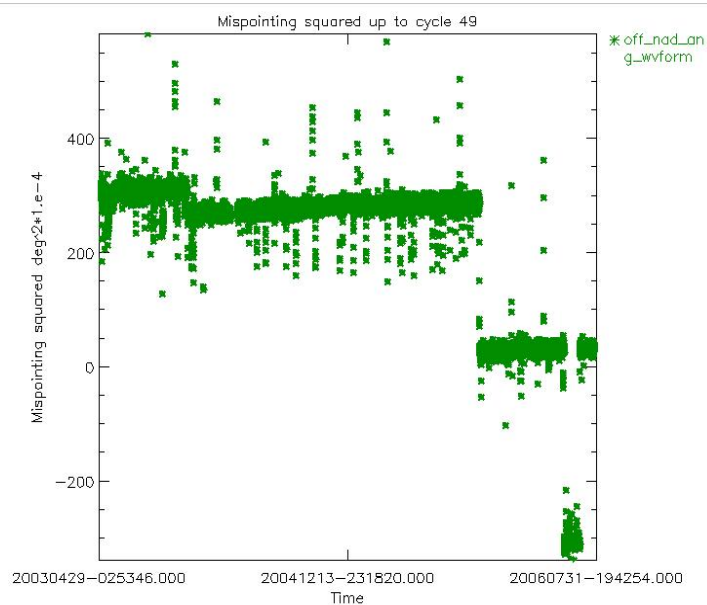

**Figure 20: Smoothed mispointing squared trend until end of cycle 49 ( $\text{deg}^2 \cdot 10^{-4}$ )**

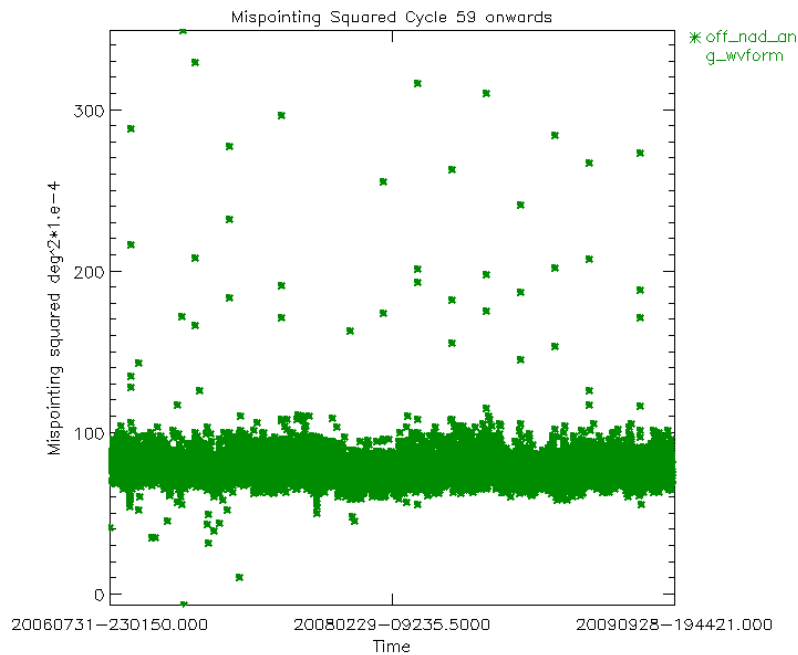


**Figure 20A: Smoothed mispointing squared trend until from cycle 50 onwards ( $\text{deg}^2 \cdot 10^{-4}$ )**


It can be noticed that the mispointing squared assumes lower values just after an instrument anomaly, showing an increasing trend until it reaches a standard mispointing value.

This problem has been reduced with the introduction of the updated mispointing retrieval algorithm as described in the previous paragraph.

This particular behaviour has always been explained by the different shape that the over-ocean average waveform has before and after an anomalous event as visible in Figure 21, i.e. the disappearance of the small dip in the waveforms acquired after the anomaly. Since the new strategy of updating once per month the RA2\_IFF\_AX file, the small bump is not present anymore in the waveforms, see Figure 21\_A, so a new explanation is currently under investigation.

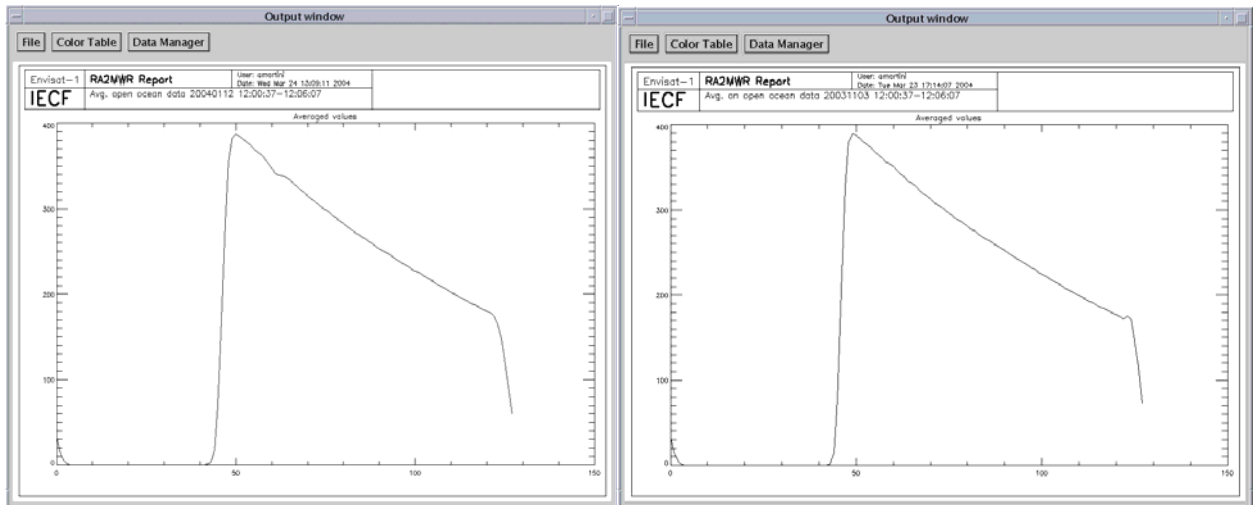

**Figure 21: Open Ocean average waveforms before (left) and after an anomaly (right)**

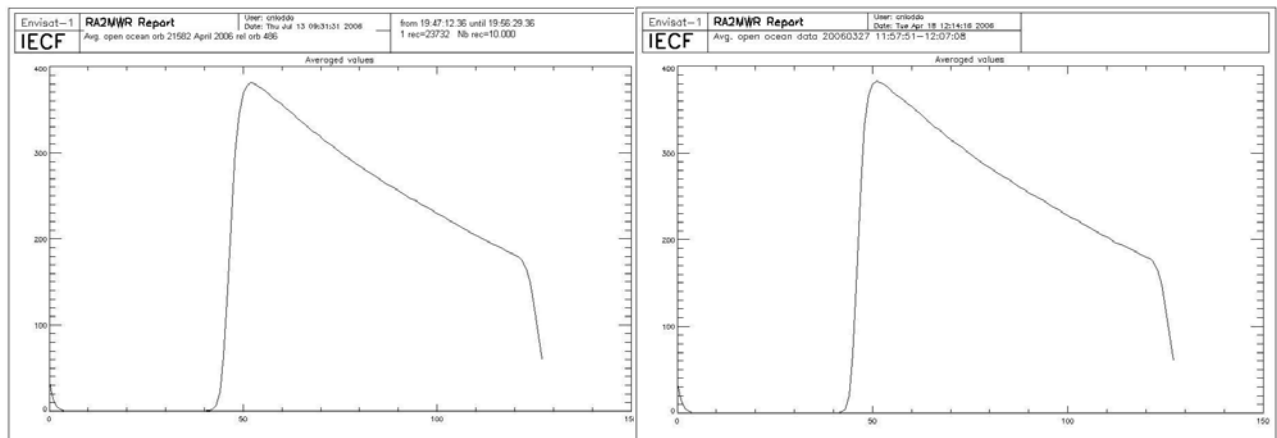

**Figure 21\_A: Open Ocean average waveforms before (left) and after an anomaly (right)**

### 6.1.8 S-BAND ANOMALY

Due to the S Band Transmission failure occurred on cycle 65, on 17 January 2008, the S Band parameters are no more relevant. The S Band Anomaly, which consists in the accumulation of the S-Band echo waveforms, are therefore no more present. For this reason, the plot on Figure 22 will no more be updated.

The Patch that prevents the S Band Anomaly by correcting the SW/HW malfunctioning has been successfully uploaded on 27th of June. The Patch has been uploaded for the first time on 16<sup>th</sup> of January 2007, but it has been dismissed on 9<sup>th</sup> of April because it was causing the Instrument to switch down to Heater 0/Refuse Mode. An investigation has been carried out and some parameter monitoring thresholds causing the instrument to switch down have been modified.

The method used for the identification of the “S-Band anomaly” is statistical and requires a minimum of 1000 seconds of data over ocean. This choice is supported by the fact that the “S-Band anomaly” is associated with a particular instrumental behaviour that cannot appear and disappear within a short time frame. (ref. [R – 7])

A valuable algorithm to detect the RA-2 DSRs affected by the S-Band anomaly within the L2 products can be found in [R- 12]. Note that the algorithm is only valid for data acquired over open-ocean.

The IPF version 5.03 includes an algorithm that can detect the presence of the so-called “S-Band anomaly” over any surface. In case of S-Band anomaly detection, bit 1 of the L1b products MCD is set to one; the anomaly is properly detected in 99.9% of the cases.

In Figure 22, the percentage of data per cycle that are affected by the so-called “S-Band” anomaly is reported. The figures are variable between 0% and 8.1%.

The number of occurrences of the S Band anomaly decreased from a mean value of 4% to 2% from cycle 31 onwards due to the implementation of the IF CAL procedure (including Heater 2 for S Band anomaly suppression) twice per day over the Himalayan region.

The relatively high value recorded for cycle 27 is due to the fact that on the day 1<sup>st</sup> of June 2004, the S-band anomaly started at around 14:30 while the instrument didn’t switch to mode Heater 2 when foreseen (at about 15:50). For this reason the S-Band anomaly continued for the next 24 hours until the next Heater 2 mode on June the 2<sup>nd</sup>.

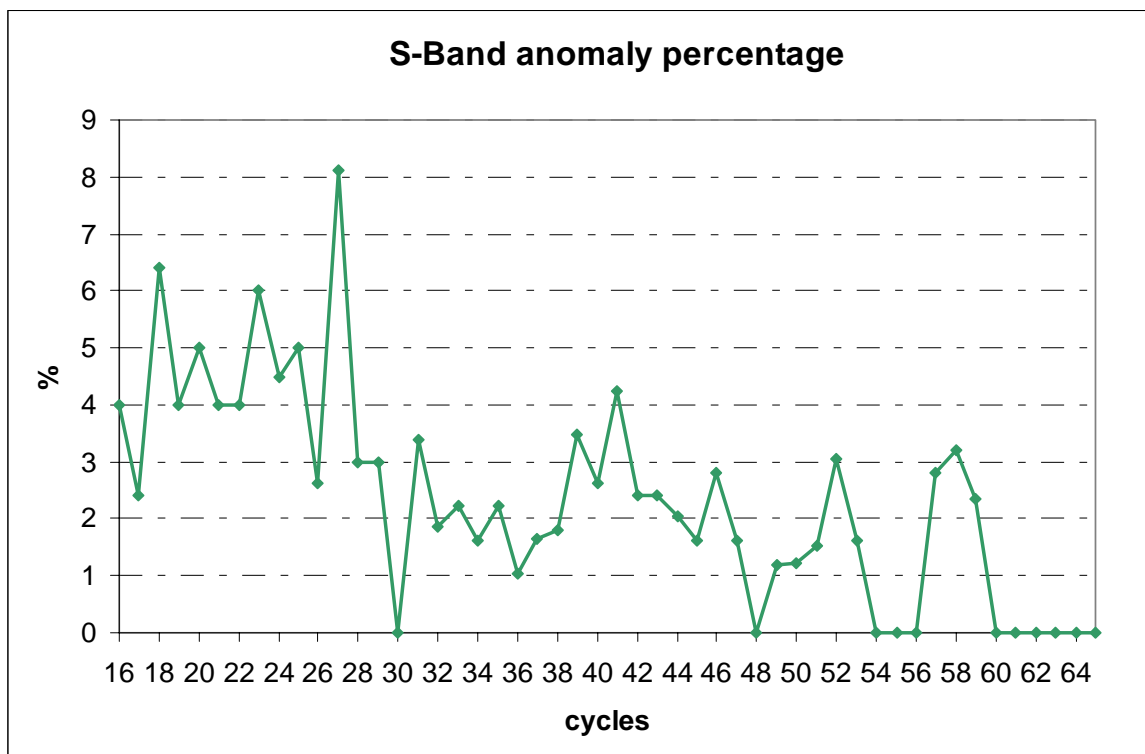


Figure 22: Percentage of data affected by the “S-Band Anomaly” for cycles 16 up to cycle 65

## **6.2 MWR Performance**

For MWR performances please refer to the Reference CLS Cyclic Report of the type of [R – 2].

## **6.3 DORIS Performance**

For DORIS performances please refer to the Reference F-PAC Monthly Report of the type of [R – 1a] and [R-1b].

# **7 PRODUCT PERFORMANCE**

## **7.1 Product disclaimer**

A summary of the products released to users and disclaimers on product quality have been established for some products and are available in the following web link:  
<http://envisat.esa.int/dataproducts/availability/>

## **7.2 Data handling recommendations**

### **7.2.1 S BAND POWER DROP**

Ten hours after the recovery of the HSM anomaly on the 17 January 2008, a drop of the RA2 S-band transmission power occurred. The drop occurred in the South Atlantic Anomaly, showing similar characteristics as for the RA-2 RFSS Side B S-band power drop anomaly occurred in May 2006.

Consequently, all the S-band parameters, as well as the dual ionospheric correction are not relevant and MUST NOT be used from the following date: 17 January 2008, 23:23:40, UTC, orbit nb 30759.

Users are advised to use the Ionospheric correction from Bent model, which is available in FGDR data products:

FGDR (*Ionospheric correction from model on Ku-band: field #47* )

Investigations have been conducted and the failure of the S Band power stage is considered to be permanent.

## 7.2.2 SEA-ICE FLAG

The following algorithm is proposed for the determination of a sea-ice flag, presently missing in the Level 2 Ra-2 and MWR data products. (See [R – 14]):

|Latitude (*lat: field#4 of L2 data*)| >50 deg  
AND  
The number of 20Hz valid data (*num\_18hz\_ku\_ocean: field#23 of L2 data*) < 17  
OR  
|MWR Wet Tropospheric Correction (*mwr\_wet\_tropo\_corr: field#42 of L2 data*)–ECMWF  
Wet Tropospheric Correction (*mod\_wet\_tropo\_corr: field#42 of L2 data*)| > 10 cm  
OR  
Peakiness (*Ku\_peak: field#139 of L2 data*) >2

## 7.2.3 OCEAN S-BAND ANOMALIES DETECTION

A valuable algorithm to detect the Level 2 DSR affected by the RA-2 S-Band anomaly is proposed in [R- 12].

## 7.2.4 WARNING ON IPF 4.56 VERSION IDENTIFICATION FIELD

All RA-2 and MWR level 1B and NRT Level 2 products generated after November 26, 2003 report a software version as being 4.54 (available in MPH field 8).

Nevertheless those products have been generated with the IPF V4.56 operational since November 26, 2003. The first nominal generated product, using the new SW version, will be the one relevant to the absolute orbit number 9094.

The software version ID is correct since December 4, 2003.

## 7.2.5 S-BAND BACKSCATTERING COEFFICIENT

For the data processed with IPF version 4.56 on, the S-Band Backscattering coefficient has been demonstrated to be on average about 0.65 dBs higher than for the previous versions of the processor. This is due to the algorithm used for the retrieval of the AGC in S-Band, corrected in IPF version 4.56 to be closer to the real functioning of the instrument.

An average value of 0.65 dBs is suggested to be added to the old software versions S-Band Sigma0 in order to be in line with the new IPF V4.56 version.

## 7.2.6 USO RANGE CORRECTION

Three different periods can be distinguished:



### 1<sup>st</sup> period

From the beginning of the mission until the 24<sup>th</sup> of October 2005 the Nominal USO clock period has been used in the processing. The data was not corrected for the bias and the drift correlated to the actual USO clock period. All data acquired before 24<sup>th</sup> October 2005, beginning of cycle 42, have thus to be corrected using the old correction files available on the web site:

<http://earth.esa.int/pcs/envisat/ra2/auxdata/OldCorrection.html>.

The measured Range shall be corrected considering a drift of -4.58 mm per year and a bias of 29.6 mm.

**Warning for data acquired before cycle 42:** bias and drift have to be **SUBTRACTED** from the original altimetric range, according to the following equation:

$$R_{\text{true}} = R_{\text{original}} - dR$$

where  $R_{\text{original}}$  is the range in the GDR products and  $R_{\text{true}}$  is the true (corrected) range.

### 2<sup>nd</sup> period

From the 24<sup>th</sup> of October 2005 until the 13<sup>th</sup> of March 2006, outside of the anomaly periods, the actual USO clock period has been used within the processing. The data was corrected for the bias and the drift correlated to the actual USO clock period. Those values, translated into altimetric range figures, are respectively of 28.5 mm and -4.58 mm/year as calculated with data covering the period 13 June 2003 to 01 February 2006.

### 3<sup>rd</sup> period

From the 13<sup>th</sup> of March 2006 onwards, and during the early occurrences of the USO anomaly, data have not been corrected with the proper value of the USO Clock period. All data acquired during this period have thus to be corrected using the new correction files. Three USO corrections have been developed for the different Envisat Level 2 altimetry data products for correcting the abnormal RA-2 USO behaviour affecting the Altimetric Range by few meters w.r.t. the Mean Sea Surface:

- A NRT orbit based USO correction for FDGDR products, available from <http://earth.esa.int/pcs/envisat/ra2/auxdata/NewCorrection.html>; or [ftp://ftp.esrin.esa.it/pub/RA2\\_MWR/USO/auxdata/](ftp://ftp.esrin.esa.it/pub/RA2_MWR/USO/auxdata/)
- An Interim daily USO correction for IGDR products, available at the same F-PAC location as for IGDR, in the directory `igdr_ous_corr`
- An OFL cycle USO correction for GDR products, available at the same F-PAC location as for GDR, in the directory `gdr_ous_corr`.

**Warning for data acquired after 1<sup>st</sup> February 2006:** This correction has to be **ADDED** to the Ku and S Band altimetric range.

The USO smoothing factor of the NRT USO Correction Tool for periods of NO-USO anomaly has been updated from value  $90 \cdot 10^{-6}$  ps to value  $120 \cdot 10^{-6}$  ps starting from 28<sup>th</sup> November 2008 at 12:00

A software routine has been developed to allow users to insert the RA-2 Ultra-Stable Oscillator (USO) corrections into Envisat Level 2 altimetry data products and is available in the same web site than the new correction files.

**WARNING: Users are still advised to apply the correction auxiliary files even during the non-anomalous period in order to correct for the nominal ageing drift of the USO device.**

## 7.2.7 KU-BAND BACKSCATTERING COEFFICIENT CALIBRATION

The results of the Ku-Band Sigma0 absolute calibration performed with a transponder have been presented in par. 6.1.4. Those results are going to be consolidated and are summarized in appendix 4, table 18. In order to absolutely calibrate the backscattering coefficient given in the RA2 L2 products, the following shall be used by the end user to get to the real Sigma0 measurement:

$$\text{Sigma}_0\text{\_true} = \text{Sigma}_0\text{\_prod} + \text{G\_tx\_rx\_prod} - \text{G\_tx\_rx\_real} - \text{Bias [dB]}$$

Where:

**Bias:** Bias retrieved from the Sigma0 Absolute Calibration (see 6.1.5)

**G\_tx\_rx\_prod:** Current effective Tx-Rx Gain value used in the operational ground processing chain (ADF file RA2\_CHD\_AX). The value nominally used since IPF V4.54 (for configuration RFSS=A and HPA=A) is 170.70 dB

**G\_tx\_rx\_real:** Pre-launch characterization value (configuration value RFSS=A and HPA=A is 167.46 dB)

## 7.2.8 RA-2 RADIO FREQUENCY MODULE SWITCHED BACK TO A-SIDE

The Envisat RA-2 sensor has been successfully reconfigured on its nominal side (RFSS A-side) and was commanded back into Measurement Mode on June 21, 2006 at 13.20.15.000 UTC time, Orbit = 22523 after a switch to RFSS B-Side on 15 May at 14:21:50 UTC Orbit=21994


The analysis of the RA-2 data shows an expected behaviour of the RA-2 parameters but also confirmed the persistence of the abnormal RA-2 Ultra-Stable Oscillator (USO) behaviour affecting the Altimetric Range by few meters.

Data from 15 May 2006 until 21 June 2006 was acquired with RFSS B-side and on-ground data processing has been performed with ADFs configured for A-side. For this reason data should be used with maximum care.

## 7.3 Availability of data

### 7.3.1 RA-2

In Figure 23 and Table 9 (Appendix 2) the summary of unavailable RA2 L0 products is given.

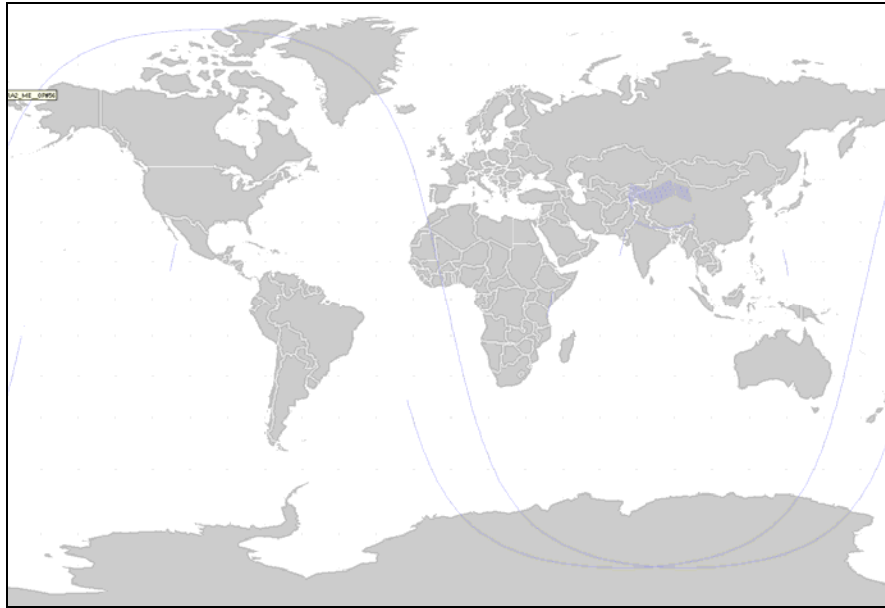

**Figure 23: RA-2 L0 unavailable products for cycle 82**

It is easy to notice that close to the Himalaya region two small gaps are present per pass, one of about 77/80 seconds and another of about 10 seconds. This is due to the daily instrument switch-offs (Heater 2 mode) performed as part of the IF calibration commands sequence.

Another recurrent gap of around 179-180 seconds is due to an instrument anomaly under investigation. It occurred 4 times on cycle 82.


Apart from these systematic small gaps, two orbits have not been acquired due to an antenna acquisition problem on 15<sup>th</sup> September 2009.

In Figure 24 and Table 11 (Appendix 2) the summary of unavailable RA2 L1b products is given. Starting from cycle 65, the reported gaps, both in the map and table, are related to the RA2 L0 products and not to the Mission Planning. One small gap of 515 s has been observed on 26<sup>th</sup> August 2009 in RA2 L1b data with respect to RA2 L0 products are observed for cycle 82.



**Figure 24: RA-2 L1b unavailable (with respect to RA2 L0) products for cycle 82**


Hereafter the percentage of the different levels of products availability is reported. Since cycle 66 the situation is improved for all levels of products. The low percentage of data from cycles 56 to 59 was due to the high number of occurrences of RA-2 Instrument unavailability which occurred as a side effect of the SPSA Patch uploaded to prevent the S Band anomaly. An improvement can be observed on the data coverage since cycle 69. Two separate occurrences of instrument unavailability occurred in cycles 78 and 79, resulting in the reduction seen in figure 25.

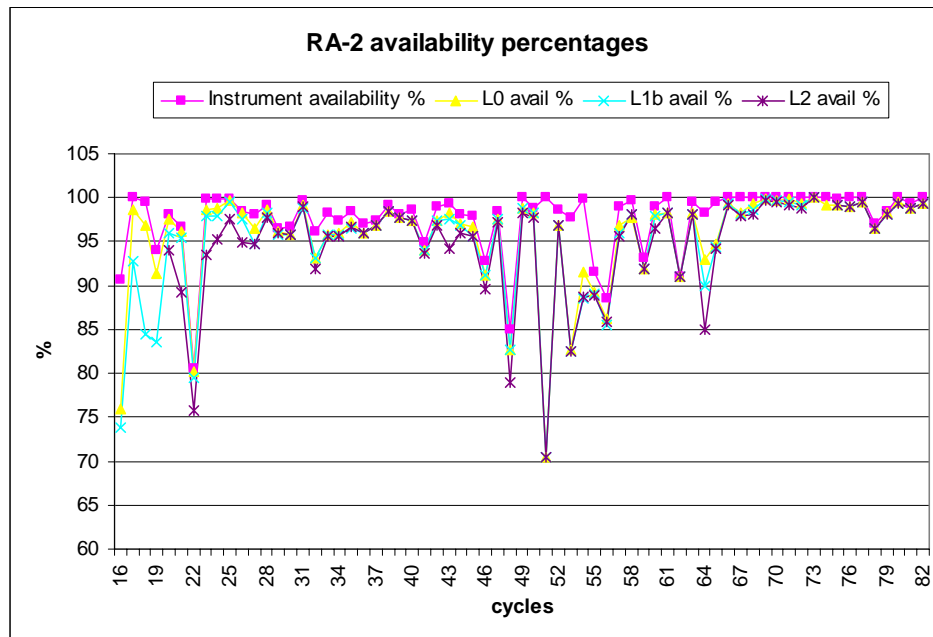

**Figure 25: Percentage of Products unavailability**

### 7.3.2 MWR

In Figure 26 and Table 10 (Appendix 2) the summary of unavailable MWR L0 products is given. Small gaps of 24 s can be seen on cycle 82. One orbit is missing due to an antenna acquisition problem due to bad weather on 15<sup>th</sup> September 2009.

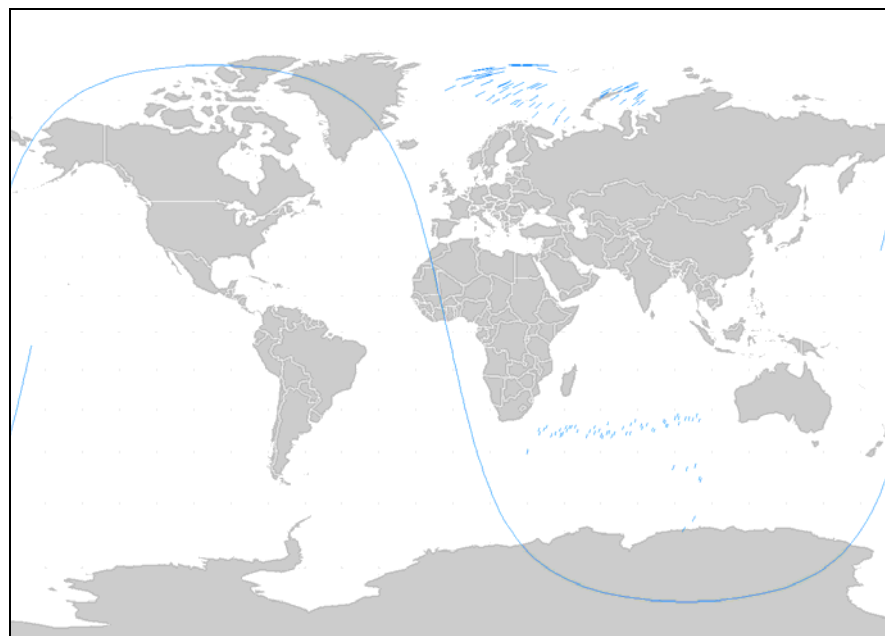

**Figure 26: MWR L0 unavailable products for cycle 82**

## 7.4 RA-2 Altimeter Parameters

Hereafter a summary of the main altimetric parameters performances is reported; these results have been obtained using only ocean surface type for the NRT product type, FDGDR.

### 7.4.1 ORBIT

Since the 20<sup>th</sup> of June 2007, operations date of IPF version 5.06, the DORIS Navigator data usage within the NRT processing has increased and it is now being nominally used for 99% of the products. On Table 3 the filenames of the FDGDR products processed without DORIS Navigator on the current cycle are reported. During the reporting cycle 15 FDGDR products have been processed without DORIS Navigator.

FDGDR								
RA2	FGD	2PNPDK20090824	140119	000050132081	00497	39128	1996.N1	
RA2	FGD	2PNPDK20090824	152911	000006452081	00498	39129	2005.N1	
RA2	FGD	2PNPDE20090826	051118	000060822082	00019	39151	8429.N1	
RA2	FGD	2PNPDE20090901	223601	000061512082	00115	39247	7249.N1	
RA2	FGD	2PNPDK20090907	162913	000005322082	00198	39330	3563.N1	
RA2	FGD	2PNPDK20090909	153508	000058952082	00226	39358	3172.N1	
RA2	FGD	2PNPDE20090915	212034	000000612082	00315	39447	5769.N1	

**Table -3: FDGDR products processed without DORIS on cycle 82**


Several anomalies occurred in the ground segment during the current cycle, affecting both ESRIN and Kiruna stations (Operation News from <http://envisat.esa.int/>), resulting in the generation of some products without DORIS files.

The usage of the DORIS Navigator data within the NRT processing increases the quality of the FDGDR SLA, leading to a SLA variability of about 50 cm (to be compared to 20 m when using predicted orbital information).

#### Feature of the ENVISAT Altimetry NRT processing:

The ENVISAT downlink strategy leads to the non-availability of one DORIS Instrument Source Packet (ISP) per orbit for the NRT operations, which corresponds to around 5 minutes per acquired orbit (e.g. number N). The ISP data are not lost but dumped during the following orbit (number N+1, i.e. too late for the NRT ground processing of orbit N).

The ISP DORIS gaps occur in the southern Atlantic (for ascending passes) and in the Indian Ocean and Asia (for the descending passes), Figure 1.

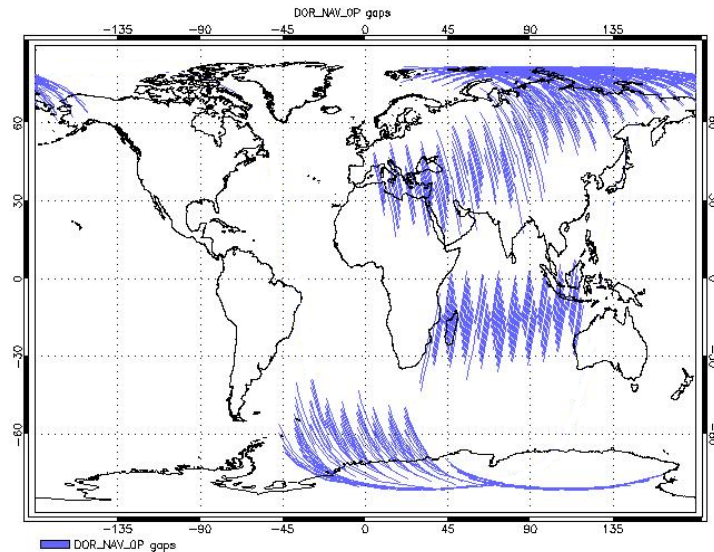

**Figure -27: DORIS Navigator missing ISP NRT**

In the ground segment processing of NRT data, the last orbit state vector available in the DORIS Navigator is extrapolated until the end of the RA2 product being processed. Given that the extrapolation is not as accurate as the interpolation, the quality of the SLA in the part of the FDGDR products not covered by DORIS Navigator results to be degraded.

An orbit quality flag is available in RA2MWR L1B and L2 products as follows:

- L1B RA2 MDSR: bit 0 of MCD (field 14)
- L2-RA2 MDSR: bit 27 of MCD (field 8)
- L1B/L2-MWR MDSR: bit 1 of MCD (field 8)

The Orbit quality flag is set to 1 when DORIS Navigator has been used in the MDSR processing.

The Orbit quality flag is set to 0 when the DORIS Navigator has not been used in the MDSR processing and this might happen in two different cases:


1. DORIS Navigator is not used on the RA2 processing and the state vector available in the MPH is propagated to the full orbit. In this case all MDSRs in the products present flag set to 0;
2. DORIS Navigator is shorter than RA2 due to the dump issue explained above, in this case only MDSRs not covered by DORIS Navigator are set to 0.

The distinction between these two cases can only be performed in a file basis, by checking the SPH field named DS\_NAME="ORBIT\_STATE\_VECTOR\_FILE". The filename is provided for case 2 whilst *NOT USED* is reported for case 1.

## 7.4.2 ALTIMETER RANGE

On Figure 27A, it can be observed that the altimetric range was nominal on cycle 82.

The gaps observed in Figure 27A are related to some PDS failures which prevented the usage of DORIS on NRT products. Almost all products have been recovered using FOS restituted orbit files (AUX\_FRO\_AX).

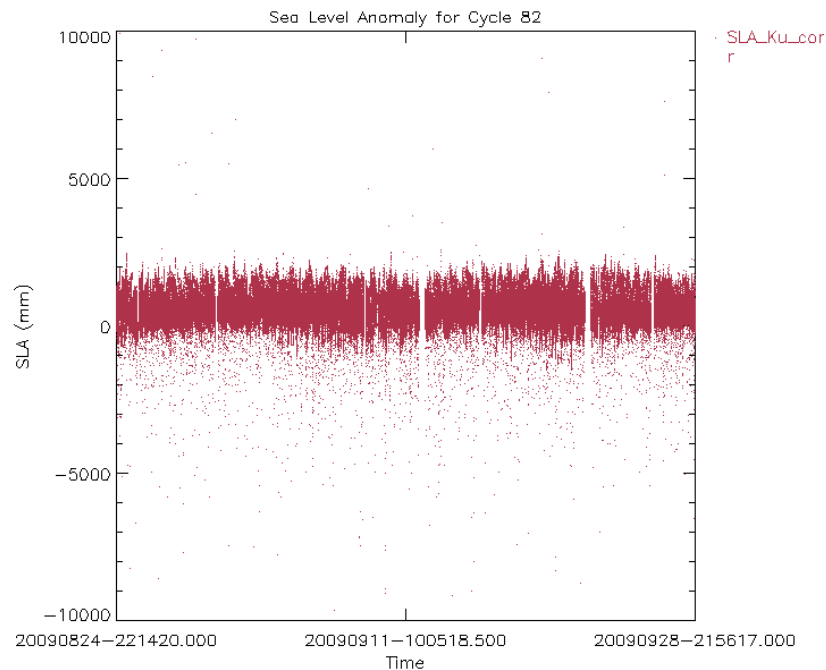

**Figure 27A: Sea Level Anomalies Cycle 82 only MDSRs with valid DORIS Flag**


The Ku Band SLA has been computed with the following corrections:

MWR\_WET\_TROPO, DRY\_TROPO, INV\_BMETER\_HEIGHT, SEA\_KU\_BIAS, IONO\_CORR

Due to the S Band Power drop anomaly, started on the 17<sup>th</sup> of January 2008, see section 7.2.1, the ionospheric correction used for the computation was the Bent model ionospheric correction

In Figure 27B the Histogram of Sea Level Anomalies is reported for the Ku Band. Only MDSRs processed with DORIS have been considered. The peak of the histogram is slightly less than 0.5 m as expected.




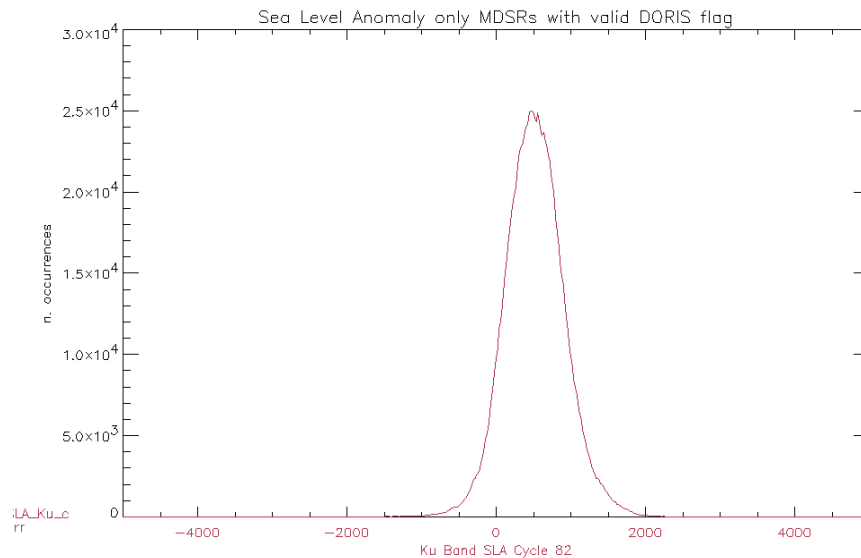


**Figure 27B: Histogram of Sea Level Anomalies on Ku Band computed on MDSRs with valid DORIS Flag**

### 7.3.3 SIGNIFICANT WAVE HEIGHT

The histogram of the SWH reported in Figure 28 shows a nominal behaviour on the Ku Band. The S Band is no more being monitored due to the S Band Power drop, which started on cycle 65, 17<sup>th</sup> January 2008, see section 7.2.1. The trend goes on following the behaviour as detected for the previous cycle. The largest peak (about 60000 data for SWH = 0m) was removed from the plot in order to have the complete picture of the SWH histogram.

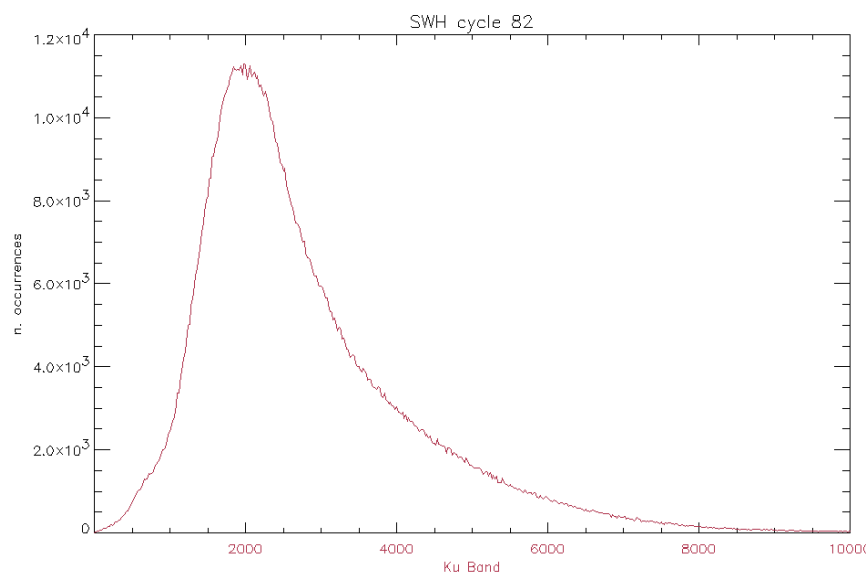


**Figure 28: Histogram of Ku Band SWH for cycle 82**

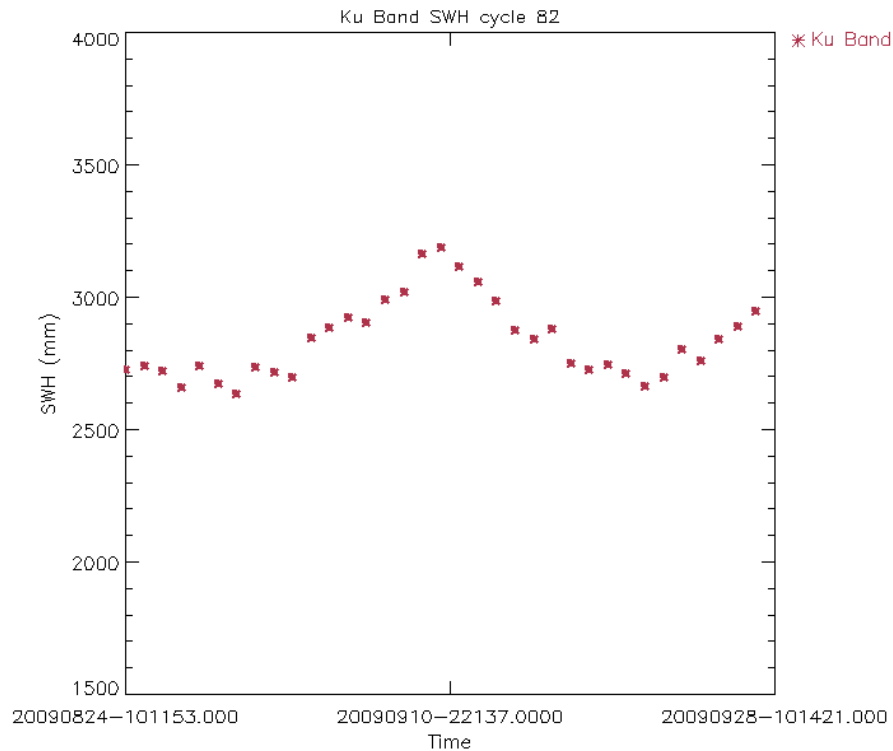


**Figure 29: Ku Band SWH daily average for Cycle 82 (mm)**

Figure 29 shows the Ku Band SWH daily mean for the current reporting cycle. The SWH long term plot is reported in two plots, cycle 16 until cycle 49 on Figure 30 and cycle 50 onwards on Figure 30A. It can be noticed that the SWH in both bands shows a trend which follows the seasonal variability. The high daily averages reported (sometimes plotted outside the figure's range) are due to the so-called S-Band anomaly (ref. par.6.1.8).

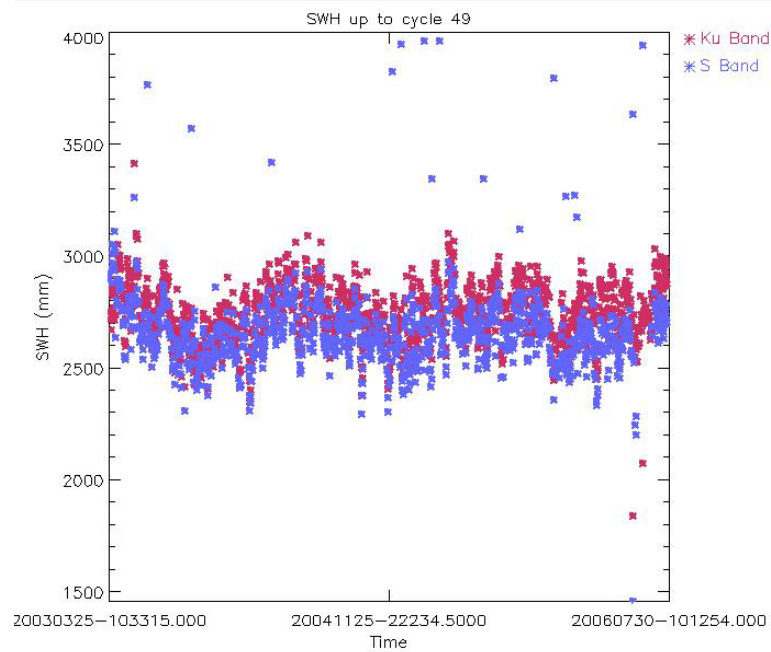

**Figure 30: Ku and S SWH daily average up to cycle 49 (mm)**

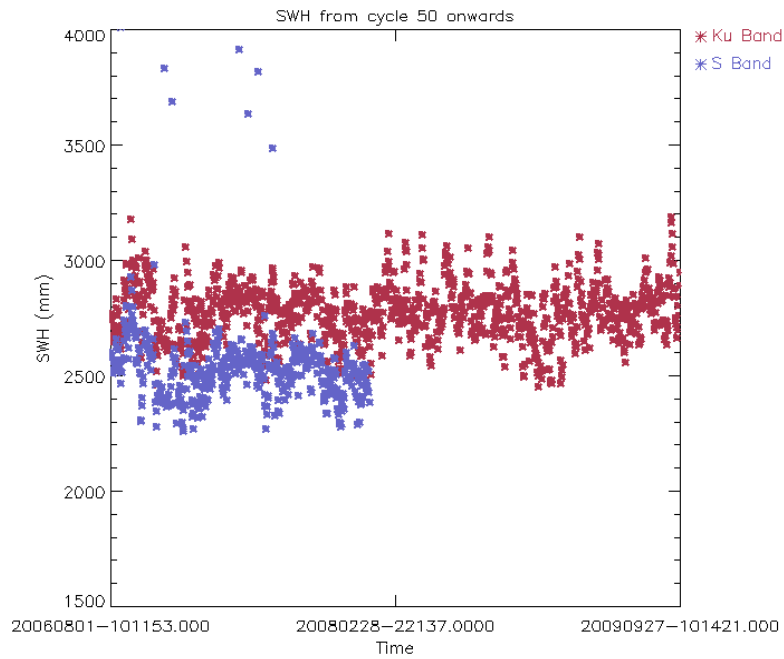


**Figure 30A: Ku and S SWH daily average from cycle 50 onwards (mm)**

### 7.3.4 BACKSCATTER COEFFICIENT – WIND SPEED


The Sigma-0 histogram in Ku Band is reported in Figure 31. The S Band is no more being monitored due to the S Band Power drop, started on date 17<sup>th</sup> of January 2008, see section 7.2.1.

The Sigma\_0 histogram in Ku Band is nominal. It shows secondary peaks as in the previous cycles. A small investigation on this problem, performed on the data of cycle 29, demonstrated that the backscattering distribution assumes a different behaviour for different sea conditions [R-17]. Indeed the majority of the data is concentrated on lower values for rough sea state (southern hemisphere, winter conditions) and on higher values for calm sea state (northern hemisphere, summer conditions).

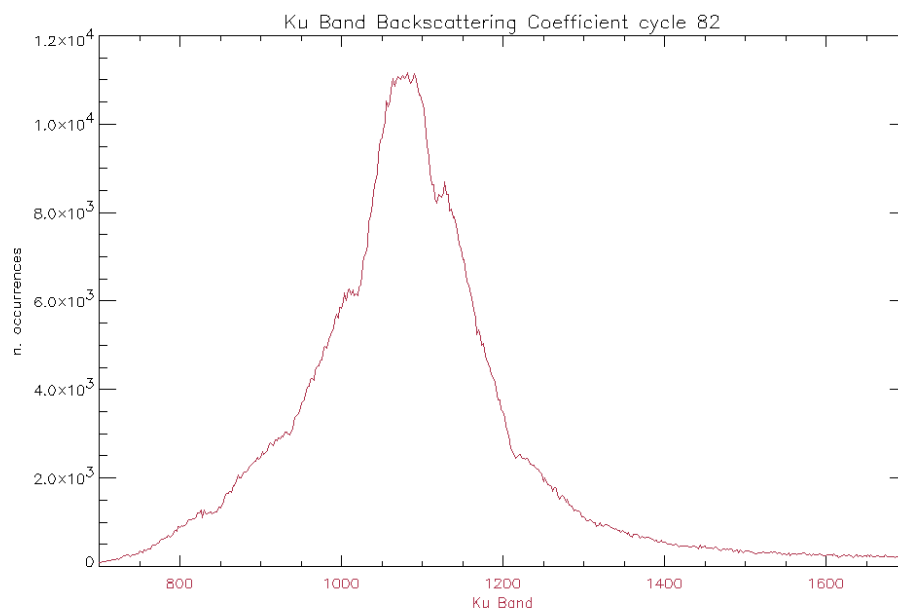

**Figure 31: Histogram of Ku Band Backscattering Coefficient for cycle 82**


In Figure 32, the backscattering coefficient daily average, computed for only ocean data, trend is reported. The Ku Band shows a nominal behaviour.

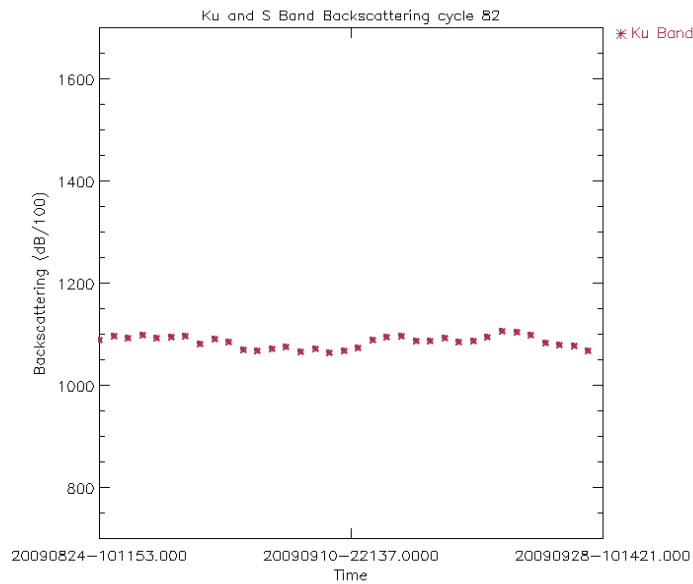


**Figure 32: Ku Band Sigma\_0 daily average for cycle 82 (dB/100)**

The histograms of Wind Speed computed for the Ku-band and the time behaviour during the current cycle are reported in Figure 33 and 34, respectively. Given that the wind speed table has been updated since IPF version 5.02, S.Abdallah Table is now used, the wind speed takes values between 1.18m/ and 21.30m/s.

The largest peak present in the histogram (about 50000 data for wind speed < 1.2m/s) was removed from the plot in order to have the complete picture of the wind histogram.

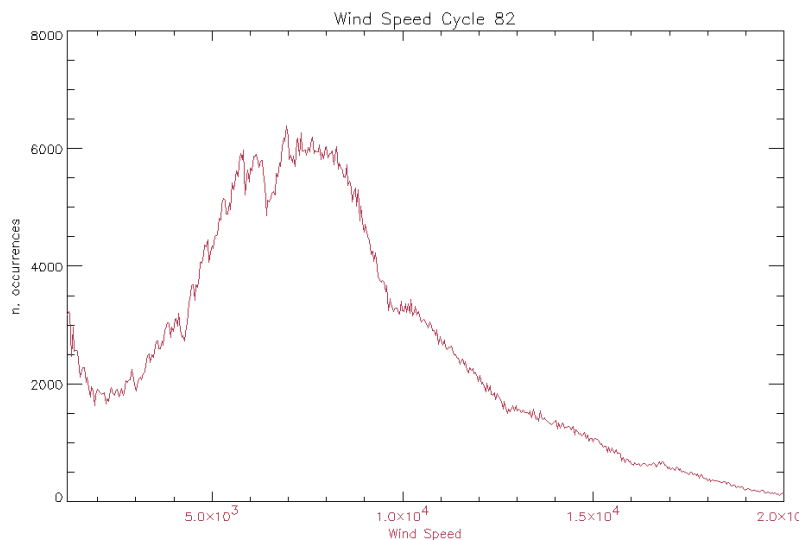

**Figure 33: Histogram of Ku Wind Speed for cycle 82 (mm/sec)**

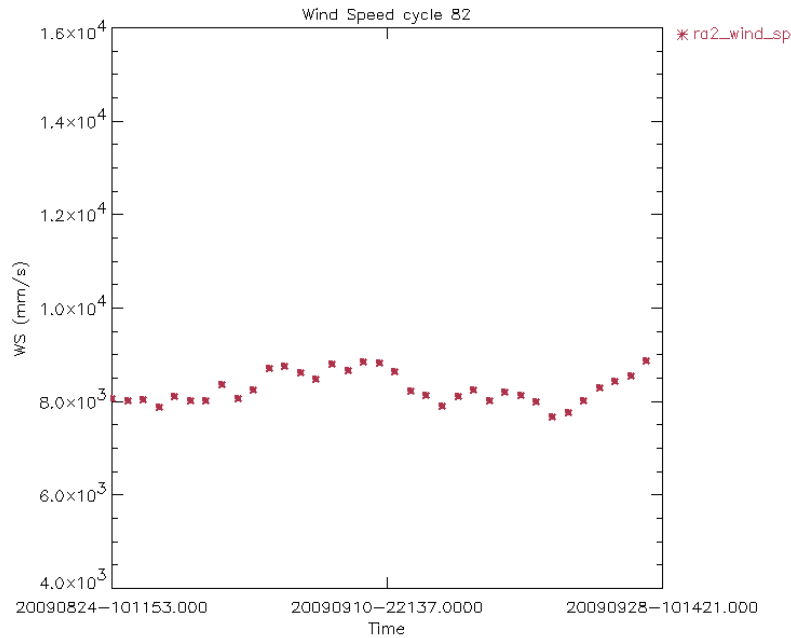


**Figure 34: Ku Band Wind Speed daily average for cycle 82 (mm/s)**


The Ku-Band Sigma<sub>0</sub> trend, reported hereafter (Figure 35 and 35A), is characterized by a jump of on average 3.24 dBs concomitant with the operational up-load of IPF version 4.54 which occurred on the 9<sup>th</sup> of April 2003. This change is due to the upload of a new RA2\_CHD\_AX ADF file that artificially shifted the RA-2 real Sigma<sub>0</sub> in order to align it with ERS-2 Sigma<sub>0</sub> and make it coherent with the Witter and Chelton empirical wind model. A similar change in trend, but in the opposite direction, is also visible in the Wind Speed trend reported in Figure 36.

Beyond the huge jump that occurred in April 2003, the S-Band Sigma<sub>0</sub> reports a smaller jump occurring on November the 26<sup>th</sup> 2003. Following the installation of the IPF processing chain V4.56, the average values of the RA-2 S-Band backscattering parameter, shows an increase of ~0.65 dBs, the new S-band sigma<sub>0</sub> being higher with respect to the previous versions. The very low values of the S Band Backscattering around 30<sup>th</sup> July 2006 are related to the S Band Power Drop Anomaly occurred when the instrument was operating on RFFS B-side from 15 May until 21<sup>st</sup> June 2006 and from the 17<sup>th</sup> of January onwards due to the S Band Power Drop Anomaly affecting RFFS A-side. The S-Band Sigma<sub>0</sub> daily means that are plotted outside the figure range can be traced back to the so-called S-Band anomaly (ref. par. 6.1.8).


In Figure 35A, the S Band is no more being monitored starting from cycle 65 due to the S Band Power drop, started on date 17<sup>th</sup> of January 2008, see section 7.2.1.

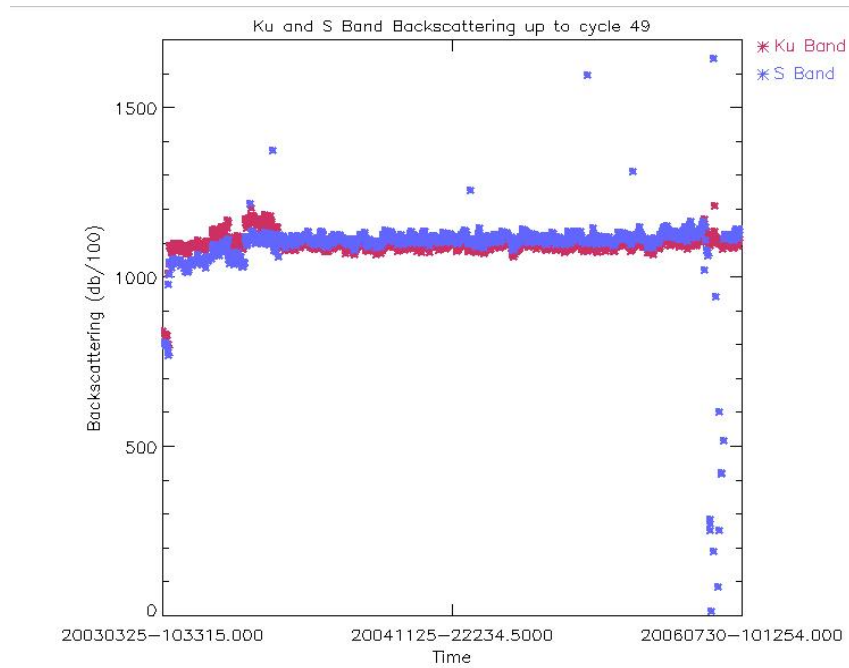


**Figure 35: Ku and S band Backscattering daily averages up to cycle 49 (dB/100)**

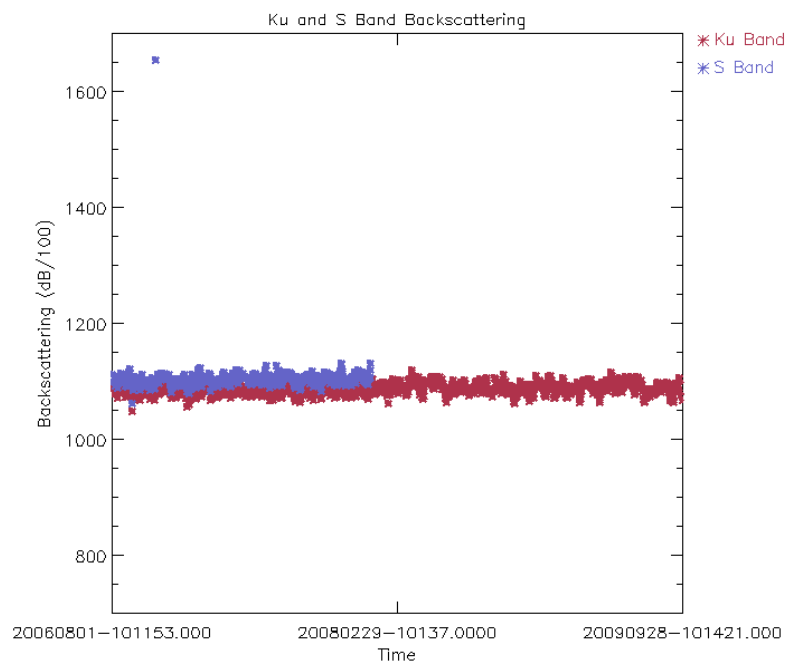

**Figure 35A: Ku and S band Backscattering daily averages from cycle 50 onwards (dB/100)**

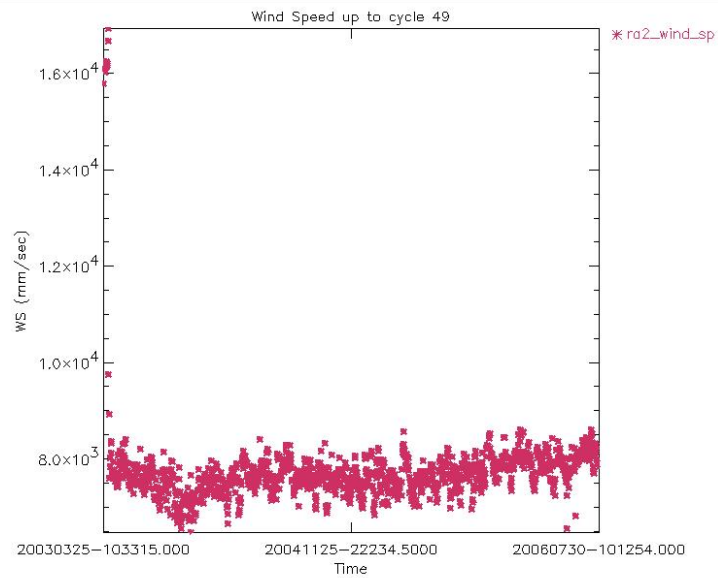

**Figure 36: Wind Speed daily averages up to cycle 49 (mm/s)**

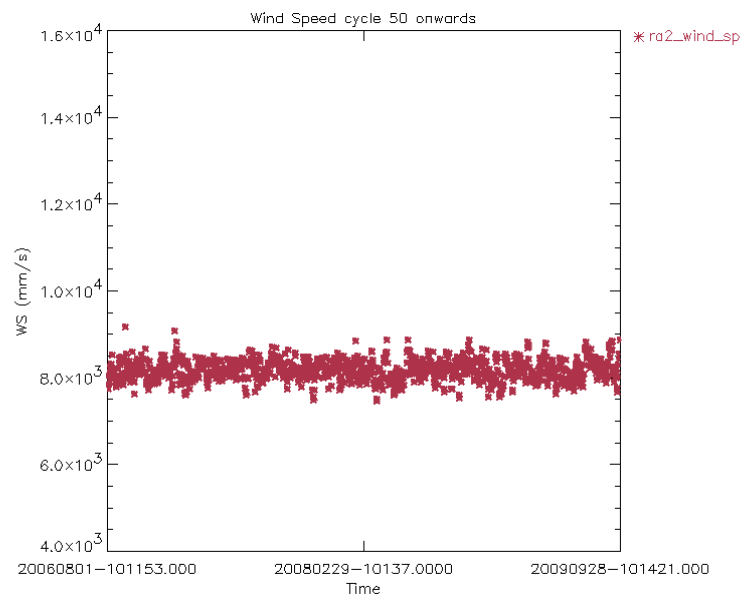

**Figure 36A: Wind Speed daily averages from cycle 50 onwards (mm/s)**

## 8 PARTICULAR INVESTIGATIONS

No particular investigations have been performed during the current cycle.



## APPENDIX 1: IPF UPGRADES

**Table 4: L1B IPF version**

IPF Version	Date of issue PDHSK & E, LRAC	L1B Algorithhm upgrades	L1B ADF updates	ADF filename
V4.53	Nov. 27, 2002			
V4.54	Apr. 7, 2003	<ul style="list-style-type: none"> <li>*Wrong sign in AGC calibration estimation</li> <li>*Missing integrity check for the Data Block number read from the Level 0 Data Blocks</li> <li>*The altitude above CoG and the altitude rate have to be included in the records also in case of dummy records</li> <li>*1Hz data should be referenced to data block 9.5 not block 10</li> </ul>	Correction of the Tx-Rx gain of Ku and S band parameters (3.5 dB)	RA2_CHD_AX
V4.56	Nov. 26, 2003	<ul style="list-style-type: none"> <li>1- Extrapolation of AGC value to the Waveform center (49.5) for both Ku- and Sband.</li> <li>2 - Correction for an error found in the evaluation of S band AGC.</li> </ul>	RA2 IF Mask	RA2_IFF_AX
V4.57	PDHS-K: 29-04-2004 PDHS-E: 28-04-2004			
V4.58	Aug. 9, 2004			
V5.0.2	Oct. 24, 2005	<ul style="list-style-type: none"> <li>MWR Side Lobe correction upgrade</li> <li>USO clock period units correction</li> <li>RA-2 alignment: OBDH &amp; USO datation, IE flags correction</li> <li>Rain Flag tuning to compensate for the increase of the S band Sigma0</li> <li>Monthly IF estimation</li> <li>Level 1B S-Band anomaly flag</li> <li>DORIS Navigator CFI</li> </ul>	<ul style="list-style-type: none"> <li>side lobe table and Config param</li> <li>New ADF format - clock period unit</li> <li>New table in SOI file</li> <li>New format</li> </ul>	<ul style="list-style-type: none"> <li>MWR_SLT_AX</li> <li>MWR_CON_AX</li> <li>RA2_USO_AX</li> <li>RA2_CHD_AX</li> <li>RA2_CON_AX</li> <li>RA2_SOI_AX</li> <li>RA2_IFF_AX</li> <li>RA2_CON_AX</li> </ul>

		<p>upgrade (RA-2 &amp; MWR)          Orbit Flag not well implemented: when a DORIS product is used for the processing, the Orbit flag is set to 1 for the whole length of the RA2 L1b product file while it should be set to 1 only for the part of the RA2 product overlapping with the DORIS one. Problem has been traced on OAR 1938 to be solved on next IPF delivery.</p> <p>Correction of the Rx_dist_fine from the Level 0 product, leading to an error in the calculation of the Window_delay (SPR-058).</p>		
V5.03	Sep. 19, 2006	<p>Level 1B S-Band anomaly flag well implemented</p> <p>Orbit Flag well implemented</p> <p>Correction of the Rx_dist_fine (for 80 and 20 MHz) from the Level 0 product, leading to an error when applying the IF mask correction on to the waveforms (SPR-059)</p>		
V 5.06	Jun. 20, 2007	<p>DORIS Navigator threshold update to 900 seconds coverage          RA2/DORIS          Alignment of Chain B to Prod Spec 3/N</p>		

**Table 5: L2 IPF version**

PF Version	Date of issue PDHS	L2 Algorithm upgrades	L2 ADF updates	ADF filename
V4.53	Nov. 27, 2002			
V4.54	Apr. 7, 2003			

V4.56	Nov. 26, 2003	SPR 26 Tuning of the Ice2 retracking New MWR NN algorithm	MSS CLS01 Rain flag Updated OCOG retracker thresholds Ice1/Sea Ice Conf file Sea State Bias Table file GOT00.2 Ocean Tide Sol 1 Map file FES 2002 Ocean Tide Sol 2 Map file FES 2002 Tidal Loading Coeff Map	RA2_MSS_AX RA2_SOI_AX RA2_ICT_AX RA2_SSB_AX RA2_OT1_AX RA2_OT2_AX RA2_TLD_AX
V4.57	PDHS-K: 29-04-2004 PDHS-E: 28-04-2004	ECMWF meteo files handling		
V4.58	Aug. 9, 2004	Addition of a Pass Number Field in FD Level		
	Oct. 24, 2005	<ul style="list-style-type: none"> <li>- Handling of the new RA2_CHD_AX ADF</li> <li>- Rain Flag tuning to compensate for the increase of the S band Sigma0</li> <li>- Improving the mispointing estimation</li> <li>- Export of the Level 1B S-band flag into the Level 2 data product</li> <li>- Export of the Level 1B NRT orbit quality flag</li> <li>- Addition of a Pass Number Field in FD Level 2 SPH product</li> <li>- Addition of peakiness in Ku and S band in FDMAR</li> <li>- Addition of square of the SWH in Ku and S band</li> <li>- Correction of MCD flag</li> <li>- SPH pass number (field 8) set to 0 in SPH NRT Level 2 data products</li> </ul>	<p>New table in SOI file</p> <p>Two needed parameters in SOI file New format</p> <p>Addition of GOT2000.2 TLD New DEM AUX file (MACCESS) merge of ACE land elevation data and Smith and Sandwell ocean bathymetry</p>	<p>RA2_CHD_AX</p> <p>RA2_SOI_AX</p> <p>RA2_SOI_AX</p> <p>RA2_SOI_AX</p> <p>RA2_TLG_AX</p> <p>AUX_DEM_AX</p>
V 5.03	Sep. 19, 2006			
V 5.06	Jun. 20, 2007			

## APPENDIX 2: AVAILABILITY:

**Table 6: RA-2 L0, L1b and L2 FGD Data products availability summary for Cycle 82**

Start Orbit	Stop Orbit	Inst. Unav Time (sec)	Data Unav Time (sec)	Time L0 gaps (sec)	Time L1b gaps (sec)	Time L2 FGD gaps (sec)	Inst. Avail %	Data Avail %	L0 Avail %	L1b Avail %	L2 FGD Avail %
39133	39233	0	6859	6859	7376	7391	100	98.86	98.86	98.78	98.77
39233	39333	0	817	817	818	830	100	99.86	99.86	99.86	99.86
39333	39433	0	641	641	642	652	100	99.9	99.9	99.90	99.90
39433	39533	0	8967	8967	8967	8984	100	98.52	98.52	98.52	98.52
39533	39633	0	822	822	822	834	100	99.86	99.86	99.86	99.86

**Table 7: MWR L0 Data products availability summary for Cycle 82**

Start Orbit	Stop Orbit	Time Instrument Unavailability (sec)	Time L0 gaps (sec)	Instrument Availability %	L0 Availability %
39133	39233	0	6792	100	98.88
39233	39333	0	576	100	99.9
39333	39433	0	456	100	99.92
39433	39533	0	5856	100	99.03
39533	39633	0	648	100	99.89

**Table 8: DORIS L0 Data products availability summary for Cycle 82**

Start Orbit	Stop Orbit	Time Instrument Unavailability (sec)	Time L0 gaps (sec)	Instrument Availability %	L0 Availability %
39133	39233	0	38256	100	93.68
39233	39333	0	30605	100	94.79
39333	39433	0	32835	100	94.58
39433	39533	0	36335	100	93.99
39533	39633	0	32837	100	94.27

**Table 9: List of gaps for RA-2 L0 Cycle 82**

The list below only contains gaps larger than 200 seconds.

Small gaps occurring everyday due to calibration or PDS anomalies have been suppressed.

<b>RA2_ME_0P</b>			
start time	stop time	Duration (seconds)	Downlink
15/09/2009 21:21	15/09/2009 21:57	2145	39447@ES
15/09/2009 21:57	15/09/2009 23:37	5992	39447@ES

**Table 10: List of gaps for MWR L0 Cycle 82**

The list below only contains gaps larger than 200 seconds.

<b>MWR_NL_0P</b>			
start time	stop time	Duration (seconds)	downlink
15/09/2009 21:18	15/09/2009 21:57	2317	39447@ES
15/09/2009 21:57	15/09/2009 22:48	3083	39447@ES

**Table 11: List of gaps for RA-2 L1b Cycle 82 (gaps with respect to L0 products)**

The list of gaps below is referred to the L0 production and not to the planning.

<b>RA2_MW_1P</b>				
predecessor name	start time	stop time	coverage missing (seconds)	ancestor coverage missing
RA2_ME_0PNPDK20090826_160547_000005712082_00026_39158_3686.N1	26/08/2009 16:05	26/08/2009 16:14	515	90,03 %

## APPENDIX 3: LEVEL 2 STATIC AUXILIARY DATA FILES

AUX\_DEM\_AXVIEC20031201\_000000\_20031201\_000000\_20200101\_000000  
 AUX\_ATT\_AXVIEC20020924\_131534\_20020703\_120000\_20781231\_235959  
 AUX\_LSM\_AXVIEC20020123\_141228\_20020101\_000000\_20200101\_000000  
 MWR\_LSF\_AXVIEC20020313\_172218\_20020101\_000000\_20200101\_000000  
 MWR\_CHD\_AXVIEC20021111\_131410\_20020101\_000000\_20200101\_000000  
 MWR\_SLT\_AXVIEC20050426\_120000\_20020101\_000000\_20200101\_000000  
 RA2\_IFA\_AXVIEC20050216\_125529\_20020101\_000000\_20200101\_000000  
 RA2\_IFB\_AXVIEC20050216\_125738\_20020101\_000000\_20200101\_000000  
 RA2\_CHD\_AXVIEC20051017\_093900\_20020101\_000000\_20200101\_000000  
 RA2\_CST\_AXVIEC20020621\_135858\_20020101\_000000\_20200101\_000000  
 RA2\_DIP\_AXVIEC20020122\_134206\_20020101\_000000\_20200101\_000000  
 RA2\_GEO\_AXVIEC20020314\_093428\_20020101\_000000\_20200101\_000000  
 RA2\_ICT\_AXVIEC20031208\_143628\_20020101\_000000\_20200101\_000000  
 RA2\_IOC\_AXVIEC20020122\_141121\_20020101\_000000\_20200101\_000000  
 RA2\_MET\_AXVIEC20020204\_073357\_20020101\_000000\_20200101\_000000  
 RA2\_MSS\_AXVIEC20031208\_145545\_20020101\_000000\_20200101\_000000  
 RA2\_OT1\_AXVIEC20040120\_082051\_20020101\_000000\_20200101\_000000  
 RA2\_OT2\_AXVIEC20031208\_150159\_20020101\_000000\_20200101\_000000  
 RA2\_SET\_AXVIEC20020122\_150917\_20020101\_000000\_20200101\_000000  
 RA2\_SL1\_AXVIEC20030131\_100228\_20020101\_000000\_20200101\_000000  
 RA2\_SL2\_AXVIEC20030131\_101757\_20020101\_000000\_20200101\_000000  
 RA2\_SOI\_AXVIEC20051003\_170000\_20020101\_000000\_20200101\_000000  
 RA2\_SSB\_AXVIEC20051129\_111810\_20020101\_000000\_20200101\_000000  
 RA2\_TLD\_AXVIEC20031208\_151137\_20020101\_000000\_20200101\_000000  
 RA2\_TLG\_AXVIEC20040310\_110000\_20020101\_000000\_20200101\_000000

## APPENDIX 4: SIGMA0 ABSOLUTE CALIBRATION

Table 18: Transponder measurement results up to cycle 76

Absolute Orbit nb	Date of Measurement	Location / Rel. track	RA-2 resolution	Transponder Bias [dB]	ECMWF Wet Tropo. Corr. [dB]
10389	24-feb-04	Rome / 315	Low	1,552	0,120
10511	04-mar-04	Valmontone / 437	Low	1,542	0,102
10618	11-mar-04	Fiuggi / 43	Low	1,447	0,135
10783	23-mar-04	Maccarese / 208	Low	1,540	0,142
10890	30-mar-04	Rome / 315	Low	1,442	0,152
11119	15-apr-04	Fiuggi / 43	High	0,963	0,122
11513	13-mag-04	Valmontone / 437	Low	1,353	0,133
11620	20-mag-04	Fiuggi / 43	Low	1,427	0,139
11892	08-giu-04	Rome / 315	Low	1,504	0,154

12014	17-giu-04	Valmontone / 437	Low	1,448	0,348
12121	24-giu-04	Fiuggi / 43	Low	1,576	0,149
14290	23-nov-04	Maccarese / 208	Low	1,43	0,164
14397	30-nov-04	Rome / 315	Low	1,11	0,142
14519	9-dic-04	Valmontone / 437	Low	1,26	0,248
14791	28-dic-04	Maccarese / 208	High	0,97	0,134
14898	4-gen-05	Rome / 315	High	0,95	0,114
15020	13-gen-05	Valmontone / 437	High	0,88	0,118
15127	20-gen-05	Fiuggi / 43	High	1,01	0,108
15292	1-feb-05	Maccarese / 208	High	0,95	0,132
15399	8-feb-05	Rome / 315	High	1,05	0,124
15521	17-feb-05	Valmontone / 437	High	0,94	0,115
15793	8-mar-05	Maccarese / 208	High	0,93	0,116
15900	15-mar-05	Rome / 315	High	0,93	0,128
16022	24-mar-05	Valmontone / 437	High	0,94	0,154
16294	12-apr-05	Maccarese / 208	High	0,97	0,140
16401	19-apr-05	Rome / 315	High	0,99	0,134
16523	28-apr-05	Valmontone / 437	High	0,97	0,114
16795	17-may-05	Maccarese / 208	High	0,84	0,168
16902	24-may-05	Rome / 315	High	1,00	0,152
17403	28-jun-05	Rome / 315	High	1,13	0,16
17525	7-jul-05	Valmontone / 437	High	1,04	0,13
17904	02-aug-05	Rome / 315	High	1,02	0,188
18026	11-aug-05	Valmontone / 437	High	0,93	0,154
18405	06-sep-05	Rome / 315	High	1,06	0,16
18634	22-Sep-05	Fiuggi/43	High	1,00	0,152
18799	04-Oct-05	Maccarese/208	High	0,85	0,164
18906	11-Oct-05	Perm site Rome / 315	Low	1,46	0,156
19407	15-Nov-05	Perm site Rome / 315	High	1,09	0,19
20409	24-Jan-06	Perm site Rome / 315	High	1,38	0,110
20910	28-Feb-06	Perm site Rome / 315	High	0,98	0,124
21912	9-May-06	Perm site Rome / 315	High	1,0	0,138
23916	26-Sep-06	Perm site Rome / 315	High	1,05	0,172
24417	31-Oct-06	Perm site Rome / 315	High	1,08	0,146
24918	05-Dec-06	Perm site Rome / 315	High	1,00	0,156
25419	09-Jan-2007	Perm site Rome / 315	High	0,97	0,148
25929	13-Feb-2007	Perm site Rome / 315	High	1,07	0,118
26922	24-Apr-2007	Perm site Rome / 315	High	1,17	0,154
27423	29-May-2007	Perm site Rome / 315	High	1,04	0,168
29928	20-Nov-2007	Perm site Rome / 315	High	1,04	0,139
30930	29-Jan-2008	Perm site Rome / 315	High	1,01	0,013
31431	04-Mar-2008	Perm site Rome / 315	High	1,04	0,139
32433	13-May-2008	Perm site Rome / 315	High	0,87	0,1758
33435	22-Jul-2008	Perm site Rome / 315	High	1,0	0,1356
35439	09-Dec-2008	Perm site Rome / 315	High	0,98	n/a
36441	17-Feb-2009	Perm site Rome / 315	High	0,97	0,0803
36942	24-Mar-2009	Perm site Rome / 315	High	0,89	0,084
37944	6-Jun-09	Perm site Rome/315	High	1.01	0.0683

## APPENDIX 5: S-BAND ANOMALY

RA-2 S Band failed on cycle 65.

## APPENDIX 6: IE SITES COORDINATES

<b>ZONE_ID="CapraiaA"</b>
RECORD polygon_pt: LONG=+009.934000<deg> LAT=+042.970000<deg>
ENDRECORD
RECORD polygon_pt: LONG=+009.863000<deg> LAT=+042.970000<deg>
ENDRECORD
RECORD polygon_pt: LONG=+009.863000<deg> LAT=+043.166000<deg>
ENDRECORD
RECORD polygon_pt: LONG=+009.934000<deg> LAT=+043.166000<deg>
ENDRECORD
<b>ZONE_ID="Toulon_D"</b>
RECORD polygon_pt: LONG=+005.500000<deg> LAT=+043.070000<deg>
ENDRECORD
RECORD polygon_pt: LONG=+005.473000<deg> LAT=+043.070000<deg>
ENDRECORD
RECORD polygon_pt: LONG=+005.473000<deg> LAT=+043.160000<deg>
ENDRECORD
RECORD polygon_pt: LONG=+005.500000<deg> LAT=+043.160000<deg>
ENDRECORD
<b>ZONE_ID="Vostok_x"</b>
RECORD polygon_pt: LONG=+106.500000<deg> LAT=-078.000000<deg>
ENDRECORD
RECORD polygon_pt: LONG=+105.500000<deg> LAT=-078.000000<deg>
ENDRECORD
RECORD polygon_pt: LONG=+105.500000<deg> LAT=-077.500000<deg>
ENDRECORD
RECORD polygon_pt: LONG=+106.500000<deg> LAT=-077.500000<deg>
ENDRECORD
<b>ZONE_ID="Dome_x_ "</b>
RECORD polygon_pt: LONG=+124.000000<deg> LAT=-075.250000<deg>
ENDRECORD
RECORD polygon_pt: LONG=+122.000000<deg> LAT=-075.250000<deg>
ENDRECORD
RECORD polygon_pt: LONG=+122.000000<deg> LAT=-074.750000<deg>
ENDRECORD
RECORD polygon_pt: LONG=+124.000000<deg> LAT=-074.750000<deg>
ENDRECORD